

Energy Analyzer EMI3P-Y2

MN325006EN



- Current inputs EMI3P-Y2C0 series: CT 5A
- Current inputs EMI3P-Y2R0 series: current sensor 333 mV or EMI3P-ROG series, Rogowski coil without necessity of external integrator
- Class 1 (kWh) according to EN62053-21
- Class 2 (kvarh) according to EN62053-23
- Accuracy ± 0.5 RDG (current/voltage)
- Energy meter
- Instantaneous variables readout: 3 DGT
- Energies readout: 7 DGT
- System variables: W, var, PF, Hz, Phase-sequence.
- Single phase variables: VLL, VLN, A, PF, THD (A,V, up to the 15th harmonic)
- Energy measurements: total kWh (imported and exported); kvarh
- TRMS measurements of distorted sine waves (voltages/currents)
- Self power supply
- Dimensions: 4-DIN modules and 72x72mm
- Protection degree (front): IP40
- Application adaptable display and programming procedure
- Easy connections management
- Detachable display
- Multi-use housing: for both DIN-rail and panel mounting applications

Product description

Three-phase energy meter with removable front LCD display unit. The same unit can be used either as a DIN-rail mounting or a panel mounting energy meter. This general purpose three-phase energy meter is suitable for both active and reactive energy metering for cost allocation but also for main electrical parameter meas-

urement and retransmission (transducer function). Possibility to display also exported active energy (e.g. in case of regenerated energy in lifts or similar applications) harmonic distortion information are available for the voltages and the currents, up to the 15th harmonic. An hourcounter meter is available to link the energy consumption to the

relevant working hours and an hourcounter to link the exported energy to production hours. Housing for DIN-rail mounting with IP40 (front) protection degree. Current measurements carried out by means of external current transformers, 5A or 333mV, or EMI3P-ROG series, Rogowski coil solution without external integrator. Voltage

measurements carried out either by means of direct connection or by means of potential transformers. EMI3P-Y2 is provided, with a pulsating output for active energy retransmission. In addition, a 2-wire RS485 communication port is available.



Type Selection

Range code

EMI3P-Y2C0	Energy analyzer 3-ph balanced and unbalanced load measurement 230/400 VLL ac (self power supply), 5(6) A (CT connection) RS485 and static output
EMI3P-Y2R0	Energy analyzer 3-ph balanced and unbalanced load measurement 230/400 VLL ac (self power supply), 0.333 V or Rogowski (Rogowski EMI3P-ROG series) RS485 and static output

Input specification

Rated Input	System type: 3 Not isolated (shunt inputs). Note: the external 5 A current transformers can be connected to earth individually.	Overload status	EEE indication when the value being measured is exceeding the "Continuous inputs overload" (maximum measurement capacity)
Current type			
Current range EMI3P-Y2C0 series	In: 5 A Imax: 1.2 In.	Max. and Min. indication	Max. instantaneous variables: 999; energies: 9 999 999. Min. instantaneous variables: 0; energies 0.00.
Current range EMI3P-Y2R0 series	In: transformer primary current corresponding to 0.333 V secondary output. Imax: 1.2 In (0.4V secondary).	LEDs	
Voltage (direct or by VT/PT)	230/400VLL; 6A; Un: 160 to 240VLN (277 to 415VLL).	Red LED (energy consumption) EMI3P-Y2C0 series	0.001 kWh by pulse if CT ratio x VT ratio is <7; 0.01 kWh by pulse if CT ratio x VT ratio is ≥ 7.0 < 70.0; 0.1 kWh by pulse if CT ratio x VT ratio is ≥ 70.0 < 700.0; 1 kWh by pulse if CT ratio x VT ratio is ≥ 700.0.
Accuracy (Display + RS485) (@25°C ±5°C, R.H. ≤60%, 50Hz)		Red LED (energy consumption) EMI3P-Y2R0 series	0.001kWh/pulse if VT ratio by In < 35.0 0.01kWh/pulse if VT ratio by In ≥35.0 and <350.0 0.1kWh/pulse if VT ratio by In ≥ 350.0 and <3500.0 1kWh/pulse if VT ratio by In ≥ 3500.0
Current	From 0.002In to 0.2In: ±(0.5% RDG +3DGT). From 0.2In to Imax: ±(0.5% RDG +1DGT). In the range Un: ±(0,5% RDG +1DGT).	Max frequency	16Hz, according to EN62052-11. Green LED (on the terminal blocks side) for power on (steady) and communication status: RX-TX (in case of RS485 option only) blinking.
Phase-neutral voltage	In the range Un: ±(1% RDG +1DGT).		
Phase-phase voltage	In the range Un: ±(1% RDG +1DGT).		
Frequency	Range: 45 to 65Hz; resolution: ±1Hz		
Active power	±(1%RDG +2DGT).		
Power factor	±[0.001+1%(1.000 - "PF RDG")].		
Reactive power	±(2%RDG +2DGT).		
Active energy	class 1 according to EN62053-21.		
Reactive energy	class 2 according to EN62053-23.		
Start up current:	10mA.		
Energy additional errors		Measurements	See "List of the variables that can be connected to:"
Influence quantities	According to EN62053-21, EN62053-23	Method	TRMS measurements of distorted wave forms.
Temperature drift	≤200ppm/°C.	Coupling type	By means of external CT's/ Rogowski coils.
Sampling rate	1600 samples/s @ 50Hz, 1900 samples/s @ 60Hz		
Display refresh time	1 second	Crest factor	EMI3P-Y2C0 series: ≤3 (15A max. peak). EMI3P-Y2R0 series: 1.414 @ Imax (Imax=1.2 In = 0.4V). In any case: Vpeak max = 0.565V.
Display	2 lines 1st line: 7-DGT or 3-DGT+3-DGT 2nd line: 3-DGT LCD, h 7mm.		
Type	3-DGT.		
Instantaneous variables read-out	Total: 5+2, 6+1 or 7DGT		
Energies			

Input specification (cont.)

Current Overloads Continuous For 500ms	1.2I _n , @ 50Hz. 20I _n , @ 50Hz.	Frequency Keypad	45 to 65 Hz. Two push buttons for variable selection and programming of the instrument working parameters.
Voltage Overloads Continuous For 500ms	1.2 U _n 2 U _n		
Current input impedance EMI3P-Y2C0 series EMI3P-Y2R0 series	< 0.3VA >100 kΩ		
Voltage input impedance Self-power supply	Power consumption: < 4VA		

Output specifications

Pulse output Number of outputs Type Pulse duration Output Load Insulation	1 Programmable from 0.01 to 9.99 kWh per pulses. Output connectable to the energy meter (+kWh) TOFF ≥120ms, according to EN62052-31. TON selectable (30 ms or 100 ms) according to EN62053-31 Static: opto-mosfet. VON 2.5 VAC/DC, 70 mA max. VOFF 260 VAC/DC max. By means of optocouplers, 4000 VRMS output to measuring inputs.	Connections Addresses Protocol Data (bidirectional) Dynamic (reading only) Static (reading and writing) Data format Baud-rate Driver input capability Insulation	2-wire max. distance 1000m, termination directly on the instrument. 247, selectable by means of the front keypad MODBUS/JBUS (RTU) System and phase variables: see table "List of variables..." All the configuration parameters. 1 start bit, 8 data bit, and even parity, 1 or 2 stop bit. 9.6, 19.2, 38.4, 57.6, 115.2 kbps. 1/5 unit load. Maximum 160 transceiver on the same bus. By means of optocouplers, 4000 VRMS output to measuring input.
RS485 Type	Multidrop, bidirectional (static and dynamic variables)		

Software functions

Password	Numeric code of max. 3 DGT; 2 protection levels of the programming data: 1st level 2nd level Programming lock	Transformer ratio VT (PT) ratio CT ratio (EMI3P-Y2C0 series) Primary current (EMI3P-Y2R0 series)	1.0 to 99.9 / 100 to 999 1.0 to 99.9 / 100 to 999 The max CTxVT product is 1187. 10 to 9990 for 333mV current sensors 1.00 kA, 2.00 kA, 4.00 kA for Rogosky sensors The max value or the multiplication Primary current x VT ratio is 220000.
System selection	System 3-Ph.n unbalanced load System 3-Ph.1 balanced load System 2-Ph System 1-Ph	3-phase (4-wire) 3-phase (3-wire) without neutral connection. • 3-phase (3-wire) one current and 3-phase to phase voltage measurements. • 3-phase (4-wire) one current and 3-phase to neutral voltage measurements. 2-phase (3-wire) 1-phase (2-wire)	Displaying Reset Easy connection function
			Up to 3 variables per page. 6 different set of variables available. By means of the front keypad: total energies (kWh, kvarh). Wrong phase detection and displaying. For all the display selections (except "D" and "E") the current, power and energy measurement are independent on the current direction.

General specifications

Operating temperature	-25°C to +55°C (-13°F to 131°F) (R.H. from 0 to 90% non-condensing) according to EN62053-21 and EN62053-23.	Immunity to conducted disturbances Surge Radio frequency suppression	10V/m from 150kHz to 80Mhz On current and voltage measuring inputs circuit: 6kV; According to CISPR 22
Storage temperature	-30°C to +70°C (-22°F to 158°F) (R.H. < 90% non-condensing) according to EN62053-21 and EN62053-23)	Standard compliance Safety Metrology Pulse output Approvals	EN61010-1 EN62053-21, EN62053-23, IEC62053-31 CE, cULus listed (available after having completed the approval process)
Overvoltage category	Cat. III	Connections Cable cross-section area	Screw type 2.4 x 3.5 mm Min./Max. screws tightening torque: 0.4 Nm / 0.8 Nm
Insulation (for 1 minute)	4000 VRMS between measuring inputs and digital output.	Housing Dimensions (WxHxD) Material Mounting	72 x 72 x 65 mm Noryl, PA66 self-extinguishing: UL 94 V-0 Panel and DIN-rail
Dielectric strength	4000VAC RMS for 1 minute	Protection degree Front Screw terminals	IP40 IP20
Noise rejection CMRR	100 dB, 48 to 62 Hz	Weight	Approx. 400g (packing included)
EMC Electrostatic discharges Immunity to irradiated electromagnetic fields Burst	According to EN62052-11 15kV air discharge. Test with current: 10V/m from 80 to 2000MHz Test without any current: 30V/m from 80 to 2000MHz; On current and voltage measuring inputs circuit: 4kV		

Power supply specifications

Self power supply

40 to 480VAC (45-65Hz).
Across input “VL2” and
“VL3”

Power consumption

≤4VA/1W

Insulation between inputs and outputs

	Measuring input	Opto-Mosfet output	Communication port	Self power supply
Measuring inputs	-	4kV	4kV	0kV
Opto-Mosfet output	4kV	-	-	4kV
Communication port	4kV	-	-	4kV
Self power supply	0kV	4kV	4kV	-

NOTE: all the models have, mandatorily, to be connected to external current transformers/sensors.

List of the variables that can be connected to:

- RS485 communication port
- Pulse outputs (only “energies”)

N°	Variable	1-ph. sys.	2-ph. sys.	3-ph. 4-wire balanced system	3-ph. 4-wire unbalanced system	3-ph. 3-wire balanced system	3-ph. 3-wire unbalanced system	Notes
1	kWh	x	x	x	x	x	x	Total (2)
2	kvarh	x	x	x	x	x	x	Total (3)
3	V L-N sys (1)	o	x	x	x	x	x	sys=system (Σ)
4	V L1	x	x	x	x	x	x	
5	V L2	o	x	x	x	x	x	
6	V L3	o	o	x	x	x	x	
7	V L-L sys (1)	o	x	x	x	x	x	sys=system (Σ)
8	V L1-2	o	x	x	x	x	x	
9	V L2-3	o	o	x	x	x	x	
10	V L3-1	o	o	x	x	x	x	
11	A L1	x	x	x	x	x	x	
12	A L2	o	x	x	x	x	x	
13	A L3	o	o	x	x	x	x	
14	VA sys (1)	x	x	x	x	x	x	sys=system (Σ)
15	VA L1 (1)	x	x	x	x	x	x	
16	VA L2 (1)	o	x	x	x	x	x	
17	VA L3 (1)	o	o	x	x	x	x	
18	var sys	x	x	x	x	x	x	sys=system (Σ)
19	var L1 (1)	x	x	x	x	x	x	
20	var L2 (1)	o	x	x	x	x	x	
21	var L3 (1)	o	o	x	x	x	x	
22	W sys	x	x	x	x	x	x	sys=system (Σ)
23	W L1 (1)	x	x	x	x	x	x	
24	W L2 (1)	o	x	x	x	x	x	
25	W L3 (1)	o	o	x	x	x	x	
26	PF sys	x	x	x	x	x	x	sys=system (Σ)
27	PF L1	x	x	x	x	x	x	
28	PF L2	o	x	x	x	x	x	
29	PF L3	o	o	x	x	x	x	
30	Hz	x	x	x	x	x	x	
31	Phase sequence	o	o	x	x	x	x	
32	THD VL1N	X	X	X	X	O	O	only if THD enabled
33	THD VL2N	O	X	X	X	O	O	only if THD enabled
34	THD VL3N	O	O	X	X	O	O	only if THD enabled
35	THD A L1	X	X	X	X	X	X	only if THD enabled
36	THD A L2	O	X	X	X	X	X	only if THD enabled
37	THD A L3	O	O	X	X	X	X	only if THD enabled
38	THD V L1-2	O	X	X	X	X	X	only if THD enabled
39	THD V L2-3	O	O	X	X	X	X	only if THD enabled
40	THD V L3-1	O	O	X	X	X	X	only if THD enabled
41	A n	O	X	O	X	O	O	

(x) = available

(o) = not available (zero indication on the display)

(1) = Variable available only through the serial communication port RS485

(2) = also kWh- (exported) with application E (see next table)

(3) = sum (not algebraic) of kvarh imported and exported with application F (see next table)

A wrong wiring detection function (supporting the voltages/currents connections to the metering device) is also available via serial port too (refer to the communication protocols for details)

Display pages

No	1st variable (1st half-line)	2nd variable (2nd half-line)	3rd variable (2nd line)	Note	Applications					
					A	B	C	D	E	F
	Phase sequence			The phase sequence triangle appears in any page only if there is a phase reverse	x	x	x	x	x	x
1	Total kWh		W sys		x	x	x	x	x	x
1b	Total kWh (-)		“NEG”	Exported active energy					+	
2	Total kvarh		kvar sys			+	+	+	+	T
3		PF sys	Hz	Indication of C, -C, L, -L depending on the quadrant		x	x	x	x	x
4	PF L1	PF L2	PF L3	Indication of C, -C, L, -L depending on the quadrant			x	x	x	x
5	A L1	A L2	A L3				x	x	x	x
6	V L1-2	V L2-3	V L3-1				x	x	x	
7	V L1	V L2	V L3				x	x		
8	“thd”	“L1”	THD VL1-N			x	x	x	x	x
9	“thd”	“L2”	THD VL2-N			x	x	x	x	x
10	“thd”	“L3”	THD VL3-N			x	x	x	x	x
11	“thd”	“L1”	THD A L1			x	x	x	x	x
12	“thd”	“L2”	THD A L2			x	x	x	x	x
13	“thd”	“L3”	THD A L3			x	x	x	x	x
14	“thd”	“L1”	THD VL1-2			x	x	x	x	x
15	“thd”	“L2”	THD VL2-3			x	x	x	x	x
16	“thd”	“L3”	THD VL3-1			x	x	x	x	x
17	“A n”		A n			x	x	x	x	x
18	“working hours”(rel. to kWh+)		h				x	x	x	x
19	“working hours”(re. to kWh-)		h-						x	

Notes: x = available

+ = only positive kvarh is measured (kvar sys is the algebraic sum of the phase kvar)

T = positive and negative kvarh are summed and measured in the same kvarh meter

(kvarsys is the sum of the absolute values of each phase kvar). The phase kvar are displayed with the correct sign.

Additional available information on the display

Type	1st line	2nd line	Note
Meter information 1	Y. 2007	r.A0	Year of production and firmware release
Meter information 2	value	LEd (kWh)	KWh per pulse of the LED
Meter information 3	SYS [3P.n]	value	System type and connection type
Meter information 4	Ct rAt.	value	Current transformer ratio
Meter information 5	Ut rAt.	value	Voltage transformer ratio
Meter information 6	PuLSE (kWh)	value	Pulse output: kWh per pulse
Meter information 7	Add	value	Serial communication address
Meter information 8	value	Sn	Secondary address (M-bus protocol)


List of selectable applications

	Description	Notes
A	Active energy meter	Active energy measurement with some minor parameters
B	Active and reactive energy meter	Active and reactive energy measurement with some minor parameters
C	Full set of variables	Full set of available variables can be displayed (default selection)
D	Full set of variables +	Full set of available variables can be displayed +
E	Full set of variables +	Full set of variables with exported (negative) kWh meter
F	Full set of variables	Full set of variables with imported and exported kWh meters

Notes:


+ Only in “D” and “E” applications the actual direction of the current is considered.

One instrument with double mounting capability

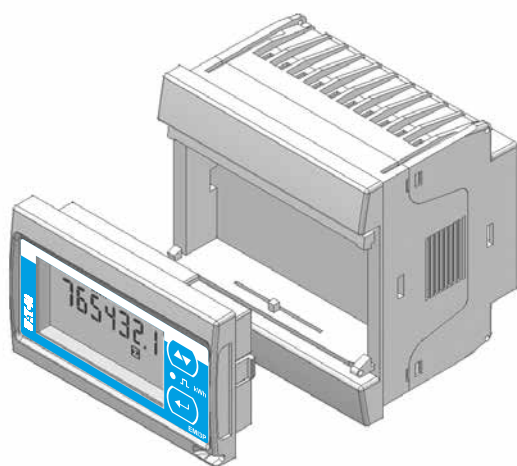




... as DIN-rail mounting meter.

By means of the detachable display it is possible to configure the same instrument either as a panel mounting meter or...






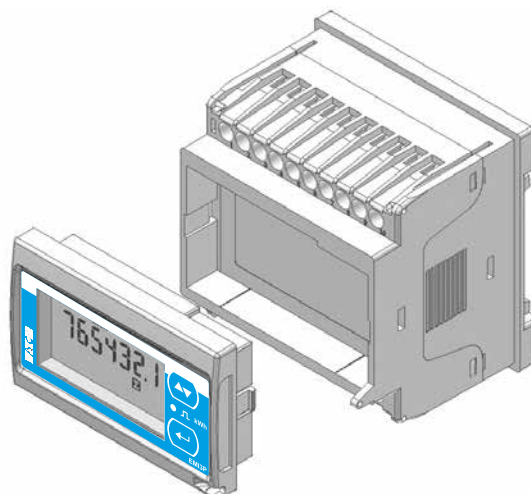


Wiring diagrams

(6A) Self power supply, system type selection: 3P.n

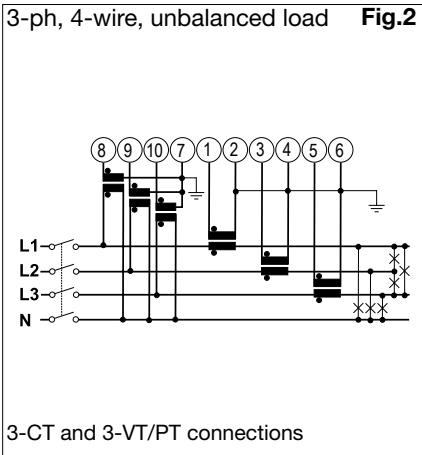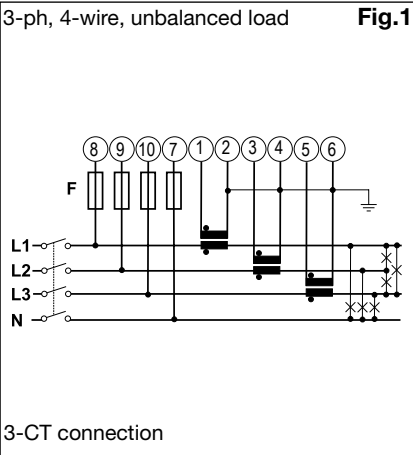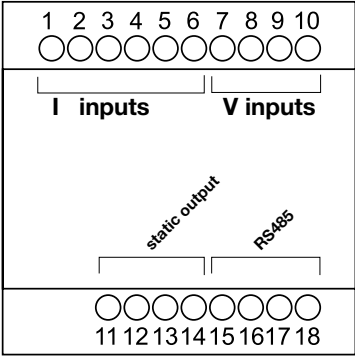


(6A) System type selection: 3P

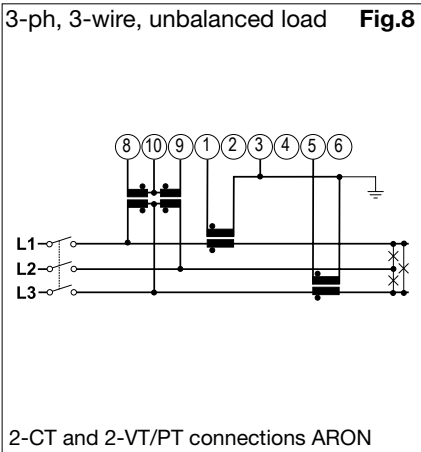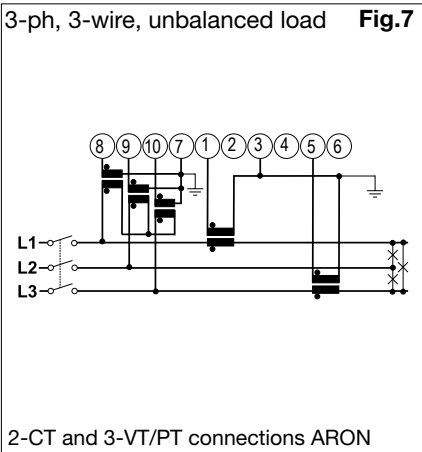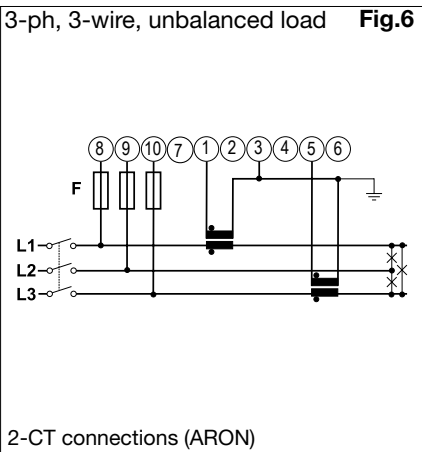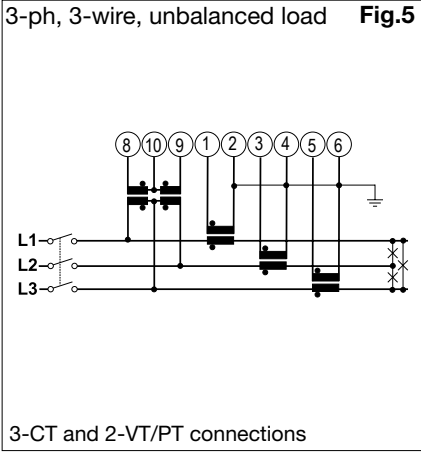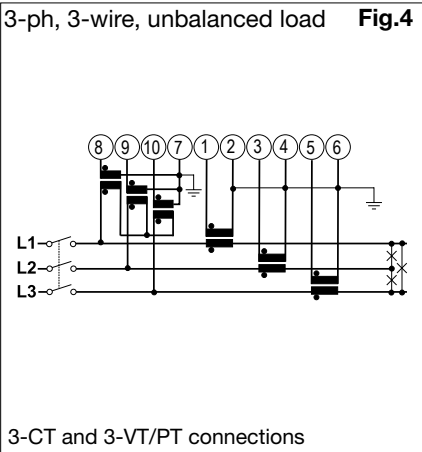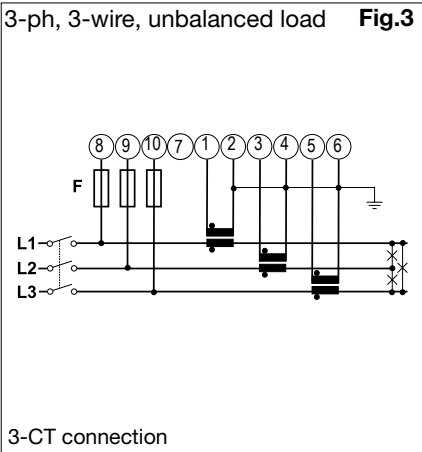

Wiring diagrams

(6A) Self power supply, system type selection: 3P.1


3-ph, 3/4-wire, balanced load **Fig.9**
1-CT connection

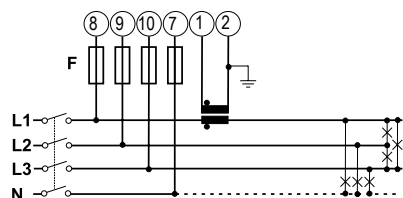

N connection is optional.


NOTE: in the calculations, it is considered only the voltage relevant to L1

3-ph, 3-wire, balanced load **Fig.10**

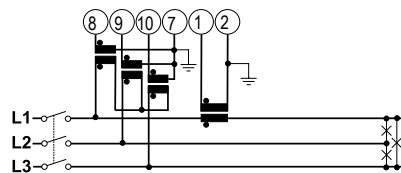

1-CT and 3-VT/PT connections


3-ph, 3-wire, balanced load **Fig.11**

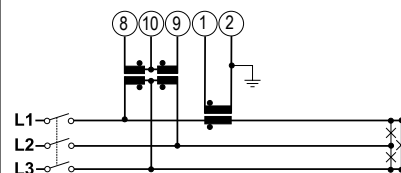

1-CT and 2-VT/PT connections


(6A) System type selection: 2P

2-ph, 3-wire **Fig.12**

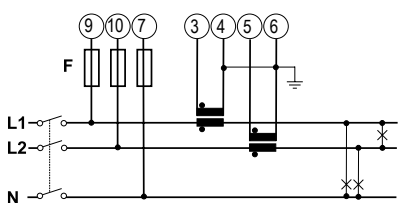

2-CT connection


2-ph, 3-wire **Fig.13**

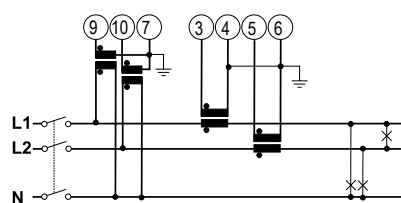

2-CT and 2-VT/PT connections

(6A) System type selection: 1P


1-ph, 2-wire **Fig.14**

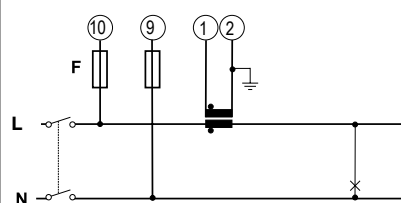

1-CT connection


(6A) System type selection: 1P

1-ph, 2-wire **Fig.15**

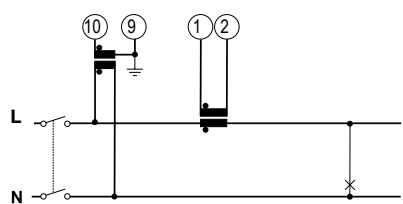


1-CT and 1-VT connections

Static output wiring diagram

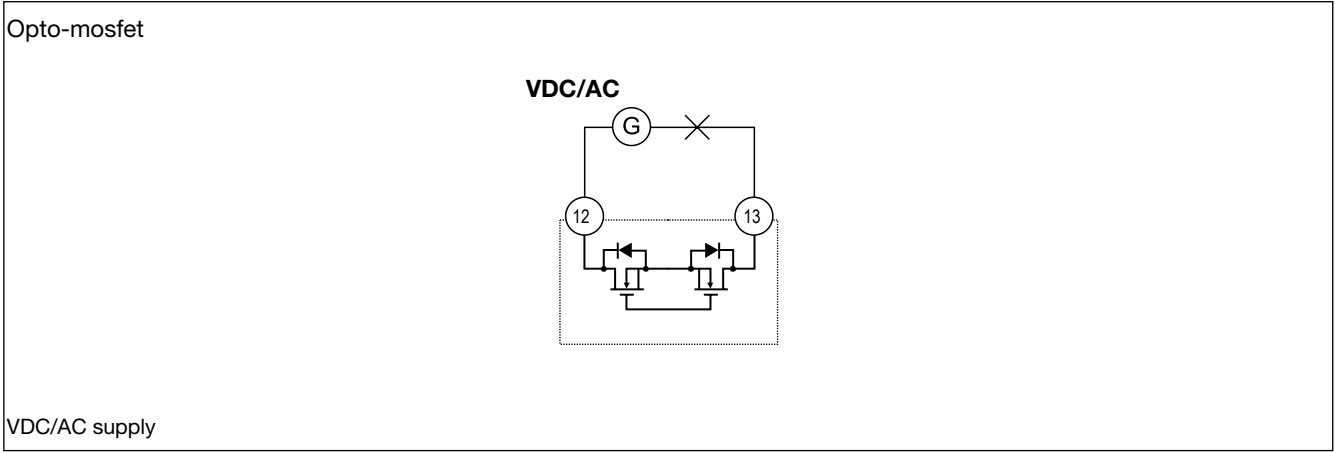


RS485 port wiring diagram

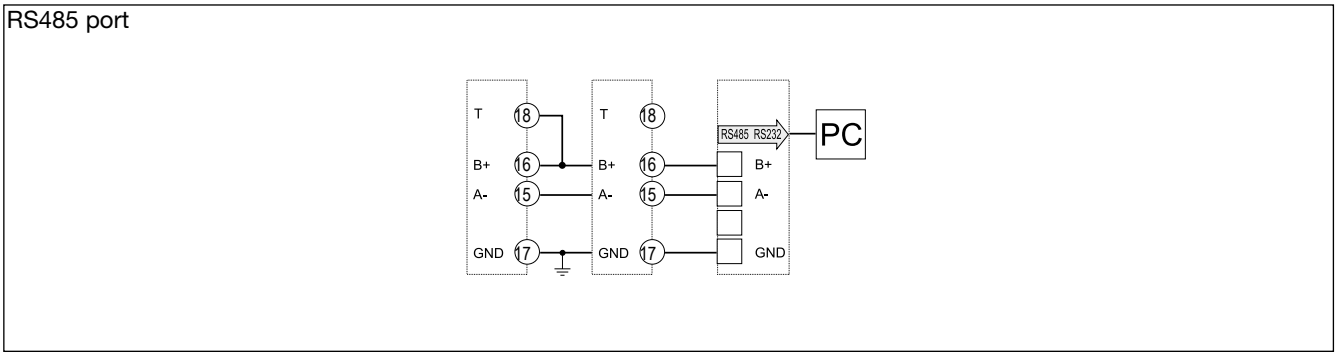


RS485 NOTE: additional devices provided with RS485 are connected as per the picture above. The termination of the serial output is carried out only on the last instrument of the network, by means of a jumper between (B+) and (T).

Front panel description

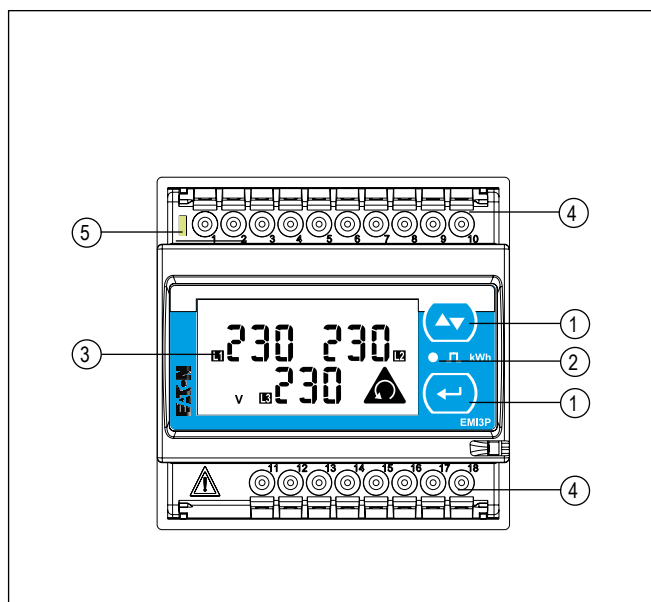

- 1. Keypad**
To program the configuration parameters and scroll the variables on the display.
- 2. Pulse output LED**
Red LED blinking proportional to the energy being measured.
- 3. Display**
LCD-type with alphanumeric indications to display all the measured variables.
- 4. Connections**
Screw terminal blocks for instrument wiring.
- 5. Green LED**
Lit when power supply is available.

Dimensions (DIN configuration)

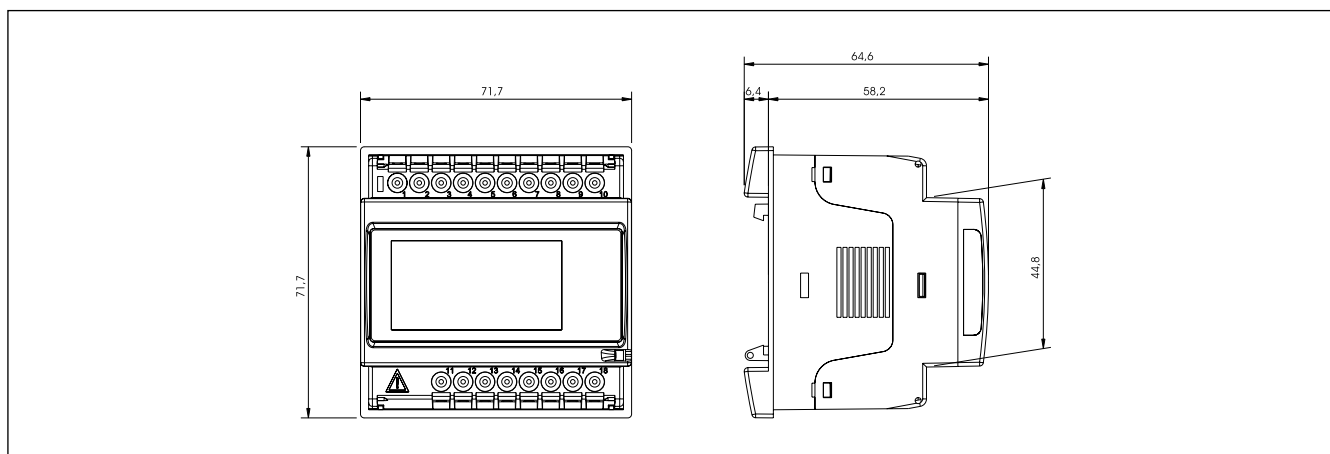

Dimensions and panel cut out (72x72 panel mounting configuration)

