



Force H3X SOP (PylontechPro)

Information Version: 1.0
5PMPA08-00XXX

Legal Information

Copyright©2024 Pylon Technologies Co., Ltd. All rights reserved.

Any reproduction or distribution of this manual or any part of this manual, or any uploading of this manual to a third party website, in any form by any means, without the prior written consent of Pylon Technologies Co., Ltd., is prohibited.

Disclaimer

The manual contains instructions for the use of the product. All the pictures and charts in this manual are for description and explanation only. Pylon Technologies Co., Ltd. reserves the right to change the information in the manual which is subject to change without further notice.

Please read this manual carefully before using the product and keep this manual for further reference. Failure to use the product in accordance with the manual may result in serious injuries, property damages and may void the warranty, for which Pylon Technologies Co., Ltd. shall not be liable.

Pylon Technologies Co., Ltd. makes no representations or warranties express or implied, with respect to all the information in this manual.

In the event of any conflicts between this manual and the applicable law, the latter prevails.


The final interpretation of this manual belongs to Pylon Technologies Co., Ltd.

Contents


1	Download and install the PylontechPro App.....	1
2	Login	2
2.1	Obtain account	2
2.2	Login	2
3	Local config	2
3.1	Network configuration	3
3.2	New plant Creation	3
3.3	Parameter Configuration	8

1 Download and install the PylontechPro App

For Andriod, search for PylontechPro in Googleplay.

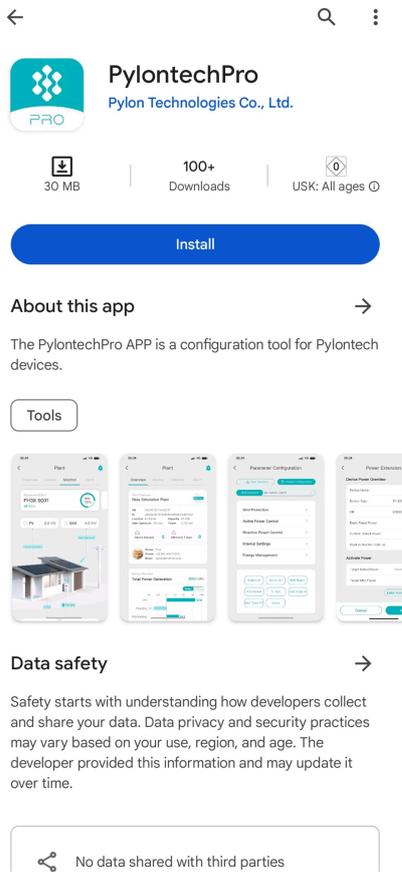

For IOS, search for PylontechPro in APPstore.

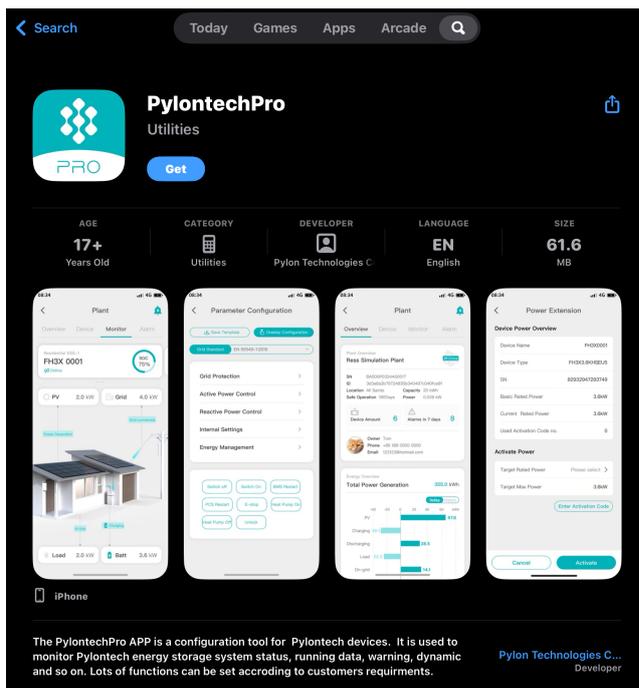


2 Login

2.1 Obtain account

Please contact the person in charge of your organization to obtain an account.


2.2 Login

Open the PylontechPro App, enter the login page. Enter your email and password (we have provided), click Login to access the system.

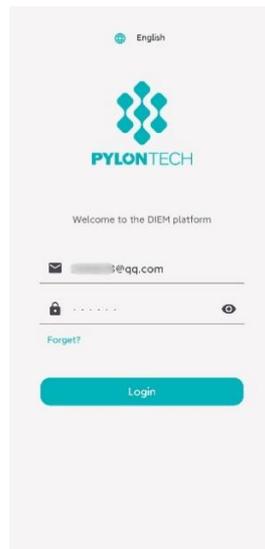

3 Local config


After confirming the device is powered on. The App will automatically search for Bluetooth of nearby devices, you can select the corresponding device and enter the “**Local Configuration**” interface.

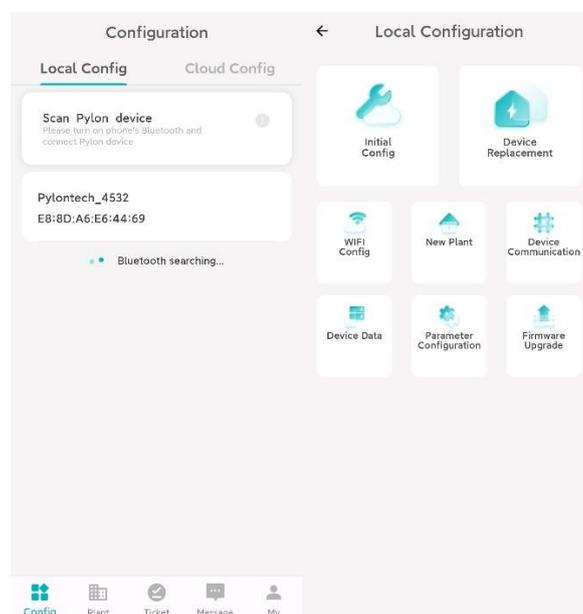

3.1 Network configuration


After selecting the “Initial Config” in the above interface, select the corresponding network config method according to the connection situation of the device (WIFI Configuration is usually recommended).

Then entering the account and password of the home WIFI (if the phone is connecting to the WIFI at this time, the app may automatically read the account the WIFI and display it). Click ‘Start’ and wait. After displaying ‘Network configuration success’, click ‘Next’.

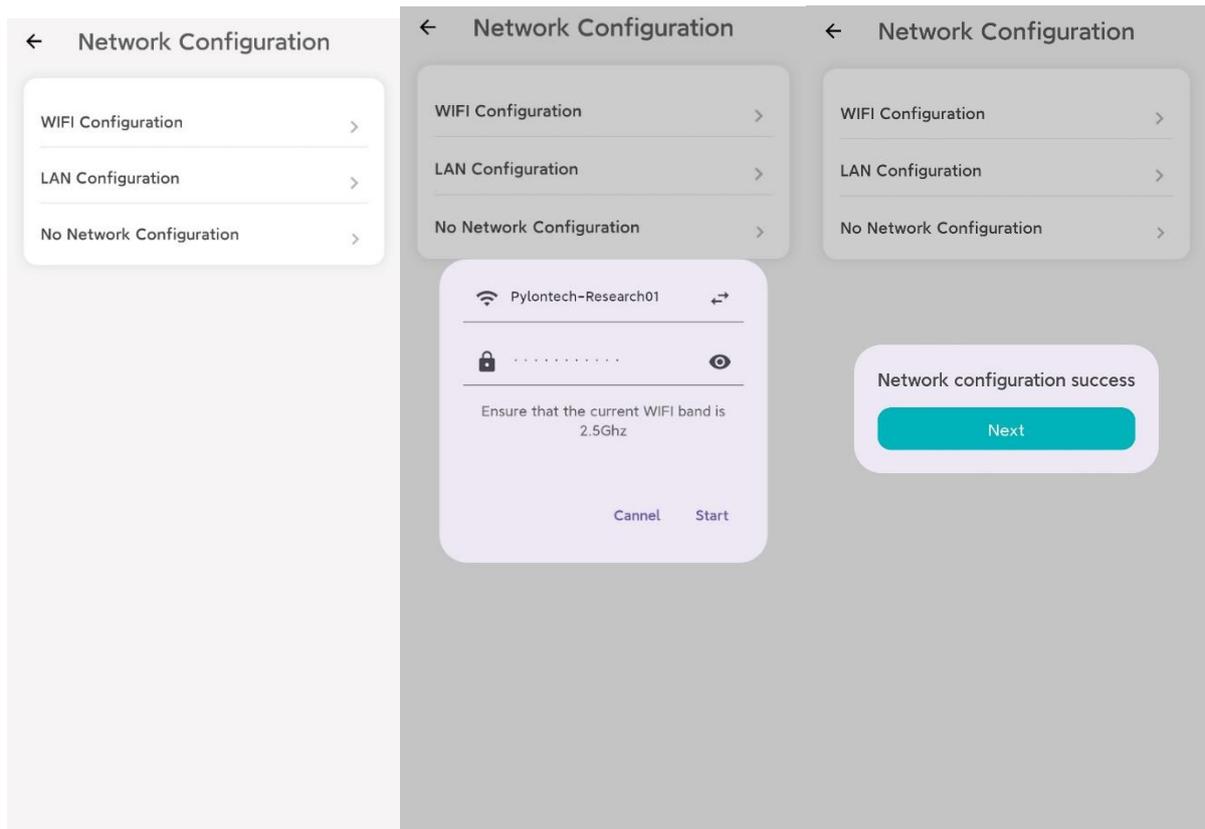


3.2 New plant Creation


1. By clicking the icon on the right side of the input box, you can scan the **QR code** on the device label to show the device SN number automatically. Or you can type it by yourself. You can copy and paste the SN number after finishing plant creation.

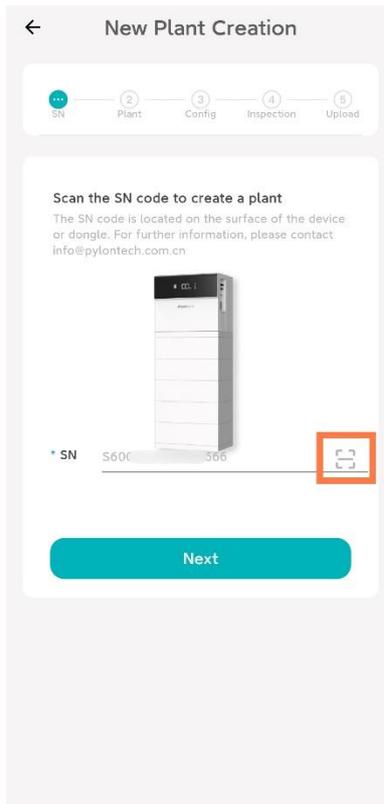

2. Click 'Next' to enter to the **plant information** Interface, please type or select the relevant information according to the actual situation of the equipment. After finishing plant creation, the terminal users can modify again in the PyHome app.

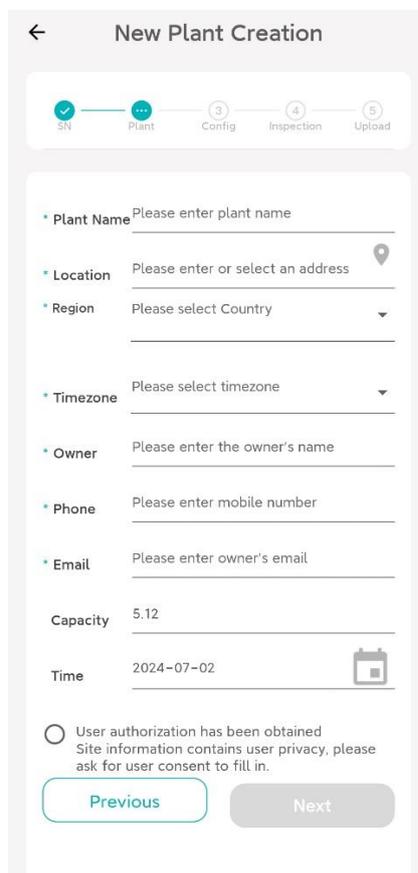

3. Click 'Next' to enter the **configuration interface**, It is essential to apply the following necessary settings, or the device cannot work normally. Only after you expand all options, the 'Next' can be click.

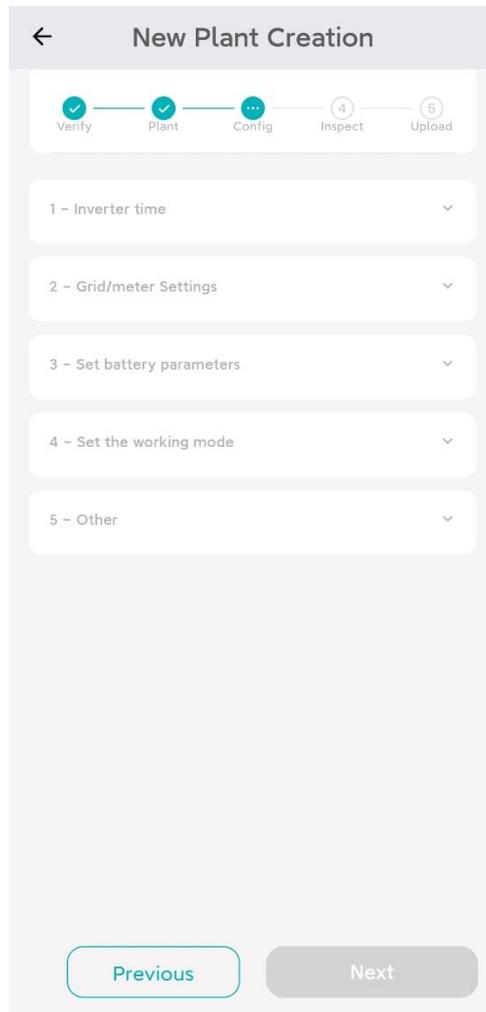

For the five options displayed on the page, 'Inverter time' is not to be cared and it will be automatically changed to the current time after the plant creation complete.

For the 'Grid/meter Settings', you only need to check the 'Meter Type' is right (three-phase is Meter(3P), single-phase is CT(1P)). The 'Power to Grid' and 'Power from Grid' can be set according to the rated power of your device.


For 'Set battery parameters', the two parameters can be set as you want. 'Discharge limited SOC' is the minimum value of the system discharging, 'Charge limited SOC' is the maximum value of the system charging.

For the 'Set the working mode', you can set one mode as you need. About the specific differences of every work mode, you can see '**6.2.3 Working Mode**' in the user manual.


For 'Other', the 'Backup Enable' can be set as users need, if you choose 'Enable', the backup

load will work normally. The 'Emergency Stop Function Enable' should 'Disable', only the device has something wrong, it can be set enable.


If you have modified one parameter, please click 'Save'.

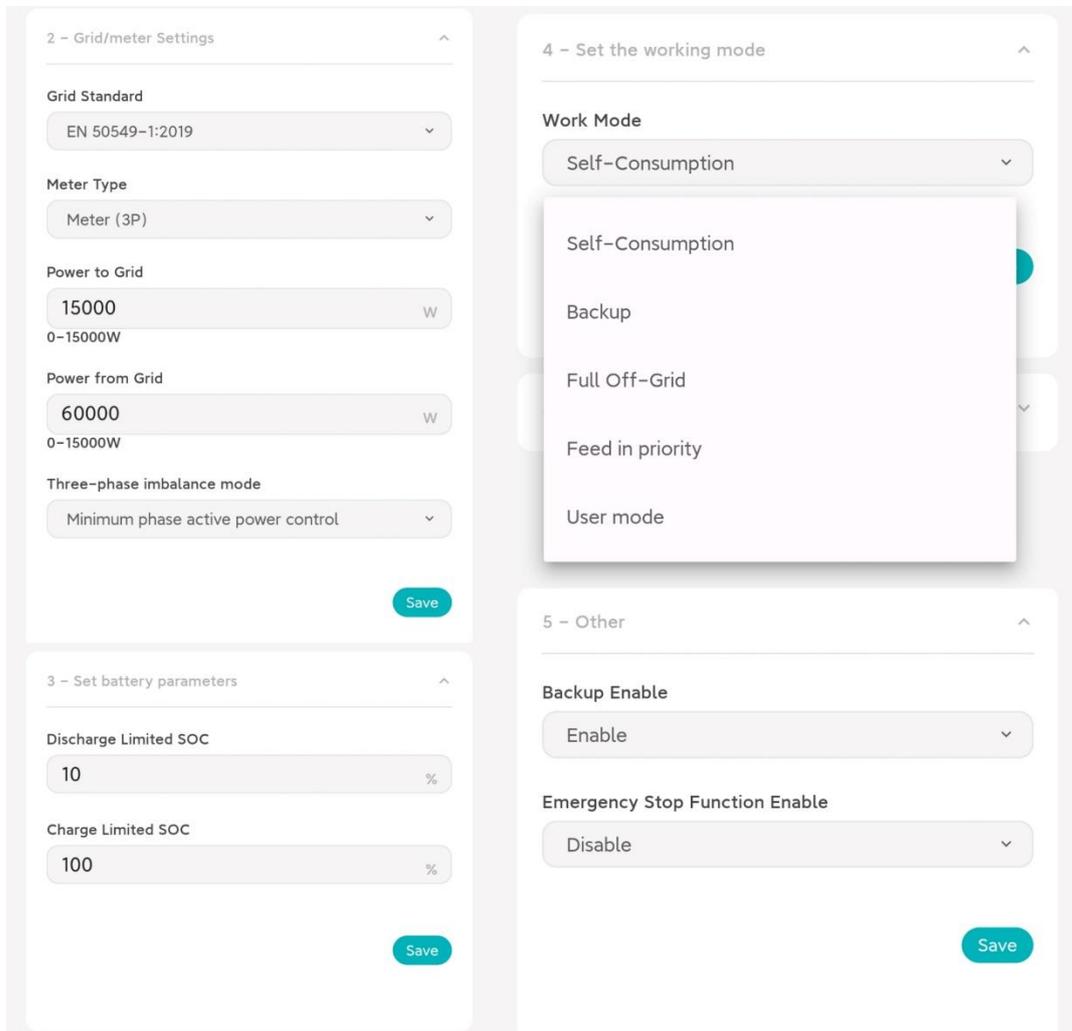


4. After checking out all parameters, you can click 'Next'. And then you will receive a message as shown in the below. Please click '**Confirm**', then all the relays will work, when the sound of relays closing over. The device start running now.

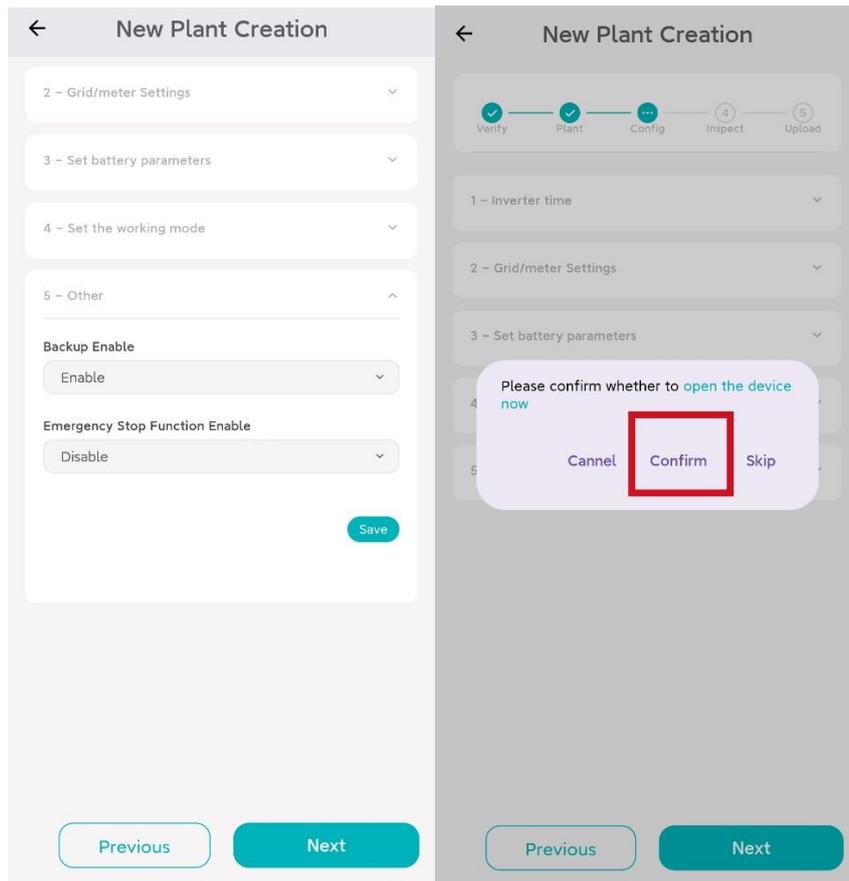

- Then users need to check the device information, where you need to confirm that the communication status is online (if the network config has been completed), and confirm there is no abnormal data of other parameters (battery, grid, PV, etc.). Then click 'Next'.

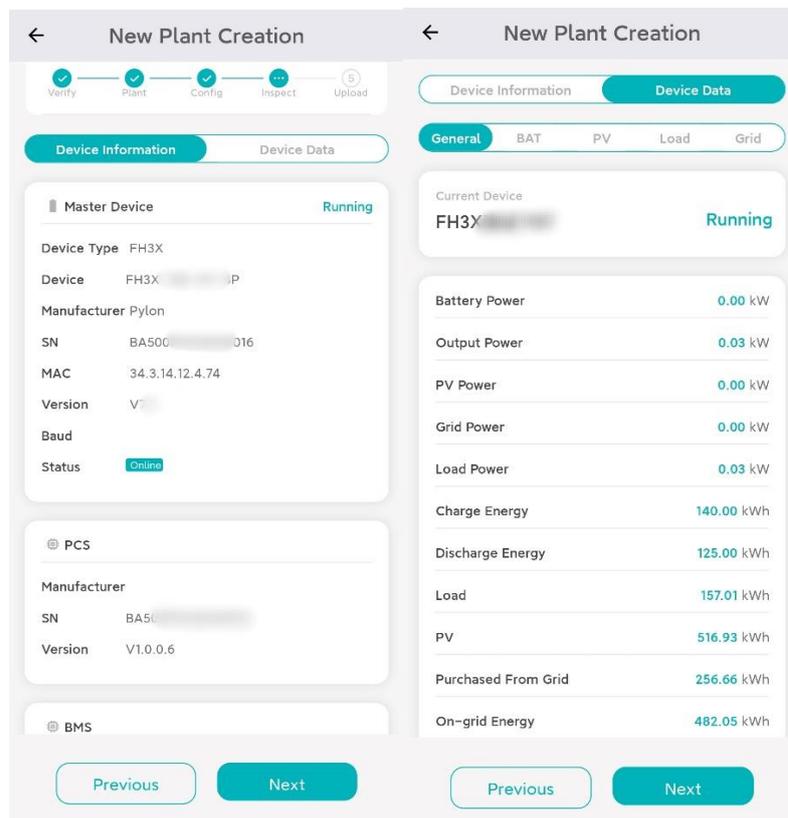


6. Finally, it is recommended to upload the actual pictures according to the user's plant condition, so as to facilitate the maintenance later. After uploading, click 'Next', all the initial settings of the device & plant will be **completed**.

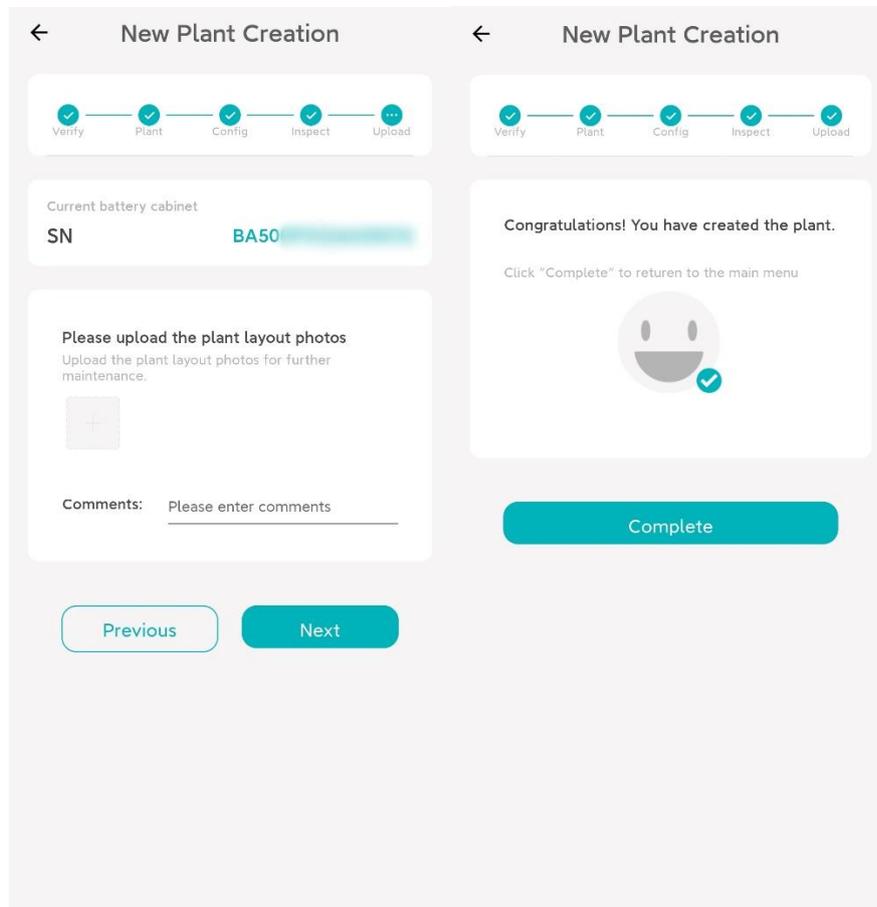

3.3 Parameter Configuration


1. When finishing the plant creation, you can exit and enter to 'Parameter Configuration' to config all parameters.
2. Users can config the parameters in the 'Quick setup'. The specific steps are the same as the above 3.2-3.
3. Also, in the specific options, the following two can be modified.

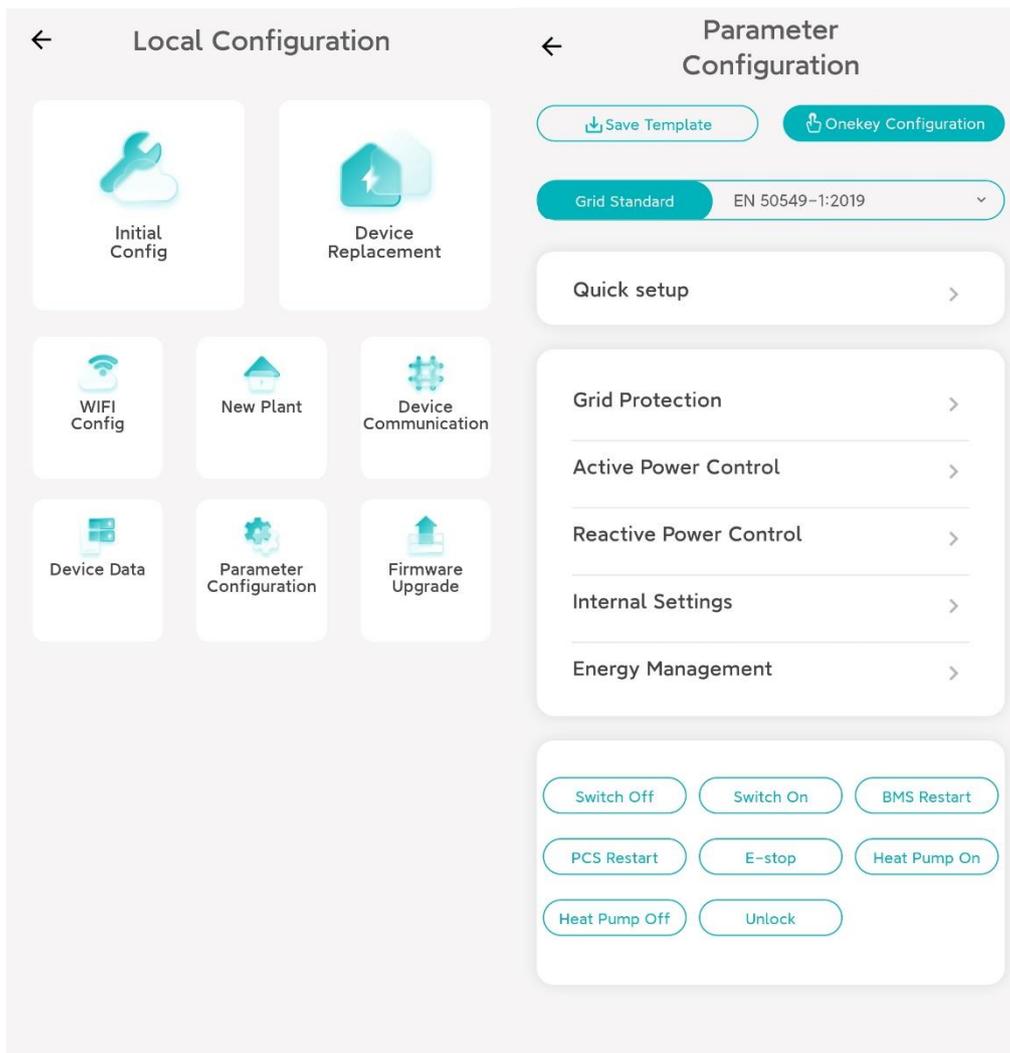

(1) Active Power Control

In this page, you need to do the following settings and do not change other options.

- ① Select "Active Power Control Mode" as meter/CT;
- ② The 'Power to Grid' represents the upper limit of system feed-in power, you need to set the value according to rated power and the local safety standard, note that the value must be more than 0. If the value you set exceed the upper limit, it will be automatically limited to the upper value.
- ③ If the machine is three-phase, select "Meter Type" as Meter(3P); if the machine is single-phase, select 'Meter Type' as CT(1P).

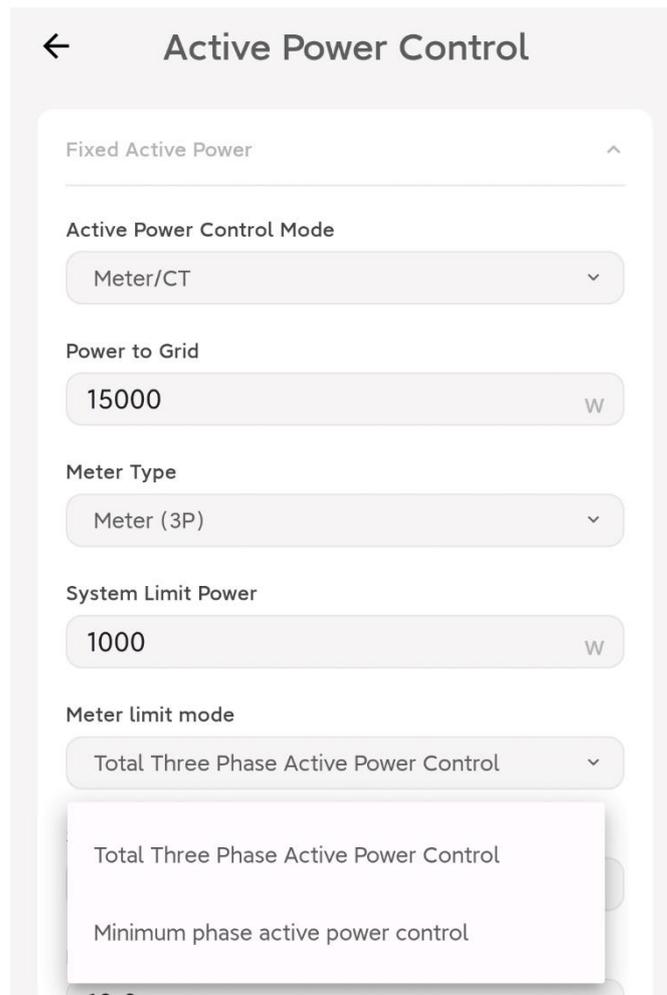


(2) Energy Management

All following settings are available to set by the terminal user.

- ① Select "System with/without Battery" as With Battery; 'Work Mode' and 'Backup Enable' as the user needs to select;
- ② The "Discharge Limited SOC" means the discharge limit of the battery. E.g setting the value as 30%, the load or grid could gain electric from battery only when the SOC more than 30%.
- ③ On the contrary, the "Charge Limited SOC" means the charge limit of the battery.
- ④ The 'Power from Grid' indicates the upper limit of power taken from the grid, which should be changed based on the actual demand.
- ⑤ Charge/discharge time can be set independently according to the user's demand, a total of four time periods can be set. Each time period can be set independently of the start and end time, charge/discharge, power, and repetition time. You can set open or close at the 'State' with the user's demand.

For all of the above parameters, if you have changed one, please click 'Save'.

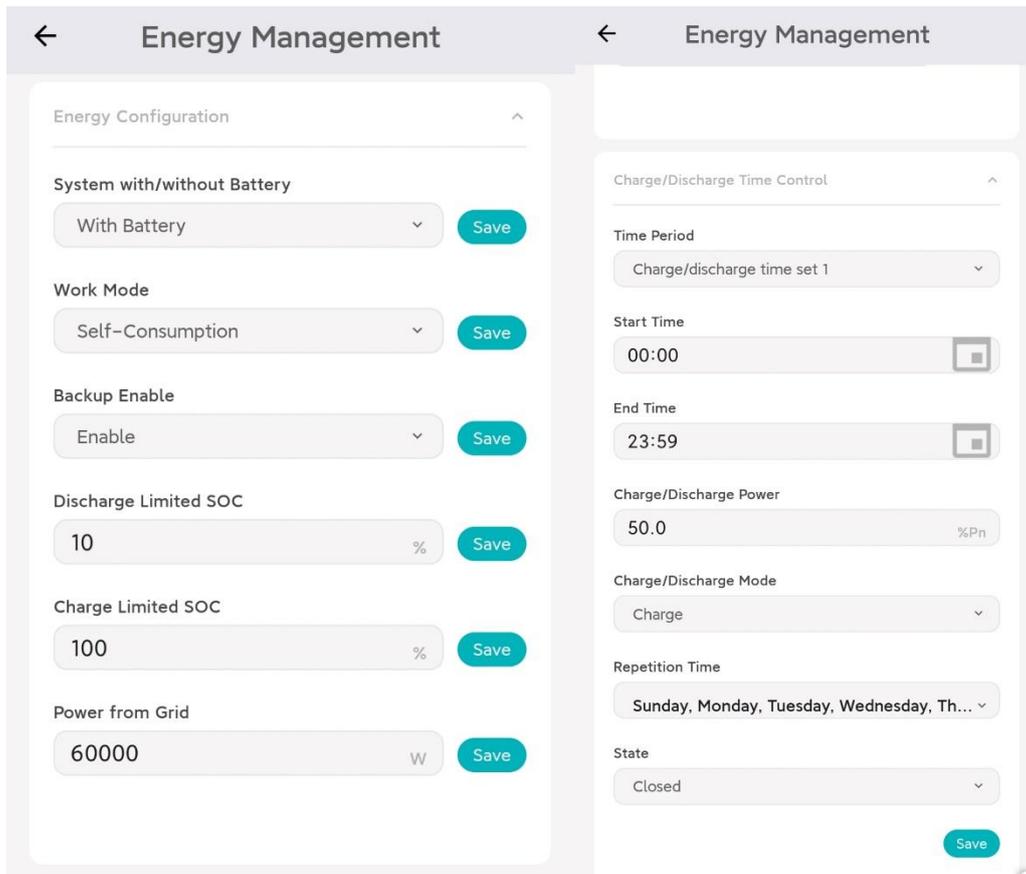

Subsequently, the user can scan the QR code of the device directly by the Pylontech APP to enter this plant. The user also can edit part of the plant information and the energy management control according to the demand.



Pylon Technologies Co., Ltd.

No.300, Miaoqiao Road, Kangqiao Town

Pudong New Area, Shanghai 201315, China

T +86-21-51317699

E service@pylontech.com.cn

W www.pylontech.com.cn