

# Concord

## OPTIX RECESSED 1200x300 2L 3000K ALU

2023660



### Features

- OPTIX RECESSED 1200x300 2L 3000K ALU is a high efficacy low glare luminaire for office and education applications. Ceiling recessed 1200x300 mm. Aluminised plastic extra low glare optics in 2 lines configuration. White RAL9016 fixture body. Constant current driver. 3000K Warm White LED, CRI>80, chromaticity tolerance of 3-step MacAdam ellipse. Luminous flux 3250lm. Power consumption 26W. Luminaire efficacy 125lm/W. Lifespan: 48,500 hours L90B10. UGR<16, Luminance at 65°<200 Cd/m<sup>2</sup>, IK07, IP20. Photobiological safety risk group 0. Electrical protection Class I. Glow wire test 850°C.

### Product Overview

<b>Product name</b>	OPTIX RECESSED 1200x300 2L 3000K ALU
<b>Technology</b>	LED (3 SDCM)
<b>Cap/Base</b>	N/A
<b>Housing</b>	Steel
<b>Mount</b>	Ceiling recessed mounting
<b>Fixture rating</b>	Enclosed
<b>Fixture luminous flux (lm)</b>	3250
<b>Luminaire efficacy (lm/W)</b>	125
<b>Colour temperature (K)</b>	3000
<b>Light colour</b>	Warm White
<b>CRI (Ra)</b>	80
<b>Colour Variation Initial (SDCM)</b>	3
<b>Glare control</b>	< 16
<b>Photobiological Risk Group</b>	RG0
<b>Total power consumption (W)</b>	26
<b>Electrical protection</b>	Class I
<b>Control gear type</b>	LED driver constant current
<b>LED Flickering Rate</b>	Ultra low (5% or less)
<b>Housing colour</b>	RAL 9016 - Traffic white / Bezel

Concord  
by SYLVANIA

# Concord

## OPTIX RECESSED 1200x300 2L 3000K ALU 2023660

**IP rating**

IP20

**IK rating**

IK07


**Product EAN number**

5025768236602

**Warranty**

5 years

### Photometry

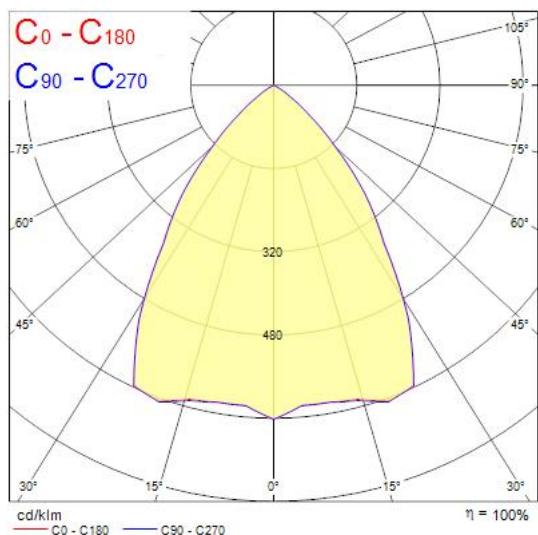

### Technical drawings

