
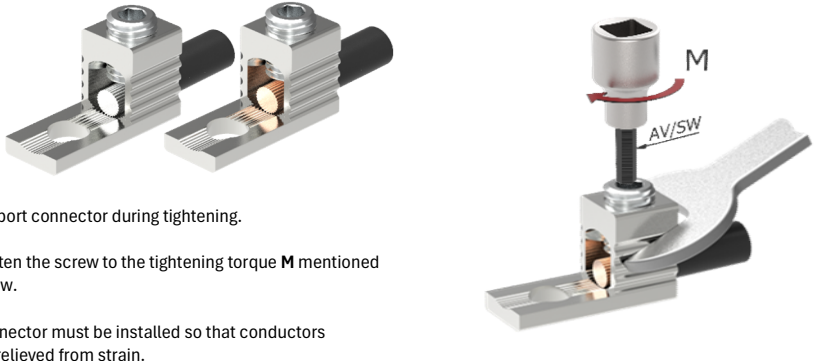






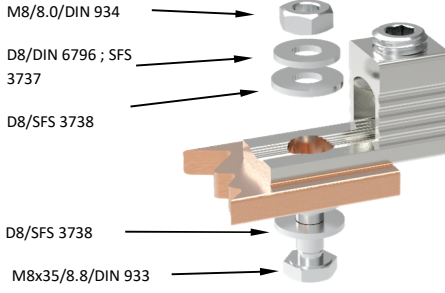



Product data							
Product code	Product name	I _{n Al}	I _{n Cu}	U _n	US specific		
					I _{max Al}	I _{max Cu}	U _{max}
VC02-0006	OT Universal connector 1,5-50mm ²	145 A	160 A	690 V	-	-	-

General	Conductor installation
<p>OT-Connectors are suitable for Aluminium- and Copper conductors.</p> <ul style="list-style-type: none"> - Segmental conductors have to be rounded before mounting. Pre-shape the sector conductor with transfer jaw pliers before removing the insulation or with rounding jaws after removing the insulation. - For stripping cable, see stripping length L (table below) - Remove any layer of oxide by brushing. 	 <p>Support connector during tightening.</p> <p>Tighten the screw to the tightening torque M mentioned below.</p> <p>Connector must be installed so that conductors are relieved from strain.</p>

Connection							
	Screw	M10	Tightening torque M		Stripping length L		
		SW	5	1,5-10 mm ²	3,5 Nm	14±1 mm	
			16-50 mm ²	10 Nm			
Conductor range			1xAl/Cu 1,5-50 mm²				
Copper conductors	Aluminium conductors	Supported IEC 60228 -conductors			Sector shaped cable		
Max. 3 X CU / Conductor contact space	1 X AL / Conductor contact space	Class 5 & 6 (fine stranded) Using ferrule is recommended			 Pre-round the cable		
 ≤ 50 mm ² total	 Anti-corrosion paste: e.g. Penetrox	 Class 1 & 2 (solid and stranded)					

Mounting to busbar	Attention!
<ul style="list-style-type: none"> - Be sure that there are no burrs around the hole. - Length of the screw depends on the busbar thickness. - Use standard screws, nuts and washers. (Plated with Zn) - Recommended torque for M8 is 22 Nm. 	 <p>When connecting to an aluminium rail, the surface of the rail must be brushed with a wire brush and immediately treated with connecting grease. In damp areas, the use of protective grease is recommended (eg. Penetrox). On the rail side, in addition to the pressure relief plate, a conical press plate (e.g. DIN 6796) must be used.</p>

Cross section and max. number of Cu- conductors / contact space (Al- conductors in parenthesis)										
1,5 mm ²	2,5 mm ²	6 mm ²	10 mm ²	16 mm ²	25 mm ²	35 mm ²	50 mm ²	The specified max. amount of conductors refers only to industrially installed terminals.		
3(1)	3(1)	3(1)	3(1)	3(1)	2(1)	1(1)	1(1)			
			70 mm ²	95 mm ²	120 mm ²	150 mm ²	185 mm ²	240 mm ²	300 mm ²	400 mm ²
			-	-	-	-	-	-	-	-