

IT

MANUALE
TECNICO

EN

TECHNICAL
MANUAL

FR

MANUEL
TECHNIQUE

NL

TECHNISCHE
HANDLEIDING

DE



TECHNISCHES
HANDBUCH

ES

MANUAL
TÉCNICO


Contatti magnetici wireless RF2MCW-RF2MCB
RF2MCW-RF2MCB Wireless magnetic contacts
Contacts magnétiques sans fil RF2MCW-RF2MCB
RF2MCW-RF2MCB Draadloze magnetische contacten
RF2MCW-RF2MCB Drahtlose Magnetkontakte
Contactos magnéticos wireless RF2MCW-RF2MCB

Comelit
Passion. Technology. Design.

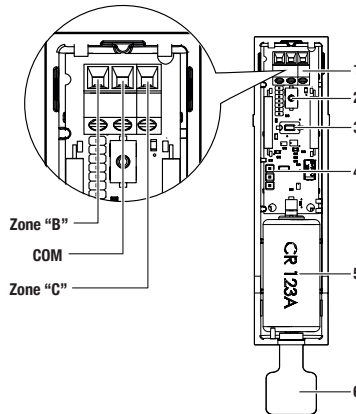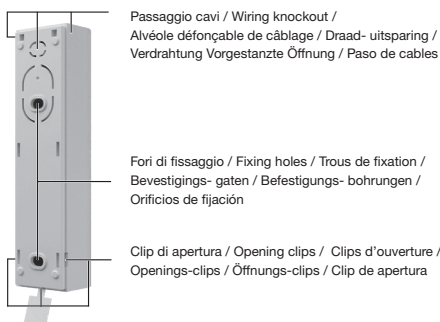


1. Morsetteria / Terminal block / Bornier / Klemmenblock /
Bloque de terminales
2. Interruttore manomissione / Tamper switch / Switch
d'autoprotection /
Tamper-schakelaar / Manipulationssicherungs-Schalter /
Interruptor de manipulación
3. Tasto di registrazione / Enroll button / Bouton Enregistrer /
Knop Enroll (Registren) / Registrierungstaste / Boton de
registro
4. Jumper di configurazione / Configuration jumper /
Cavalier de configuration / Configuratiejumper /
Konfigurationsjumper / Puente de configuración
5. Batteria CR123 / Battery CR123 / Pile CR123 /
CR123-batterij / Batterie CR123 / Bateria CR123
6. Linguetta batteria / Battery pull tab / Languette d'extraction
des piles / Trekstrip batterij /
Batterie-Isolierungsstreifen / Lengüeta para la batería


ZONE B - ZONE C

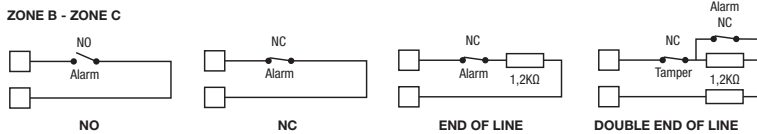

ZONE C

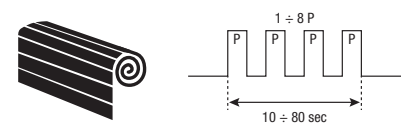


**Installazione / Installation / Installation / Installatie /
Installation / Instalación**

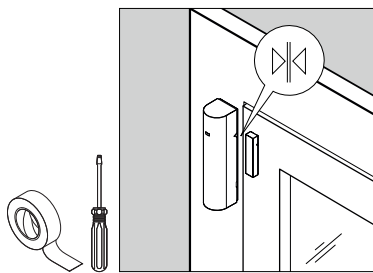

**Prestazioni di rilevamento / Detection performance
/ Performances de détection / Detectieprestatie /
Erkennungsleistung / Rendimiento de detección**

	24 mm	21 mm	12 mm	10 mm
X	24 mm	21 mm	12 mm	10 mm
Y	28 mm	22 mm	11 mm	9 mm
Z	14 mm	13 mm	13 mm	12 mm



IT	EN	FR	NL	DE	ES	
Tipo di comunicazione RF	RF Communication type	Type de communication RF	Type RF-communicatie	Funkkommunikationsart	Tipo de comunicación RF	Bidirectional
Banda di frequenza	Frequency band	Bande de fréquence	Frequentieband	Frequenzband	Banda de frecuencia	868,05-869,95 MHz
Contatti magnetici (N.)	Magnetic contacts No	Contacts magnétiques (N°)	Magnetische contacten (aant.)	Magnetkontakte (Nr.)	Contactos magnéticos (N.º)	2
Zone cablate indipendenti	Independent wired zones	Zones câblées indépendantes	Onafhankelijke bedrade zones	Unabhängige verdrahtete Zonen	Área cableada independiente	2
Bilanciamento delle zone cablate	Wired zones balance	Équilibre des zones câblées	Balans bedrade zones	Ausgleich verdrahtete Zonen	Equilibrio áreas cableadas	NO, NC, EOL, DEOL
Zona cablata rapida	Fast wired zone	Zone câblée rapide	Snelbedrade zone	Schnelle verdrahtete Zone	Área cableada rápida	Zone C
Rilevamento manomissione magnetica	Magnetic tamper detection	Détection de sécurité magnétique	Detectie magnetische tamper	Erkennung Magnet-Manipulationsschutz	Detección tamper magnético	✓
Batteria	Battery	Pile	Accu	Batterie	Batería	CR123A
Soglia di bassa tensione	Low voltage threshold	Seuil basse tension	Laagspanningsdrempel	Untere Spannungsgrenze	Umbral de voltaje bajo	2,6V
Corrente assorbita (TX / Stand-by)	Current consumption (TX / Stand-by)	Consommation de courant (TX / veille)	Stroomverbruik (TX / Stand-by)	Stromaufnahme (TX / Stand-by)	Consumo eléctrico (TX / Stand-by)	26mA / 4µA
Immunità EMC	EMC immunity	Immunité CEM	EMC-immuniteit	EMV Störemfindlichkeit	Inmunidad CEM	EN50130-4
Range di temperatura di funzionamento	Operational temperature range	Plage de température de fonctionnement	Bedrijfstemperatuurbereik	Betriebstemperaturbereich	Rango de temperatura de funcionamiento	-10 ÷ 50°C

