

PHILIPS

Ledinaire waterproof

WT065C G3

Scan me!
DOWNLOAD

Suspension hook 2x

Screw M4x30 2x

Pipe 2x

Installation bracket 2x

Gland PG13.5 1x

Screw M4x11 2x

220V
240V

50Hz
60Hz


IP65

IK08

Max.
40°C
Min.
-20°C

%
90
O <10

Product Description	P(W)	Energy Efficiency Class of Light source	Dimensions (mm)		
			L	A	
WT065C G3 LED18S/840 PSU L600 BN	16	D	607	210-350	0.75
WT065C G3 LED24S/840 PSU L1200 BN	22	D	1207	660-880	1.10
WT065C G3 LED48S/840 PSU L1200 BN	44	D	1207	660-880	1.15
WT065C G3 LED35S/840 PSU L1500 BN	31	D	1507	960-1160	1.35
WT065C G3 LED68S/840 PSU L1500 BN	53	C	1507	960-1160	1.40
WT065C G3 LED74S/840 PSU L1500 BN	54	C	1507	960-1160	1.40

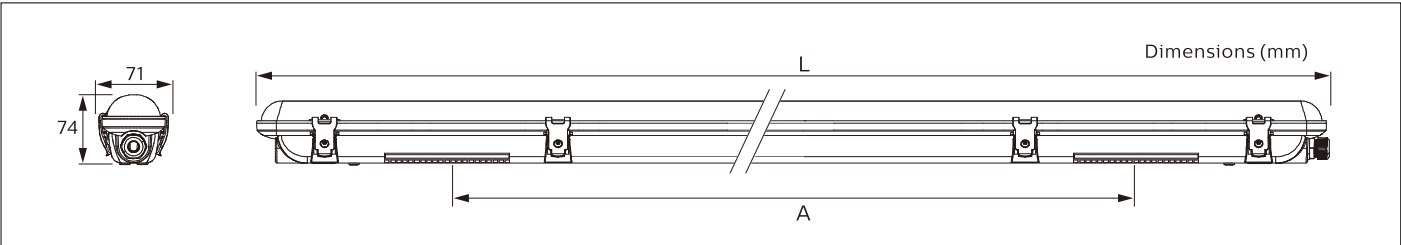


	LED18S	LED24S	LED48S	LED35S	LED68S	LED74S
I _{max}	14.5	15.8	18.6	15.8	17.2	17.2
T _{ref} [μs]	182	175	153	175	172	172
Max. Nr of products						
Drivers/ MCB16A type B [max.]	72	50	36	50	31	31
Drivers/ MCB10A type B [max.]	45	32	23	32	20	20
Drivers/ MCB16A type C [max.]	122	85	61	85	53	53
Drivers/ MCB10A type C [max.]	75	52	37	52	32	32

Inrush current
I mains (A)
I max
max/2
I nom
T_{ref}
Time (us)

- Do not stare into LED light beam.
- The luminaire shall be installed by a qualified electrician and wired in accordance with the latest IEE electrical regulations or the national requirements.
- The light source contained in this luminaire shall only be replaced by the manufacturer or his service agent or a similar qualified person.
- Above average concentration of sulfur effects the useful lifetime of the product. E.g: Light color changes from white to blue. Typically in chicken & pig farms.
- For use in environments where an accumulation of conductive dust on the luminaire may be expected.
- Do not install the luminaire on the location where it is exposed to heavily grease, esp. mineral oil and distillates (petroleum), heavy naphthenic treated with hydrogen.
- This product is not suitable for cold & humid storage areas, especially where obvious temperature gradients are present, such as ventilation opening, door, etc.e.g. freezers.
- Do not install the luminaire on locations where it is exposed to direct sunlight. UV radiation will damage the material over time resulting in loss of waterproof sealing and IP65 rating.
- Do not install the luminaire on the location where it is exposed to (animal) grease, oil, esp. cooking or mineral oil and distillates (petroleum), heavy naphthenic treated with hydrogen, or swimming pool applications (with chlorine present), or carwash (due to chemicals and/or salt presence).

ATTENTION
OBSERVE PRECAUTIONS
FOR HANDLING
ELECTROSTATIC
SENSITIVE
DEVICES

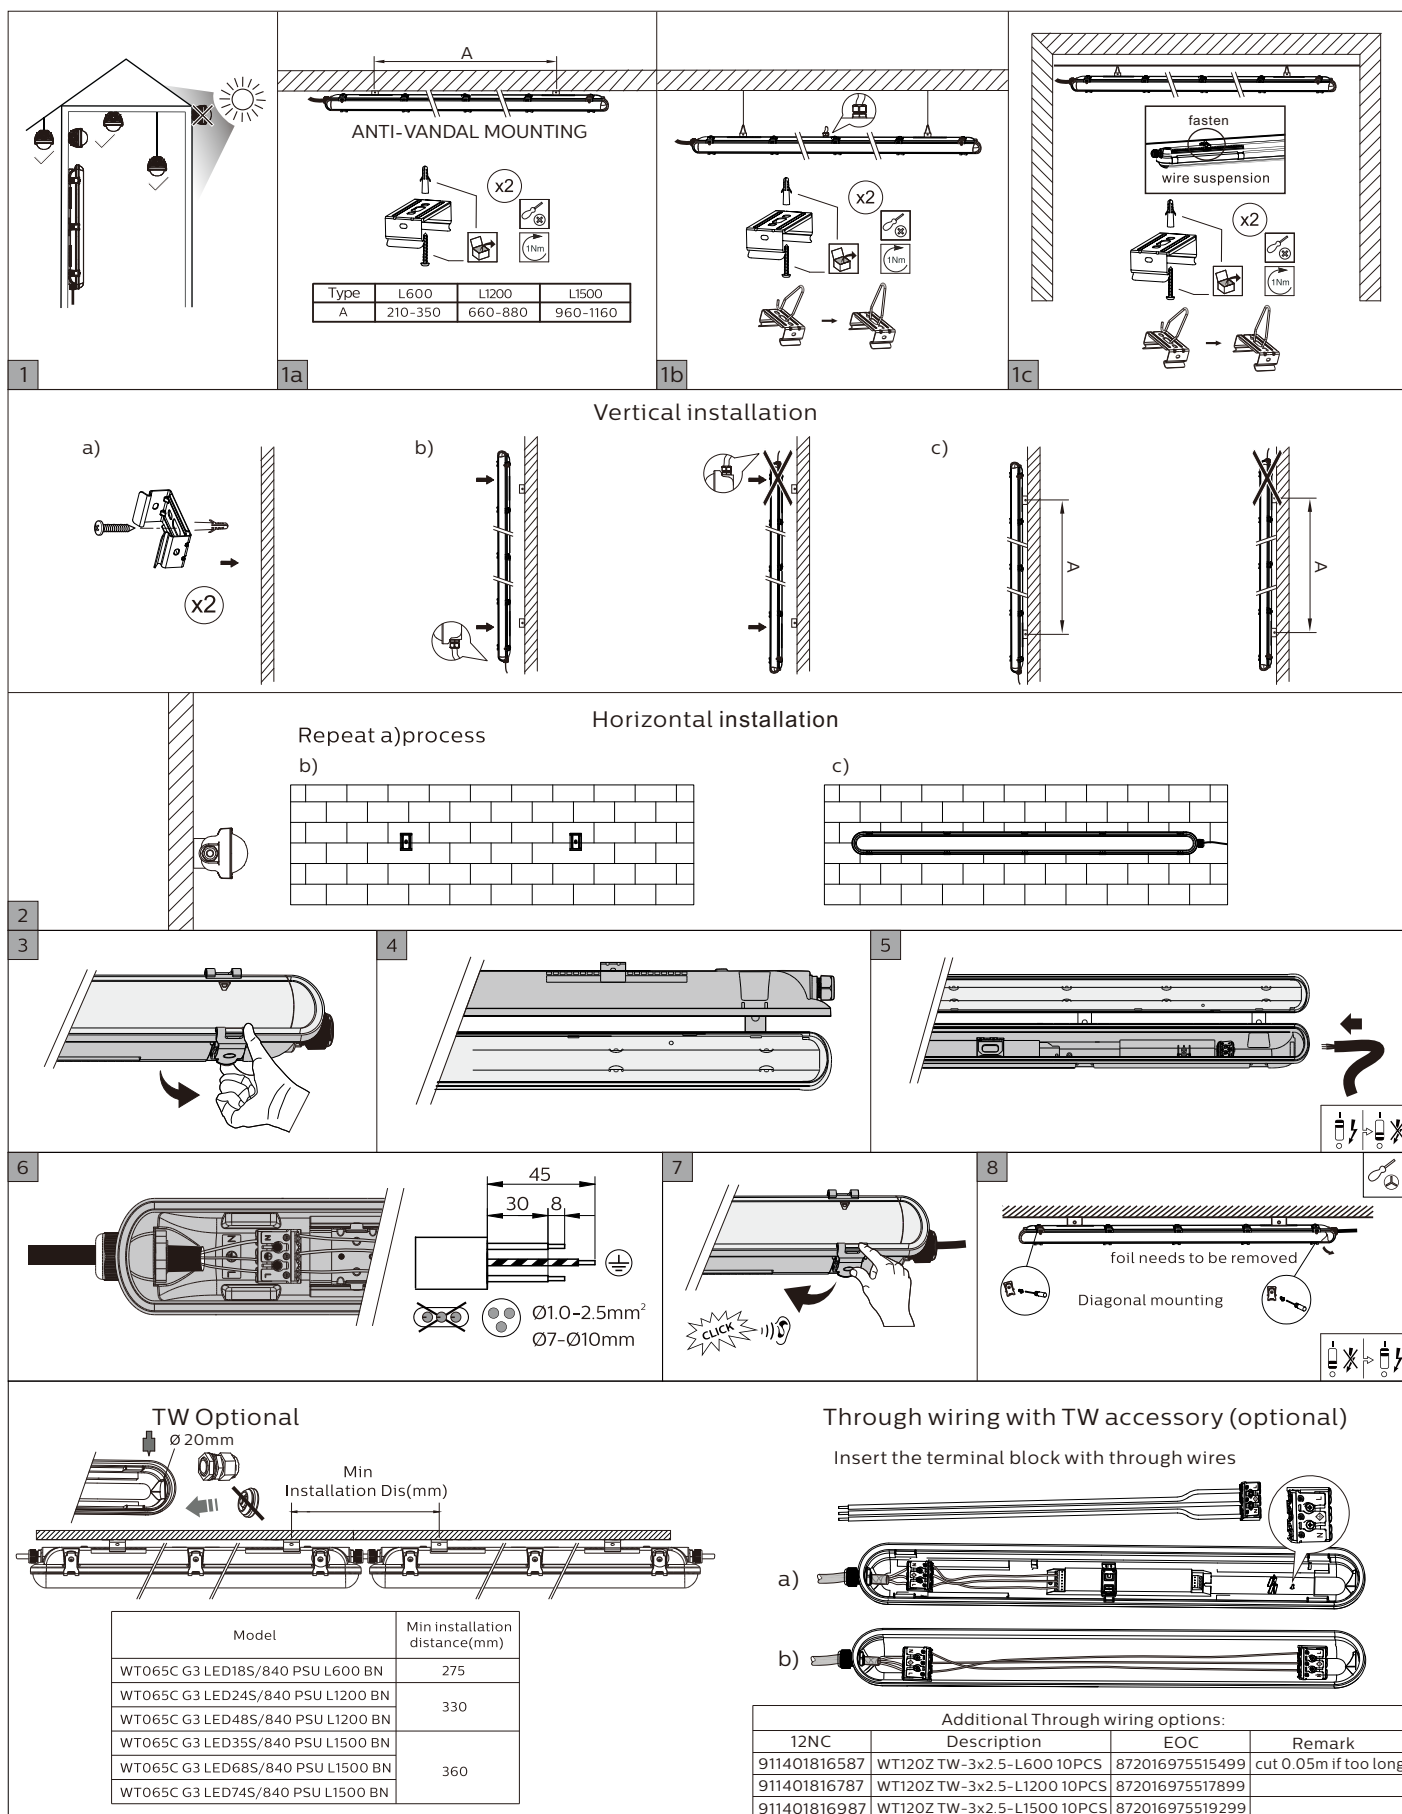

©08/2026 Signify Holding.

All rights reserved. This document contains information relating to the product portfolio of Signify which information may be subject to change. No representation or warranty as to the accuracy or completeness of the information included herein is given and any liability for any action in reliance thereon is disclaimed. The information presented in this document is not intended as any commercial offer and does not form part of any quotation or contract. Philips and the Philips Shield Emblem are registered trademarks of Koninklijke Philips N.V.. All other trademarks are owned by Signify Holding or their respective owners.

Signify Holding.
The Netherlands

