

The future starts now



The new digital NZM compact • reliable • innovative Catalog 2024



Powering Business Worldwide

Compact circuit breakers, switch disconnectors

Content

System overview

Description, functions and technical dataPage 4

1. Compact circuit breakers, switch disconnectors IEC

- 1.1 Circuit breakers, thermomagnetic releases, 3 polePage 58
- 1.2 Circuit breakers, magnetic short-circuit releases, 3 polePage 72
- 1.3 Circuit breakers IEC, electronic releases, 3 polePage 78
- 1.4 Circuit breakers IEC, electronic releases with energy meter function, 3 polePage 94
- 1.5 Circuit breakers IEC, thermomagnetic releases, 4 polePage 108
- 1.6 Circuit breakers IEC, electronic releases, 4 polePage 118
- 1.7 Circuit breakers IEC, electronic releases with energy meter function, 4 polePage 132
- 1.8 Compact circuit breakers IEC, thermomagnetic releases, 1 polePage 140
- 1.9 Switch disconnectors IEC, 3 polePage 141
- 1.10 Switch disconnectors IEC, 4 polePage 145

2. Compact circuit breakers, switch disconnectors UL/CSA, IEC

- 2.1 Circuit breakers UL/CSA, IEC, thermomagnetic releases, 3 polePage 148
- 2.2 Circuit breakers UL/CSA, IEC, magnetic short-circuit releases, 3 polePage 158
- 2.3 Circuit breakers UL/CSA, IEC, electronic releases, 3 polePage 162
- 2.4 Circuit breakers UL/CSA, IEC, electronic releases with energy meter function, 3 polePage 176
- 2.5 Circuit breakers UL/CSA, IEC, thermomagnetic releases, 4 polePage 180
- 2.6 Molded case switches for North AmericaPage 182

3. Compact circuit breakers, switch disconnectors IEC, EC, UL/CSA

- 3.1 Circuit breakers IEC for 1000 V AC, 3 polePage 184
- 3.2 Switch disconnectors UL/CSA, IEC for 1000 V DC, 1/2 polePage 185
- 3.3 Switch disconnectors UL/CSA, IEC for 1500 V DC, 1/2 polePage 186
- 3.4 Switch disconnectors IEC for 1500 V DC, 1/2 pole N...DCPage 187
- 3.5 Photovoltaic - Switch disconnectors up to 1500 V Bridge kitsPage 189

4. Accessories

- 4.1 Terminals, NZM1Page 192
- 4.2 Terminals, NZM2Page 200
- 4.3 Terminals, NZM3Page 208
- 4.4 Terminals, NZM4Page 222
- 4.5 Plug-in units, withdrawable unitsPage 235
- 4.6 Auxiliary contacts with screw terminals/spring-cage terminalPage 237
- 4.7 Undervoltage releasesPage 240
- 4.8 Shunt releasesPage 248
- 4.9 Relay modulesPage 252
- 4.10 Door coupling rotary handlesPage 254
- 4.11 Door coupling rotary handle with key lockPage 257
- 4.12 Door coupling rotary handles for North AmericaPage 258

1230PIC-785 Symbolphoto



1230PIC-785 Symbolphoto




1230PIC-802 Symbolphoto




1230PIC-721 Symbolphoto



1230PIC-677 Symbolphoto



00244478_0



System overview

- 4.13 Rotary handlesPage 260
- 4.14 Rotary handles with key lockPage 261
- 4.15 Rotary handles with door interlockPage 262
- 4.16 Main switch assembly kitPage 263
- 4.17 Main switch assembly kit with additional handlePage 267
- 4.18 Remote operatorsPage 270
- 4.19 AccessoriesPage 272
- 4.20 Mechanical interlockPage 275
- 4.21 Paralleling mechanismPage 276
- 4.22 Earth-fault releasePage 277
- 4.23 Power supply module / Interface modulePage 279
- 4.24 Communication modulePage 280
- 4.25 SASY 60i Busbar SystemPage 281

5. Construction

- 5.1 Construction size 1: Basic device 1Page 284
- 5.2 Construction size 1: Basic device 2Page 285
- 5.3 Construction size 1: Basic device 3Page 286
- 5.4 Construction size 1: Basic device 4Page 287

More informationPage 288

Thinking ahead. Shaping the future.

- switch
- protect
- control
- measure
- communicate



The energy supply and distribution systems of tomorrow have to contend with multiple competing demands. And Eaton has the right products to meet these challenges. Because Eaton, as a global leader in many technology areas, understands what panel building is all about.

For Eaton, future-oriented energy management means: to tackle complex tasks head-on with smart, simple solutions; to develop products that cover a broad range of applications and to provide all markets and sectors with the necessary systems for ensuring a safe, reliable and efficient energy future.

Eaton's product range leaves nothing to be desired, from the big picture down to the smallest detail:

- **xEnergy Elite** offers globally proven modular switchgears for a wide range of building and industrial applications up to 7500 A
- With **xEnergy** Eaton is able to offer safety-tested switchgear systems for power distribution systems up to 5000 A
- Eaton's new **digital NZM circuit breakers** are universally suitable for rated currents from 20 A to 1,600 A; they are now also equipped with the innovative **PXR electronic release** technology



xEnergy Elite

Low Voltage Motor Control and Power Distribution solutions up to 7500A

The xEnergy Elite motor control and power distribution centers are offering great flexibility to design and configure according your specific needs helping to ensure it is built for your application. The complete design is based on a very robust galvanized frame. This base frame offers high stability and superior earthing capabilities and will last for a lifetime.

You can specify different sizes of copper or aluminum busbars; air insulation or epoxy coating; top or

bottom cable entry; internal degree of protection; and fuse or breaker solutions. Plus, its optimized footprint helps improve your overall bottom line. Space inside buildings and industrial facilities is at a premium. We understand that you would rather use that valuable space for your process, so we looked at the best ways to design our electrical equipment to maximize your space savings.



xEnergy Main

Low-voltage power distribution systems up to 5000 A

The xEnergy switchgear system has been designed to meet demands that are constantly growing: This makes it ideal for building infrastructure up to 5,000 A. Every function block has been carefully and systematically calibrated, from the switchgear and mounting technology to the enclosures and the requisite software. You will not only get safety-tested switchgear that represents the state of the art – you will also save time, money and space.

xEnergy combines maximum safety with easy planning:

- xEnergy fully complies with the IEC 61439 standard.
- To make the planning and assembly of an xEnergy system as easy as possible, we offer our established planning tool, the xEnergy configurator, free of charge.



The NZM series – circuit breakers up to 1600 A

Best in class

Full performance, compact design

Eaton's NZM series circuit breakers cover rated currents of 20 to 1600 A – with only four frame sizes. And they are also optimally matched to each other. The wide range of possible applications covers every need. Eaton took a close look at what customers really want and designed the product accordingly.

What stands out, for example, is the comprehensive system of accessories, which can be individually assembled and easily installed in line with specific application requirements. The same goes for the flexible terminals, which offer increased safety for operators thanks to the variety of available covers.

The circuit breakers are thus suitable for universal use – from small distribution boards to machine controls and motor-starter combinations, and all the way to large power distribution systems with a short-circuit breaking capacity of up to 150 kA.




The new digital NZM circuit breakers combine full performance with a compact design. The circuit breakers and accessories have been designed in such a way that their function, assembly and handling are the same throughout, in order to make your work as simple as possible.

Various types of releases are available, including cost-effective versions with bimetallic strips and models with communications-enabled digital electronics, which can take on a variety of protective functions. This makes them suitable for use in both AC and DC networks – from cable protection to the protection of motors, generators and transformers. With switch-disconnectors up to 1600 A, implementing applications such as main switches, emergency power-off switches and coupler switches is quick and simple.

Despite their slim design, the NZM circuit breakers can handle loads with rated currents up to 1600 A, and they can safely switch off short-circuit currents up to 150 kA.


The innovative switching technology with double-break contacts helps to speed up the switching process. In the event of a short circuit, the special design and the selected materials will generate repulsive magnetic forces that fling open the contacts in a fraction of a sine wave.

Switching capacities up to 150 kA and operating voltages up to 690 V pose no problem at all. At the same time, thanks to their optimal rate of power loss, the devices have a positive impact on the size of the control panel. The digital NZM circuit breakers are suitable for use in even the toughest environments, such as mining (up to 1000 V AC), renewable energy (up to 1500 V DC) and other power-intensive applications with high switching capacities at 690 V AC (e.g. data center, marine and renewable energy applications etc.).

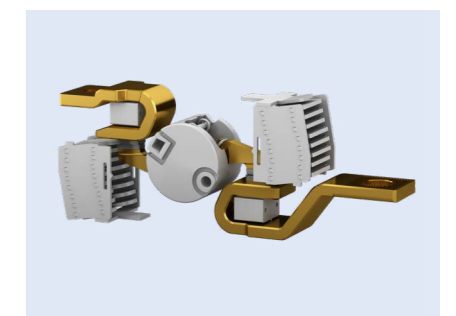


Circuit breakers offer comprehensive protection:

They protect entire systems while offering many additional functions

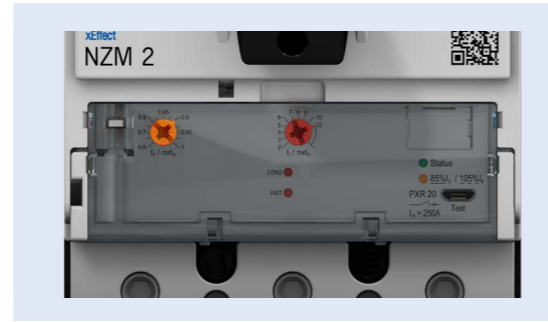


1. The NZM protects systems

as well as cables across all levels, from the main distribution board all the way to the load itself.
See page 28

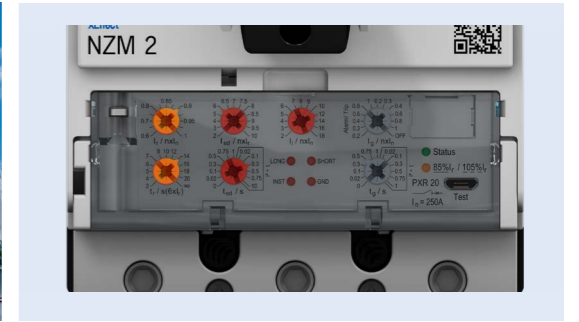


4. The NZM offers earth-fault protection

with integrated alert and trip functions as well as Arcflash Reduction Maintenance System™ and ZSI.
See page 30

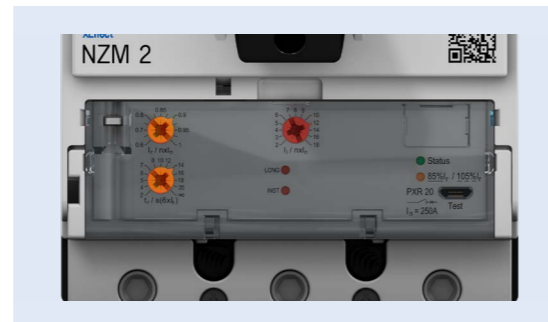


2. The NZM protects motors

as well as motor-starter combinations and input wiring against overloads and short circuits.
See page 29

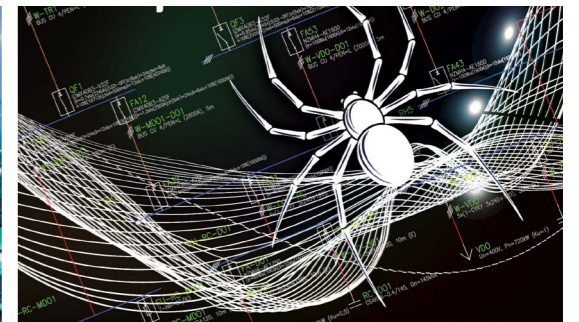


5. The NZM offers selectivity and backup protection

against excessive short-circuit currents.
See page 31

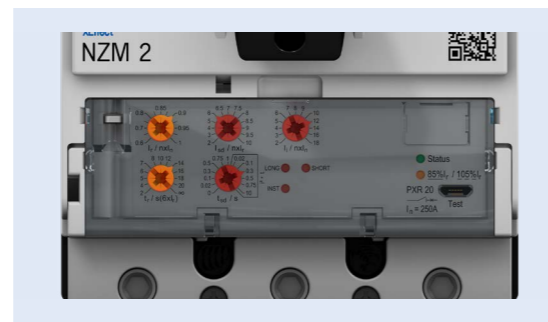


3. The NZM offers full-range protection

and selective protection for many applications.
See page 30

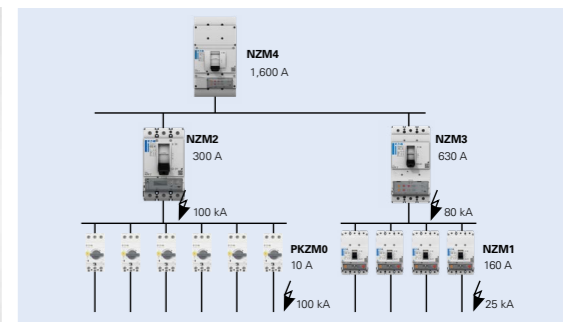

6. The NZM offers zone selectivity and protection against electric arcs

with the patented Arcflash Reduction Maintenance System™.
See page 32

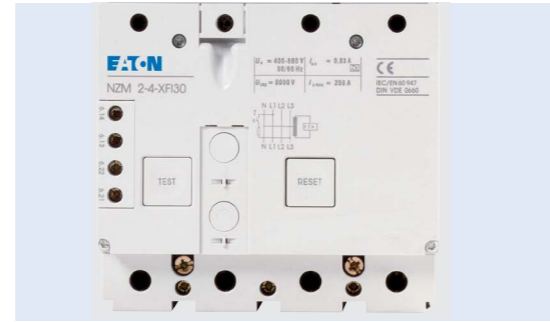


7. The NZM offers protection against residual currents

for universal mounting, or for mounting directly on the circuit breaker.
See page 33




8. The NZM protects DC systems

either as a circuit breaker with thermo-magnetic release, or as a switch-disconnector.
See page 34

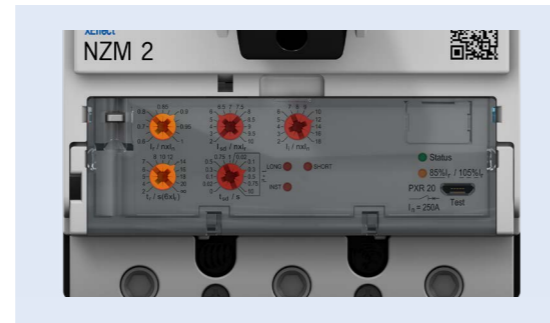

9. The NZM protects special applications

with high switching capacities at 690 V AC, at high frequencies, in IT networks, and at 1000 V AC.
See page 35

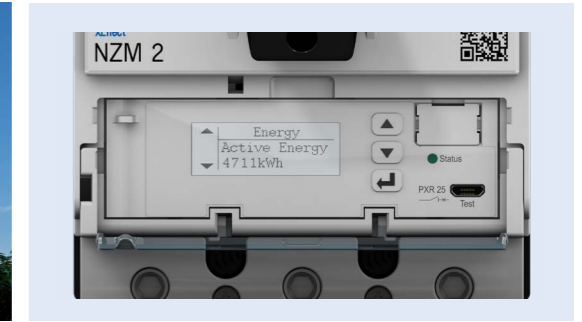

10. The NZM offers protection and ISO 50001

energy metering with Class 1 accuracy* in accordance with IEC 61557-12.
See page 38

Which release provides the right type of protection?

Release	TMTU				PXR10	PXR20			PXR25		
	-A	-AF	-M	-S	-AX	-MX	-VX	-VX...-T	-PX	-PX...-TZ(TAZ)	-PMX
T = Thermomagnetic E = Electronic	T	T	T	T	E	E	E	E	E	E	E
Protective features											
Overload protection	✓	✓	✓	-	✓	✓	✓	✓	✓	✓	✓
Short-time delayed short-circuit protection	-	-	-	-	-	-	✓	✓	✓	✓	-
Non-delayed short-circuit protection	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
Earth-fault protection	-	-	-	-	-	-	-	✓	-	✓	-
Arcflash Reduction Maintenance System™ maintenance mode	-	-	-	-	-	-	-	-	-	✓	-
ZSI zone-selective interlocking	-	-	-	-	-	-	-	-	-	✓	-
Additional functions											
Suitable for DC protection	✓	-	-	-	-	-	-	-	-	-	-
USB interface	-	-	-	-	✓	✓	✓	✓	✓	✓	✓
Current measuring (data readout)	-	-	-	-	-	✓	✓	✓	✓	✓	✓
Comprehensive data collection, including Class 1 energy metering*	-	-	-	-	-	-	-	-	✓	✓	✓
Communications-enabled	-	-	-	-	-	✓	✓	✓	✓	✓	✓
Total harmonic distortion (THD)	-	-	-	-	-	-	-	-	✓	✓	✓
Harmonic content	-	-	-	-	-	-	-	-	✓	✓	✓

*For further information please contact your Eaton sales person.

Is a thermo-magnetic or an electronic release the better option? The right protection for the task at hand



Thermo-magnetic trip units offer protection against overloads and short circuits. Electronic releases, meanwhile, make it possible to fine-tune the protective effect and to enhance it exponentially. On the one hand, electronic systems trip much more flexibly and precisely thanks to the use of digital electronics. On the other hand, by recording the data digitally, they also open up new possibilities for analytics and predictive maintenance. The most important technical aspects of the two types of releases are explained in detail below.

Thermo-magnetic overcurrent releases

Thermo-magnetic releases are the basic release mechanism for protection against overloads and short circuits. This type of release is ideal for cost-effective system designs up to 500 A. It is suitable for use in three-phase networks, AC networks and DC networks as well as for 400 Hz applications.

Thermal releases

A so-called bimetallic strip is used as the release element in thermally (current- dependent) delayed overload releases. This bimetallic strip is composed of at least two different metals with different coefficients of thermal expansion. The coefficient of thermal or linear expansion indicates the expansion of an object at a temperature increase of 1 K. When a rotor stalls, for example, the motor will draw more current. As a result of this increased current consumption, the current-carrying components of the motor-protective circuit breaker will experience a greater increase in temperature. This means that the metal with the greater coefficient of thermal expansion will expand at a higher rate, causing the bimetallic strip to start bending. This bending results in the release of the internal breaker mechanism, thereby tripping the motor-protective circuit breaker. The circuit breaker's main contacts will then open, which interrupts the supply of power to the motor, so that the corresponding motor fault can be repaired without danger. Once the motor-protective circuit breaker is switched back on, the motor will again start up.


Magnetic releases

In a circuit breaker, a magnetic overload release performs the short-circuit tripping function. This release works based on the principle of an electromagnet and a current coil. This current coil is not energized by a separate voltage source – instead, the main current flows directly through it. In the event of a short circuit, a large overcurrent will flow through the current coil. The resulting magnetic field will pull the armature into the coil, meaning it will then hit the moving contact piece. This momentum, together with the dynamics of the short-circuit current itself, will cause the contacts to open abruptly, thereby safely disconnecting the short-circuit current. The breaker mechanism will be released simultaneously. As a result, the circuit breaker will remain in the "OFF" position after the short-circuit current has been switched off.

Ambient temperature compensation

The NZM1 and NZM3 type A releases are not temperature compensated. The NZM2-A and all NZM-M motor-protective releases compensate the ambient temperature by means of an additional bimetallic strip. This compensation significantly reduces the impact of the ambient temperature on the functioning of the thermal release, which in turn improves the current-carrying capacity.

The electronic releases have been equipped with a microprocessor to ensure improved operational continuity.

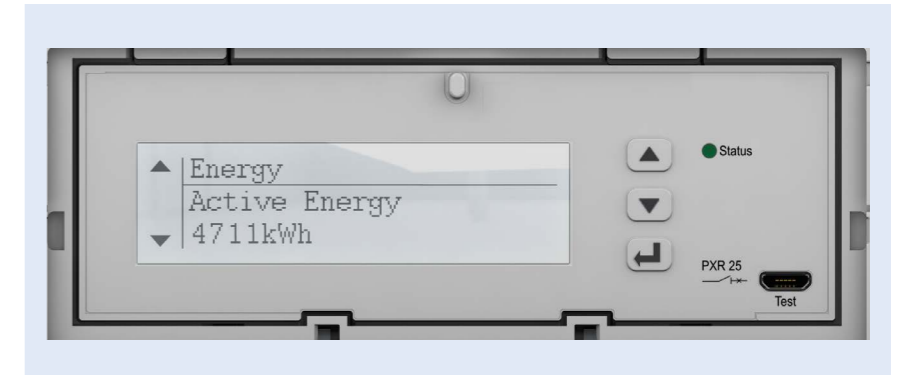

Electronic trip units


The digital electronics are controlled by the microprocessor, making it possible to determine the values of the load current that is being monitored. In contrast to analog electronic systems, the digital electronics will correctly evaluate any harmonics occurring in the network to prevent undesired early tripping. This helps to avoid unnecessary downtime.

Dedicated components simulate a thermal memory even when no current is present and the circuit breaker has tripped due to load overload. This ensures the reliable protection of the connected equipment – even if the cooling-down phase prior to the system restart was too short.

The proper functioning of the electronic components can be checked during protection via a run-in test. Thermocouples ensure the safe tripping of the circuit breaker in the unlikely event that the electronic components overheat.

Redundant safety

A parallel mechanical solution ensures maximum safety in the case of very high short-circuit currents, as the hinged armature functions as an additional magnetic release. This release will trip within only a few milliseconds.

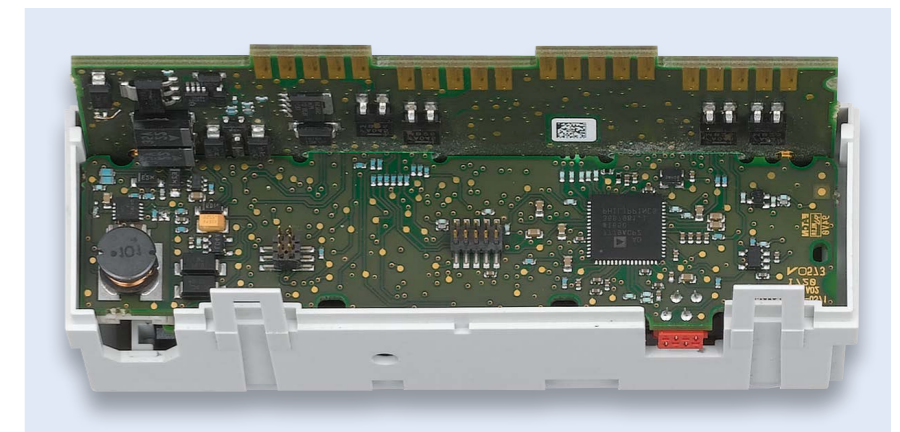




Power Xpert Release

The next generation of electronic releases – now also available for the NZM


Convincing in every way

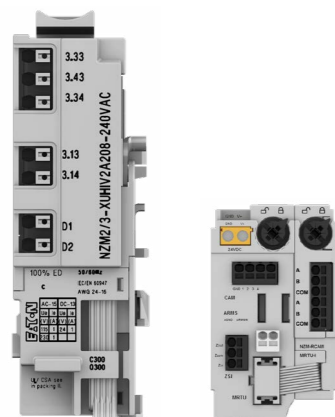

With the Power Xpert Release (PXR) Eaton has developed a new platform for trip units. This technology has already been integrated in the IZMX series of air circuit breakers, and is now also available for the compact circuit breakers of the NZM series.


The PXR is a powerful trip unit for professional users. Our customers' greatest possible benefit is always our main priority. Therefore, the PXR combines easy handling across all frame sizes with state of the art technology, a wide range of practical functions and, as always, a proven safety record.

The PXR technology makes it possible to configure and test the circuit breakers from a PC via a USB port. This makes it very easy to access the information generated by the switchgear, to save the test data and to print it. This is the fastest and most convenient way to continuously improve control and maintenance systems. All sensitive data and settings are password-protected to prevent unauthorized access.

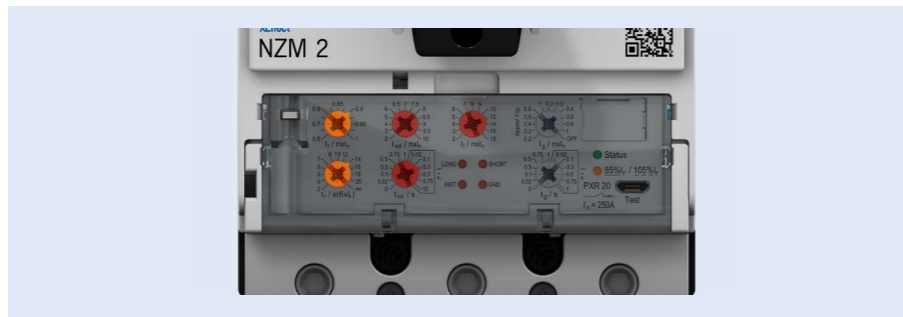

Improved lifecycle management through digital circuit protection

What does lifecycle management mean and what are the benefits for users? Different approaches from Eaton and their advantages and benefits are discussed in this [white paper](#).

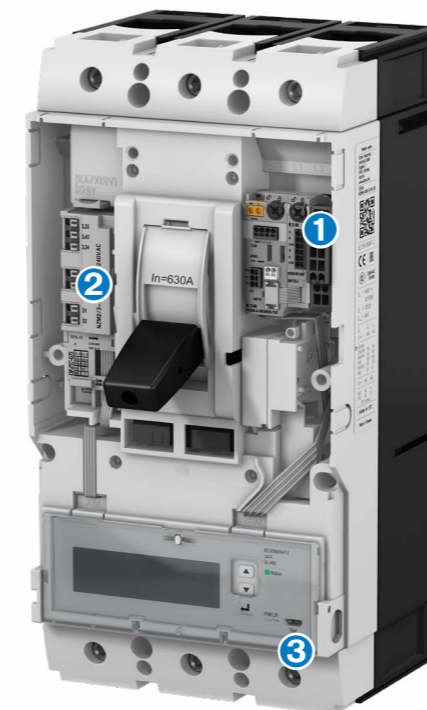

Saving our users time and offering them the broadest possible range of applications – these were the goals Eaton had in mind while developing the Power Xpert Release platform.

1 As such, we have equipped the PXR with a consistent design and clear menu navigation that will simplify your day-to-day work. With the PXR, communications are similarly easy: The many available communication modules for various bus systems allow for high-performance connections in line with the respective system requirements. Additionally, the integrated Modbus RTU connection also saves space during installation.

The new, fully integrated control and measurement technology creates additional benefits for customers

- 2 The integrated relays inside the voltage release enable the control of any associated components, alongside the display of operating states (such as alert notifications), the control of remote operators and motor-starter combinations, and much more.
- 3 The USB interface allows for easy connection to a PC to change the settings, conduct analyses or launch one of the test function.

The Rogowski coil transformer supports ISO 50001 energy management with Class 1 energy metering* in accordance with IEC 61557-12.

The PXR25 premium version with display

With the PXR25 premium version (NZM....PX/PMX...), you can keep everything in sight. For intuitive handling and to make configuration even easier, the PXR25 is equipped with a high-resolution display. You can enter the desired settings via this display. You can choose between protection settings and soft settings (additional settings). The settings of PXR switches can also be easily adjusted by using the Power Xpert Protection Manager (PXPM) software for PC. With the PXR20 version, you can adjust the protection settings using the rotary heads on the circuit breaker itself, while the soft settings can be adjusted using the PXPM software.

*For further information please contact your Eaton sales person.



What the PXR is capable of

The most important benefits and features at a glance

One design for all products

The consistent design for all product groups and the clear, ergonomic arrangement of the various elements ensures that the operation is the same operation and configuration of the PXR across the whole range of compact and open circuit breakers.

Now also with LED light for status and overload indication

A green-red dual LED indicates the current status: In start-up mode, the LED is permanently green. Green flashing indicates normal operation. Red flashing indicates an error in the electronic trip unit (tripping unit). The overload LED indicates the load status of the circuit breaker.

This warning can also be transmitted via the integrated communications. The PXR20 is fixed at 80 % and 105 % of I_r . The PXR25 has same default-values as the PXR20, but in this case they can be adjusted as required.

Everything under control – thanks to the high-resolution display

The high-quality, full graphic display features a premium pixel matrix for enhanced contrast and brightness. The uniform menu navigation has been designed for maximum user-friendliness.

Always the right setting

The new NZM is fully adjustable over an extended range. The customary PZ2 screwdriver can still be used. The VX trip unit of the NZM2 can now also be set for the instantaneous release range. In addition the NZM2 now comes with optional ground fault protection.

The PXR – a real knack for connectivity

The PXR electronic release uses the modern communications platform provided by the internal Modbus RTU module, with possible connections to numerous systems such as EtherNet/IP™, EtherCAT®, Profinet and SmartWire-DT.

New modules that make things easier

Interface module

This module is used to detect the status of the circuit breaker by means of photoelectric light barriers, and for connection to enhanced functional interfaces. Each version has been specifically adapted to the respective circuit breaker type. A 24 V DC screw terminal supplies the tripping unit with power. Photoelectric sensors detect the respective device status (on/off/tripped) and relay it via the communication connection. In the event of a short circuit, zone selectivity ensures a faster and more precise shutdown. In addition, the module can be used to connect an internal Modbus RTU module, to remotely operate the Arcflash Reduction Maintenance System™ maintenance mode.

The internal Modbus RTU module

A Modbus RTU connection can be integrated internally, so that no external communication components are required. The connection to a superordinate system saves space and allows for the quick and cost effective transmission of data. As a result, your system will be optimally prepared for all Industry 4.0-related tasks. The internal Modbus RTU module may also be used to connect to any external communication modules.



Relay module

The relay module contains two programmable relays, in addition to established components such as the undervoltage release. These relays can be used, for example, for the remote control of drives or to control motor starters. They are equally suitable for alert notifications or status messages.




How to correctly adjust the PXR

Overload release I_r , now with extended 13-point adjustment range (from 0.4 to $1 \times I_n$).

Delayed short-circuit release I_{sd}
To ensure the selectivity of the mains connection, the circuit breaker will trip after the set delay time t_{sd} .

Non-delayed short-circuit release I_i
The threshold value can be set between 2 and $18 \times I_n$. The I_i value refers to the rated current I_n .

Earth fault protection I_g
Should excessive earth impedance prevent the tripping of the short-circuit release, the earth fault protection will automatically issue an alert and switch off the device.

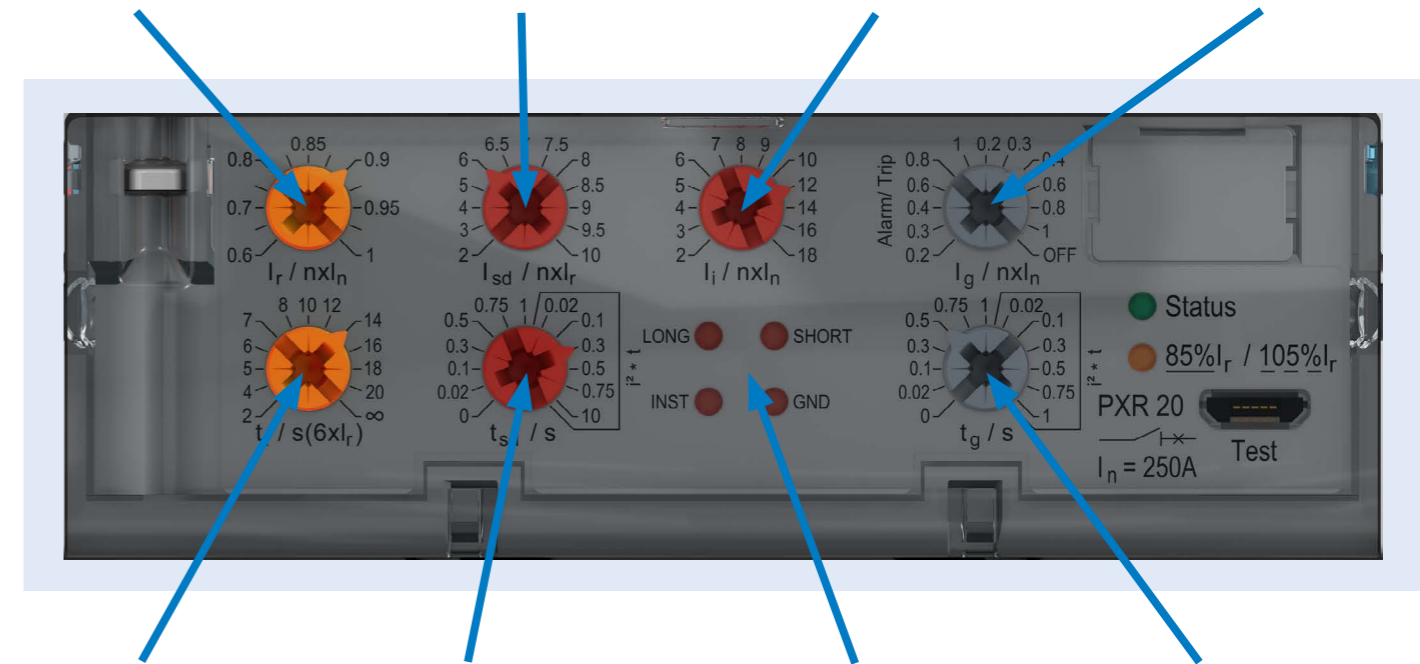

Time lag t_r
Stipulates the time lag after which an overload of $6 \times I_r$ causes the device to trip. Adjustable in increments of $t_r = 2$ to 20 or ∞ .


Time delay t_{sd} (with reference to I_{sd})
Adjustable in 7 steps, from 0 ms to 1,000 ms, for delayed tripping in the event of a short circuit.

“Tripped” message
If the circuit breaker trips, the corresponding LED will indicate the reason, e.g. an overload.

Time delay t_g (with reference to I_g)
Thanks to the time delay $t_g = 0$ ms to 1,000 ms, a selective shutdown is possible even in the event of an earth fault.

Electrical parameters

- I_r – Overload release
- t_r – Time lag
- I_{sd} – Delayed short-circuit release
- t_{sd} – Time delay
- I_i – Non-delayed short-circuit release

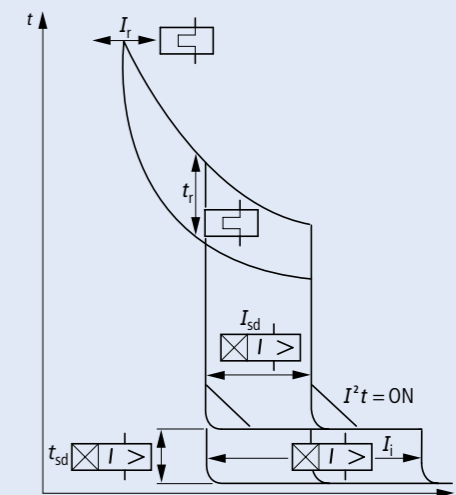







TYPE			PN1/N1	PN2/N2	PN3/N3	N4	N2...-DC...	N3...-DC...	N4...-DC...	N4...-PV-NA
General information										
Number of poles			3, 4	3, 4	3, 4	3, 4	4	4	4	4
Degree of protection of the device (operating elements)	IP20				✓				✓	
of enclosure and bezel	IP40			✓					✓	
of enclosures with rotary handles	IP66			✓					✓	
Dimensions (WxHxD)		mm	3-pole: 90x145x84.5 4-pole: 120x145x84.5	3-pole: 105x184x149 4-pole: 140x184x149	3-pole: 140x275x166 4-pole: 185x275x166	3-pole: 210x401x207 4-pole: 280x401x207	140x184x149	185x275x166	280x401x207	
Ambient temperature	Storage at -40 °C to +70 °C Operation at -25 °C to +70 °C				✓				✓	
Direction of current supply top or bottom					✓				✓	
Mounting positions	In general		Vertical and 90° in all directions				Vertical and 90° in all directions			
	with plug-in units		-	Vertical and 90° left	Vertical and 90° right/left	-				
	with withdrawable units		-	-	Vertical and 90° left	Vertical				
Electrical properties in accordance with IEC 60947-3										
Rated operational current I_n at 40 °C	AC-1	A	max. 160	max. 250	max. 630	max. 1,600				
	AC-22A, (AC-23 for (PN1...))	A	max. 160	max. 250	max. 630	max. 1,600				
Rated operational voltage U_e	DC-22A (DC-21A for N...-S15-PV-NA)	A	-	-	-	-	250	550	1,600	1,200
	AC 50/60 Hz	V	690	690	690	690	N...-S1-DC: 1,000 N...-S15-DC: 1,500	N...-S1-DC: 1,000 N...-S15-DC: 1,500	N...-S1-DC: 1,000 N...-S15-DC: 1,500	N...-S1-DC: 1,000 N...-S15-DC: 1,500
For use in unearthed networks		V AC	690	690	690	525	N...-S1-DC: 1,000 N...-S15-DC: 1,500	N...-S1-DC: 1,000 N...-S15-DC: 1,500	N...-S1-DC: 1,000 N...-S15-DC: 1,500	N...-S1-DC: 1,000 N...-S15-DC: 1,500
		V	690	690	1000	1000	N...-S1-DC: 1,250 N...-S15-DC: 1,500	N...-S1-DC: 1,250 N...-S15-DC: 1,500	N...-S1-DC: 1,250 N...-S15-DC: 1,500	N...-S1-DC: 1,250 N...-S15-DC: 1,500
Rated insulation voltage U_i		V	690	690	1000	1000				
		V	-	-	-	-				
Rated impulse-withstand voltage U_{imp}	Main contacts	kV	6	8	8	8	N...-S1-DC: 8 N...-S15-DC: 10	N...-S1-DC: 8 N...-S15-DC: 10	N...-S1-DC: 8 N...-S15-DC: 10	N...-S1-PV-NA: 8 N...-S15-PVNA: 10
	Auxiliary contacts	kV			6	6				
Overvoltage category					III	III				
Pollution category					3	3	N...-S1-DC: 3 N...-S15-DC: 2	N...-S1-DC: 3 N...-S15-DC: 2	3	3
Safe electrical disconnection in accordance with IEC 60947-3					✓	✓			✓	
Switching capacity in accordance with IEC 60947-3										
Rated short-circuit making capacity	I_{cm}	kA	2.8	5.5	25	53				
Rated short-time current	I_{cw}	kA								
	t = 0.3 s	kA	2	3.5	12	25				
	t = 1 s	kA	2	3.5	12	25				
Rated short-circuit current I_q	With fuse upstream	A gG/gL A gR	PN1(N1)-63...125: 125 PN1(N1)-160: 160	PN2(N2)-160...250: 250	PN3(N3)-400...630: 630	PN4(N4)-630...1600: 2x800				
	With fuse upstream	kA	100	100	100	100				
	400/415 V	kA	80	80	80	80				
	1000 V	kA	-	-	-	-				
	With fuse downstream	A gG/gL A gG/gL	PN1(N1)-63...125: 125 PN1(N1)-160: 160	PN2(N2)-160...250: 250	PN3(N3)-400...630: 630	PN4(N4)-630...1600: 2x800				
	400/415 V	kA	100	100	100	100				
690 V	kA	10	80	80	80					
Service life										
Mechanical		O-C-O	20000	20000	15000	10000				
Maximum operating frequency		Operations / h	120	120	60	60				
Electrical 50/60 Hz										
AC-1	415 V		10000	10000	5000*	3000				
	690 V		7500	7500	5000	2000				
	1000 V		-	-	-	-				
AC-3 ((PN1: AC23))	415 V		7500	7500	3000	2000				
	690 V		5000	5500	2000	1000				
DC-22A (DC-21A for N...-S15-PV-NA)							1000	1000	500	500





Additional technical information can be found in the product datasheet on our website.
* This value is 3000 for all 630 A switch disconnectors

Circuit breakers

NS...-...NA				NS1-...-NA	NS2-...-NA	NS3-...-NA	NS4-...-NA
							
Circuit breaker				max. 125 A	max. 250 A	max. 600 A	max. 1,200 A
Rated peak-withstand current		U_{imp}					
Main circuits		V		6000	8000	8000	8000
Auxiliary circuits		V		6000	6000	6000	6000
Rated operational voltage		U_e	V AC	690	690	690	690
Max. rated uninterrupted current							
IEC/EN 60947-2 Annex L		I_n	A	125	250	600	1200
UL489/CSA 22.2 No. 5.1		I_n	A	125	250	600	1200
Overvoltage category/degree of pollution				III/3	III/3	III/3	III/3
Rated insulation voltage		U_i	V	690	1000	1000	1000
Switching capacity in accordance with UL 489, CSA 22.2 No. 5.1							
	240 V 60 Hz		kA	85	150	150	85
	480 V 60 Hz		kA	35	100	100	65
	600 V 60 Hz		kA	-	50	50	42
Products intended for the North American market have a different switching capacity							
Rated short-circuit making capacity	240 V 50/60 Hz	I_{cm}	kA	187	330	330	187
	400/415 V 50/60 Hz	I_{cm}		105	330	330	154
	440 V 50/60 Hz	I_{cm}	kA	74	286	286	143
	525 V 50/60 Hz	I_{cm}	kA	53	105	143	84
	690 V 50/60 Hz	I_{cm}	kA	17	53	74	74
Rated short-circuit breaking capacity $I_{cc} = I_{cu}$ in accordance with IEC/EN 60947-2 Annex L	240 V 50/60 Hz	I_{cs}	kA	85	150	150	85
	400/415 V 50/60 Hz	I_{cs}	kA	50	150	150	70
	440 V 50/60 Hz	I_{cs}	kA	35	130	130	65
	525 V 50/60 Hz	I_{cs}	kA	20	50	85	40
	690 V 50/60 Hz	I_{cs}	kA	10	20	35	35
I_{cs} to IEC/EN 60947, switching sequence O-t-CO-t-CO	240 V 50/60 Hz	I_{cs}	kA	85	150	150	43
	400/415 V 50/60 Hz	I_{cs}	kA	50	150	150	35
	440 V 50/60 Hz	I_{cs}	kA	35	130	130	33
	525 V 50/60 Hz	I_{cs}	kA	10	37.5	33	20
	690 V 50/60 Hz	I_{cs}	kA	7.5	5	9	18
Service life, mechanical (of which max. 50 % is tripped by the shunt/undervoltage release)		Switching operations		20000	20000	15000	10000
Maximum operating frequency		ops./h		120	120	60	60
Service life, electrical							
AC-1	400/415 V 50/60 Hz	Switching operations		10000	10000	5000	3000
	690 V 50/60 Hz	Switching operations		7500	7500	3000	2000
Total downtime in the event of a short circuit		ms		< 10	< 10	< 10	< 25 \leq 415 V < 35 > 415 V


Additional technical information can be found in the product datasheet on our website.

Accessories

TYPE		NZM1	NZM2	NZM3	NZM4
					
Internal accessories					
Auxiliary contacts	M22-(C)K...	✓	✓	✓	✓
Trip-indicating auxiliary contacts	M22-(C)K...	✓	✓	✓	✓
Early-make auxiliary contacts	NZM...XHIV...	✓	✓	✓	✓
Undervoltage releases	NZM...XU...	✓	-	✓	-
Undervoltage releases with relay module	NZM...XU...2A...	-	-	✓ (PXR)	-
Shunt releases	NZM...XA...	✓	-	✓	-
Shunt releases with relay module	NZM...XA...2A...	-	-	✓ (PXR)	-
Interface Module	NZM...XBSM	-	-	✓ (PXR)	-
External accessories					
Actuator					
With thumb grip		✓	✓	✓	✓
Rotary handle, direct	NZM...XDV...	✓	✓	✓	✓
Rotary handle with shaft extension	NZM...XTVD...	✓	✓	✓	✓
Rotary handle, lateral	NZM...XS	✓	✓	✓	✓
Rotary handle with side lever (UL/CSA)	NZM...SXH	-	-	✓	✓
Rotary handle, at the rear	NZM...SXH	✓	✓	✓	-
Remote operator (electrical)	NZM...XR...	-	-	✓	✓
Residual-current protection					
Residual-current circuit breaker – mountable	NZM...XFI	✓	✓	✓	-
Ground fault relay – cannot be mounted directly	ELR...	✓	✓	✓	✓
Type of installation					
Fixed	NZM...	✓	✓	✓	✓
Plug-in units	NZM...SVE	✓	-	✓	-
Withdrawable units	NZM...AVE	-	-	-	✓
Covers					
Cable lug cover	NZM...XKSAE	-	-	✓	✓
Terminal cover	NZM...XKSA...	✓	✓	✓	✓
Phase isolator	NZM...XKP...	✓	✓	✓	✓
Terminal cover	NZM...XKFA...	✓	✓	✓	✓
Finger guard	NZM...XIPK...	✓	✓	✓	✓
Terminal type					
Screw-in/direct connection	NZM...XKS...	✓	✓	✓	✓
Box terminal	NZM...XKC...	✓	✓	✓	✓
Connection at rear	NZM...XKR...	✓	✓	✓	✓
Tunnel terminal	NZM...XKA...	✓	✓	✓	✓
Control-circuit terminal	NZM...XST...	✓	✓	✓	✓
Connection expansion	NZM...XKV...	-	-	-	✓
Module plate	NZM...XKM...	-	-	-	✓

Additional technical information can be found in the product datasheet on our website.

Type design of the basic devices

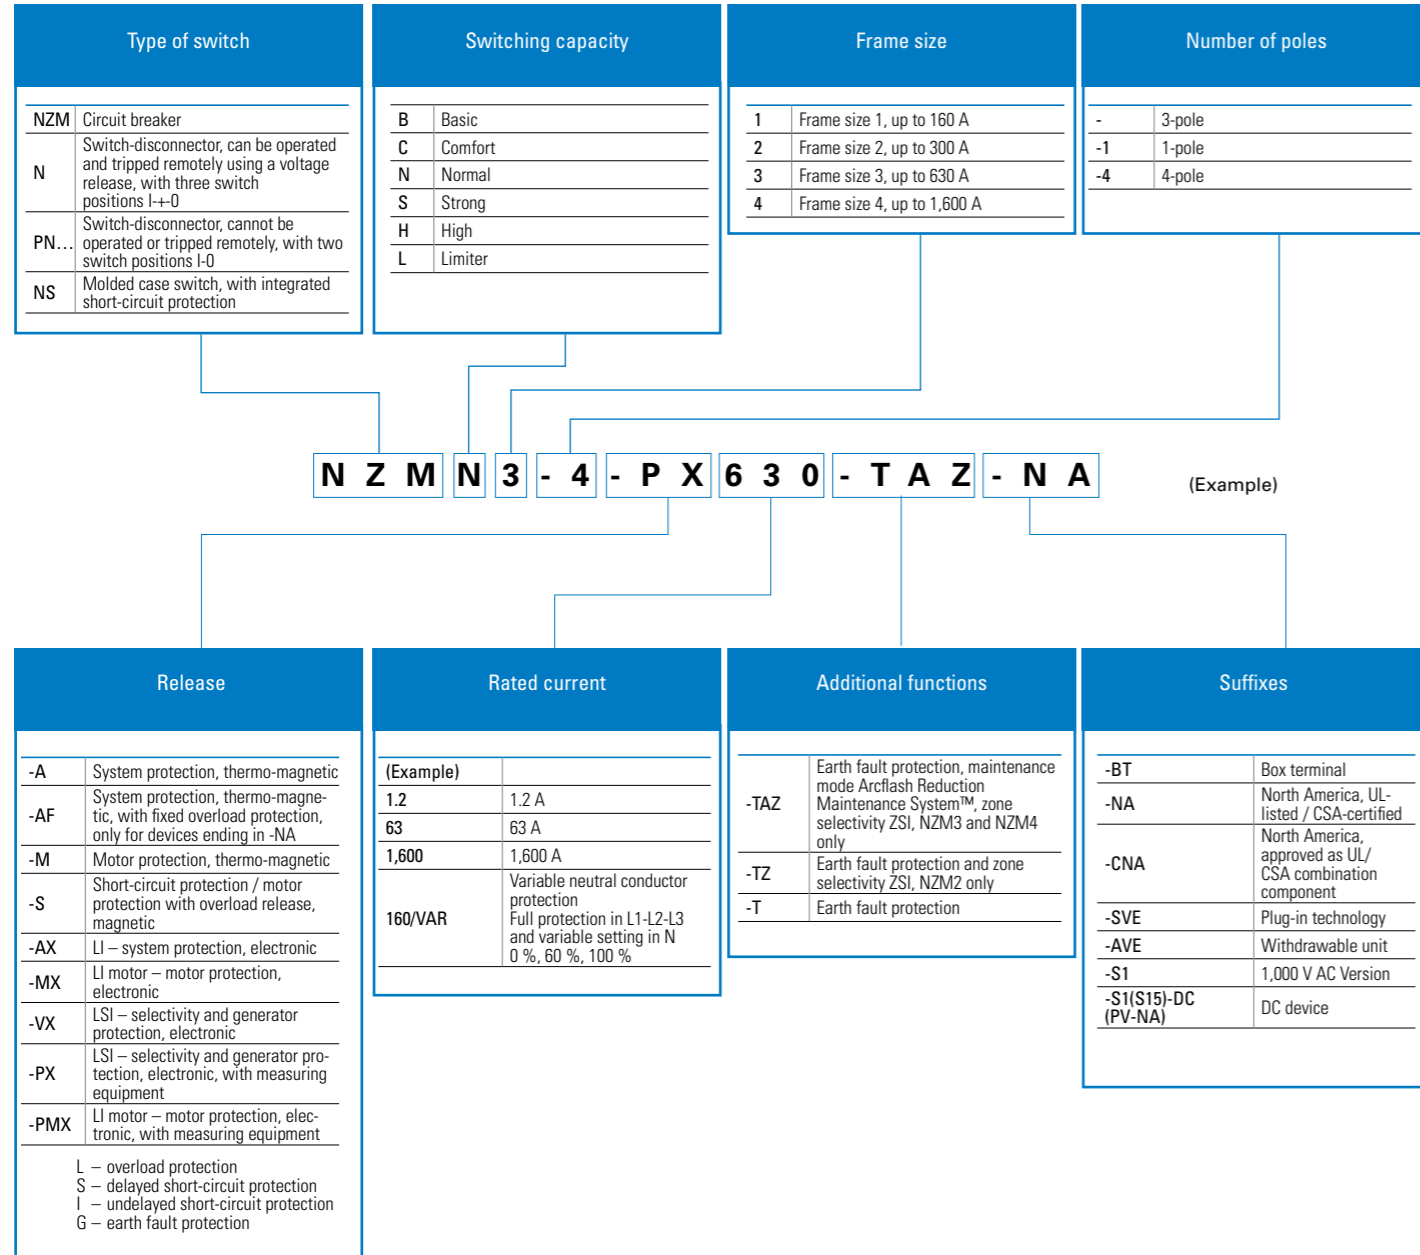


Conformity to standards

Circuit breakers for global use

All circuit breakers meet the requirements for global use. This also applies to the United States, Canada and the Chinese market, with UL, CSA and CCC (China Compulsory Certification) certifications.

In cooperation with the ship classification societies, Eaton is carrying out a series of tests in order to receive the following approvals: Lloyds Register of Shipping, Bureau Veritas, Det Norske Veritas, Polski Rejestr Statkow, China Classification Society, Germanischer Lloyd and Russian Maritime Register of Shipping.

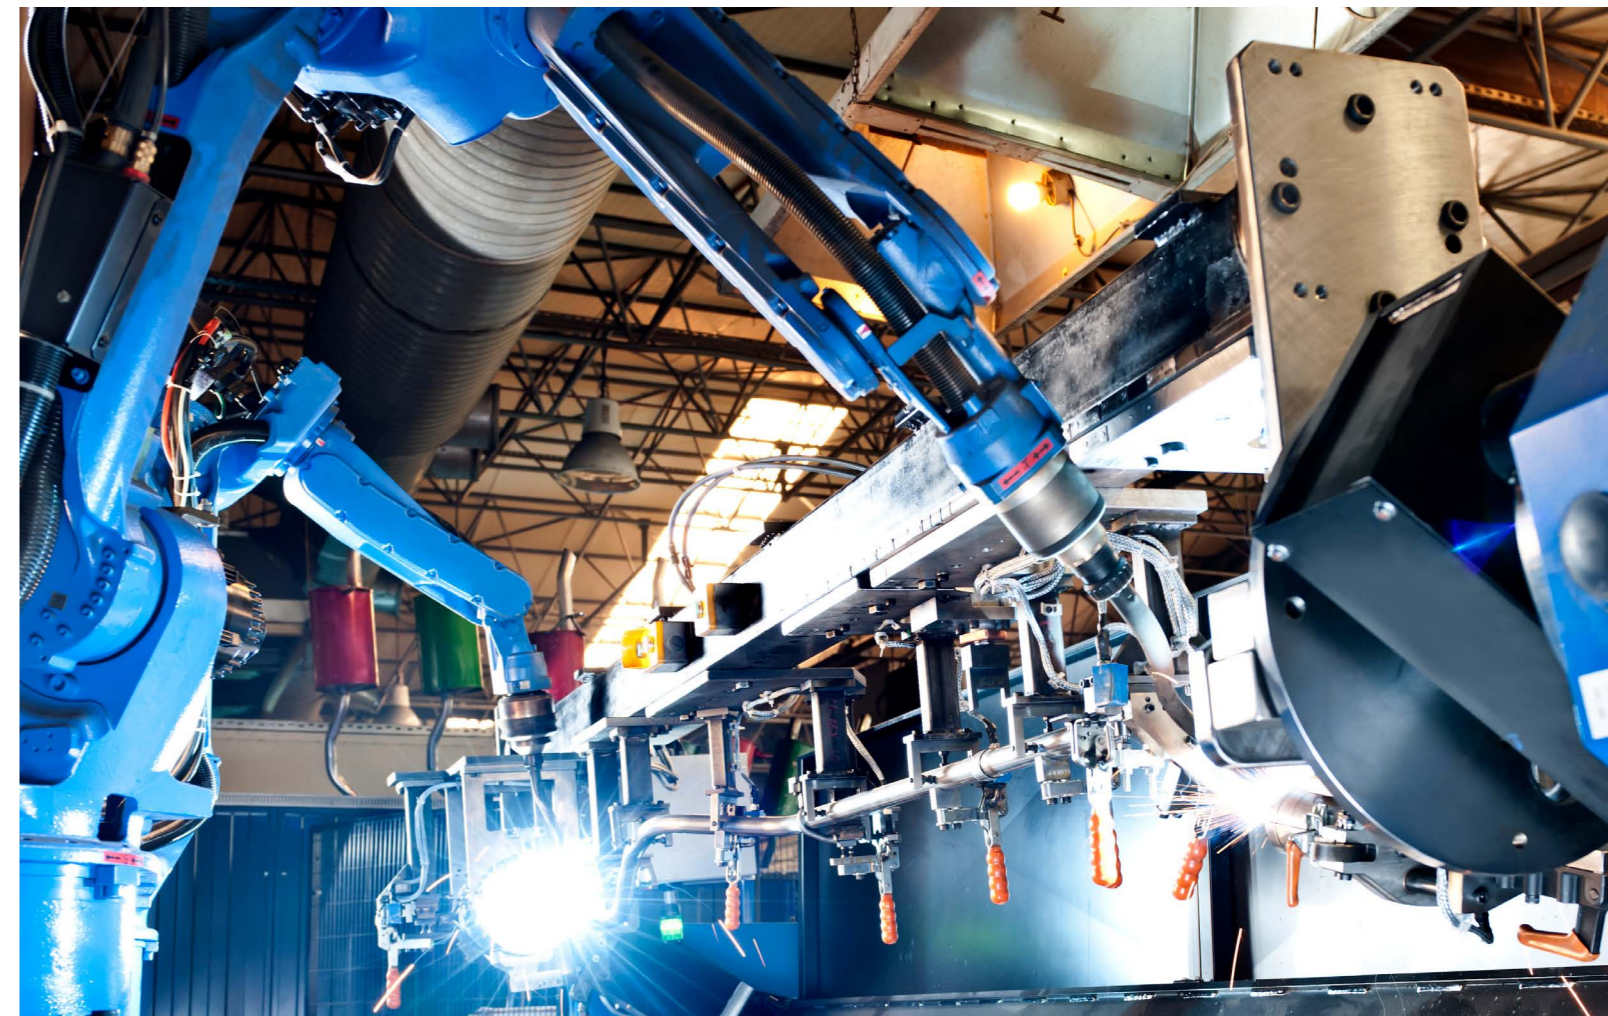



System and cable protection

Across all levels

The NZM circuit breakers protect entire systems and cables across all levels, from the main distribution board all the way to the load itself. Based on your requirements, you can choose between the thermo-magnetic version for standard applications and the electronic trip unit version with a wider setting range as well as diagnostic and test functions via USB.

The thermo-magnetic version for system and cable protection features a robust design and a bimetallic strip release that ensures overload protection for the setting range of $I_r = 0.8$ to $1 \times I_n$. The magnetic release has a setting range of 6 to $10 \times I_n$. In the electronic trip unit version, the setting range of the overload has been extended to $I_r = 0.4$ to $1 \times I_n$. This means, for example, that a 250 A circuit breaker can safely operate rated operational currents down to 100 A.

This provides enhanced flexibility when it comes to selection and planning. The circuit breakers for system and cable protection can also be tested via the integrated micro-USB interface, using the Power Xpert Protection Manager (PXPM) software. Thanks to the integrated test protocol function, a report in PDF format can be easily generated.

Protection of motors and motor-starter combinations

in case of overload and short circuit events

With a range of 16 A to 1400 A, the NZM circuit breakers provide reliable protection for motors and input wiring in the event of overloads, short circuits and phase failure. To prevent the protective device from switching off during start-up peaks, the short-circuit releases can be set at up to 18 times the rated current. The extended setting range even protects energy-efficient motors with high starting currents.

The NZM motor-protective circuit breakers meet the requirements for tripping characteristics outlined in IEC/EN 60947-4-1 as well as the associated requirements for phase-failure sensitivity and phase-failure protection.


Motor-starter combinations can be controlled via the communication connection and the relay module (also in conjunction with an undervoltage release, for example). DOL starters, reversing starters and circuits with heavy starting duty can all be implemented. The contactor coils can either be automatically controlled directly from the NZM, or manually via the communication connection.

In the event of an overload, the relay module offers a sophisticated option for contactor release prior to the tripping of the NZM. As a result, temporary overloads of 110 % of I_n can be switched off and then automatically back on again without any need to trip or reset the NZM. Alternatively, the device can also be set to issue an alert only.

The devices intended for motor protection are all IE3/IE4-compatible, to prevent undesired tripping in energy-efficient motors. The new electronic releases have been further optimized for applications with high in-rush currents.

Full-range protection

For system protection, cable protection, selectivity and generator protection

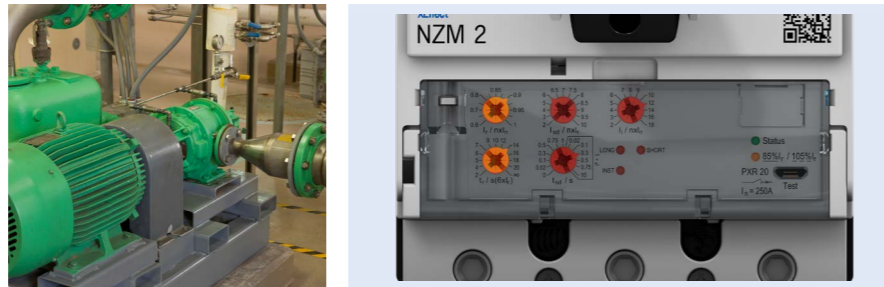

As an incoming circuit breaker, the NZM naturally also offers overload protection on the secondary side of the transformer. A version with time-delayed short-circuit releases is also available, to ensure the selectivity of the mains connection. This option is especially suitable if power is supplied via a transformer or a generator, and in IT and TN networks with long cables.

You can fully rely on the NZM circuit breakers, even if the generators struggle to produce between two and six times the continuous current in the event of a short circuit. The NZM will safely switch off even very low short-circuit currents within just a few milliseconds. If special tasks require it, the circuit breakers can be set so that short-circuit currents up to 10 times the rated current will be ignored for up to one second.

Thanks to the extended setting range of the full-range release, the devices can be optimally adapted to any application. Whether it is generator protection, the support of extremely long outputs with low short-circuit currents, or the protection of transformers in case of very high in-rush currents, the NZM circuit breaker can do it all.

Earth fault protection

With current-dependent short-time delay



Residual currents to earth are detected based on the core-balance principle by means of the integrated converters. The circuit breaker will trip or issue an alert in line with the selected settings, and the setting range can be set at 20 % to 100 % of the rated operational current. It is possible to delay the tripping by up to one second.

Selectivity and backup protection


For maximum supply security

Selective overload and short-circuit protection

A combination of two or more short-circuit protection devices (such as circuit breakers or fuses) is selective when only the device closest to the fault detects and interrupts the fault current and the upstream breaker(s) do not trip.

This ensures that branches of the distribution not affected by the fault will continue operation. The NZM circuit breakers are able to achieve selectivity even without the addition of any electronic short-time delay devices.

Selectivity viewed schematically

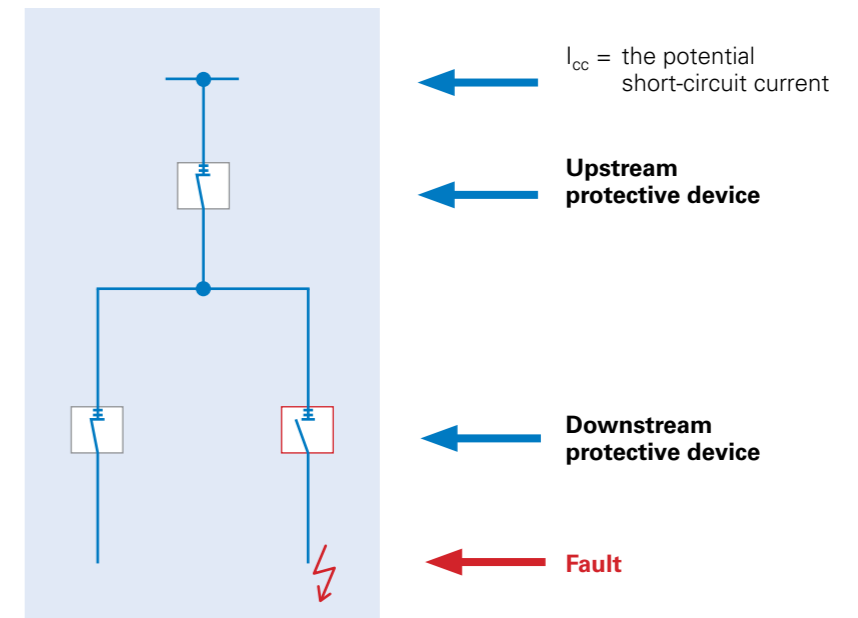

Backup protection against excessive short-circuit currents

Backup protection is provided if the upstream protective device is able to protect the downstream protective device against excessive short-circuit currents. If the short-circuit current exceeds the short-circuit capacity I_{cu} of the downstream circuit breaker, the up-stream circuit breaker will limit the current flow to ensure optimum protection of the system. NZM frame sizes 1, 2 and 3 have a

current-limiting effect. The take-over current I_B of the upstream circuit breaker, i.e. the current at which the latter trips, must not be greater than the I_{cu} of the down-stream circuit breaker. This ensures backup protection against all potential short-circuit currents.

Detailed information on selectivity and backup protection can be found in Eaton's "Selectivity, Backup Protection and Coordination Guide".

Zone selectivity and Arcflash Reduction Maintenance System™ maintenance mode

Precise disconnection of faults upstream from their location and protection against arc faults

Zone selectivity

Zone selectivity is the next stage in the concept of time selectivity. In contrast to time selectivity, any faults will be switched off instantaneously and at any point in the network. This keeps the energy that is being generated

($I^2 \times t$) – and thus the thermal and dynamic system load – as low as possible. For this purpose, the circuit breakers are connected to a signal cable. In the event of a fault, the signal cable ensures that only the circuit breaker

located directly upstream of the fault (i.e. the circuit breaker that feeds into the short circuit) switches off immediately. This keeps that part of the system that has not been affected by the fault operational and thereby minimizes downtime.



Arcflash Reduction Maintenance System™

Our circuit breakers can be optionally equipped with our new, patented Arcflash Reduction Maintenance System™. In the event of an arc fault, this system

ensures an immediate and accelerated shutdown.

The disconnection is even faster than that effected by a non-delayed short-circuit release. This feature can either be activated

directly at the circuit breaker or via an external switch, for example when maintenance personnel enter a hazardous area. No special wiring is required.




More safety when working on live electrical circuits

Safety is Eaton's top priority. Therefore, we offer additional safety functions that go beyond the standard requirements. In this white paper you can find out what advantages this has for users.

Residual-current protection

For universal mounting, or for mounting directly on the circuit breaker

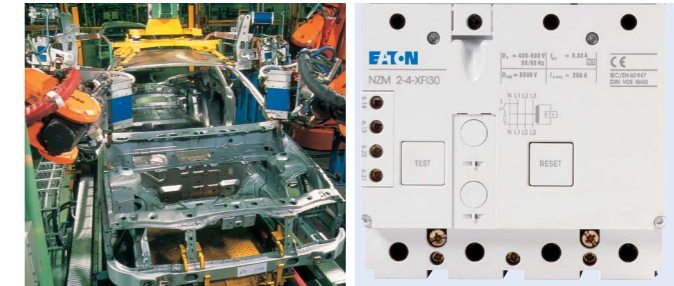

For universal mounting

Eaton's new relay/transformer combinations cover operating currents from 1 A to 1800 A. The wide range of applications extends from general power distribution systems to individual motor feeders. The relay can detect and process residual currents between 30 mA and 5 A.

The scope of application of the individual relay/transformer combinations depends on the applicable regulations, and ranges from personnel and fire protection to general power protection for 1 to 4-pole networks.

Compact, safe, versatile...

... these are the qualities required of residual-current protection devices, especially in areas – such as installation boards – where space is limited. The measuring relay can be snapped onto a DIN rail as required. It forms a functional unit with the ring-type transformers, which are arranged along the power chain to save space.



For direct mounting on the circuit breaker

The residual-current release modules can be mounted flush with the bases of the NZM1 and NZM2 circuit breakers (in the case of the NZM1 also on the right). Eaton thus offers a compact product that is easy to install without the need for external auxiliary voltage.

The residual-current protection module of the NZM2 is fully independent of the mains voltage and can therefore be used for the purposes of personnel protection in Germany.

Both pulse-current and AC/DC-sensitive devices are available. For virtually any mains constellation, 3 and 4-pole versions are possible, with different rated residual currents ranging from 30 mA to 3 A (with time selectivity).

Protection of DC applications

For use as circuit breakers or switch-disconnectors



Circuit breakers DC applications

The NZM circuit breakers with thermo-magnetic releases can be used for DC applications. However, using the circuit breakers in DC environments alters their technical characteristics. As a result, the threshold value of the short-circuit release has to be adjusted. In addition, the short-circuit breaking capacity will also be affected.

The NZM...-S07-DC circuit breaker has been designed specifically for use in battery applications. As such, the threshold value of the short-circuit release is set especially low to ensure reliable control of the low short-circuit currents in the battery banks.

Switch-disconnectors for DC applications

Our powerful range of switch-disconnectors for DC use comprises three frame sizes, from 160 A to 1600 A, for applications with 1000 V DC or 1,500 V DC. The devices are IEC 60947-3 and UL489B approved and can therefore be used worldwide. Together with the wide and versatile range of NZM accessories, the DC switch-disconnectors are the ideal choice for demanding DC applications, including (but not limited to) central inverters used in renewable energy systems.

The tested combination of switch-disconnector and 1 or 2-pole link set is especially powerful, and the perfect option for every type of connection situation and for environments with high ambient temperatures. Eaton can guarantee reliable derating values up to 70 °C. The DC switch-disconnectors can also be used without restriction in unearthed IT networks, provided the error case of a double earth fault can be ruled out by means of technical measures.



Protection for special applications

With high power density



Circuit breakers with high switching capacity at 690 V AC

The NZML2 and NZML3 circuit breakers complement the globally recognized NZM family and complete Eaton's offering for systems with high power density. High switching capacities at 690 V AC are not only required in mining, marine applications or the chemical industry; the new products have also been designed with renewable energy systems such as wind turbines in mind.

Our product portfolio covers virtually any demand: The NZML2 is available with up to 160 A, while the NZML3 covers the range up to 400 A. Both devices come with integrated electronic trip units. They offer a switching capacity of 80 kA at 690 V AC. The devices have been equipped with a communications interface and come in the same dimensions as our proven NZM2 and NZM3 circuit breakers. Users of the NZML series have the full range of NZM accessories at their disposal.

Main fields of application:

- Mining
- Shipbuilding
- Industrial applications
- Wind turbines
- Data centers

You can find more information in the Eaton brochure "The circuit breaker series NZML2 and NZML3 for high breaking capacities at 690 V."





Using the NZM circuit breakers at 1000 V AC

With the tailor-made models for rated operational voltages up to 1000 V AC, we have further expanded the scope of application of our NZM circuit breakers and switch-disconnectors. These devices are particularly suitable for use in challenging environmental conditions, notably in the areas of mining, road tunnels, refineries, chemical plants and electric railways. Typical applications include high-power drives and general power supply systems for industrial applications with long supply lines.

Using the NZM circuit breakers in IT networks



All NZM circuit breakers can be used in unearthed IT networks, unless otherwise indicated. The following must be observed during project planning:

Why do I have to assume that the voltage in the IT system is $\sqrt{3}$ times the mains voltage?

Behavior in TN and TT systems

For circuit breakers in TN and TT systems, the three-phase short circuit to earth is the short circuit with the highest load. To determine the voltage present at each contact, the mains voltage has to be divided by $\sqrt{3}$.

Example:

In a TN-S system with 400 V AC, each circuit breaker contact switches only 230 V AC in the event of a three-phase short circuit to earth. (400 V / 1.73).

Short circuit in the IT system

Short circuits between the phases are also possible in IT systems. In this case, however, the short circuit will be disconnected by two separate contacts inside the circuit breaker, so that each contact only has to switch off half the mains voltage (as illustrated in figure 1, each contact should switch 200 V AC). The short circuit between two phases represents a lower load for the circuit breaker than the three-phase short circuit to earth.

Double earth faults in IT systems


In IT systems, double earth faults are the short circuits with the highest possible loads. When planning for short circuits, it should always be assumed that a double earth fault will be present; this is also explicitly pointed out in IEC/EN 60947-2, Annex H. In case of a double earth fault, the full mains voltage will be applied to the circuit breaker contact in question (see figure 3 on the left). In this case, one contact alone has to switch off the entire chained voltage (mains voltage). Since the chained voltage is $\sqrt{3}$ times (1.73) the voltage to earth, the short-circuit breaking capacity in the IT network should be planned for as $\sqrt{3}$ the mains voltage.

Technical safety parameters


The NZM circuit breakers can be used in conjunction with undervoltage releases in order to calculate the safety-related parameters (e.g. $B10_d$ or $MTTF_d$). Detailed information can be found here:

Technical safety parameters
www.eaton.com/safety


1. Faults between the phases



2. Earth fault (simple fault)

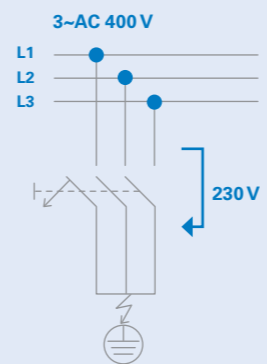

3. Earth fault (double fault)

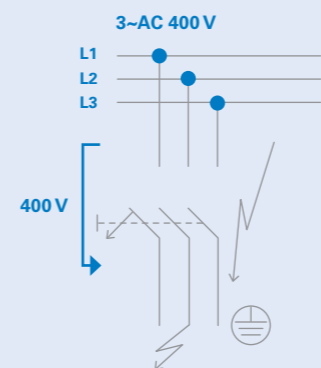

Energy metering with the digital NZM

Measurement data for ISO 50001

With Class 1 energy-metering accuracy in accordance with IEC 61557-12



Greater efficiency with ISO 50001

The EN ISO 50001 standard was defined at the international level to facilitate the implementation of in-house energy management systems. The most important aim of the standard is the sustainable reduction of energy costs, energy consumption and CO₂ emissions by means of organizational and technical changes. Both for globally connected companies and for small and medium-sized businesses, sound energy management can lead to enhanced cost transparency and cost savings, while also contributing to the protection of natural resources and to a better corporate image. Especially for power-intensive companies whose consumption exceeds 10 GWh, or whose electricity costs account for more than 14 % of the value added, the German Renewable Energy Sources Act harbors enormous cost reduction potentials in the form of lower energy taxes.

The importance of accurate metrics and analytics

Prerequisites for introducing an energy management system in accordance with ISO 50001 are accurate energy metrics, the identification of the main energy consumers and a full analysis of the company's energy costs. This creates a sound foundation for realizing concrete energy-efficiency improvements. Eaton offers a broad range of innovative products for monitoring, measuring and analyzing energy data.

ISO 50003 – new as of October 2017

Since October 2017, new energy-efficiency requirements have been in place following the publication of the ISO 50003 standard. From now on, companies with certified energy management systems will have to provide hard data to prove the energy-efficiency gains they have realized. With our innovative energy metering technology, we are able to support you in meeting the stricter certification criteria.

Product cost efficiency through precise measurement

To compete in today's markets, cost-optimized products must be manufactured. By measuring the energy requirements of production machines, the energy costs incurred for the production of the individual product can be precisely calculated. The more precise the measurement, the more precise the calculation of the proportional energy costs of the individual product. Especially when large production volumes and short cycle times come together, a very precise measurement is profitable, as incorrect values will otherwise falsify the cost calculation.

*For further information please contact your Eaton sales person.

Communications

Effective energy management systems



Saving space – quick and safe connection

With the integrated Modbus RTU module, you will save space inside the control panel. In addition, the process of planning your system is now more flexible and cost-effective thanks to the modular interface module. This reduces the time and effort required for installation as well as the overall size of the control cabinet. The handling of the devices has also been simplified thanks to the new push-in terminals. This not only reduces the likelihood of errors, but also simplifies preparation and wiring and ensures that your installation concept meets the highest safety requirements.

Centralized data collection – integration into existing systems

Eaton's centralized data collection system consolidates the operating data of the entire system to ensure their rapid transmission. The operating data are collected in a uniform format by all IZMX air circuit breakers, all NZM compact circuit breakers and all other PXR modules. For you, this means that the amount of programming work required across the system will be much lower. In addition, the ECAM module simplifies the integration of existing communications systems, such as EtherNet/IP™, EtherCAT®, Profinet and SmartWire-DT. Eaton has thus made it much easier to connect your existing architecture.


Full access at all times – conveniently with remote control

Via the integrated communications of the PXR and additional modules, such as a remote operator, motor-starter combinations etc., you will have full access to the circuit breaker at all times. The remote operator can be conveniently controlled via the communication connection in combination with the relay module. The relays can also be used to control other devices, e.g. automatic contactor releases at low overloads. You will thus benefit from a significant increase in security while saving time.



Everything at a glance

With the new, integrated communications platform

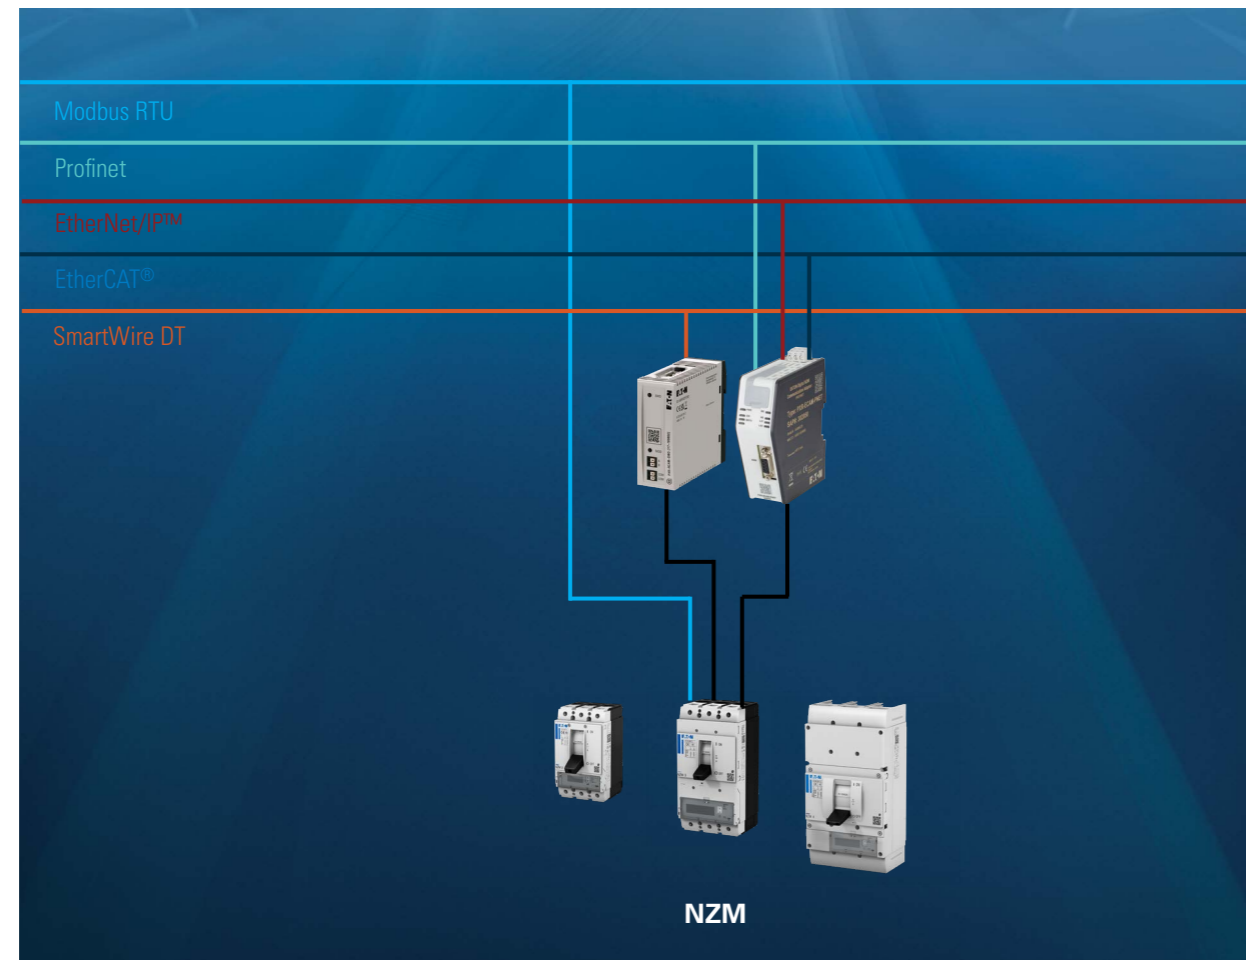

Reliable and efficient data collection, with Eaton's PXR circuit breakers and measurement and communication modules. Providing users with data in the required form and data format is a challenge, not least given the many different types of communications architectures used in industry today.

Eaton has answered this challenge by creating a variable topology of measuring points in order to meet the demands of users. Eaton offers a comprehensive range of communication interfaces to meet the demands of the market. Based on this structure, the data can be transferred to other communication platforms via various interfaces and gateways as required.

Features and measurement values of the PXR variants

	NZM...-AX...	NZM...-VX/MX...	NZM...-PX/PMX...
Power Xpert Release version	PXR10	PXR20	PXR25
Connectivity			
Test option / PXPM connection via USB	✓	✓	✓
Interface module	-	optional	✓
Internal Modbus RTU module	-	optional	optional
Relay module	-	optional	optional
Provision of the measured data			
Current			
In real time, value per phase and neutral conductor	✓	✓	✓
Average	✓	✓	✓
Asymmetry in %	✓	✓	✓
Min/max	✓	✓	✓
Voltage			
In real time, phase-phase / phase-neutral	-	-	✓
Asymmetry in %	-	-	✓
Min/max	-	-	✓
Frequency			
In real time	-	-	✓
Min/max	-	-	✓
Real/apparent/reactive energy Class 1*			
Total	-	-	✓
Forward	-	-	✓
Backward	-	-	✓
Net	-	-	✓
Real/apparent/reactive power Class 1*			
In real time	-	-	✓
Min/max	-	-	✓
Total harmonic distortion (THD)			
Harmonic content	-	-	✓
Power factor			
Power factor	-	-	✓
Maintenance information and notifications			
Service life indicator	-	-	✓
LED display	status, alert	status, alert, trip reason	status
LCD display	-	-	settings, alert, trip reason
Safety-related functions			
Arcflash Reduction Maintenance System™ maintenance mode	-	-	optional
ZSI zone-selective interlocking	-	-	optional
Thermal memory	✓	✓	✓
Ambient temperature compensation	✓	✓	✓


*For further information please contact your Eaton sales person.

The universal PXP software

One program for all Eaton devices with PXR electronics

Power Xpert Protection Manager

With the new PXP software, Eaton has developed a universal program that will allow you to conveniently manage all Eaton PXR devices.

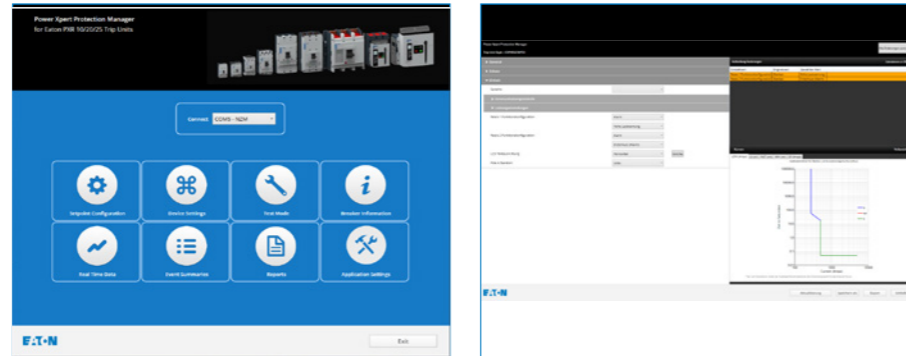

Main features:

- Configuration and settings
- Retrieval and evaluation of data
- Test function

With the PXR technology, configuring, controlling, protecting and testing the system architecture of your Eaton devices is easier than ever before, thanks to the Power Xpert Protection Manager. It is no longer necessary to manually identify the various devices, as the program automatically adapts to each. Guided and drop-down menus ensure that the configuration process is as user-friendly as possible. And the recorded data are always clearly displayed via a single screen.

The PXP software speaks your language: Eaton provides you with a wide range of language packs; the system can either recognize the language of your computer automatically, or you can set it manually.

A wide selection of additional options allows you to select application-specific settings exactly as required:

- The protective function can be adapted and controlled via the display and by configuring the trip type.
- The waveforms of both current and voltage can be automatically captured and displayed before and after tripping, or manually via the "waveform capture" function.

Eaton software for a broad range of tasks

Configuration, project planning, visualization and much more



xEnergy configurator

The circuit breaker configurator is part of the xEnergy Configurator, and supports users in correctly configuring and ordering their Eaton products:

- Easy to operate
- Support of error-free selection and ordering of compact and open circuit breakers (NZM / IZMX)



xSpider


xSpider is the next generation of software for the sizing and planning of low-voltage networks. It supports the design, selection and optimal configuration of the requisite switchgear. The graphic-oriented drafting software is easy to use and the corresponding database contains all relevant Eaton devices. The ability to select a circuit breaker based on the network diagram, and to examine the tripping characteristic directly, allows for a quick assessment of the selectivity and the required backup fuse. The integrated ArcRisk module, which is currently unique on the market, offers a quick and clear assessment of the arc fault risk in the planned low-voltage switchgear assembly.

Product groups

System overview – circuit breakers / switch-disconnectors

Benefit from our portfolio of integrated accessories

Assembly and function are identical for all accessories, independent of frame size. For example, the contact elements from the RMQ-Titan® range of control devices are used for the entire series of NZM circuit breakers. This reduces the number of separate product groups while simplifying the processes related to ordering and storage. The contact elements can simply be snapped on at the front. The position determines the function: signaling contact or trip-indicating auxiliary contact. Shunt or undervoltage releases, which can also be combined with early-make auxiliary contacts (e.g. for interlocking or load-shedding circuits), offer a sophisticated approach to a wide range of applications.

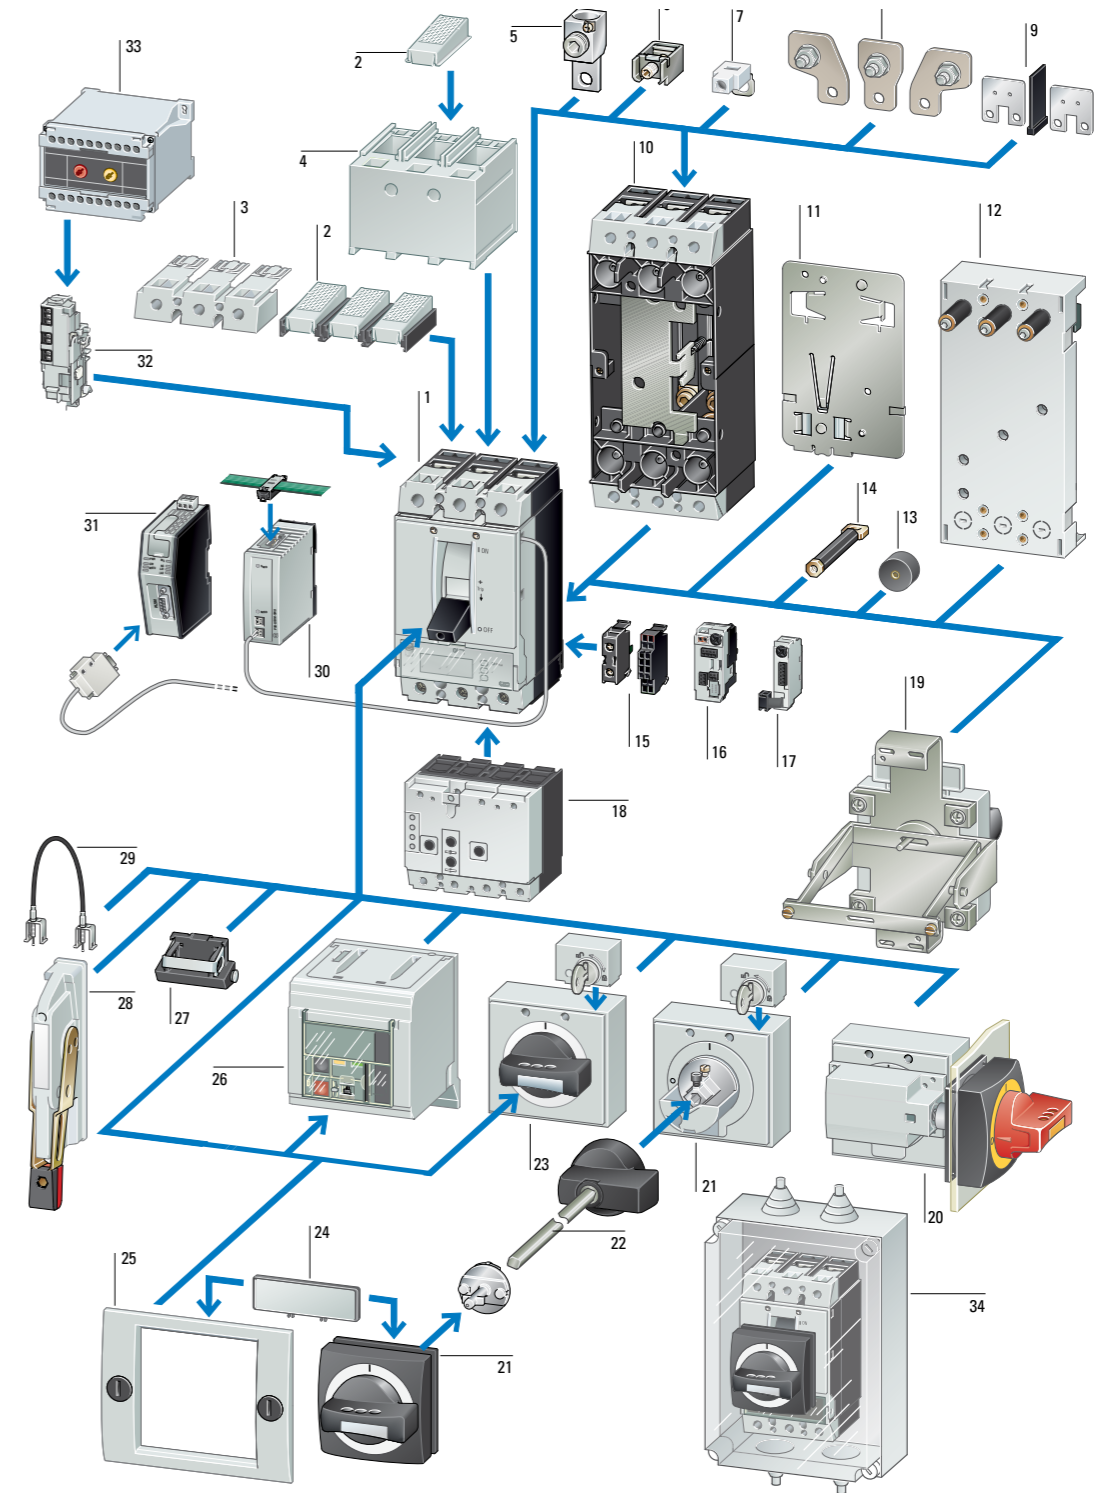

- | | | |
|---|--|--|
| 1 Switch-disconnector; circuit breaker; circuit breaker for North America; molded case switches for North America | 13 Spacer | 24 External warning plate/marketing plate |
| 2 IP2X protection against finger-contact | 14 Connection on rear | 25 Insulating surround |
| 3 Terminal cover, knockout | 15 Standard auxiliary contacts, trip-indicating auxiliary switches | 26 Remote operator |
| 4 Terminal cover | 16 BSM interface module | 27 Toggle lever interlock device |
| 5 Tunnel terminals | 17 Interface communication module for Modbus RTU | 28 Side operator handle |
| 6 Box terminals | 18 Residual-current protection device | 29 Mechanical interlock |
| 7 Control circuit terminal | 19 Rear operator | 30 Communication module for SmartWire-DT |
| 8 Connection width extension | 20 Main switch rotary handle for side panel mounting | 31 Communication module Ethercat, Ethernet/IP and Profinet |
| 9 Link kit | 21 Door coupling rotary handle | 32 Voltage release/early-make auxiliary contact mounting |
| 10 Plug-in and withdrawable unit | 22 Extension shaft | 33 Delay unit for undervoltage releases |
| 11 Adapter plate | 23 Rotary handle | |
| 12 Busbar adapter | | |


Terminal types

The matching accessories for versatile applications

The terminal technology of the NZM circuit breakers enables you to address the specific requirements of your system in a flexible manner. Whether it is copper cables from 6 mm² to 300 mm² or aluminum cables, copper strips or copper bars – the NZM has the right solution for every type of connection. On the NZM2 and NZM3, for example, the box terminal can be opened upwards to simply swivel in the conductors. An IP20 (finger-safe) degree of protection can be achieved by means of accessories.

The heads of all the screws used in the circuit breakers, with the exception of the main terminal screws, have a plus-minus profile. This has the advantage that fast machine screwdrivers with standardized Pozidriv 2 drill bits can be used. Alternatively, a standard flat-bladed screwdriver may also be used. This applies to all fixing screws, auxiliary conductor terminals, flaps and covers as well as to all adjustment knobs.

Like the Pozidriv cross slot, the plus-minus slot can transmit a higher torque, which also makes it easier to center the tool while exerting less surface pressure. In addition, the plus-minus slot can be used for different types of tools and is particularly suitable for devices that require frequent maintenance.



1 Enhanced connectivity

The NZM circuit breakers and the PN and N switch-disconnectors can be connected by means of round conductors with or without cable lug, or by using laminated copper strips or copper bars. Another special feature: A narrow version of the cable lug is available to facilitate the connection of thick round conductors up to 300 mm².



2 Screw terminal

Screw terminals are an inexpensive option for connecting cable lugs, perforated strips or copper bars. Our product portfolio of switch-gear accessories also includes the matching cable lugs. Furthermore, a stud version is offered which allows the simplest mounting of the cable lugs.



3 Box terminal for copper cable

If one or two flexible copper conductors or strips are to be directly connected, the box terminal ensures that the contact is safe. On the NZM2 and NZM3, the box terminal can be opened upwards for easy insertion of thick and rigid conductors, which makes connection particularly easy.



Back-of-hand and finger protection

Back-of-hand protection for cable lugs, box terminals or tunnel terminals can also be achieved by means of covers. IP2X finger protection, as required for main switches in accordance with IEC/EN 60204-1, can be quickly and easily implemented. The additional covers can be adapted to any cross section.

Control-circuit terminals

The control-circuit terminals are simply screwed on below the respective connection type. This makes it possible to quickly set up the taps for voltmeters, control transformers, undervoltage releases etc.



4 Tunnel terminal for aluminum and copper cables

The connection space of this special, tin-plated aluminum terminal is tunnel-shaped to reliably prevent the typical "flow behavior" of aluminum under high pressure. Depending on the model, up to six aluminum or copper conductors can be connected per phase.




5 Connection expansion for additional conductors

This allows for the connection of up to six conductors with cable lugs per phase. Auxiliary busbar systems are no longer required. Special covers for IP2X finger protection are available.



6 Connection at rear

This allows for the connection of rails or round conductors with cable lugs at the rear. The switch area, the cable connection area and the control area can be easily partitioned.

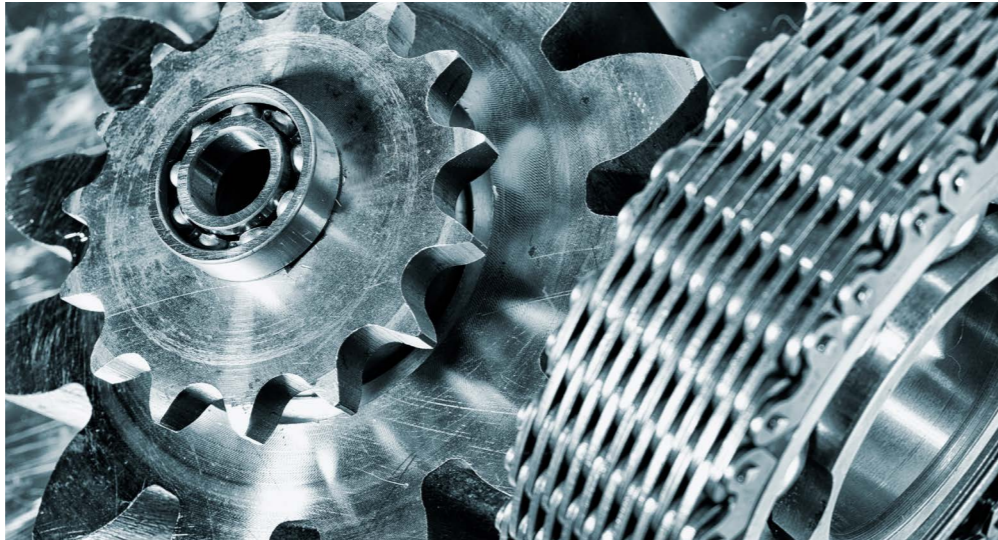



Plug-in and withdrawable units

Safe to operate, with quick switch replacement

Withdrawable units

In addition to the fixed installation type, the NZM3 and NZM4 circuit breakers are also available with plug-in and withdrawable units. You will benefit in more than one way: You will save money and time while eliminating sources of error. This makes it possible to react quickly to malfunctions or to replace the parts (e.g. as a result of an increase in the rated current), thereby avoiding long and expensive downtimes. The withdrawable units are operated using a uniform crank, which increases operational safety. This also makes it possible to put the switch into the test position for functional testing without any switching of the main contacts.

The position of the switch in the cassette can be detected by means of auxiliary contacts. This involves the following positions: connected/test position/disconnected. Even in the disconnected position, the switch is secured inside the cassette by means of a lock, to prevent it from falling out. Removal is only possible via manual release. In addition, the cassette can be locked in any position using a padlock. The standard terminals are compatible with the cassette base.

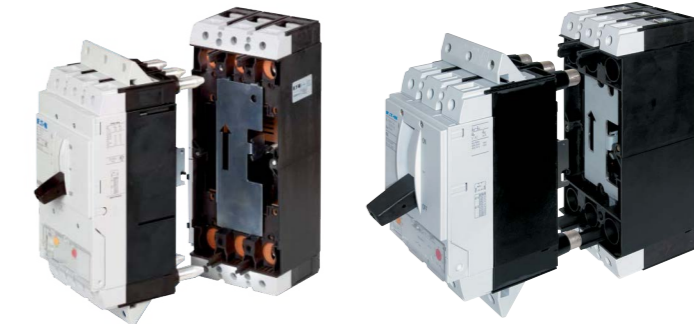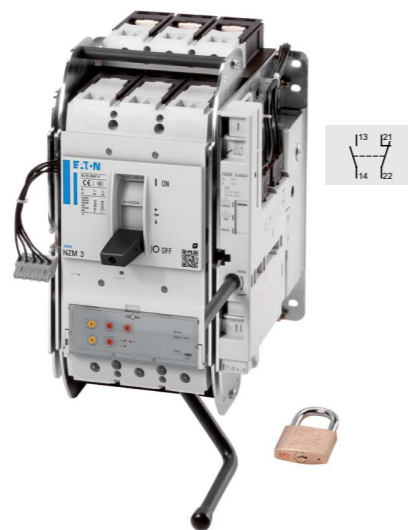

Plug-in units

The plug-in technology allows for the quick and easy replacement of switches, without the need to switch off the system. The equal width of the fixed circuit breakers and the plug-in units simplifies the planning and design of the system. In addition to its isolating characteristics, the plug-in technology also facilitates the implementation of a clearly visible isolating distance.


The socket features the same terminals as the fixed switches, while the open plug-in contacts provide for IP2X finger protection. During dismantling, the circuit breaker will be automatically opened and moved to the tripped position for safety reasons. The control-circuit cable can be disconnected by means of a controlcircuit plug unit. If the system is to be modified at a later date, the use of plug-in sockets for reserve outlets is recommended.

The plug-in technology is available for the NZM1, NZM2 and NZM3 models. The technology enables the safe and simple electrical isolation of the system during maintenance or replacement of the circuit breaker. An optional control-circuit plug unit is also available. This control-circuit plug unit makes it possible to test the control commands to/from the circuit breaker (shunt/undervoltage release, auxiliary contacts), even if it is not installed as part of the system. The socket has the same types of terminals as the main device. The NZM system accessories can be used without restriction.



Multi-purpose adapter

For universal use and space-saving

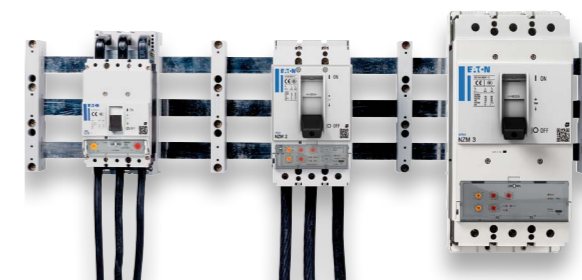

Thanks to their space-saving contacts, the busbar adapters can be installed even in applications where space is limited. They are suitable for universal use on any 60 mm busbar system. They are compatible with three different frame sizes, for 160 A, 250 A and 550 A.

Releases and auxiliary contacts

Multi-purpose elements for easy handling



Identical function and assembly of accessories

Assembly and function are identical for all accessories, independent of frame size. This makes handling considerably easier, enabling you to save time while reducing installation and maintenance costs.

Push-in: Quick and safe connection

Both the new undervoltage and shunt releases up to 250 V and the relay modules now come with push-in terminals. This not only reduces the likelihood of errors, but also simplifies preparation and wiring while ensuring that your installation concept meets the highest safety requirements.



The relay modules allow for automated signaling and responses

The relay modules are available for voltages up to 230 V AC and 24 V DC. Combinations with a shunt release or undervoltage release, or with an optional early-make auxiliary contact, are also possible. If you do not require any additional functions, configurations with two relays will suffice. The modules can be activated in the event of certain alerts, statuses or functions. In addition, it is also possible to control a remote operator or a motor-starter combination, or to set up alert and status signaling to the PLC.

Simplified ordering thanks to the RMQ-Titan® contact elements

Like all standard auxiliary contacts in the 22-mm range, the trip-indicating switches use contact elements from the RMQ-Titan® range of control devices. The contact elements can simply be snapped on at the front. You can therefore choose from a wide range of auxiliary contacts, which are not only universally applicable, but also extremely robust and inexpensive. This simplifies the processes related to ordering and also reduces storage costs.

The position determines the function

Whether it's signaling contacts or trip-indicating auxiliary contacts – all contacts as well as releases are also available with screw terminals. This ensures quick wiring of the circuit breakers and switch-disconnectors. The double contacts allow for twice as many auxiliary and signaling contacts in the same space. They are equipped with spring-loaded cage clamps.


Flexible options for safety and locking tasks

Shunt or undervoltage releases are a sophisticated option for a wide range of applications – especially in combination with early-make auxiliary contacts, for example in interlocking or load-shedding circuits.



Voltage releases for a variety of tasks

Voltage releases are available for the following applications: as undervoltage releases (with or without early-make auxiliary contacts) for main switch applications in accordance with EN 60204; as shunt releases for remote release; and as mesh-network circuit breakers for increased trip reliability.

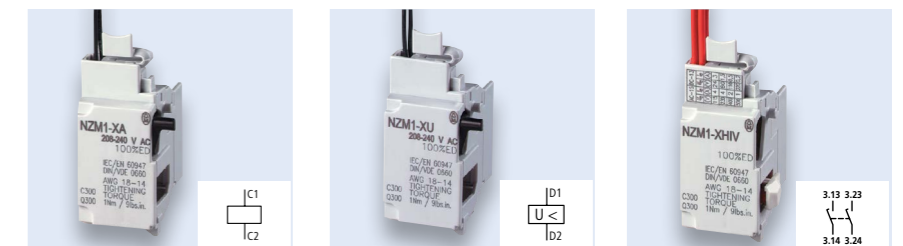

A special case: Mesh-network circuit breakers

Eaton offers two options for mesh-network circuit breakers: a shunt release that functions as intended in the range from 10 % to 110 % of the control voltage, and a special shunt release that ensures trip reliability up to 12 hours after a power failure, provided it is used in conjunction with a capacitor unit.

Variable operation

Toggle, turn, switch automatically

Door-coupling rotary handles – ergonomic switching

Shafts that can be cut to different lengths allow for installation in control panels and enclosures with depths up to 600 mm. A cost-effective and easy-to-install option is also available for tight installations where the switch is located directly on the inside of the cover.

Consistent and flexible

All door-coupling rotary handles have the same drilling template. This consistency contributes to a faster installation process. The switches can be installed either vertically or horizontally inside the control panel.




Toggle or turn

The new circuit breaker series comes with the proven toggle lever as standard. The three switching positions ON, OFF and "TRIPPED" indicate the status of the device. For typical isolator applications where a voltage release is not required, Eaton offers the cost-effective PN switch-disconnector with the switch position indicators 0 and I. Depending on the individual requirements, the toggle mechanism can be converted to rotary action by means of a rotary drive. If a main switch or emergency power-off switch is used with a rotary handle, the latter can be locked with up to three padlocks. For the emergency power-off function, the rotary handles are also available in red/yellow.



Application-specific connections

For greater flexibility, the door-coupling rotary handle is available in various versions. The standard handle allows for automatic locking of the handle position, so that the control-panel doors can be conveniently closed even at different switching positions. The second version can be locked by means of padlocks, which will lock the doors automatically when closed. In the third version, an additional locking mechanism is available directly at the switch. In a large distribution board, for example, the switches can thus be individually locked. For the emergency-stop function, the handles are also available in contrasting red/yellow.

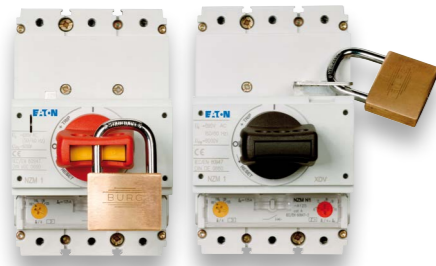

Rotary handles

For switches and various types of interlocks



Key locks for NZM circuit breakers

This function prevents the corresponding circuit breaker or switch-disconnector from being opened, and ensures the isolating condition for the OFF position in accordance with IEC/EN 60947-1. In this version, a cylinder lock combines with our proven rotary handles and door-coupling rotary handles and acts directly on the switch. To activate the lock, the circuit breaker or switch-disconnector must be first switched off. The safety key can only be removed in the "OFF" position. Once the machine has been switched off, operators can easily and safely work on it. They will also be able to lock multiple switches securely against one another.



IEC and NA door-coupling rotary handles

Enhanced security by means of an additional handle on the switch




Door-coupling rotary handle for North America in accordance with NFPA79 and UL508A

The North American user guidelines stipulate that the actuator must always be connected to the switch. This also applies when the control panel door is open. The door-coupling rotary handle with additional handle on the switch fulfills this condition. The handle complies with the latest NFPA79 and UL508A regulations for "deliberate action". Deliberate action is ensured by the fact that the additional handle must first be moved by approximately 20° before being simultaneously pressed (2) and turned (3) to turn on the switch. All essential safety features, such as the means of actuation, the switch position indication and the locking capability, are present twice, i.e. both on the outside of the door-coupling rotary handle and on the inside of the switch. The rotary handle for North American standards is available for frame sizes 1, 2, 3, and 4.

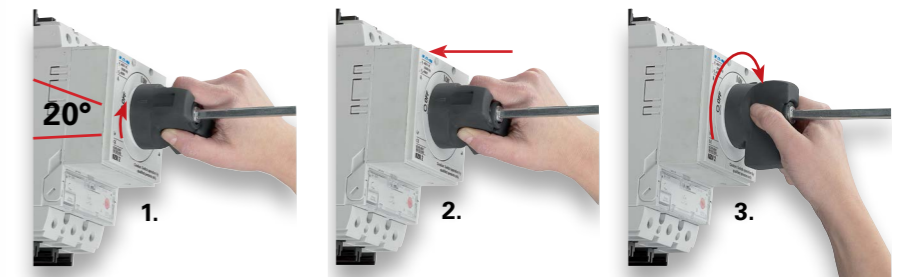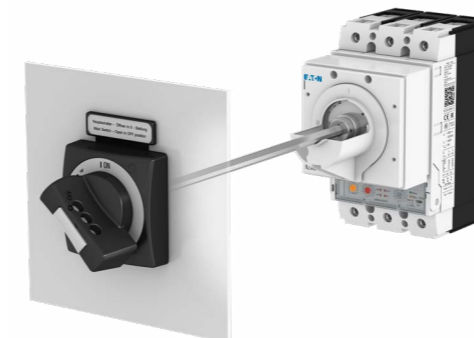

Main switch assembly kits

Operators and accessories



Flange operator

For applications up to 1600 A, the flange operator allows the switch to be operated from the right or left hand side, as desired. With the optional addition of our mounting bracket for frame sizes 1 and 2, the space inside the control panel can be optimally used. The mounting plate can thus be used for other machine control elements.



Side-mounted handle

In UL applications, the side-mounted handle can be used for different frame sizes and for complete sets as well as for different degrees of protection and Bowden cable lengths. Caution: The side-mounted handle does not have IEC approval.



Rear operator

The innovative rear operators for circuit breakers and switch-disconnectors of frame sizes 1 and 2 offer an inexpensive and compact option for installing the switch and the door handle as a single unit in the enclosure doors or side panels. Typical applications include main switches with rated currents up to 250 A, for example in processing machines where space is limited (with or without emergency power-off function).

In addition to the optical benefits of this type of externally visible mounting, it also provides simple and fast access to the terminals, setting buttons, voltage releases and auxiliary contacts. Thanks to the UL/CSA approvals, the devices are suitable for global use, including North America. All circuit breakers and switch-disconnectors from the NZM1 and NZM2 range can be fitted with a rear operator. The compact mechanism and the solid rotary handle allow for quick installation and easy operation.


Accessories

A wide range of accessories, such as covers, locking devices, bezels and spacers etc., are available for all rotary handles and operators.



Paralleling mechanism

The sophisticated paralleling mechanism for disconnectors (PN) up to 630 A enables the simultaneous switching of multiple devices with just one movement. In a processing machine, for example, both the main and the auxiliary circuits can thus be safely switched at the same time.



Remote operators

A consistent functional concept for simplified operation

It is in Eaton's nature to move things forward, as proven by our efforts to continuously optimize the accessories of the NZM product family. For example, the remote operators have now been equipped with a new control-circuit terminal, in which the plug can be firmly screwed to the pin header. An additional advantage: The terminal system comes with time-saving push-in terminals as a standard.



The economic NZM2 remote operator for standard tasks with rated currents up to 300 A

The switching time of the new NZM2 remote operator is max. 170 ms, and it can therefore be used for automated or remote energy control in standard applications. The retractable mounting plate allows for quick checking of the built-in auxiliary contacts and voltage releases. Thanks to its slim design, the remote operator does not require any additional mounting surface. It has been equipped with a selector switch to ensure safe differentiation between the various operating positions. In addition, the switches can be securely locked in the 0 position by means of padlocks.

The convenient remote operator for synchronization tasks of the NZM2 to NZM4 series


The spring-loaded operator enables fast switch-on times of 60 ms or 100 ms, making it suitable for use with synchronization tasks. Short function sequences and the small number of parts ensure a high degree of stability and a long service life. The possibility to seal the auto function and the option of locking the remote operator with a padlock are further important contributions to safety.



Mechanical interlocks

With Bowden cable

Mechanical lock modules allow for the locking of two or three switches (of identical or different frame sizes), which can either be equipped with rotary handles (a) or remote operators (b). The use of the Bowden cable makes it possible to mount the switches freely in various positions. The switches may be arranged up to 1 m apart – for example in separate enclosures.

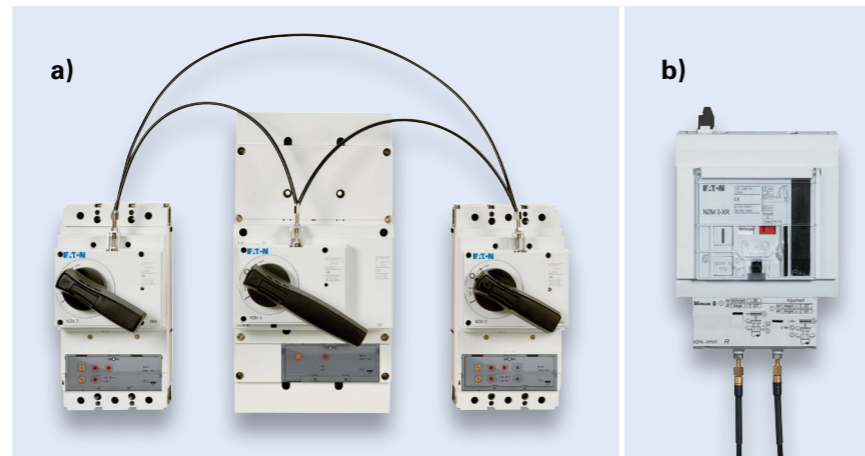

Mounting tools

Save time and money



Spacers

All switches, including their accessories, have been designed on a grid with the spacer as the base unit. Different switch depths can be easily compensated with the quick addition of inexpensive spacers. If the circuit breaker is to be externally operated, this option offers a cost-effective alternative to the door-coupling rotary handle with shaft extension. This brand new technology thus results in significant time and cost savings.


Bezels



Whether the switch is equipped with a toggle lever, a rotary operator or a remote operator, the bezel will always fit. There is thus no need to keep various types of bezels in stock. This is a low-cost option for operating switches from the outside when the control panel door is closed. The bezel has IP40 degree of protection, and the inscription labels can be simply snapped on.



Top-hat rail mounting

The top-hat rail mounting saves time thanks to the use of clip plates for NZM1 and NZM2. Simply attach the clip plate to the circuit breaker at the rear and then clip it onto the top-hat rail. A tiresome drilling of holes in the mounting plate is no longer necessary. A special advantage of the small NZM1: Thanks to the standardized front dimensions, add-on configurations (e.g. with narrow circuit breakers) are possible inside the distribution board.

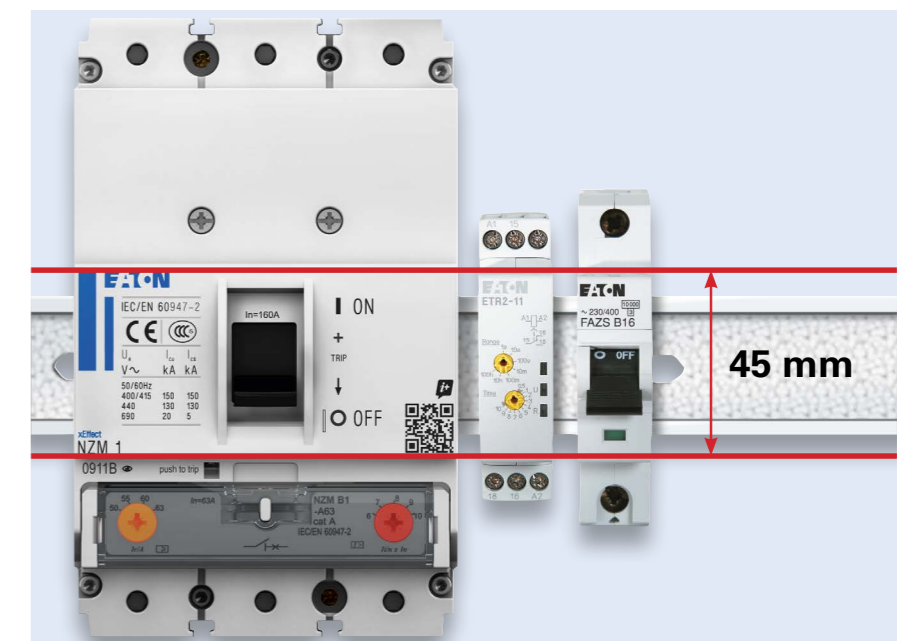

Switching capacity 400/415V 50/60 Hz	Rated current = Rated uninterrupted current	Setting range	Fixed mounting with screw terminals	
			Part no.	Article no.
I_{cu} kA	$I_n = I_u$ A	$I_p = I_p \dots$ A	Overload releases	Short-circuit releases Non-delayed
				

System and cable protection

- IEC/EN 60947-2

Basic switching capacity

Switching capacity	Rated current	Setting range	Fixed mounting with screw terminals	Part no.	Article no.
25	20	15 - 20	350 A fixed	Screw terminals as accessories	
	25	20 - 25	350 A fixed		
	32	25 - 32	350 A fixed		
	40	32 - 40	8 - 10		
	50	40 - 50	6 - 10		
	63	50 - 63	6 - 10		
	80	63 - 80	6 - 10		
	100	80 - 100	6 - 10		
	125	100 - 125	6 - 10		
	160	125 - 160	1280 A fixed		
SG08021 L Symbolphoto	125	100 - 125	6 - 10	NZMB2-A125	259087
	160	125 - 160	6 - 10	NZMB2-A160	259088
	200	160 - 200	6 - 10	NZMB2-A200	259089
	250	200 - 250	6 - 10	NZMB2-A250	259090
	300	240 - 300	5 - 8.3	NZMB2-A300	107518

Comfort switching capacity

Switching capacity	Rated current	Setting range	Fixed mounting with screw terminals	Part no.	Article no.
36	20	15 - 20	350 A fixed	Screw terminals as accessories	
	25	20 - 25	350 A fixed		
	32	25 - 32	350 A fixed		
	40	32 - 40	8 - 10		
	50	40 - 50	6 - 10		
	63	50 - 63	6 - 10		
	80	63 - 80	6 - 10		
	100	80 - 100	6 - 10		
	125	100 - 125	6 - 10		
	160	125 - 160	1280 A fixed		
SG08021 L Symbolphoto	125	100 - 125	6 - 10	NZMC2-A125	271420
	160	125 - 160	6 - 10	NZMC2-A160	271421
	200	160 - 200	6 - 10	NZMC2-A200	271422
	250	200 - 250	6 - 10	NZMC2-A250	271423
	300	240 - 300	5 - 8.3	NZMC2-A300	107519
SG09521 L Symbolphoto	250	200 - 250	6 - 10	NZMC3-A250	109664
	320	250 - 320	6 - 10	NZMC3-A320	109665
	400	320 - 400	6 - 10	NZMC3-A400	109666
	500	400 - 500	6 - 10	NZMC3-A500	109667
	-	-	-	-	-

Fixed mounting with box terminals


Part no. Article no.

Plug-in/withdrawable units


Part no. Article no. Std. pack

Order base separately

For further terminal types
see accessories

NZMB1-A20	280987		NZMB1-A20-SVE	112733	1 Off
NZMB1-A25	280988		NZMB1-A25-SVE	112734	
NZMB1-A32	280989		NZMB1-A32-SVE	112735	
NZMB1-A40	259075		NZMB1-A40-SVE	112703	
NZMB1-A50	259076		NZMB1-A50-SVE	112704	
NZMB1-A63	259077		NZMB1-A63-SVE	112705	
NZMB1-A80	259078		NZMB1-A80-SVE	112706	
NZMB1-A100	259079		NZMB1-A100-SVE	112707	
NZMB1-A125	259080		NZMB1-A125-SVE	112708	
NZMB1-A160	281230		-	-	

Terminals as accessory				
NZMB2-A160-BT	110215		NZMB2-A125-SVE	113192
NZMB2-A200-BT	110216		NZMB2-A160-SVE	113193
NZMB2-A250-BT	110217		NZMB2-A200-SVE	113194
NZMB2-A300-BT	110214		NZMB2-A250-SVE	113195

NZMC1-A20	283293		NZMC1-A20-SVE	112753	1 Off
NZMC1-A25	283294		NZMC1-A25-SVE	112754	
NZMC1-A32	283295		NZMC1-A32-SVE	112755	
NZMC1-A40	271392		NZMC1-A40-SVE	112737	
NZMC1-A50	271393		NZMC1-A50-SVE	112738	
NZMC1-A63	271394		NZMC1-A63-SVE	112739	
NZMC1-A80	271395		NZMC1-A80-SVE	112740	
NZMC1-A100	271396		NZMC1-A100-SVE	112741	
NZMC1-A125	271397		NZMC1-A125-SVE	112742	
NZMC1-A160	283296		-	-	

Terminals as accessory					
NZMC2-A160-BT	110219		NZMC2-A125-SVE	113219	1 Off
NZMC2-A200-BT	110280		NZMC2-A160-SVE	113220	
NZMC2-A250-BT	110281		NZMC2-A200-SVE	113221	
NZMC2-A300-BT	110218		NZMC2-A250-SVE	113222	

Terminals as accessory				
NZMC3-A320-BT	110299		-	-
-	-		NZMC3-A320-SVE	168450
NZMC3-A400-BT	110300		NZMC3-A320-AVE	113509
-	-		NZMC3-A400-SVE	168451
-	-	NZMC3-A400-AVE	113510	
NZMC3-A500-BT	110301	NZMC3-A500-SVE	168452	
-	-	NZMC3-A500-AVE	113511	

Switching capacity 400/415V 50/60 Hz	Rated current = Rated uninterrupted current	Setting range		Fixed mounting with screw terminals	
		Overload releases	Short-circuit releases Non-delayed	Part no.	Article no.
I_{cu} kA	$I_n = I_u$ A	$I_r = I_n \times \dots$ A	$I_s = I_n \times \dots$		

System and cable protection

- IEC/EN 60947-2

Normal switching capacity



Switching capacity	Rated current	Setting range	Short-circuit releases	Part no.	Article no.
50	20	15 - 20	350 A fixed	Screw terminals as accessories	
	25	20 - 25	350 A fixed		
	32	25 - 32	350 A fixed		
	40	32 - 40	8 - 10		
	50	40 - 50	6 - 10		
	63	50 - 63	6 - 10		
	80	63 - 80	6 - 10		
	100	80 - 100	6 - 10		
	125	100 - 125	6 - 10		
	160	125 - 160	1280 A fixed		



125	100 - 125	6 - 10	NZMN2-A125	259091
160	125 - 160	6 - 10	NZMN2-A160	259092
200	160 - 200	6 - 10	NZMN2-A200	259093
250	200 - 250	6 - 10	NZMN2-A250	259094
300	240 - 300	5 - 8.3	NZMN2-A300	107580



250	200 - 250	6 - 10	NZMN3-A250	109668
320	250 - 320	6 - 10	NZMN3-A320	109669
400	320 - 400	6 - 10	NZMN3-A400	109670
500	400 - 500	6 - 10	NZMN3-A500	109671

Fixed mounting with box terminals

Part no. Article no.

Plug-in/withdrawable units

Part no. Article no. Std. pack

Order base separately

For further terminal types
see accessories

NZMN1-A20	281231
NZMN1-A25	281232
NZMN1-A32	281233
NZMN1-A40	259081
NZMN1-A50	259082
NZMN1-A63	259083
NZMN1-A80	259084
NZMN1-A100	259085
NZMN1-A125	259086
NZMN1-A160	281234



NZMN1-A20-SVE	112776	1 Off
NZMN1-A25-SVE	112777	
NZMN1-A32-SVE	112778	
NZMN1-A40-SVE	112757	
NZMN1-A50-SVE	112758	
NZMN1-A63-SVE	112759	
NZMN1-A80-SVE	112760	
NZMN1-A100-SVE	112761	
NZMN1-A125-SVE	112762	
-	-	

Terminals as accessory	
NZMN2-A160-BT	110283
NZMN2-A200-BT	110284
NZMN2-A250-BT	110285
NZMN2-A300-BT	110282





NZMN2-A125-SVE	113243
NZMN2-A160-SVE	113244
NZMN2-A200-SVE	113245
NZMN2-A250-SVE	113246
-	-

Terminals as accessory	
NZMN3-A320-BT	110302
-	-
NZMN3-A400-BT	110303
-	-
NZMN3-A500-BT	110304
-	-



-	-
NZMN3-A320-SVE	168486
NZMN3-A320-AVE	110858
NZMN3-A400-SVE	168487
NZMN3-A400-AVE	110859
NZMN3-A500-SVE	168488
NZMN3-A500-AVE	110860

Switching capacity 400/415V 50/60 Hz	Rated current = Rated uninterrupted current	Setting range		Fixed mounting with screw terminals	
		Overload releases	Short-circuit releases Non-delayed	Part no.	Article no.
I_{cu} kA	$I_n = I_u$ A	$I_r = I_n \times \dots$ A	$I_s = I_n \times \dots$		

System and cable protection

- IEC/EN 60947-2

Strong switching capacity



70	20	15 - 20	350 A fixed	Screw terminals
	25	20 - 25	350 A fixed	as accessories
	32	25 - 32	350 A fixed	
	40	32 - 40	8 - 10	
	50	40 - 50	6 - 10	
	63	50 - 63	6 - 10	
	80	63 - 80	6 - 10	
	100	80 - 100	6 - 10	
	125	100 - 125	6 - 10	
	160	125 - 160	1280 A fixed	



20	15 - 20	350 A fixed	NZMS2-A20	192020
32	25 - 32	350 A fixed	NZMS2-A32	192022
40	32 - 40	8 - 10	NZMS2-A40	109958
50	40 - 50	6 - 10	NZMS2-A50	109959
63	50 - 63	6 - 10	NZMS2-A63	109960
80	63 - 80	6 - 10	NZMS2-A80	109961
100	80 - 100	6 - 10	NZMS2-A100	109962
125	100 - 125	6 - 10	NZMS2-A125	109963
160	125 - 160	6 - 10	NZMS2-A160	109964
200	160 - 200	6 - 10	NZMS2-A200	109965
250	200 - 250	6 - 10	NZMS2-A250	109966
300	240 - 300	5 - 8.3	NZMS2-A300	109967



250	200 - 250	6 - 10	NZMS3-A250	192023
320	250 - 320	6 - 10	NZMS3-A320	192024
400	320 - 400	6 - 10	NZMS3-A400	192025
500	400 - 500	6 - 10	NZMS3-A500	192026

Fixed mounting with box terminals

Part no. Article no.

Plug-in/withdrawable units

Part no. Article no. Std. pack

Order base separately

For further terminal types see accessories

NZMS1-A20	109933
NZMS1-A25	109934
NZMS1-A32	109935
NZMS1-A40	109936
NZMS1-A50	109937
NZMS1-A63	109938
NZMS1-A80	109939
NZMS1-A100	109940
NZMS1-A125	109941
NZMS1-A160	109942





NZMS1-A20-SVE	112780	1 Off
NZMS1-A25-SVE	112781	
NZMS1-A32-SVE	112782	
NZMS1-A40-SVE	112783	
NZMS1-A50-SVE	112784	
NZMS1-A63-SVE	112785	
NZMS1-A80-SVE	112786	
NZMS1-A100-SVE	112787	
NZMS1-A125-SVE	112788	
-		

Terminals as accessory



-	
NZMS2-A40-SVE	113283
NZMS2-A50-SVE	113284
NZMS2-A63-SVE	113285
NZMS2-A80-SVE	113286
NZMS2-A100-SVE	113287
NZMS2-A125-SVE	113288
NZMS2-A160-SVE	113289
NZMS2-A200-SVE	113290
NZMS2-A250-SVE	113291
-	




Terminals as accessory

Switching capacity 400/415V 50/60 Hz	Rated current = Rated uninterrupted current	Setting range		Fixed mounting with screw terminals	
		Overload releases	Short-circuit releases Non-delayed	Part no.	Article no.
I_{cu} kA	$I_n = I_u$ A	$I_r = I_n \times \dots$ A	$I_s = I_n \times \dots$		
					

System and cable protection

- IEC/EN 60947-2



High switching capacity

SG08921 L Symbolphoto 	100	20	15 - 20	350 A fixed	Screw terminals as accessories	
		25	20 - 25	350 A fixed		
		32	25 - 32	350 A fixed		
		40	32 - 40	8 - 10		
		50	40 - 50	6 - 10		
		63	50 - 63	6 - 10		
		80	63 - 80	6 - 10		
		100	80 - 100	6 - 10		
		125	100 - 125	6 - 10		
		160	125 - 160	1280 A fixed		
SG08021 L Symbolphoto 	150	20	15 - 20	350 A fixed	NZMH2-A20	281281
		25	20 - 25	350 A fixed	NZMH2-A25	281282
		32	25 - 32	350 A fixed	NZMH2-A32	281283
		40	32 - 40	8 - 10	NZMH2-A40	259095
		50	40 - 50	6 - 10	NZMH2-A50	259096
		63	50 - 63	6 - 10	NZMH2-A63	259097
		80	63 - 80	6 - 10	NZMH2-A80	259098
		100	80 - 100	6 - 10	NZMH2-A100	259099
		125	100 - 125	6 - 10	NZMH2-A125	259100
		160	125 - 160	6 - 10	NZMH2-A160	259101
SG09521 L Symbolphoto 	250	200 - 250	6 - 10	NZMH3-A250	109672	
		320	250 - 320	6 - 10	NZMH3-A320	109673
		400	320 - 400	6 - 10	NZMH3-A400	109674
		500	400 - 500	6 - 10	NZMH3-A500	109675
		-	-	-	-	-

Fixed mounting with box terminals		Plug-in/withdrawable units		
Part no.	Article no.	Part no.	Article no.	Std. pack
		Order base separately		

For further terminal types
see accessories

N100 	NZMH1-A20	284376	NZMH1-A20-SVE	112795	1 Off
	NZMH1-A25	284377	NZMH1-A25-SVE	112796	
	NZMH1-A32	284378	NZMH1-A32-SVE	112797	
	NZMH1-A40	284379	NZMH1-A40-SVE	112798	
	NZMH1-A50	284410	NZMH1-A50-SVE	112799	
	NZMH1-A63	284411	NZMH1-A63-SVE	112800	
	NZMH1-A80	284412	NZMH1-A80-SVE	112801	
	NZMH1-A100	284413	NZMH1-A100-SVE	112802	
	NZMH1-A125	284414	NZMH1-A125-SVE	112803	
	NZMH1-A160	284415	-	-	-
N150 	NZMH2-A20-BT	110296	NZMH2-A20-SVE	113351	
	NZMH2-A25-BT	110297	NZMH2-A25-SVE	113352	
	NZMH2-A32-BT	110298	NZMH2-A32-SVE	113353	
	NZMH2-A40-BT	110287	NZMH2-A40-SVE	113328	
	NZMH2-A50-BT	110288	NZMH2-A50-SVE	113329	
	NZMH2-A63-BT	110289	NZMH2-A63-SVE	113330	
	NZMH2-A80-BT	110290	NZMH2-A80-SVE	113331	
	NZMH2-A100-BT	110291	NZMH2-A100-SVE	113332	
	NZMH2-A125-BT	110292	NZMH2-A125-SVE	113333	
	NZMH2-A160-BT	110293	NZMH2-A160-SVE	113334	
N250 	NZMH2-A200-BT	110294	NZMH2-A200-SVE	113335	
	NZMH2-A250-BT	110295	NZMH2-A250-SVE	113336	
	NZMH2-A300-BT	110286	-	-	-
	Terminals as accessory				
	NZMH3-A320-BT	110305	NZMH3-A320-SVE	168913	
N400	-		NZMH3-A320-AVE	110861	
	NZMH3-A400-BT	110306	NZMH3-A400-SVE	168914	
	-		NZMH3-A400-AVE	110862	
	NZMH3-A500-BT	110307	NZMH3-A500-SVE	168915	
	-		NZMH3-A500-AVE	110863	

Switching capacity 400/415V 50/60 Hz	Rated current = Rated uninterrupted current	Setting range		Rated operational power AC-3 50/60 Hz	Rated operational current	Fixed mounting with screw terminals	
		Overload releases	Short-circuit releases Non-delayed			Part no.	Article no.
I_{cu} kA	$I_n = I_b$ A	$I_r = I_n \times \dots$ A	$I_s = I_n \times \dots$	400 V P kW	400 V I_b A		

Motor protection

- NZM...1-M... with phase-failure sensitivity
- Tripping class 10 A
- IEC/EN 60947-2

Basic switching capacity

Switching capacity	Rated current	Setting range	Short-circuit releases	Rated operational power	Rated operational current	Part no.	Article no.
25	40	32 - 40	8 - 14	18.5	36	Screw terminals as accessories	
	50	40 - 50	8 - 14	22	41		
	63	40 - 63	8 - 14	30	55		
	80	63 - 80	8 - 14	37	68		
	100	80 - 100	8 - 12.5	45	81		
125	100 - 125	8 - 14	55	99	NZMB2-M125	265715	
	160	125 - 160	8 - 14	75	134	NZMB2-M160	265716
	200	160 - 200	8 - 14	110	196	NZMB2-M200	265717

Comfort switching capacity

Switching capacity	Rated current	Setting range	Short-circuit releases	Rated operational power	Rated operational current	Part no.	Article no.
36	40	32 - 40	8 - 14	18.5	36	Screw terminals as accessories	
	50	40 - 50	8 - 14	22	41		
	63	50 - 63	8 - 14	30	55		
	80	63 - 80	8 - 14	37	68		
	100	80 - 100	8 - 12.5	45	81		
125	100 - 125	8 - 14	55	99	NZMC2-M125	271424	
	160	125 - 160	8 - 14	75	134	NZMC2-M160	271425
	200	160 - 200	8 - 14	110	196	NZMC2-M200	271426



Fixed mounting with box terminals

Part no. Article no.

Plug-in units

Part no. Article no. Std. pack

Order base separately



For further terminal types
see accessories

Part no.	Article no.	Image	Plug-in units Part no.	Article no.	Std. pack
NZMB1-M40	265710		NZMB1-M40-SVE	112709	1 Off
NZMB1-M50	265711		NZMB1-M50-SVE	112720	
NZMB1-M63	265712		NZMB1-M63-SVE	112721	
NZMB1-M80	265713		NZMB1-M80-SVE	112722	
NZMB1-M100	265714		NZMB1-M100-SVE	112723	

Part no.	Article no.	Image	Plug-in units Part no.	Article no.	Std. pack
NZMB2-M125-BT	115260		NZMB2-M125-SVE	113196	
Terminals as accessory			NZMB2-M160-SVE	113197	
			NZMB2-M200-SVE	113198	

Part no.	Article no.	Image	Plug-in units Part no.	Article no.	Std. pack
NZMC1-M40	271398		NZMC1-M40-SVE	112743	1 Off
NZMC1-M50	271399		NZMC1-M50-SVE	112744	
NZMC1-M63	271400		NZMC1-M63-SVE	112745	
NZMC1-M80	271401		NZMC1-M80-SVE	112746	
NZMC1-M100	271402		NZMC1-M100-SVE	112747	

Part no.	Article no.	Image	Plug-in units Part no.	Article no.	Std. pack
Terminals as accessory			NZMC2-M125-SVE	113223	
			NZMC2-M160-SVE	113224	
			NZMC2-M200-SVE	113225	

Switching capacity 400/415V 50/60 Hz	Rated current = Setting range		Rated operational power		Rated operational current	Part no.	Article no.
	Rated uninterrupted current	Overload releases	Short-circuit releases Non-delayed	AC-3 50/60 Hz			
I_{cu} kA	$I_n = I_b$ A	$I_r = I_n \times \dots$ A	$I_s = I_n \times \dots$ A	400 V P kW	400 V I_b A		
							

Motor protection

- NZM...1-M... with phase-failure sensitivity
- Tripping class 10 A
- IEC/EN 60947-2

Normal switching capacity

Switching capacity	Rated current	Setting range	Short-circuit releases	Rated operational power	Rated operational current	Part no.	Article no.
50	40	32 - 40	8 - 14	18.5	36	Screw terminals	
	50	40 - 50	8 - 14	22	41	as accessories	
	63	50 - 63	8 - 14	30	55		
	80	63 - 80	8 - 14	37	68		
	100	80 - 100	8 - 12.5	45	81		
125	100 - 125	8 - 14	55	99	NZMN2-M125		265723
	160	125 - 160	8 - 14	75	134	NZMN2-M160	265724
	200	160 - 200	8 - 14	110	196	NZMN2-M200	265725

Strong switching capacity

Switching capacity	Rated current	Setting range	Short-circuit releases	Rated operational power	Rated operational current	Part no.	Article no.
70	20	15 - 20	350 A fixed	7.5	16	NZMS2-M20	109968
	25	20 - 25	350 A fixed	11	21.7	NZMS2-M25	109969
	32	25 - 32	350 A fixed	15	29.3	NZMS2-M32	109970
	40	32 - 40	8 - 14	18.5	36	NZMS2-M40	109971
	50	40 - 50	8 - 14	22	41	NZMS2-M50	109972
	63	50 - 63	8 - 14	30	55	NZMS2-M63	109973
	80	63 - 80	8 - 14	37	68	NZMS2-M80	109974
	100	80 - 100	8 - 14	45	81	NZMS2-M100	109975
	125	100 - 125	8 - 14	55	100	NZMS2-M125	109976
	160	125 - 160	8 - 14	75	134	NZMS2-M160	109977
	200	160 - 200	8 - 14	110	196	NZMS2-M200	109978



Fixed mounting with box terminals

Part no. Article no.

Plug-in units

Part no. Article no. Std. pack

Order base separately

For further terminal types see accessories

Part no.	Article no.	Image	Part no.	Article no.	Std. pack
NZMN1-M40	265718		NZMN1-M40-SVE	112763	1 Off
NZMN1-M50	265719		NZMN1-M50-SVE	112764	
NZMN1-M63	265720		NZMN1-M63-SVE	112765	
NZMN1-M80	265721		NZMN1-M80-SVE	112766	
NZMN1-M100	265722		NZMN1-M100-SVE	112767	

Part no.	Article no.	Image	Part no.	Article no.	Std. pack
Terminals as accessory			NZMN2-M125-SVE	113250	
			NZMN2-M160-SVE	113251	
			NZMN2-M200-SVE	113252	

Part no.	Article no.	Image	Part no.	Article no.	Std. pack
Terminals as accessory			NZMS2-M20-SVE	113293	1 Off
			NZMS2-M25-SVE	113294	
			NZMS2-M32-SVE	113295	
			NZMS2-M40-SVE	113296	
			NZMS2-M50-SVE	113297	
			NZMS2-M63-SVE	113298	
			NZMS2-M80-SVE	113299	
			NZMS2-M100-SVE	113300	
			NZMS2-M125-SVE	113301	
			NZMS2-M160-SVE	113302	
			NZMS2-M200-SVE	113303	

Switching capacity 400/415V 50/60 Hz	Rated current = Rated uninterrupted current	Setting range		Rated operational power AC-3 50/60 Hz	Rated operational current	Fixed mounting with screw terminals	
		Overload releases	Short-circuit releases Non-delayed			Part no.	Article no.
	$I_n = I_b$	$I_r = I_n \times \dots$	$I_s = I_n \times \dots$	400 V P kW	400 V I_b A		

Motor protection

- NZM...1-M... with phase-failure sensitivity
- Tripping class 10 A
- IEC/EN 60947-2

High switching capacity

100	40	32-40	8 - 14	18.5	36	Screw terminals as accessories	
	50	40-50	8 - 14	22	41		
	63	50-63	8 - 14	30	55		
	80	63-80	8 - 14	37	68		
	100	80-100	8 - 12.5	45	81		



25	20-25	350 A fixed	11	21.7	NZMH2-M25	281300
32	25-32	350 A fixed	15	29.3	NZMH2-M32	281301
40	32-40	8 - 14	18.5	36	NZMH2-M40	281302
50	40-50	8 - 14	22	41	NZMH2-M50	281303
63	50-63	8 - 14	30	55	NZMH2-M63	281304
80	63-80	8 - 14	37	68	NZMH2-M80	281305
100	80-100	8 - 14	45	81	NZMH2-M100	281306
125	100-125	8 - 14	55	99	NZMH2-M125	281307
160	125-160	8 - 14	75	134	NZMH2-M160	281308
200	160-200	8 - 14	110	196	NZMH2-M200	281309

Fixed mounting with box terminals

Part no. Article no.

Plug-in units

Part no. Article no. Std. pack

Order base separately

For further terminal types
see accessories

NZMH1-M40	115450
NZMH1-M50	115451
NZMH1-M63	115452
NZMH1-M80	115453
NZMH1-M100	115454



NZMH1-M40-SVE	115790	1 Off
NZMH1-M50-SVE	115791	
NZMH1-M63-SVE	115792	
NZMH1-M80-SVE	115793	
NZMH1-M100-SVE	115794	

Terminals as accessory



NZMH2-M25-SVE	113355
NZMH2-M32-SVE	113356
NZMH2-M40-SVE	113357
NZMH2-M50-SVE	113358
NZMH2-M63-SVE	113359
NZMH2-M80-SVE	113360
NZMH2-M100-SVE	113361
NZMH2-M125-SVE	113362
NZMH2-M160-SVE	113363
NZMH2-M200-SVE	113364

Switching capacity 400/415V 50/60 Hz	Rated current = Rated uninterrupted current	Setting range Short-circuit releases Non-delayed	Rated operational power AC-3 50/60 Hz	Rated operational current AC-3 50/60 Hz	Fixed mounting with screw terminals	
					Part no.	Article no.
I_{cu} kA	$I_n = I_b$ A	$I_f = I_n \times \dots$	400 V P kW	400 V I_b A		



Short-circuit protection

Motor protection in conjunction with overload relay

- With short-circuit releases
- Without overload releases $I_r = I_n \times \dots$
- IEC/EN 60947-2

Basic switching capacity

Capacity	Setting range	Rated operational power	Rated operational current	Part no.	Article no.	
25	40	8 - 14	18.5	36	Screw terminals	
	50	8 - 14	22	41	as accessories	
	63	8 - 14	30	55		
	80	8 - 14	37	68		
	100	8 - 12.5	45	81		
125	8 - 14	45	99	NZMB2-S125	265736	
	160	8 - 14	75	134	NZMB2-S160	265737
	200	8 - 12.5	110	196	NZMB2-S200	265738

Comfort switching capacity

Capacity	Setting range	Rated operational power	Rated operational current	Part no.	Article no.	
36	40	8 - 14	18.5	36	Screw terminals	
	50	8 - 14	22	41	as accessories	
	63	8 - 14	30	55		
	80	8 - 14	37	68		
	100	8 - 12.5	45	81		
125	8 - 14	45	99	NZMC2-S125	271427	
	160	8 - 14	75	134	NZMC2-S160	271428
	200	8 - 12.5	110	196	NZMC2-S200	271429
250	8 - 14	132	231	NZMC3-S250	109676	
	320	8 - 14	160	279	NZMC3-S320	109677
	400	7 - 12.5	200	349	NZMC3-S400	109678
	500	6 - 10	250	437	NZMC3-S500	109679
	-	-	-	-	-	-



Fixed mounting with box terminals

Part no. Article no.

Plug-in/withdrawable units

Part no. Article no. Std. pack

Order base separately

For further terminal types
see accessories

NZMB1-S40	265726	NZMB1-S40-SVE	112724	1 Off
NZMB1-S50	265727	NZMB1-S50-SVE	112725	
NZMB1-S63	265728	NZMB1-S63-SVE	112726	
NZMB1-S80	265729	NZMB1-S80-SVE	112727	
NZMB1-S100	265730	NZMB1-S100-SVE	112728	



Terminals as accessory



NZMC1-S40	271403	NZMC1-S40-SVE	112748	1 Off
NZMC1-S50	271404	NZMC1-S50-SVE	112749	
NZMC1-S63	271405	NZMC1-S63-SVE	112750	
NZMC1-S80	271406	NZMC1-S80-SVE	112751	
NZMC1-S100	271407	NZMC1-S100-SVE	112752	



Terminals as accessory



NZMC3-S250-SVE	168453
NZMC3-S250-AVE	113512
NZMC3-S320-SVE	168454
NZMC3-S320-AVE	113513
NZMC3-S400-SVE	168455
NZMC3-S400-AVE	113514
NZMC3-S500-SVE	168456
NZMC3-S500-AVE	113515



Switching capacity 400/415V 50/60 Hz	Rated current = Rated uninterrupted current	Setting range Short-circuit releases Non-delayed	Rated operational power AC-3 50/60 Hz	Rated operational current AC-3 50/60 Hz	Fixed mounting with screw terminals	
					Part no.	Article no.
I_{cu} kA	$I_n = I_b$ A	$I_r = I_n \times \dots$	400 V P kW	400 V I_b A		






Short-circuit protection



Motor protection in conjunction with overload relay

- With short-circuit releases
- Without overload releases $I_r = I_n \times \dots$
- IEC/EN 60947-2

Normal switching capacity

	50	40	8 - 14	18.5	36	Screw terminals as accessories		
		50	8 - 14	22	41			
		63	8 - 14	30	55			
		80	8 - 14	37	68			
		100	8 - 12.5	45	81			
	125	8 - 14	45	99		NZMN2-S125	265739	
	160	8 - 14	75	134		NZMN2-S160	265740	
	200	8 - 12.5	110	196		NZMN2-S200	265741	
	250	8 - 14	132	231		NZMN3-S250	109680	
						-		
		320	8 - 14	160	279		NZMN3-S320	109681
							-	
		400	7 - 12.5	200	349		NZMN3-S400	109682
						-		
	500	6 - 10	250	437		NZMN3-S500	109683	
						-		

Strong switching capacity

	70	40	8 - 14	18.5	36	Screw terminals as accessories	
		50	8 - 14	22	41		
		63	8 - 14	30	55		
		80	8 - 14	37	68		
		100	8 - 12.5	45	81		
	125	8 - 14	45	99		NZMS2-S125	109979
	160	8 - 14	75	134		NZMS2-S160	109980
	200	8 - 12.5	110	196		NZMS2-S200	109981

Fixed mounting with box terminals

Part no. Article no.

Plug-in/withdrawable units

Part no. Article no. Std. pack

Order base separately

For further terminal types
see accessories

NZMN1-S40	265731		NZMN1-S40-SVE	112768	1 Off
NZMN1-S50	265732		NZMN1-S50-SVE	112769	
NZMN1-S63	265733		NZMN1-S63-SVE	112770	
NZMN1-S80	265734		NZMN1-S80-SVE	112771	
NZMN1-S100	265735		NZMN1-S100-SVE	112772	
Terminals as accessory			NZMN2-S125-SVE	113253	
			NZMN2-S160-SVE	113254	
			NZMN2-S200-SVE	113255	
Terminals as accessory			NZMN3-S250-SVE	168489	
			NZMN3-S250-AVE	113523	
			NZMN3-S320-SVE	168490	
			NZMN3-S320-AVE	113524	
			NZMN3-S400-SVE	168491	
		NZMN3-S400-AVE	113525		
		NZMN3-S500-SVE	168492		
		NZMN3-S500-AVE	113526		

NZMS1-S40	109943		NZMS1-S40-SVE	112790	1 Off
NZMS1-S50	109944		NZMS1-S50-SVE	112791	
NZMS1-S63	109945		NZMS1-S63-SVE	112792	
NZMS1-S80	109946		NZMS1-S80-SVE	112793	
NZMS1-S100	109947		NZMS1-S100-SVE	112794	
Terminals as accessory			NZMS2-S125-SVE	113304	
			NZMS2-S160-SVE	113305	
			NZMS2-S200-SVE	113306	

Switching capacity 400/415V 50/60 Hz	Rated current = Rated uninterrupted current	Setting range Short-circuit releases Non-delayed	Rated operational power AC-3 50/60 Hz	Rated operational current AC-3 50/60 Hz	Fixed mounting with screw terminals	
					Part no.	Article no.
			400 V P kW	400 V I_b A		






Short-circuit protection

Motor protection in conjunction with overload relay

- With short-circuit releases
- Without overload releases $I_r = I_{n\alpha}$
- IEC/EN 60947-2

High switching capacity

Switching capacity	Rated current	Setting range	Rated operational power	Rated operational current	Part no.	Article no.
100 	40	8 - 14	18.5	36	Screw terminals as accessories	
	50	8 - 14	22	41		
	63	8 - 14	30	55		
	80	8 - 14	37	68		
	100	8 - 12.5	45	81		
150 	40	8 - 14	18.5	36	NZMH2-S40	265742
	50	8 - 14	22	41	NZMH2-S50	265743
	63	8 - 14	30	55	NZMH2-S63	265744
	80	8 - 14	37	68	NZMH2-S80	265745
	100	8 - 14	45	81	NZMH2-S100	265746
	125	8 - 14	45	99	NZMH2-S125	265747
	160	8 - 12.5	75	134	NZMH2-S160	265748
200	8 - 12.5	110	196	NZMH2-S200	265749	
250 	250	8 - 14	132	231	NZMH3-S250	109684
	320	8 - 14	160	279	NZMH3-S320	109685
	400	7 - 12.5	200	349	NZMH3-S400	109686
	500	6 - 10	250	437	NZMH3-S500	109687

Fixed mounting with box terminals
Part no.

Article no.

Plug-in/withdrawable units
Part no.



Article no.

Std. pack

Order base separately

For further terminal types
see accessories

NZMH1-S40	284436		NZMH1-S40-SVE	112805	1 Off
NZMH1-S50	284437		NZMH1-S50-SVE	112806	
NZMH1-S63	284438		NZMH1-S63-SVE	112807	
NZMH1-S80	284439		NZMH1-S80-SVE	112808	
NZMH1-S100	284440		NZMH1-S100-SVE	112809	
Terminals as accessory			NZMH2-S40-SVE	113340	
			NZMH2-S50-SVE	113341	
			NZMH2-S63-SVE	113342	
			NZMH2-S80-SVE	113343	
			NZMH2-S100-SVE	113344	
			NZMH2-S125-SVE	113345	
			NZMH2-S160-SVE	113346	
Terminals as accessory			NZMH2-S200-SVE	113347	
			NZMH3-S250-SVE	168916	
			NZMH3-S250-AVE	113566	
			NZMH3-S320-SVE	168917	
			NZMH3-S320-AVE	113567	
		NZMH3-S400-SVE	168918		
		NZMH3-S400-AVE	113568		
		NZMH3-S500-SVE	168919		
		NZMH3-S500-AVE	113569		

Switching capacity 400/415V 50/60 Hz	Rated current = Rated uninterrupted current	Setting range		Fixed mounting with screw terminals	
		Overload releases	Short-circuit releases	Part no.	Article no.
I_{cu} kA	$I_n = I_u$ A	$I_r = I_n \times \dots$ A	$I_s = I_n \times \dots$		

System and cable protection

- IEC/EN 60947-2

Normal switching capacity

50	40	20 - 40	2 - 12	NZMN2-AX40*	192001
	63	25 - 63	2 - 12	NZMN2-AX63*	192002
	100	40 - 100	2 - 12	NZMN2-AX100	192003
	160	64 - 160	2 - 12	NZMN2-AX160	192004
	350	100 - 250	2 - 12	NZMN2-AX250	192005
*For availability information please contact your local Eaton sales team.					
250	100 - 250	2 - 11		NZMN3-AX250	191599
	400	160 - 400	2 - 11	NZMN3-AX400	191600
	630	252 - 630	2 - 8	NZMN3-AX630	191601
630	252 - 630	2 - 12		NZMN4-AX630	191418
	800	320 - 800	2 - 12	NZMN4-AX800	191419
	1000	400 - 1000	2 - 12	NZMN4-AX1000	191420
	1250	500 - 1250	2 - 12	NZMN4-AX1250	191421
	1600	640 - 1600	2 - 12	NZMN4-AX1600	191422

Strong switching capacity

70	40	20 - 40	2 - 12	NZMS2-AX40*	192028
	63	25 - 63	2 - 12	NZMS2-AX63*	192029
	100	40 - 100	2 - 12	NZMS2-AX100	192030
	160	64 - 160	2 - 12	NZMS2-AX160	192031
	250	100 - 250	2 - 12	NZMS2-AX250	192032
*For availability information please contact your local Eaton sales team.					
250	100 - 250	2 - 11		NZMS3-AX250	192033
	400	160 - 400	2 - 11	NZMS3-AX400	191494
	630	252 - 630	2 - 8	NZMS3-AX630	191495



Fixed mounting with box terminals

Part no. Article no.

Withdrawable units

Part no. Article no. Std. pack

Order base separately

For further terminal types see accessories

Terminals as accessory					1 Off
------------------------	--	--	--	--	-------

Terminals as accessory					
NZMN3-AX400-BT	191586				
NZMN3-AX630-BT	191587				



NZMN3-AX250-AVE	191574
NZMN3-AX400-AVE	191575
NZMN3-AX630-AVE	191576





NZMN4-AX630-AVE	500893
NZMN4-AX800-AVE	500894
NZMN4-AX1000-AVE	500895
NZMN4-AX1250-AVE	500896
NZMN4-AX1600-AVE	500897

Terminals as accessory					1 Off
------------------------	--	--	--	--	-------

Terminals as accessory					



NZMS3-AX400-AVE	191503
NZMS3-AX630-AVE	191504

Switching capacity 400/415V 50/60 Hz	Rated current = Rated uninterrupted current	Setting range		Fixed mounting with screw terminals	
		Overload releases	Short-circuit releases Non-delayed	Part no.	Article no.
I_{cu} kA	$I_n = I_u$ A	$I_r = I_n \times \dots$ A	$I_s = I_n \times \dots$		

System and cable protection

- IEC/EN 60947-2

High switching capacity

150	40	20 - 40	2 - 12	NZMH2-AX40*	192007
	63	25 - 63	2 - 12	NZMH2-AX63*	192008
	100	40 - 100	2 - 12	NZMH2-AX100	192009
	160	64 - 160	2 - 12	NZMH2-AX160	192010
	250	100 - 250	2 - 12	NZMH2-AX250	192011
*For availability information please contact your local Eaton sales team.					
250	100 - 250	2 - 11		NZMH3-AX250	191346
	400	160 - 400	2 - 11	NZMH3-AX400	191347
	630	252 - 630	2 - 8	NZMH3-AX630	191348



*For further information please contact your Eaton sales person.

Limiter switching capacity

100	630	252 - 630	2 - 12	NZML4-AX630	191363
	800	320 - 800	2 - 12	NZML4-AX800	191364
	1000	400 - 1000	2 - 12	NZML4-AX1000	191365
	1250	500 - 1250	2 - 12	NZML4-AX1250	191366
	1600	640 - 1600	2 - 12	NZML4-AX1600	191322



Fixed mounting with box terminals

Part no. Article no.

Withdrawable units

Part no. Article no. Std. pack

Order base separately

For further terminal types see accessories

Terminals as accessory					1 Off
------------------------	--	--	--	--	-------

Terminals as accessory			NZMH3-AX250-AVE	191545	
			NZMH3-AX400-AVE	191546	
			NZMH3-AX630-AVE	191547	

			NZMH4-AX630-AVE	500906	
			NZMH4-AX800-AVE	500907	
			NZMH4-AX1000-AVE	500908	
			NZMH4-AX1250-AVE	500909	
			NZMH4-AX1600-AVE	500910	

			NZML4-AX630-AVE	500889	1 Off
			NZML4-AX800-AVE	500890	
			NZML4-AX1000-AVE	500891	
			NZML4-AX1250-AVE	500892	
			NZML4-AX1600-AVE	500878	

Switching capacity 400/415V 50/60 Hz	Rated current = uninterrupted current	Setting range		Rated operational power		Rated operational current		Fixed mounting with screw terminals	
		Rated releases	Short-circuit releases Non-delayed	AC-3 50/60 Hz	AC-3 50/60 Hz	Part no.	Article no.		
I_{cu} kA	$I_n = I_u$ A	$I_r = I_n \times \dots$ A	$I_s = I_n \times \dots$ A	400 V P kW	690 V P kW	400 V I_b A	690 V I_b A		

Motor protection

- IEC/EN 60947-2
- With phase-failure sensitivity

Normal switching capacity

50	90	36 - 90	2 - 18	45	75	81	78	NZMN2-MX90	191631
	140	56 - 140	2 - 18	75	132	134	134	NZMN2-MX140	191632
	220	88 - 220	2 - 14	110	200	196	202	NZMN2-MX220	191633
220	220	88 - 220	2 - 18	110	200	196	202	NZMN3-MX220	191605
	350	140 - 350	2 - 15	200	315	349	316	NZMN3-MX350	191606
	450	180 - 450	2 - 12	250	450	437	446	NZMN3-MX450	191607
550	550	220 - 550	2 - 18	315	560	544	550	NZMN4-MX550	191428
	875	350 - 875	2 - 18	500	800	846	785	NZMN4-MX875	191429
	1400	560 - 1400	2 - 14	800	1400	1354	1374	NZMN4-MX1400	191430

Strong switching capacity

70	90	36 - 90	2 - 18	45	75	81	78	NZMS2-MX90	191650
	140	56 - 140	2 - 18	75	132	134	134	NZMS2-MX140	191651
	220	88 - 220	2 - 14	110	200	196	202	NZMS2-MX220	191652
220	220	88 - 220	2 - 18	110	200	196	202	NZMS3-MX220	191498
	350	140 - 350	2 - 15	200	315	349	316	NZMS3-MX350	191499
	450	180 - 450	2 - 12	250	450	437	446	NZMS3-MX450	191500



WA_SG169121_L Symbolphoto



WA_SG01122_L Symbolphoto



WA_SG00622_L Symbolphoto



Fixed mounting with box terminals

Part no. Article no.

Plug-in/withdrawable units

Part no. Article no. Std. pack

Order base separately

For further terminal types
see accessories

Terminals as accessory



NZMN2-MX90-SVE	191622	1 Off
NZMN2-MX140-SVE	191623	
NZMN2-MX220-SVE	191624	

Terminals as accessory



NZMN3-MX220-SVE	191596
NZMN3-MX220-AVE	191580
NZMN3-MX350-SVE	191597
NZMN3-MX350-AVE	191581
NZMN3-MX450-SVE	191598
NZMN3-MX450-AVE	191582

Terminals as accessory



NZMN4-MX550-AVE	500979
NZMN4-MX875-AVE	500980
NZMN4-MX1400-AVE	500978

Terminals as accessory



NZMS2-MX90-SVE	191656	1 Off
NZMS2-MX140-SVE	191657	
NZMS2-MX220-SVE	191658	

Terminals as accessory



NZMS3-MX220-SVE	191514
NZMS3-MX220-AVE	191507
NZMS3-MX350-SVE	191515
NZMS3-MX350-AVE	191508
NZMS3-MX450-SVE	191516
NZMS3-MX450-AVE	191509

Switching capacity 400/415V 50/60 Hz	Rated current = uninterrupted current	Setting range		Rated operational power		Rated operational current		Fixed mounting with screw terminals	
		Overload releases	Short-circuit releases Non-delayed	AC-3 50/60 Hz	AC-3 50/60 Hz	Part no.	Article no.		
I_{cu} kA	$I_n = I_u$ A	$I_r = I_n \times \dots$ A	$I_s = I_n \times \dots$	400 V P kW	690 V P kW	400 V I_e A	690 V I_e A		

Motor protection

- IEC/EN 60947-2
- With phase-failure sensitivity

High switching capacity

150	90	36 - 90	2 - 18	45	75	81	78	NZMH2-MX90	191681
	140	56 - 140	2 - 18	75	132	134	134	NZMH2-MX140	191682
	220	88 - 220	2 - 14	110	200	196	202	NZMH2-MX220	191683
220	88 - 220	2 - 18	2 - 18	110	200	196	202	NZMH3-MX220	191352
	350	140 - 350	2 - 15	200	315	349	316	NZMH3-MX350	191367
	450	180 - 450	2 - 12	250	450	437	446	NZMH3-MX450	191368
75*	550	220 - 550	2 - 18	315	560	544	550	NZMH4-MX550	191457
	875	350 - 875	2 - 18	500	800	846	785	NZMH4-MX875	191458
	1400	560 - 1400	2 - 14	800	1400	1354	1374	NZMH4-MX1400	191459

**For further information please contact your Eaton sales person.

Limiter switching capacity

100	550	220 - 550	2 - 18	315	560	544	550	NZML4-MX550	191328
	875	350 - 875	2 - 18	500	800	846	785	NZML4-MX875	191329
	1400	560 - 1400	2 - 14	800	1400	1354	1374	NZML4-MX1400	191330



Fixed mounting with box terminals

Part no. Article no.

Plug-in/withdrawable units

Part no. Article no. Std. pack

Order base separately

For further terminal types
see accessories

Terminals as accessory



NZMH2-MX90-SVE	191675	1 Off
NZMH2-MX140-SVE	191676	
NZMH2-MX220-SVE	191677	

Terminals as accessory



NZMH3-MX220-SVE	191372	
NZMH3-MX220-AVE	191551	
NZMH3-MX350-SVE	191373	
NZMH3-MX350-AVE	191552	
NZMH3-MX450-SVE	191374	
NZMH3-MX450-AVE	191553	

Terminals as accessory



NZMH4-MX550-AVE	500973	
NZMH4-MX875-AVE	500974	

Terminals as accessory



NZML4-MX550-AVE	500976	1 Off
NZML4-MX875-AVE	500977	
NZML4-MX1400-AVE	500975	

Switching capacity 400/415V 50/60 Hz	Rated current = Rated uninterrupted current	Setting range			Fixed mounting with screw terminals	
		Overload releases	Short-circuit releases delayed	Short-circuit releases Non-delayed	Part no. Article no.	Part no. Article no.
I_{cu} kA	$I_n = I_b$ A	$I_r = I_n \times \dots$ A	$I_{sd} = I_n \times \dots$	$I_i = I_n \times \dots$		

System and cable protection, selectivity and generator protection
• IEC/EN 60947-2

Normal switching capacity

50	40	20 - 40	2 - 10	2 - 18	NZMN2-VX40*	192013	
	63	25 - 63	2 - 10	2 - 18	NZMN2-VX63*	192014	
	100	40 - 100	2 - 10	2 - 18	NZMN2-VX100	191628	
	160	64 - 160	2 - 10	2 - 18	NZMN2-VX160	191629	
	250	100 - 250	2 - 10	2 - 12	NZMN2-VX250	191630	
*For availability information please contact your local Eaton sales team.							
250	100 - 250	2 - 10	2 - 18	NZMN3-VX250	191602	-	
	400	160 - 400	2 - 10	2 - 12	NZMN3-VX400	191603	-
	630	252 - 630	1.5 - 7	2 - 8	NZMN3-VX630	191604	-
630	252 - 630	2 - 10	2 - 18	NZMN4-VX630	191423	-	
	800	320 - 800	2 - 10	2 - 18	NZMN4-VX800	191424	-
	1000	400 - 1000	2 - 10	2 - 18	NZMN4-VX1000	191425	-
	1250	500 - 1250	2 - 10	2 - 15	NZMN4-VX1250	191426	-
	1600	640 - 1600	2 - 10	2 - 12	NZMN4-VX1600	191427	-

Strong switching capacity

70	40	20 - 40	2 - 10	2 - 18	NZMS2-VX40*	192035	
	63	25 - 63	2 - 10	2 - 18	NZMS2-VX63*	192036	
	100	40 - 100	2 - 10	2 - 18	NZMS2-VX100	191647	
	160	64 - 160	2 - 10	2 - 18	NZMS2-VX160	191648	
	250	100 - 250	2 - 10	2 - 12	NZMS2-VX250	191649	
*For availability information please contact your local Eaton sales team.							
250	125 - 250	2 - 10	2 - 18	NZMS3-VX250	192037	-	
	400	160 - 400	2 - 10	2 - 12	NZMS3-VX400	191496	-
	630	252 - 630	1.5 - 7	2 - 8	NZMS3-VX630	191497	-



Fixed mounting with box terminals
Part no. Article no.

Plug-in/withdrawable units
Part no. Article no. Std. pack
Order base separately

For further terminal types see accessories

Terminals as accessory	-	1 Off
NZMN2-VX100-BT	191625	NZMN2-VX100-SVE 191619
NZMN2-VX160-BT	191626	NZMN2-VX160-SVE 191620
NZMN2-VX250-BT	191627	NZMN2-VX250-SVE 191621



Terminals as accessory	-	NZMN3-VX250-SVE 191593
NZMN3-VX400-BT	191588	NZMN3-VX250-AVE 191577
Terminals as accessory	-	NZMN3-VX400-SVE 191594
NZMN3-VX630-BT	191589	NZMN3-VX400-AVE 191578
Terminals as accessory	-	NZMN3-VX630-SVE 191595
	-	NZMN3-VX630-AVE 191579



-	-	NZMN4-VX630-AVE 191413
-	-	NZMN4-VX800-AVE 191414
-	-	NZMN4-VX1000-AVE 191415
-	-	NZMN4-VX1250-AVE 191416
-	-	NZMN4-VX1600-AVE 191417



Terminals as accessory	-	1 Off
	-	NZMS2-VX100-SVE 191653
	-	NZMS2-VX160-SVE 191654
	-	NZMS2-VX250-SVE 191655



Terminals as accessory	-	NZMS3-VX400-SVE 191512
	-	NZMS3-VX400-AVE 191505
	-	NZMS3-VX630-SVE 191513
	-	NZMS3-VX630-AVE 191506



Switching capacity 400/415V 50/60 Hz	Rated current = Rated uninterrupted current	Setting range			Fixed mounting with screw terminals	
		Overload releases	Short-circuit releases delayed	Short-circuit releases Non-delayed	Part no.	Article no.
I_{cu} kA	$I_n = I_b$ A	$I_r = I_n \times \dots$ A	$I_{sd} = I_n \times \dots$	$I_s = I_n \times \dots$		

System and cable protection, selectivity and generator protection

- IEC/EN 60947-2

High switching capacity

Switching capacity (kA)	Rated current (A)	Overload releases	Short-circuit releases delayed	Short-circuit releases Non-delayed	Part no.	Article no.
150	40	20 - 40	2 - 10	2 - 18	NZMH2-VX40*	192017
	63	25 - 63	2 - 10	2 - 18	NZMH2-VX63*	192018
	100	40 - 100	2 - 10	2 - 18	NZMH2-VX100	191678
	160	64 - 160	2 - 10	2 - 18	NZMH2-VX160	191679
	250	100 - 250	2 - 10	2 - 12	NZMH2-VX250	191680

*For availability information please contact your local Eaton sales team.

250	100 - 250	2 - 10	2 - 18	NZMH3-VX250	191349	
	400	160 - 400	2 - 10	2 - 12	NZMH3-VX400	191350
	630	252 - 630	1.5 - 7	2 - 8	NZMH3-VX630	191351

Switching capacity (kA)	Rated current (A)	Overload releases	Short-circuit releases delayed	Short-circuit releases Non-delayed	Part no.	Article no.
75*	630	252 - 630	2 - 10	2 - 18	NZMH4-VX630	191452
	800	320 - 800	2 - 10	2 - 18	NZMH4-VX800	191453
	1000	400 - 1000	2 - 10	2 - 18	NZMH4-VX1000	191454
	1250	500 - 1250	2 - 10	2 - 15	NZMH4-VX1250	191455
	1600	640 - 1600	2 - 10	2 - 12	NZMH4-VX1600	191456

*For further information please contact your Eaton sales person.

Limiter switching capacity

100	630	252 - 630	2 - 10	2 - 18	NZML4-VX630	191323
	800	320 - 800	2 - 10	2 - 18	NZML4-VX800	191324
	1000	400 - 1000	2 - 10	2 - 18	NZML4-VX1000	191325
	1250	500 - 1250	2 - 10	2 - 15	NZML4-VX1250	191326
	1600	640 - 1600	2 - 10	2 - 12	NZML4-VX1600	191327



Fixed mounting with box terminals

Part no. Article no.


Plug-in/withdrawable units

Part no. Article no. Std. pack

Order base separately

For further terminal types see accessories

Terminals as accessory				1 Off
------------------------	--	--	--	-------

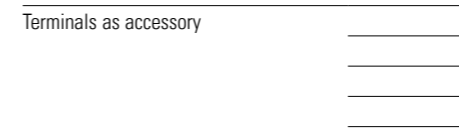

NZMH2-VX100-SVE	191672
NZMH2-VX160-SVE	191673
NZMH2-VX250-SVE	191674

Terminals as accessory	
NZMH3-VX400-BT	191557
NZMH3-VX630-BT	191558



NZMH3-VX250-SVE	191369
NZMH3-VX250-AVE	191548
NZMH3-VX400-SVE	191370
NZMH3-VX400-AVE	191549
NZMH3-VX630-SVE	191371
NZMH3-VX630-AVE	191550

Terminals as accessory	
------------------------	--



NZMH4-VX630-AVE	193328
NZMH4-VX800-AVE	193329
NZMH4-VX1000-AVE	193330
NZMH4-VX1250-AVE	193331
NZMH4-VX1600-AVE	193332

Terminals as accessory	
------------------------	--



NZML4-VX630-AVE	500922	1 Off
NZML4-VX800-AVE	500923	
NZML4-VX1000-AVE	500919	
NZML4-VX1250-AVE	500920	
NZML4-VX1600-AVE	500921	

Circuit breakers, electronic releases, 3 pole
NZM...VX...-T

Switching capacity 400/415V 50/60 Hz	Rated current = Rated uninterrupted current	Setting range				Fixed mounting with screw terminals	
		Overload releases	Short-circuit releases delayed	Short-circuit releases Non-delayed	Earth-fault release Alarm or trip	Part no.	Article no.
I_{cu} kA	$I_n = I_u$ A	$I_t = I_n \times \dots$ A	$I_{sd} = I_n \times \dots$	$I_s = I_n \times \dots$	$I_G = I_n \times \dots$		

System and cable protection, selectivity, generator and earth fault protection

- IEC/EN 60947-2

Normal switching capacity

50	40	20 - 40	2 - 10	2 - 18	20 - 40	NZMN2-VX40-T*	193287
	63	25 - 63	2 - 10	2 - 18	20 - 63	NZMN2-VX63-T*	193288
	100	40 - 100	2 - 10	2 - 18	20 - 100	NZMN2-VX100-T	193289
	160	64 - 160	2 - 10	2 - 18	32 - 160	NZMN2-VX160-T	193290
	250	100 - 250	2 - 10	2 - 12	50 - 250	NZMN2-VX250-T	193291

*For availability information please contact your local Eaton sales team.

250	100 - 250	2 - 10	2 - 18	50 - 250	NZMN3-VX250-T	191583
	400	160 - 400	2 - 10	80 - 400	NZMN3-VX400-T	191584
	630	252 - 630	1.5 - 7	125 - 630	NZMN3-VX630-T	191585

630	315 - 630	2 - 10	2 - 18	125 - 630	NZMN4-VX630-T	193310
	800	400 - 800	2 - 10	160 - 800	NZMN4-VX800-T	193311
	1000	500 - 1000	2 - 10	200 - 1000	NZMN4-VX1000-T	193312
	1250	630 - 1250	2 - 10	250 - 1250	NZMN4-VX1250-T	193313
	1600	800 - 1600	2 - 10	320 - 1600	NZMN4-VX1600-T	193314



Circuit breakers, electronic releases, 3 pole
NZM...VX...-T

Fixed mounting with box terminals
Part no.

Article no.

Withdrawable units
Part no.

Article no.

Std. pack

Order base separately

For further terminal types see accessories

Terminals as accessory					1 Off
------------------------	--	--	--	--	-------

Terminals as accessory			NZMN3-VX250-T-AVE	191590	1 Off
			NZMN3-VX400-T-AVE	191591	
			NZMN3-VX630-T-AVE	191592	

-			NZMN4-VX630-T-AVE	500969	1 Off
			NZMN4-VX800-T-AVE	500971	
			NZMN4-VX1000-T-AVE	500963	
			NZMN4-VX1250-T-AVE	500965	
			NZMN4-VX1600-T-AVE	500967	

Switching capacity 400/415V 50/60 Hz	Rated current = Rated uninterrupted current	Setting range		Fixed mounting with screw terminals			
		Overload releases	Short-circuit releases delayed	Short-circuit releases Non-delayed	Earth-fault release Alarm or trip	Part no.	Article no.
I_{cu} kA	$I_n = I_u$ A	$I_r = I_n \times \dots$ A	$I_{sd} = I_n \times \dots$	$I_s = I_n \times \dots$	$I_g = I_n \times \dots$		

System and cable protection, selectivity, generator and earth fault protection

- IEC/EN 60947-2

Strong switching capacity

70	400	160 - 400	2 - 10	2 - 12	80 - 400	NZMS3-VX400-T	191501
	630	252 - 630	1.5 - 7	2 - 8	126 - 630	NZMS3-VX630-T	191502

High switching capacity

150	40	20 - 40	2 - 10	2 - 18	20 - 40	NZMH2-VX40-T*	193293
	63	25 - 63	2 - 10	2 - 18	20 - 63	NZMH2-VX63-T*	193294
	100	40 - 100	2 - 10	2 - 18	20 - 100	NZMH2-VX100-T	193295
	160	64 - 160	2 - 10	2 - 18	32 - 160	NZMH2-VX160-T	193296
	250	100 - 250	2 - 10	2 - 12	50 - 250	NZMH2-VX250-T	193297

*For availability information please contact your local Eaton sales team.

250	100 - 250	2 - 10	2 - 18	50 - 250	NZMH3-VX250-T	191554	
	400	160 - 400	2 - 10	2 - 12	80 - 400	NZMH3-VX400-T	191555
	630	252 - 630	1.5 - 7	2 - 8	126 - 630	NZMH3-VX630-T	191556

75*	630	252 - 630	2 - 10	2 - 18	125 - 630	NZMH4-VX630-T	193315
	800	320 - 800	2 - 10	2 - 18	160 - 800	NZMH4-VX800-T	193316
	1000	400 - 1000	2 - 10	2 - 18	200 - 1000	NZMH4-VX1000-T	193317
	1250	500 - 1250	2 - 10	2 - 15	250 - 1250	NZMH4-VX1250-T	193318
	1600	640 - 1600	2 - 10	2 - 12	320 - 1600	NZMH4-VX1600-T	193319

*For further information please contact your Eaton sales person.

Limiter switching capacity

100	630	252 - 630	2 - 10	2 - 18	125 - 630	NZML4-VX630-T 500937	
	800	320 - 800	2 - 10	2 - 18	160 - 800	NZML4-VX800-T 500938	
	1000	400 - 1000	2 - 10	2 - 18	200 - 1000	NZML4-VX1000-T 500934	
	1250	500 - 1250	2 - 10	2 - 15	250 - 1250	NZML4-VX1250-T 500935	



Fixed mounting with box terminals

Part no. Article no.

Withdrawable units

Part no. Article no. Std. pack

Order base separately

For further terminal types see accessories

Terminals as accessory			NZMS3-VX400-T-AVE	191510	1 Off
			NZMS3-VX630-T-AVE	191511	

Terminals as accessory					1 Off
------------------------	--	--	--	--	-------



Terminals as accessory			NZMH3-VX250-T-AVE	191559	1 Off
			NZMH3-VX400-T-AVE	191560	
			NZMH3-VX630-T-AVE	191561	

			NZMH4-VX630-T-AVE	500953	1 Off
			NZMH4-VX800-T-AVE	500954	
			NZMH4-VX1000-T-AVE	500950	
			NZMH4-VX1250-T-AVE	500951	
			NZMH4-VX1600-T-AVE	500952	

			NZML4-VX630-T-AVE	500944	
			NZML4-VX800-T-AVE	500945	
			NZML4-VX1000-T-AVE	500941	1 Off
			NZML4-VX1250-T-AVE	500942	
			NZML4-VX1600-T-AVE	500943	

Compact circuit breakers, switch disconnectors

Circuit breakers IEC, electronic releases with energy meter function, 3 pole
NZM...PMX

Switching capacity 400/415V 50/60 Hz	Rated current = Rated uninterrupted current	Setting range		Fixed mounting with screw terminals	
		Overload releases	Short-circuit releases Non-delayed	Part no.	Article no.
I_{cu} kA	$I_n = I_u$ A	$I_r = I_n \times \dots$ A	$I_s = I_n \times \dots$		

Motor protection

- Energy metering class I up to IEC61557-12
- With phase-failure sensitivity
- IEC/EN 60947-2

Normal switching capacity

50	40	20 - 40	2 - 18	NZMN2-PMX40*	192104
	63	25 - 63	2 - 18	NZMN2-PMX63*	192105
	100	40 - 100	2 - 18	NZMN2-PMX100	192106
	160	64 - 160	2 - 18	NZMN2-PMX160	192107
	220	88 - 220	2 - 14	NZMN2-PMX220	192108
*For availability information please contact your local Eaton sales team.					
250	100 - 250	2 - 18	-	NZMN3-PMX250	192322
	350	140 - 350	2 - 15	NZMN3-PMX350	192323
	450	180 - 450	2 - 12	NZMN3-PMX450	192324
550	220 - 550	2 - 18	-	NZMN4-PMX550	189681
	875	350 - 875	2 - 18	NZMN4-PMX875	189682
	1400	560 - 1400	2 - 14	NZMN4-PMX1400	189683



Compact circuit breakers, switch disconnectors

Circuit breakers IEC, electronic releases with energy meter function, 3 pole
NZM...PMX

Fixed mounting with box terminals
Part no.

Article no.

Plug-in/withdrawable units
Part no.


Article no.

Std. pack

Order base separately


For further terminal types
see accessories

Terminals as accessory



NZMN2-PMX40-SVE*	192116	1 Off
NZMN2-PMX63-SVE*	192117	
NZMN2-PMX100-SVE	192118	
NZMN2-PMX160-SVE	192119	
NZMN2-PMX220-SVE	192120	
*For availability information please contact your local Eaton sales team.		

Terminals as accessory



NZMN3-PMX250-SVE	192328	
NZMN3-PMX250-AVE	192334	
NZMN3-PMX350-SVE	192329	
NZMN3-PMX350-AVE	192335	
NZMN3-PMX450-SVE	192330	
NZMN3-PMX450-AVE	192336	



-



NZMN4-PMX550-AVE	189687	
NZMN4-PMX875-AVE	189688	
NZMN4-PMX1400-AVE	189689	

Compact circuit breakers, switch disconnectors

Circuit breakers IEC, electronic releases with energy meter function, 3 pole
NZM...PMX

Switching capacity 400/415V 50/60 Hz	Rated current = Rated uninterrupted current	Setting range		Fixed mounting with screw terminals	
		Overload releases	Short-circuit releases Non-delayed	Part no.	Article no.
I_{cu} kA	$I_n = I_u$ A	$I_r = I_n \times \dots$ A	$I_s = I_n \times \dots$		
					

Motor protection

- Energy metering class I up to IEC61557-12
- With phase-failure sensitivity
- IEC/EN 60947-2

High switching capacity

150	40	20 - 40	2 - 18	NZMH2-PMX40*	192110
	63	25 - 63	2 - 18	NZMH2-PMX63*	192111
	100	40 - 100	2 - 18	NZMH2-PMX100	192112
	160	64 - 160	2 - 18	NZMH2-PMX160	192113
	220	88 - 220	2 - 14	NZMH2-PMX220	192114
*For availability information please contact your local Eaton sales team.					
250	100 - 250	2 - 18		NZMH3-PMX250	192325
	350	140 - 350	2 - 15	NZMH3-PMX350	192326
	450	180 - 450	2 - 12	NZMH3-PMX450	192327
75*	550	220 - 550	2 - 18	NZMH4-PMX550	189684
	875	350 - 875	2 - 18	NZMH4-PMX875	189685
	1400	560 - 1400	2 - 14	NZMH4-PMX1400	189686

*For further information please contact your Eaton sales person

Limiter switching capacity

100	550	220 - 550	2 - 18	NZML4-PMX550	189706
	875	350 - 875	2 - 18	NZML4-PMX875	189707
	1400	560 - 1400	2 - 14	NZML4-PMX1400	189708



Compact circuit breakers, switch disconnectors

Circuit breakers IEC, electronic releases with energy meter function, 3 pole
NZM...PMX

Fixed mounting with box terminals
Part no. Article no.

Plug-in/withdrawable units
Part no. Article no. Std. pack

Order base separately

For further terminal types
see accessories

Terminals as accessory			NZMH2-PMX40-SVE*	192122	1 Off
			NZMH2-PMX63-SVE*	192123	
			NZMH2-PMX100-SVE	192124	
			NZMH2-PMX160-SVE	192125	
			NZMH2-PMX220-SVE	192126	
Terminals as accessory			NZMH3-PMX250-SVE	192331	
			NZMH3-PMX250-AVE	192337	
			NZMH3-PMX350-SVE	192332	
			NZMH3-PMX350-AVE	192338	
			NZMH3-PMX450-SVE	192333	
			NZMH3-PMX450-AVE	192339	
			NZMH4-PMX550-AVE	189690	
			NZMH4-PMX875-AVE	189691	
			NZMH4-PMX1400-AVE	189692	
			NZML4-PMX550-AVE	500997	1 Off
			NZML4-PMX875-AVE	500998	
			NZML4-PMX1400-AVE	500996	

Switching capacity 400/415V 50/60 Hz	Rated current = Rated uninterrupted current	Setting range			Fixed mounting with screw terminals	
		Overload releases	Short-circuit releases delayed	Short-circuit releases Non-delayed	Part no.	Article no.
I_{cu} kA	$I_n = I_u$ A	$I_r = I_r \times \dots$ A	$I_{sd} = I_s \times \dots$	$I_s = I_s \times \dots$		

System and cable protection, selectivity and generator protection

- Energy metering class I up to IEC61557-12
- IEC/EN 60947-2

Normal switching capacity

50	40	20 - 40	2 - 10	2 - 18	NZMN2-PX40*	192237	
	63	25 - 63	2 - 10	2 - 18	NZMN2-PX63*	192238	
	100	40 - 100	2 - 10	2 - 18	NZMN2-PX100	192239	
	160	64 - 160	2 - 10	2 - 18	NZMN2-PX160	192240	
	250	100 - 250	2 - 10	2 - 12	NZMN2-PX250	192241	
*For availability information please contact your local Eaton sales team.							
250	100 - 250	2 - 10	2 - 18	-	NZMN3-PX250	192354	
	400	160 - 400	2 - 10	2 - 12	-	NZMN3-PX400	192355
	630	252 - 630	1.5 - 7	2 - 8	-	NZMN3-PX630	192356
630	252 - 630	2 - 10	2 - 18	-	NZMN4-PX630	189601	
	800	320 - 800	2 - 10	2 - 18	-	NZMN4-PX800	189602
	1000	400 - 1000	2 - 10	2 - 18	-	NZMN4-PX1000	189603
	1250	500 - 1250	2 - 10	2 - 15	-	NZMN4-PX1250	189604
	1600	640 - 1600	2 - 10	2 - 12	-	NZMN4-PX1600	189605



Fixed mounting with box terminals	Article no.	Plug-in/withdrawable units	Article no.	Std. pack
Part no.		Part no.		
		Order base separately		

For further terminal types see accessories

NZMN2-PX40-BT*	192046		NZMN2-PX40-SVE*	192162	1 Off
NZMN2-PX63-BT*	192047		NZMN2-PX63-SVE*	192163	
NZMN2-PX100-BT	192048		NZMN2-PX100-SVE	192164	
NZMN2-PX160-BT	192049		NZMN2-PX160-SVE	192165	
NZMN2-PX250-BT	192050		NZMN2-PX250-SVE	192166	
NZMN3-PX250-BT	192363		NZMN3-PX250-SVE	192264	
-			NZMN3-PX250-AVE	192348	
NZMN3-PX400-BT	192364		NZMN3-PX400-SVE	192340	
-			NZMN3-PX400-AVE	192349	
NZMN3-PX630-BT	192365		NZMN3-PX630-SVE	192341	
-			NZMN3-PX630-AVE	192350	
-			NZMN4-PX630-AVE	189621	
-			NZMN4-PX800-AVE	189622	
-			NZMN4-PX1000-AVE	189623	
-			NZMN4-PX1250-AVE	189624	
-		NZMN4-PX1600-AVE	189625		

Switching capacity 400/415V 50/60 Hz	Rated current = Rated uninterrupted current	Setting range			Fixed mounting with screw terminals	
		Overload releases	Short-circuit releases delayed	Short-circuit releases Non-delayed	Part no.	Article no.
I_{cu} kA	$I_n = I_u$ A	$I_r = I_r \times \dots$ A	$I_{sd} = I_s \times \dots$	$I_s = I_s \times \dots$		

System and cable protection, selectivity and generator protection

- Energy metering class I up to IEC61557-12
- IEC/EN 60947-2

Strong switching capacity

70	40	20 - 40	2 - 10	2 - 18	NZMS2-PX40*	192244	
	63	25 - 63	2 - 10	2 - 18	NZMS2-PX63*	192245	
	100	40 - 100	2 - 10	2 - 18	NZMS2-PX100	192246	
	160	64 - 160	2 - 10	2 - 18	NZMS2-PX160	192247	
	250	100 - 250	2 - 10	2 - 12	NZMS2-PX250	192248	
* For availability information please contact your local Eaton sales team.							
250	100 - 250	2 - 10	2 - 18	-	NZMS3-PX250	192357	
	400	160 - 400	2 - 10	2 - 12	-	NZMS3-PX400	192358
	630	252 - 630	1.5 - 7	2 - 8	-	NZMS3-PX630	192359

High switching capacity

150	40	20 - 40	2 - 10	2 - 18	NZMH2-PX40*	192039	
	63	25 - 63	2 - 10	2 - 18	NZMH2-PX63*	192040	
	100	40 - 100	2 - 10	2 - 18	NZMH2-PX100	192041	
	160	64 - 160	2 - 10	2 - 18	NZMH2-PX160	192042	
	250	100 - 250	2 - 10	2 - 12	NZMH2-PX250	192043	
*For availability information please contact your local Eaton sales team.							
250	100 - 250	2 - 10	2 - 18	-	NZMH3-PX250	192360	
	400	160 - 400	2 - 10	2 - 12	-	NZMH3-PX400	192361
	630	252 - 630	1.5 - 7	2 - 8	-	NZMH3-PX630	192362
75*	630	315 - 630	2 - 10	2 - 18	NZMH4-PX630	189606	
	800	400 - 800	2 - 10	2 - 18	NZMH4-PX800	189607	
	1000	500 - 1000	2 - 10	2 - 18	NZMH4-PX1000	189608	
	1250	630 - 1250	2 - 10	2 - 15	NZMH4-PX1250	189609	
	1600	800 - 1600	2 - 10	2 - 12	NZMH4-PX1600	189610	

*For further information please contact your Eaton sales person.



Fixed mounting with box terminals

Part no. Article no.

Plug-in/withdrawable units

Part no. Article no. Std. pack

Order base separately

For further terminal types see accessories

NZMS2-PX40-BT*	192127		NZMS2-PX40-SVE*	192169	1 Off
NZMS2-PX63-BT*	192128		NZMS2-PX63-SVE*	192170	
NZMS2-PX100-BT	192129		NZMS2-PX100-SVE	192171	
NZMS2-PX160-BT	192130		NZMS2-PX160-SVE	192172	
NZMS2-PX250-BT	192131		NZMS2-PX250-SVE	192173	

NZMS3-PX250-BT	192366		NZMS3-PX250-SVE	192342	
-	-		NZMS3-PX250-AVE	192351	
NZMS3-PX400-BT	192367		NZMS3-PX400-SVE	192343	
-	-		NZMS3-PX400-AVE	192352	
NZMS3-PX630-BT	192251		NZMS3-PX630-SVE	192344	
-	-	NZMS3-PX630-AVE	192353		




NZMH2-PX40-BT*	192134		NZMH2-PX40-SVE*	192176	1 Off
NZMH2-PX63-BT*	192135		NZMH2-PX63-SVE*	192177	
NZMH2-PX100-BT	192136		NZMH2-PX100-SVE	192178	
NZMH2-PX160-BT	192137		NZMH2-PX160-SVE	192179	
NZMH2-PX250-BT	192138		NZMH2-PX250-SVE	192180	

NZMH3-PX250-BT	192252		NZMH3-PX250-SVE	192345	
-	-		NZMH3-PX250-AVE	192265	
NZMH3-PX400-BT	192253		NZMH3-PX400-SVE	192346	
-	-		NZMH3-PX400-AVE	192266	
NZMH3-PX630-BT	192254		NZMH3-PX630-SVE	192347	
-	-	NZMH3-PX630-AVE	192267		

-	-		NZMH4-PX630-AVE	189626	
-	-		NZMH4-PX800-AVE	189627	
-	-		NZMH4-PX1000-AVE	189628	
-	-		NZMH4-PX1250-AVE	189629	
-	-		NZMH4-PX1600-AVE	189630	

Compact circuit breakers, switch disconnectors

Circuit breakers IEC, electronic releases with energy meter function, 3 pole
NZM...PX

Switching capacity 400/415V 50/60 Hz	Rated current = Rated uninterrupted current	Setting range			Fixed mounting with screw terminals		
		Overload releases	Short-circuit releases delayed	Short-circuit releases Non-delayed	Part no.	Article no.	Std. pack
I_{cu} kA	$I_n = I_u$ A	$I_r = I_n \dots$ A	$I_{sd} = I_n \dots$	$I_s = I_n \dots$			

System and cable protection, selectivity and generator protection

- Energy metering class I up to IEC61557-12
- IEC/EN 60947-2

Limiting switching capacity

Switching capacity	Rated current	Overload releases	Short-circuit releases delayed	Short-circuit releases Non-delayed	Part no.	Article no.	Std. pack
100	630	252 - 630	2 - 10	2 - 18	NZML4-PX630	189697	1 Off
	800	320 - 800	2 - 10	2 - 18	NZML4-PX800	189698	
	1000	400 - 1000	2 - 10	2 - 18	NZML4-PX1000	189699	
	1250	500 - 1250	2 - 10	2 - 15	NZML4-PX1250	189700	
	1600	640 - 1600	2 - 10	2 - 12	NZML4-PX1600	189701	

SG10321_L_Symbolphoto



Compact circuit breakers, switch disconnectors

Circuit breakers IEC, electronic releases with energy meter function, 3 pole
NZM...PX

Fixed mounting with box terminals
Part no. Article no.

Plug-in/withdrawable units
Part no. Article no. Std. pack

Order base separately

For further terminal types
see accessories



NZML4-PX630-AVE	500989	1 Off
NZML4-PX800-AVE	500990	
NZML4-PX1000-AVE	500986	
NZML4-PX1250-AVE	500987	
NZML4-PX1600-AVE	500988	

Switching capacity 400/415V 50/60 Hz	Rated current = Rated uninterrupted current	Setting range				Fixed mounting with screw terminals	
		Overload releases	Short-circuit releases delayed	Short-circuit releases Non-delayed	Earth-fault release	Part no.	Article no.
I_{cu} kA	$I_n = I_b$ A	$I_r = I_n \times \dots$ A	$I_{sd} = I_n \times \dots$	$I_s = I_n \times \dots$	$I_g = I_n \times \dots$		

System and cable protection, selectivity, generator and earth fault protection

- Energy metering class I up to IEC61557-12
- IEC/EN 60947-2
- NZM3, NZM4: with maintenance mode (Arcflash Reduction Maintenance System™) and zone-selective interlocking ZSI
- NZM2: with zone-selective interlocking ZSI

Normal switching capacity

50	40	20 - 40	2 - 10	2 - 18	20 - 40	NZMN2-PX40-TZ*	192141	
	63	25 - 63	2 - 10	2 - 18	20 - 63	NZMN2-PX40-TZ*	192142	
	100	40 - 100	2 - 10	2 - 18	20 - 100	NZMN2-PX100-TZ	192143	
	160	64 - 160	2 - 10	2 - 18	32 - 160	NZMN2-PX160-TZ	192144	
	250	100 - 250	2 - 10	2 - 12	50 - 250	NZMN2-PX250-TZ	192145	
*For availability information please contact your local Eaton sales team.								
250	100 - 250	2 - 10	2 - 18	50 - 250	NZMN3-PX250-TAZ	192255		
	400	160 - 400	2 - 10	2 - 12	80 - 400	NZMN3-PX400-TAZ	192256	
	630	252 - 630	1.5 - 7	2 - 8	126 - 630	NZMN3-PX630-TAZ	192257	

630	252 - 630	2 - 10	2 - 18	126 - 630	NZMN4-PX630-TAZ	189611		
	800	320 - 800	2 - 10	2 - 18	160 - 800	NZMN4-PX800-TAZ	189612	
	1000	400 - 1000	2 - 10	2 - 18	200 - 1000	NZMN4-PX1000-TAZ	189613	
	1250	500 - 1250	2 - 10	2 - 15	250 - 1250	NZMN4-PX1250-TAZ	189614	
	1600	640 - 1600	2 - 10	2 - 12	320 - 1600	NZMN4-PX1600-TAZ	189615	

Strong switching capacity

70	40	20 - 40	2 - 10	2 - 18	20 - 40	NZMS2-PX40-TZ*	192148	
	63	25 - 63	2 - 10	2 - 18	20 - 63	NZMS2-PX40-TZ*	192149	
	100	40 - 100	2 - 10	2 - 18	20 - 100	NZMS2-PX100-TZ	192150	
	160	64 - 160	2 - 10	2 - 18	32 - 160	NZMS2-PX160-TZ	192151	
	250	100 - 250	2 - 10	2 - 12	50 - 250	NZMS2-PX250-TZ	192152	
*For availability information please contact your local Eaton sales team.								
250	100 - 250	2 - 10	2 - 18	50 - 250	NZMS3-PX250-TAZ	192258		
	400	160 - 400	2 - 10	2 - 12	80 - 400	NZMS3-PX400-TAZ	192259	
	630	252 - 630	1.5 - 7	2 - 8	126 - 630	NZMS3-PX630-TAZ	192260	



SG08921_L Symbolphoto



SG10321_L Symbolphoto



SG08921_L Symbolphoto



Fixed mounting with box terminals
Part no. Article no.

Plug-in/withdrawable units
Part no. Article no. Std. pack

Order base separately

For further terminal types see accessories

Terminals as accessory			NZMN2-PX40-TZ-SVE*	192183	1 Off
			NZMN2-PX63-TZ-SVE*	192184	
			NZMN2-PX100-TZ-SVE	192185	
			NZMN2-PX160-TZ-SVE	192186	
			NZMN2-PX250-TZ-SVE	192187	

Terminals as accessory			NZMN3-PX250-TAZ-AVE	192268	
			NZMN3-PX400-TAZ-AVE	192269	
			NZMN3-PX630-TAZ-AVE	192270	

			NZMN4-PX630-TAZ-AVE	189631	
			NZMN4-PX800-TAZ-AVE	189632	
			NZMN4-PX1000-TAZ-AVE	189633	
			NZMN4-PX1250-TAZ-AVE	189634	
			NZMN4-PX1600-TAZ-AVE	189635	

Terminals as accessory			NZMS2-PX40-TZ-SVE*	192190	1 Off
			NZMS2-PX63-TZ-SVE*	192191	
			NZMS2-PX100-TZ-SVE	192192	
			NZMS2-PX160-TZ-SVE	192193	
			NZMS2-PX250-TZ-SVE	192194	

Terminals as accessory			NZMS3-PX250-TAZ-AVE	192271	
			NZMS3-PX400-TAZ-AVE	192272	
			NZMS3-PX630-TAZ-AVE	192273	

Compact circuit breakers, switch disconnectors

Circuit breakers IEC, electronic releases with energy meter function, 3 pole
NZM...PX...-TZ, ...-TAZ

Switching capacity 400/415V 50/60 Hz	Rated current = Rated uninterrupted current	Setting range				Fixed mounting with screw terminals	
		Overload releases	Short-circuit releases delayed	Short-circuit releases Non-delayed	Earth-fault release	Part no.	Article no.
I_{cu} kA	$I_n = I_b$ A	$I_r = I_r \dots$ A	$I_{sd} = I_r \dots$	$I_s = I_r \dots$	$I_g = I_r \dots$		

System and cable protection, selectivity, generator and earth fault protection

- Energy metering class I up to IEC61557-12
- IEC/EN 60947-2
- NZM3, NZM4: with maintenance mode (Arcflash Reduction Maintenance System™) and zone-selective interlocking ZSI
- NZM2: with zone-selective interlocking ZSI

High switching capacity

150	40	20 - 40	2 - 10	2 - 18	20 - 40	NZMH2-PX40-TZ*	192155	
	63	25 - 63	2 - 10	2 - 18	20 - 63	NZMH2-PX63-TZ*	192156	
	100	40 - 100	2 - 10	2 - 18	20 - 100	NZMH2-PX100-TZ	192157	
	160	64 - 160	2 - 10	2 - 18	32 - 160	NZMH2-PX160-TZ	192158	
	250	100 - 250	2 - 10	2 - 12	50 - 250	NZMH2-PX250-TZ	192159	
*For availability information please contact your local Eaton sales team.								
250	100 - 250	2 - 10	2 - 18	50 - 250	NZMH3-PX250-TAZ	192261		
	400	160 - 400	2 - 10	2 - 12	80 - 400	NZMH3-PX400-TAZ	192262	
	630	252 - 630	1.5 - 7	2 - 8	126 - 630	NZMH3-PX630-TAZ	192263	

75*	630	252 - 630	2 - 10	2 - 18	126 - 630	NZMH4-PX630-TAZ	189616
	800	320 - 800	2 - 10	2 - 18	160 - 800	NZMH4-PX800-TAZ	189617
	1000	400 - 1000	2 - 10	2 - 18	200 - 1000	NZMH4-PX1000-TAZ	189618
	1250	500 - 1250	2 - 10	2 - 15	250 - 1250	NZMH4-PX1250-TAZ	189619
	1600	640 - 1600	2 - 10	2 - 12	320 - 1600	NZMH4-PX1600-TAZ	189620
*For further information please contact your Eaton sales person.							

Limiter switching capacity

100	630	252 - 630	2 - 10	2 - 18	126 - 630	NZML4-PX630-TAZ	500984
	800	320 - 800	2 - 10	2 - 18	160 - 800	NZML4-PX800-TAZ	500985
	1000	400 - 1000	2 - 10	2 - 18	200 - 1000	NZML4-PX1000-TAZ	500981
	1250	500 - 1250	2 - 10	2 - 15	250 - 1250	NZML4-PX1250-TAZ	500982
	1600	640 - 1600	2 - 10	2 - 12	320 - 1600	NZML4-PX1600-TAZ	500983



Compact circuit breakers, switch disconnectors



Circuit breakers IEC, electronic releases with energy meter function, 3 pole
NZM...PX...-TZ, ...-TAZ

Fixed mounting with box terminals
Part no. Article no.

Plug-in/withdrawable units
Part no. Article no. Std. pack
Order base separately

For further terminal types see accessories

Terminals as accessory			NZMH2-PX40-TZ-SVE*	192197	1 Off
			NZMH2-PX63-TZ-SVE*	192198	
			NZMH2-PX100-TZ-SVE	192199	
			NZMH2-PX160-TZ-SVE	192200	
			NZMH2-PX250-TZ-SVE	192201	
Terminals as accessory			NZMH3-PX250-TAZ-AVE	192274	
			NZMH3-PX400-TAZ-AVE	192275	
			NZMH3-PX630-TAZ-AVE	192276	
			NZMH4-PX630-TAZ-AVE	189636	
			NZMH4-PX800-TAZ-AVE	189637	
			NZMH4-PX1000-TAZ-AVE	189638	
			NZMH4-PX1250-TAZ-AVE	189639	
			NZMH4-PX1600-TAZ-AVE	189640	
			NZML4-PX630-TAZ-AVE	500994	
			NZML4-PX800-TAZ-AVE	500995	
			NZML4-PX1000-TAZ-AVE	500991	
			NZML4-PX1250-TAZ-AVE	500992	
			NZML4-PX1600-TAZ-AVE	500993	

Switching capacity 400/415V 50/60 Hz	Rated current = Rated uninterrupted current Phase conductor $I_n = I_u$	Neutral conductor $I_n = I_p \times \dots \times$ % of phase conductor	Setting range		Fixed mounting with screw terminals
			Overload releases $I_r = I_p \times \dots$	Short-circuit releases Non-delayed $I_s = I_p \times \dots$	Part no. Article no.
I_{cu} kA	A	%	A		
					

System and cable protection

- IEC/EN 60947-2

Basic switching capacity

25	20	100	15 - 20	350 A fixed	Screw terminals	
	25	100	20 - 25	350 A fixed	as accessories	
	32	100	25 - 32	350 A fixed		
	40	100	32 - 40	8 - 10		
	50	100	40 - 50	6 - 10		
	63	100	50 - 63	6 - 10		
	80	100	63 - 80	6 - 10		
	100	100	80 - 100	6 - 10		
	125	100	100 - 125	6 - 10		
	160	100	125 - 160	1280 A fixed		
125	100	100 - 125	6 - 10	NZMB2-4-A125	265847	
	160	100	125 - 160	6 - 10	NZMB2-4-A160	265849
200	60	125 - 160	6 - 10	NZMB2-4-A160/100	265850	
	100	160 - 200	6 - 10	NZMB2-4-A200	265852	
250	60	160 - 200	6 - 10	NZMB2-4-A200/125	265853	
	100	200 - 250	6 - 10	NZMB2-4-A250	265855	
300	60	200 - 250	6 - 10	NZMB2-4-A250/160	265856	
	100	240 - 300	5 - 8.3	NZMB2-4-A300	107582	
	60	240 - 300	5 - 8.3	NZMB2-4-A300/200	107583	

SG07021_L Symbol/photo



SG08421_L Symbol/photo



Fixed mounting with box terminals

Part no. Article no.

Plug-in units

Part no. Article no. Std. pack

Order base separately

For further terminal types see accessories

NZMB1-4-A20	281237	-	1 Off
NZMB1-4-A25	281239		
NZMB1-4-A32	281241		
NZMB1-4-A40	265799		
NZMB1-4-A50	265801		
NZMB1-4-A63	265803		
NZMB1-4-A80	265805		
NZMB1-4-A100	265807		
NZMB1-4-A125	265809		
NZMB1-4-A160	281243		

Terminals as accessory



NZMB2-4-A125-SVE	113207
NZMB2-4-A160-SVE	113209
NZMB2-4-A160/100-SVE	113210
NZMB2-4-A200-SVE	113212
NZMB2-4-A200/125-SVE	113213
NZMB2-4-A250-SVE	113215
NZMB2-4-A250/160-SVE	113216
-	-

Switching capacity 400/415V 50/60 Hz	Rated current = Rated uninterrupted current	Setting range		Fixed mounting with screw terminals	
		Phase conductor	Neutral conductor	Part no.	Article no.
I_{cu}	$I_n = I_u$	$I_r = I_p \times \dots \times \% \text{ of phase conductor}$	$I_r = I_p \times \dots$		
kA	A	%	A		



System and cable protection

- IEC/EN 60947-2

Comfort switching capacity

SG07021 Symbolphoto 	36	20	100	15 - 20	350 A fixed	Screw terminals as accessories	
		25	100	20 - 25	350 A fixed		
		32	100	25 - 32	350 A fixed		
		40	100	32 - 40	8 - 10		
		50	100	40 - 50	6 - 10		
		63	100	50 - 63	6 - 10		
		80	100	63 - 80	6 - 10		
		100	100	80 - 100	6 - 10		
		125	100	100 - 125	6 - 10		
		160	100	125 - 160	1280 A fixed		
SG08421 L Symbolphoto 	125	100	100 - 125	6 - 10	NZMC2-4-A125	271430	
	160	100	125 - 160	6 - 10	NZMC2-4-A160	271432	
		60	125 - 160	6 - 10	NZMC2-4-A160/100	271433	
	200	100	160 - 200	6 - 10	NZMC2-4-A200	271435	
		60	160 - 200	6 - 10	NZMC2-4-A200/125	271436	
	250	100	200 - 250	6 - 10	NZMC2-4-A250	271438	
		60	200 - 250	6 - 10	NZMC2-4-A250/160	271439	
	300	100	240 - 300	5 - 8.3	NZMC2-4-A300	107584	
		60	240 - 300	5 - 8.3	NZMC2-4-A300/200	107585	
	SG09621 L Symbolphoto 	320	100	250 - 320	6 - 10	-	
		60	250 - 320	6 - 10	-		
		100	250 - 320	6 - 10	NZMC3-4-A320	109688	
		60	250 - 320	6 - 10	NZMC3-4-A320/200	109689	
400		100	320 - 400	6 - 10	-		
		60	320 - 400	6 - 10	-		
		100	320 - 400	6 - 10	NZMC3-4-A400	109690	
		60	320 - 400	6 - 10	NZMC3-4-A400/250	109691	
500		100	400 - 500	6 - 10	-		
		60	400 - 500	6 - 10	-		
	100	400 - 500	6 - 10	NZMC3-4-A500	109692		
	60	400 - 500	6 - 10	NZMC3-4-A500/320	109693		

Fixed mounting with box terminals

Part no. Article no.

Plug-in/withdrawable units

Part no. Article no. Std. pack

Order base separately

For further terminal types see accessories

NZMC1-4-A20	283300	-	1 Off
NZMC1-4-A25	283302	-	
NZMC1-4-A32	283304	-	
NZMC1-4-A40	271408	-	
NZMC1-4-A50	271410	-	
NZMC1-4-A63	271412	-	
NZMC1-4-A80	271414	-	
NZMC1-4-A100	271416	-	
NZMC1-4-A125	271418	-	
NZMC1-4-A160	283306	-	
Terminals as accessory			
			NZMC2-4-A125-SVE 113231
			NZMC2-4-A160-SVE 113233
			NZMC2-4-A160/100-SVE 113234
			NZMC2-4-A200-SVE 113236
			NZMC2-4-A200/125-SVE 113237
			NZMC2-4-A250-SVE 113239
			NZMC2-4-A250/160-SVE 113240
			-
			-
Terminals as accessory			
			NZMC3-4-A320-SVE 168464
			NZMC3-4-A320/200-SVE 168465
			NZMC3-4-A320-AVE 113516
			NZMC3-4-A320/200-AVE 113517
			NZMC3-4-A400-SVE 168466
			NZMC3-4-A400/250-SVE 168467
			NZMC3-4-A400-AVE 113518
			NZMC3-4-A400/250-AVE 113519
			NZMC3-4-A500-SVE 168468
			NZMC3-4-A500/320-SVE 168469
			NZMC3-4-A500-AVE 113520
			NZMC3-4-A500/320-AVE 113521

Switching capacity 400/415V 50/60 Hz	Rated current = Rated uninterrupted current	Setting range		Fixed mounting with screw terminals	
		Phase conductor	Neutral conductor	Part no.	Article no.
I_{cu}	$I_n = I_u$	$I_r = I_p \times \dots \times \% \text{ of phase conductor}$	$I_r = I_p \times \dots$		
kA	A	%	A		



System and cable protection

- IEC/EN 60947-2

Strong switching capacity

70	20	100	16 - 20	350 A fixed	Screw terminals	
	25	100	20 - 25	350 A fixed	as accessories	
	32	100	25 - 32	350 A fixed		
	40	100	32 - 40	8 - 10		
	50	100	40 - 50	6 - 10		
	63	100	50 - 63	6 - 10		
	80	100	63 - 80	6 - 10		
	100	100	80 - 100	6 - 10		
	125	100	100 - 125	6 - 10		
	160	100	125 - 160	1280 A fixed		
	125	100	100 - 125	6 - 10	NZMS2-4-A125	109988
	160	100	125 - 160	6 - 10	NZMS2-4-A160	109989
	160	60	125 - 160	6 - 10	NZMS2-4-A160/100	109990
	200	100	160 - 200	6 - 10	NZMS2-4-A200	109991
	200	60	160 - 200	6 - 10	NZMS2-4-A200/125	109992
	250	100	200 - 250	6 - 10	NZMS2-4-A250	109993
	250	60	200 - 250	6 - 10	NZMS2-4-A250/160	109994
	300	100	240 - 300	5 - 8.3	NZMS2-4-A300	110205
	300	60	240 - 300	5 - 8.3	NZMS2-4-A300/200	110206

SG07021_L Symbolphoto



SG08421_L Symbolphoto



Fixed mounting with box terminals
Part no.

Article no.

Plug-in units
Part no.

Article no.

Std. pack

Order base separately

For further terminal types see accessories

NZMS1-4-A20	109948			1 Off
NZMS1-4-A25	109949			
NZMS1-4-A32	109950			
NZMS1-4-A40	109951			
NZMS1-4-A50	109952			
NZMS1-4-A63	109953			
NZMS1-4-A80	109954			
NZMS1-4-A100	109955			
NZMS1-4-A125	109956			
NZMS1-4-A160	109957			

Terminals as accessory



NZMS2-4-A125-SVE	113313
NZMS2-4-A160-SVE	113314
NZMS2-4-A160/100-SVE	113315
NZMS2-4-A200-SVE	113316
NZMS2-4-A200/125-SVE	113317
NZMS2-4-A250-SVE	113318
NZMS2-4-A250/160-SVE	113319

Circuit breakers IEC, electronic releases, 4 pole
NZM...-4-AX

Switching capacity 400/415V 50/60 Hz	Rated current = Rated uninterrupted current	Neutral conductor $I_n \times \%$ of phase conductor %	Setting range		Fixed mounting with screw terminals	
			Overload releases	Short-circuit releases Non-delayed	Part no.	Article no.
I_{cu} kA	$I_n = I_u$ A		$I_1 = I_n \times \dots$ A	$I_2 = I_n \times \dots$		

System and cable protection

- IEC/EN 60947-2

Normal switching capacity

50	40	100	20 - 40	2 - 12	NZMN2-4-AX40*	193357
	63	100	25 - 63	2 - 12	NZMN2-4-AX63*	193358
	100	100	40 - 100	2 - 12	NZMN2-4-AX100	193359
	160	100	64 - 160	2 - 12	NZMN2-4-AX160	193360
	250	100	100 - 250	2 - 12	NZMN2-4-AX250	193361
*For availability information please contact your local Eaton sales team.						
400	100	160 - 400	2 - 11		NZMN3-4-AX400	191486
	0 - 60 - 100	160 - 400	2 - 11		NZMN3-4-AX400/VAR	191487
	630	100	252 - 630	2 - 8	NZMN3-4-AX630	191488
	0 - 60 - 100	252 - 630	2 - 8		NZMN3-4-AX630/VAR	191489
800	100	320 - 800	2 - 12		NZMN4-4-AX800	191431
	0 - 60 - 100	320 - 800	2 - 12		NZMN4-4-AX800/VAR	191432
	1000	100	400 - 1000	2 - 12	NZMN4-4-AX1000	191433
	0 - 60 - 100	400 - 1000	2 - 12		NZMN4-4-AX1000/VAR	191434
	1250	100	500 - 1250	2 - 12	NZMN4-4-AX1250	191435
	0 - 60 - 100	500 - 1250	2 - 12		NZMN4-4-AX1250/VAR	191436
1600	100	640 - 1600	2 - 12		NZMN4-4-AX1600	191437
	0 - 60 - 100	640 - 1600	2 - 12		NZMN4-4-AX1600/VAR	191438

Strong switching capacity

70	40	100	20 - 40	2 - 12	NZMS2-4-AX40*	193371
	63	100	25 - 63	2 - 12	NZMS2-4-AX63*	193372
	100	100	40 - 100	2 - 12	NZMS2-4-AX100	193373
	160	100	64 - 160	2 - 12	NZMS2-4-AX160	193374
	250	100	100 - 250	2 - 12	NZMS2-4-AX250	193375
*For availability information please contact your local Eaton sales team.						
400	100	160 - 400	2 - 11		NZMS3-4-AX400	191517
	0 - 60 - 100	160 - 400	2 - 11		NZMS3-4-AX400/VAR	191518
	630	100	252 - 630	2 - 8	NZMS3-4-AX630	191519
	0 - 60 - 100	252 - 630	2 - 8		NZMS3-4-AX630/VAR	191520



Circuit breakers IEC, electronic releases, 4 pole
NZM...-4-AX

Fixed mounting with box terminals
Part no.

Article no.

Withdrawable units
Part no.

Article no.

Std. pack

Order base separately

For further terminal types
see accessories

Terminals as accessory

1 Off

NZMN3-4-AX400-BT	191612
Terminals as accessory	
NZMN3-4-AX630-BT	191613
Terminals as accessory	



NZMN3-4-AX400-AVE	191608
NZMN3-4-AX400/VAR-AVE	191614
NZMN3-4-AX630-AVE	191609
NZMN3-4-AX630/VAR-AVE	191615

Terminals as accessory



NZMN4-4-AX800-AVE	500898
NZMN4-4-AX800/VAR-AVE	500899
NZMN4-4-AX1000-AVE	500900
NZMN4-4-AX1000/VAR-AVE	500901
NZMN4-4-AX1250-AVE	500902
NZMN4-4-AX1250/VAR-AVE	500903
NZMN4-4-AX1600-AVE	500904
NZMN4-4-AX1600/VAR-AVE	500905



Terminals as accessory

1 Off

Terminals as accessory



NZMS3-4-AX400-AVE	191529
NZMS3-4-AX400/VAR-AVE	191530
NZMS3-4-AX630-AVE	191531
NZMS3-4-AX630/VAR-AVE	191532

Switching capacity 400/415V 50/60 Hz	Rated current = Rated uninterrupted current	Neutral conductor $I_n \times \%$ of phase conductor %	Setting range		Fixed mounting with screw terminals	
			Overload releases	Short-circuit releases Non-delayed	Part no.	Article no.
I_{cu} kA	$I_n = I_u$ A		$I_r = I_n \times \dots$ A	$I_s = I_n \times \dots$		

System and cable protection

- IEC/EN 60947-2

High switching capacity

150	40	100	20 - 40	2 - 12	NZMH2-4-AX40*	193364
	63	100	25 - 63	2 - 12	NZMH2-4-AX63*	193365
	100	100	40 - 100	2 - 12	NZMH2-4-AX100	193366
	160	100	64 - 160	2 - 12	NZMH2-4-AX160	193367
	250	100	100 - 250	2 - 12	NZMH2-4-AX250	193368

*For availability information please contact your local Eaton sales team.

400	100	160 - 400	2 - 11	NZMH3-4-AX400	191387
	0 - 60 - 100	160 - 400	2 - 11	NZMH3-4-AX400/VAR	191388
630	100	252 - 630	2 - 8	NZMH3-4-AX630	191389
	0 - 60 - 100	252 - 630	2 - 8	NZMH3-4-AX630/VAR	191390

75*	800	100	320 - 800	2 - 12	NZMH4-4-AX800	191473
		0 - 60 - 100	320 - 800	2 - 12	NZMH4-4-AX800/VAR	191474
	1000	100	400 - 1000	2 - 12	NZMH4-4-AX1000	191475
		0 - 60 - 100	400 - 1000	2 - 12	NZMH4-4-AX1000/VAR	191476
	1250	100	500 - 1250	2 - 12	NZMH4-4-AX1250	191477
		0 - 60 - 100	500 - 1250	2 - 12	NZMH4-4-AX1250/VAR	191478
1600	100	640 - 1600	2 - 12	NZMH4-4-AX1600	191353	
	0 - 60 - 100	640 - 1600	2 - 12	NZMH4-4-AX1600/VAR	191354	

*For further information please contact your local Eaton sales team.

Limiter switching capacity

100	800	100	320 - 800	2 - 12	NZML4-4-AX800	191331
		0 - 60 - 100	320 - 800	2 - 12	NZML4-4-AX800/VAR	191332
	1000	100	400 - 1000	2 - 12	NZML4-4-AX1000	191333
		0 - 60 - 100	400 - 1000	2 - 12	NZML4-4-AX1000/VAR	191334
	1250	100	500 - 1250	2 - 12	NZML4-4-AX1250	191335
		0 - 60 - 100	500 - 1250	2 - 12	NZML4-4-AX1250/VAR	191336
1600	100	640 - 1600	2 - 12	NZML4-4-AX1600	191337	
	0 - 60 - 100	640 - 1600	2 - 12	NZML4-4-AX1600/VAR	191338	

Fixed mounting with box terminals
Part no. Article no.

Withdrawable units
Part no. Article no. Std. pack
Order base separately

For further terminal types see accessories

Terminals as accessory					1 Off
------------------------	--	--	--	--	-------

Terminals as accessory			NZMH3-4-AX400-AVE	191375
			NZMH3-4-AX400/VAR-AVE	191379
			NZMH3-4-AX630-AVE	191376
			NZMH3-4-AX630/VAR-AVE	191380

			NZMH4-4-AX800-AVE	500911
			NZMH4-4-AX800/VAR-AVE	500912
			NZMH4-4-AX1000-AVE	500913
			NZMH4-4-AX1000/VAR-AVE	500914
			NZMH4-4-AX1250-AVE	500915
			NZMH4-4-AX1250/VAR-AVE	500916
			NZMH4-4-AX1600-AVE	500887
			NZMH4-4-AX1600/VAR-AVE	500888

			NZML4-4-AX800-AVE	500879	1 Off
			NZML4-4-AX800/VAR-AVE	500880	
			NZML4-4-AX1000-AVE	500881	
			NZML4-4-AX1000/VAR-AVE	500882	
			NZML4-4-AX1250-AVE	500883	
			NZML4-4-AX1250/VAR-AVE	500884	
			NZML4-4-AX1600-AVE	500885	
			NZML4-4-AX1600/VAR-AVE	500886	

Switching capacity 400/415V 50/60 Hz	Rated current = Rated uninterrupted current	Neutral conductor I_n x % of phase conductor %	Setting range			Fixed mounting with screw terminals	
			Overload releases	Short-circuit releases delayed	Short-circuit releases Non-delayed	Part no.	Article no.
			$I_r = I_n \times \dots$ A	$I_{sd} = I_n \times \dots$	$I_s = I_n \times \dots$		

System and cable protection, selectivity and generator protection

- IEC/EN 60947-2

Normal switching capacity

	50	100	100	40 - 100	2 - 10	2 - 18	NZMN2-4-VX100	191642
		160	100	64 - 160	2 - 10	2 - 18	NZMN2-4-VX160	191643
	250	0 - 60 - 100	64 - 160	2 - 10	2 - 18	NZMN2-4-VX160/VAR	191644	
		100	100 - 250	2 - 10	2 - 12	NZMN2-4-VX250	191645	
	400	0 - 60 - 100	100 - 250	2 - 10	2 - 12	NZMN2-4-VX250/VAR	191646	
		100	160 - 400	2 - 10	2 - 12	-		
630	0 - 60 - 100	160 - 400	2 - 10	2 - 12	NZMN3-4-VX400/VAR	191491		
	100	252 - 630	1.5 - 7	2 - 8	NZMN3-4-VX630	191492		
	100	252 - 630	1.5 - 7	2 - 8	-			
	0 - 60 - 100	252 - 630	1.5 - 7	2 - 8	NZMN3-4-VX630/VAR	191493		
800	0 - 60 - 100	252 - 630	1.5 - 7	2 - 8	-			
	100	320 - 800	2 - 10	2 - 18	NZMN4-4-VX800	191439		
1000	0 - 60 - 100	320 - 800	2 - 10	2 - 18	NZMN4-4-VX800/VAR	191440		
	100	400 - 1000	2 - 10	2 - 18	NZMN4-4-VX1000	191441		
1250	0 - 60 - 100	400 - 1000	2 - 10	2 - 18	NZMN4-4-VX1000/VAR	191442		
	100	500 - 1250	2 - 10	2 - 15	NZMN4-4-VX1250	191443		
1600	0 - 60 - 100	500 - 1250	2 - 10	2 - 15	NZMN4-4-VX1250/VAR	191444		
	100	640 - 1600	2 - 10	2 - 12	NZMN4-4-VX1600	191445		
	0 - 60 - 100	640 - 1600	2 - 10	2 - 12	NZMN4-4-VX1600/VAR	191446		

Fixed mounting with box terminals
Part no.

Article no.

Plug-in/withdrawable units
Part no.

Article no.

Std. pack

Order base separately

For further terminal types
see accessories

NZMN2-4-VX100-BT	191639		NZMN2-4-VX100-SVE	191634	1 Off
NZMN2-4-VX160-BT	191640		NZMN2-4-VX160-SVE	191635	
Terminals as accessory			NZMN2-4-VX160/VAR-SVE	191636	
NZMN2-4-VX250-BT	191641		NZMN2-4-VX250-SVE	191637	
Terminals as accessory			NZMN2-4-VX250/VAR-SVE	191638	
Terminals as accessory			NZMN3-4-VX400-SVE	191482	
			NZMN3-4-VX400-AVE	191610	
			NZMN3-4-VX400/VAR-SVE	191484	
			NZMN3-4-VX400/VAR-AVE	191616	
			NZMN3-4-VX630-SVE	191483	
			NZMN3-4-VX630-AVE	191611	
			NZMN3-4-VX630/VAR-SVE	191485	
			NZMN3-4-VX630/VAR-AVE	191617	
			NZMN4-4-VX800-AVE	193333	
			NZMN4-4-VX800/VAR-AVE	500931	
			NZMN4-4-VX1000-AVE	193334	
			NZMN4-4-VX1000/VAR-AVE	500928	
			NZMN4-4-VX1250-AVE	193335	
			NZMN4-4-VX1250/VAR-AVE	500929	
			NZMN4-4-VX1600-AVE	193336	
			NZMN4-4-VX1600/VAR-AVE	500930	

Circuit breakers IEC, electronic releases, 4 pole
NZM...-4-VX

Switching capacity 400/415V 50/60 Hz	Rated current = Rated uninterrupted current	Neutral conductor I_n x % of phase conductor %	Setting range			Fixed mounting with screw terminals		
			Overload releases	Short-circuit releases delayed	Short-circuit releases Non-delayed	Part no.	Article no.	
I_{cu} kA	$I_n = I_b$ A		$I_r = I_n \times \dots$ A	$I_{sd} = I_n \times \dots$	$I_s = I_n \times \dots$			

System and cable protection, selectivity and generator protection

- IEC/EN 60947-2

Strong switching capacity

70	100	100	40 - 100	2 - 10	2 - 18	NZMS2-4-VX100	191659
	160	100	64 - 160	2 - 10	2 - 18	NZMS2-4-VX160	191660
	250	0 - 60 - 100	64 - 160	2 - 10	2 - 18	NZMS2-4-VX160/VAR	191661
		100	100 - 250	2 - 10	2 - 12	NZMS2-4-VX250	191662
400	100	0 - 60 - 100	100 - 250	2 - 10	2 - 12	NZMS2-4-VX250/VAR	191663
		100	160 - 400	2 - 10	2 - 12	NZMS3-4-VX400	191521
	630	0 - 60 - 100	160 - 400	2 - 10	2 - 12	-	
		100	160 - 400	2 - 10	2 - 12	NZMS3-4-VX400/VAR	191522
630	100	252 - 630	1.5 - 7	2 - 8	2 - 8	NZMS3-4-VX630	191523
	0 - 60 - 100	100	252 - 630	1.5 - 7	2 - 8	-	
		252 - 630	1.5 - 7	2 - 8	2 - 8	NZMS3-4-VX630/VAR	191524
	0 - 60 - 100	252 - 630	1.5 - 7	2 - 8	-		

WA_SG02722_L Symbolphoto



WA_SG00622_L Symbolphoto



Circuit breakers IEC, electronic releases, 4 pole
NZM...-4-VX

Fixed mounting with box terminals
Part no.

Article no.

Plug-in/withdrawable units
Part no.


Article no.

Std. pack

Order base separately


For further terminal types
see accessories

Terminals as accessory



NZMS2-4-VX100-SVE	191664	1 Off
NZMS2-4-VX160-SVE	191665	
NZMS2-4-VX160/VAR-SVE	191666	
NZMS2-4-VX250-SVE	191667	
NZMS2-4-VX250/VAR-SVE	191668	

Terminals as accessory



NZMS3-4-VX400-SVE	191541	
NZMS3-4-VX400-AVE	191533	
NZMS3-4-VX400/VAR-SVE	191542	
NZMS3-4-VX400/VAR-AVE	191534	
NZMS3-4-VX630-SVE	191543	
NZMS3-4-VX630-AVE	191535	
NZMS3-4-VX630/VAR-SVE	191544	
NZMS3-4-VX630/VAR-AVE	191536	

Switching capacity 400/415V 50/60 Hz	Rated current = Rated uninterrupted current	Neutral conductor $I_n \times \%$ of phase conductor %	Setting range			Fixed mounting with screw terminals		
			Overload releases	Short-circuit releases delayed	Short-circuit releases Non-delayed	Part no.	Article no.	
I_{cu} kA	$I_n = I_b$ A		$I_r = I_n \times \dots$ A	$I_{sd} = I_n \times \dots$	$I_s = I_n \times \dots$			

System and cable protection, selectivity and generator protection

- IEC/EN 60947-2

High switching capacity

	150	100	100	40 - 100	2 - 10	2 - 18	NZMH2-4-VX100	191689
		160	100	64 - 160	2 - 10	2 - 18	NZMH2-4-VX160	191690
	250	0 - 60 - 100	64 - 160	2 - 10	2 - 18	NZMH2-4-VX160/VAR	191691	
		100	100 - 250	2 - 10	2 - 12	NZMH2-4-VX250	191692	
		0 - 60 - 100	100 - 250	2 - 10	2 - 12	NZMH2-4-VX250/VAR	191693	
	400	100	160 - 400	2 - 10	2 - 12	NZMH3-4-VX400	191391	
		100	160 - 400	2 - 10	2 - 12	-		
		0 - 60 - 100	160 - 400	2 - 10	2 - 12	NZMH3-4-VX400/VAR	191392	
		0 - 60 - 100	160 - 400	2 - 10	2 - 12	-		
	630	100	252 - 630	1.5 - 7	2 - 8	NZMH3-4-VX630	191393	
	75*	800	100	320 - 800	2 - 10	2 - 18	NZMH4-4-VX800	191355
		0 - 60 - 100	320 - 800	2 - 10	2 - 18	NZMH4-4-VX800/VAR	191356	
	1000	100	400 - 1000	2 - 10	2 - 18	NZMH4-4-VX1000	191357	
		0 - 60 - 100	400 - 1000	2 - 10	2 - 18	NZMH4-4-VX1000/VAR	191358	
		1250	100	500 - 1250	2 - 10	2 - 15	NZMH4-4-VX1250	191359
1600	0 - 60 - 100	500 - 1250	2 - 10	2 - 15	NZMH4-4-VX1250/VAR	191360		
	100	640 - 1600	2 - 10	2 - 12	NZMH4-4-VX1600	191361		
	0 - 60 - 100	640 - 1600	2 - 10	2 - 12	NZMH4-4-VX1600/VAR	191362		

* For further information please contact your local Eaton sales team.

Fixed mounting with box terminals

Part no. Article no.

Plug-in/withdrawable units

Part no. Article no. Std. pack

Order base separately

For further terminal types see accessories

Terminals as accessory		NZMH2-4-VX100-SVE	191684	1 Off
		NZMH2-4-VX160-SVE	191685	
		NZMH2-4-VX160/VAR-SVE	191686	
		NZMH2-4-VX250-SVE	191687	
		NZMH2-4-VX250/VAR-SVE	191688	
Terminals as accessory		NZMH3-4-VX400-SVE	191395	
		NZMH3-4-VX400-AVE	191377	
		NZMH3-4-VX400/VAR-SVE	191397	
		NZMH3-4-VX400/VAR-AVE	191381	
		NZMH3-4-VX630-SVE	191396	
		NZMH3-4-VX630-AVE	191378	
		NZMH3-4-VX630/VAR-SVE	191398	
		NZMH3-4-VX630/VAR-AVE	191382	
		NZMH4-4-VX800-AVE	193337	
		NZMH4-4-VX800/VAR-AVE	500927	
		NZMH4-4-VX1000-AVE	193338	
		NZMH4-4-VX1000/VAR-AVE	500924	
		NZMH4-4-VX1250-AVE	193339	
		NZMH4-4-VX1250/VAR-AVE	500925	
		NZMH4-4-VX1600-AVE	193340	
		NZMH4-4-VX1600/VAR-AVE	500926	

Switching capacity 400/415V 50/60 Hz	Rated current = Rated uninterrupted current	Neutral conductor $I_n \times \%$ of phase conductor %	Setting range				Fixed mounting with screw terminals	
			Overload releases	Short-circuit releases delayed	Short-circuit releases Non-delayed	Earth-fault release	Part no.	Article no.
I_{cu} kA	$I_n = I_b$ A		$I_r = I_n \times \dots$ A	$I_{sd} = I_n \times \dots$	$I_s = I_n \times \dots$	$I_G = I_n \times \dots$		

System and cable protection, selectivity, generator and earth fault protection

- IEC/EN 60947-2

Normal switching capacity

50	40	100	20 - 40	2 - 10	2 - 18	20 - 40	NZMN2-4-VX40-T*	193299
	63	100	25 - 63	2 - 10	2 - 18	20 - 63	NZMN2-4-VX40-T*	193300
	100	100	40 - 100	2 - 10	2 - 18	20 - 100	NZMN2-4-VX100-T	193301
	160	100	64 - 160	2 - 10	2 - 18	32 - 160	NZMN2-4-VX160-T	193302
	250	100	100 - 250	2 - 10	2 - 12	50 - 250	NZMN2-4-VX250-T	193303

*For availability information please contact your local Eaton sales team.

400	100	160 - 400	2 - 10	2 - 12	80 - 400	NZMN3-4-VX400-T	191480
630	100	252 - 630	1.5 - 7	2 - 8	126 - 630	NZMN3-4-VX630-T	191481

800	100	320 - 800	2 - 10	2 - 18	160 - 800	NZMN4-4-VX800-T	193320
1000	100	400 - 1000	2 - 10	2 - 18	200 - 1000	NZMN4-4-VX1000-T	193321
1250	100	500 - 1250	2 - 10	2 - 15	250 - 1250	NZMN4-4-VX1250-T	193322
1600	100	640 - 1600	2 - 10	2 - 12	320 - 1600	NZMN4-4-VX1600-T	193323

Strong switching capacity

70	400	100	160 - 400	2 - 10	2 - 12	80 - 400	NZMS3-4-VX400-T	191525
		0 - 60 - 100	160 - 400	2 - 10	2 - 12	80 - 400	NZMS3-4-VX400/VAR-T	191526
630	100	252 - 630	1.5 - 7	2 - 8	126 - 630	NZMS3-4-VX630-T	191527	
		0 - 60 - 100	252 - 630	1.5 - 7	2 - 8	126 - 630	NZMS3-4-VX630/VAR-T	191528



SG09821_L Symbolphoto



SG10621_L Symbolphoto



SG09821_L Symbolphoto



Fixed mounting with box terminals
Part no.

Article no.

Plug-in/withdrawable units
Part no.

Article no.

Std. pack

Order base separately

For further terminal types
see accessories

Terminals as accessory					1 Off
------------------------	--	--	--	--	-------

Terminals as accessory			NZMN3-4-VX400-T-AVE	191618	1 Off
			NZMN3-4-VX630-T-AVE	191479	

			NZMN4-4-VX800-T-AVE	500961	1 Off
			NZMN4-4-VX1000-T-AVE	500955	
			NZMN4-4-VX1250-T-AVE	500957	
			NZMN4-4-VX1600-T-AVE	500959	

Terminals as accessory			NZMS3-4-VX400-T-AVE	191537	1 Off
			NZMS3-4-VX400/VAR-T-AVE	191538	
			NZMS3-4-VX630-T-AVE	191539	
			NZMS3-4-VX630/VAR-T-AVE	191540	

Switching capacity 400/415V 50/60 Hz	Rated current = Rated uninterrupted current	Neutral conductor $I_n \times \%$ of phase conductor %	Setting range				Fixed mounting with screw terminals	
			Overload releases	Short-circuit releases delayed	Short-circuit releases Non-delayed	Earth-fault release	Part no.	Article no.
I_{cu} kA	$I_n = I_b$ A		$I_r = I_r \times \dots$ A	$I_{sd} = I_x \dots$	$I_1 = I_r \times \dots$	$I_G = I_r \times \dots$		

System and cable protection, selectivity, generator and earth fault protection

- IEC/EN 60947-2

High switching capacity

150	40	100	20 - 40	2 - 10	2 - 18	20 - 40	NZMH2-4-VX40-T*	193305	
	63	100	25 - 63	2 - 10	2 - 18	20 - 63	NZMH2-4-VX63-T*	193306	
	100	100	40 - 100	2 - 10	2 - 18	20 - 100	NZMH2-4-VX100-T	193307	
	160	100	64 - 160	2 - 10	2 - 18	32 - 160	NZMH2-4-VX160-T	193308	
	250	100	100 - 250	2 - 10	2 - 12	50 - 250	NZMH2-4-VX250-T	193309	
*For availability information please contact your local Eaton sales team.									
400	100	160 - 400	2 - 10	2 - 12	80 - 400	NZMH3-4-VX400-T	191385		
	630	100	252 - 630	1.5 - 7	2 - 8	126 - 630	NZMH3-4-VX630-T	191386	
75*	800	100	320 - 800	2 - 10	2 - 18	160 - 800	NZMH4-4-VX800-T	193324	
	1000	100	400 - 1000	2 - 10	2 - 18	200 - 1000	NZMH4-4-VX1000-T	193325	
	1250	100	500 - 1250	2 - 10	2 - 15	250 - 1250	NZMH4-4-VX1250-T	193326	
	1600	100	640 - 1600	2 - 10	2 - 12	320 - 1600	NZMH4-4-VX1600-T	193327	

*For further information please contact your Eaton sales person.



Fixed mounting with box terminals

Part no. Article no.

Plug-in/withdrawable units

Part no. Article no. Std. pack

Order base separately

For further terminal types
see accessories

Terminals as accessory								1 Off
Terminals as accessory			NZMH3-4-VX400-T-AVE	191383	1 Off			
			NZMH3-4-VX630-T-AVE	191384				
			NZMH4-4-VX800-T-AVE	500949	1 Off			
			NZMH4-4-VX1000-T-AVE	500946				
			NZMH4-4-VX1250-T-AVE	500947				
			NZMH4-4-VX1600-T-AVE	500948				



Switching capacity 400/415V 50/60 Hz	Rated current = Rated uninterrupted current	Neutral conductor $I_n \times \%$ of phase conductor %	Setting range			Fixed mounting with screw terminals		
			Overload releases	Short-circuit releases delayed	Short-circuit releases Non-delayed	Part no.	Article no.	
I_{cu} kA	$I_n = I_b$ A		$I_r = I_n \times \dots$ A	$I_{sd} = I_n \times \dots$	$I_s = I_n \times \dots$			

System and cable protection, selectivity and generator protection
• IEC/EN 60947-2

Normal switching capacity

	50	40	0 - 60 - 100	20 - 40	2 - 10	2 - 18	NZMN2-4-PX40/VAR*	192204
		63	0 - 60 - 100	25 - 63	2 - 10	2 - 18	NZMN2-4-PX63/VAR*	192205
		100	0 - 60 - 100	40 - 100	2 - 10	2 - 18	NZMN2-4-PX100/VAR	192206
		160	0 - 60 - 100	64 - 160	2 - 10	2 - 18	NZMN2-4-PX160/VAR	192207
		250	0 - 60 - 100	100 - 250	2 - 10	2 - 12	NZMN2-4-PX250/VAR	192208
*For availability information please contact your local Eaton sales team.								
	250		0 - 60 - 100	100 - 250	2 - 10	2 - 18	NZMN3-4-PX250/VAR	192277
			0 - 60 - 100	100 - 250	2 - 10	2 - 18	-	
	400		0 - 60 - 100	160 - 400	2 - 10	2 - 12	NZMN3-4-PX400/VAR	192278
			0 - 60 - 100	160 - 400	2 - 10	2 - 12	-	
	630		0 - 60 - 100	252 - 630	1.5 - 7	2 - 8	NZMN3-4-PX630/VAR	192279
			0 - 60 - 100	252 - 630	1.5 - 7	2 - 8	-	
	630		0 - 60 - 100	252 - 630	2 - 10	2 - 12	NZMN4-4-PX630/VAR	189641
	800		0 - 60 - 100	320 - 800	2 - 10	2 - 18	NZMN4-4-PX800/VAR	189642
	1000		0 - 60 - 100	500 - 1000	2 - 10	2 - 12	NZMN4-4-PX1000/VAR	189643
	1250		0 - 60 - 100	630 - 1250	2 - 10	2 - 12	NZMN4-4-PX1250/VAR	189644
	1600		0 - 60 - 100	800 - 1600	2 - 10	2 - 12	NZMN4-4-PX1600/VAR	189645

Strong switching capacity

	70	40	0 - 60 - 100	20 - 40	2 - 10	2 - 18	NZMS2-4-PX40/VAR*	192211
		63	0 - 60 - 100	25 - 63	2 - 10	2 - 18	NZMS2-4-PX63/VAR*	192212
		100	0 - 60 - 100	40 - 100	2 - 10	2 - 18	NZMS2-4-PX100/VAR	192213
		160	0 - 60 - 100	64 - 160	2 - 10	2 - 18	NZMS2-4-PX160/VAR	192214
		250	0 - 60 - 100	100 - 250	2 - 10	2 - 12	NZMS2-4-PX250/VAR	192215
*For availability information please contact your local Eaton sales team.								
	250		0 - 60 - 100	100 - 250	2 - 10	2 - 18	NZMS3-4-PX250/VAR	192280
			0 - 60 - 100	100 - 250	2 - 10	2 - 18	-	
	400		0 - 60 - 100	160 - 400	2 - 10	2 - 12	NZMS3-4-PX400/VAR	192281
			0 - 60 - 100	160 - 400	2 - 10	2 - 12	-	
	630		0 - 60 - 100	252 - 630	1.5 - 7	2 - 8	NZMS3-4-PX630/VAR	192282
		0 - 60 - 100	252 - 630	1.5 - 7	2 - 8	-		

Fixed mounting with box terminals
Part no.

Article no.

Plug-in/withdrawable units
Part no.

Article no.

Std. pack

Order base separately

For further terminal types see accessories

Terminals as accessory			NZMN2-4-PX40/VAR-SVE*	192062	1 Off
			NZMN2-4-PX63/VAR-SVE*	192063	
			NZMN2-4-PX100/VAR-SVE	192064	
			NZMN2-4-PX160/VAR-SVE	192065	
			NZMN2-4-PX250/VAR-SVE	192066	
*For availability information please contact your local Eaton sales team.					
Terminals as accessory			NZMN3-4-PX250/VAR-SVE	192295	
			NZMN3-4-PX250/VAR-AVE	192304	
			NZMN3-4-PX400/VAR-SVE	192296	
			NZMN3-4-PX400/VAR-AVE	192305	
			NZMN3-4-PX630/VAR-SVE	192297	
			NZMN3-4-PX630/VAR-AVE	192306	
			NZMN4-4-PX630/VAR-AVE	189661	
			NZMN4-4-PX800/VAR-AVE	189662	
			NZMN4-4-PX1000/VAR-AVE	189663	
			NZMN4-4-PX1250/VAR-AVE	189664	
			NZMN4-4-PX1600/VAR-AVE	189665	
Terminals as accessory			NZMS2-4-PX40/VAR-SVE*	192069	1 Off
			NZMS2-4-PX63/VAR-SVE*	192070	
			NZMS2-4-PX100/VAR-SVE	192071	
			NZMS2-4-PX160/VAR-SVE	192072	
			NZMS2-4-PX250/VAR-SVE	192073	
*For availability information please contact your local Eaton sales team.					
Terminals as accessory			NZMS3-4-PX250/VAR-SVE	192298	
			NZMS3-4-PX250/VAR-AVE	192307	
			NZMS3-4-PX400/VAR-SVE	192299	
			NZMS3-4-PX400/VAR-AVE	192308	
			NZMS3-4-PX630/VAR-SVE	192300	
			NZMS3-4-PX630/VAR-AVE	192309	

Switching capacity 400/415V 50/60 Hz	Rated current = Rated uninterrupted current	Neutral conductor $I_n \times \%$ of phase conductor %	Setting range			Fixed mounting with screw terminals		
			Overload releases	Short-circuit releases delayed	Short-circuit releases Non-delayed	Part no.	Article no.	
I_{cu} kA	$I_n = I_b$ A		$I_r = I_n \times \dots$ A	$I_{sd} = I_n \times \dots$	$I_s = I_n \times \dots$			

System and cable protection, selectivity and generator protection

- IEC/EN 60947-2

High switching capacity



150	40	0 - 60 - 100	20 - 40	2 - 10	2 - 18	NZMH2-4-PX40/VAR*	192218
	63	0 - 60 - 100	25 - 63	2 - 10	2 - 18	NZMH2-4-PX63/VAR*	192219
	100	0 - 60 - 100	40 - 100	2 - 10	2 - 18	NZMH2-4-PX100/VAR	192220
	160	0 - 60 - 100	64 - 160	2 - 10	2 - 18	NZMH2-4-PX160/VAR	192221
	250	0 - 60 - 100	100 - 250	2 - 10	2 - 12	NZMH2-4-PX250/VAR	192222

*For availability information please contact your local Eaton sales team.



250	0 - 60 - 100	100 - 250	2 - 10	2 - 18	NZMH3-4-PX250/VAR	192283
	0 - 60 - 100	100 - 250	2 - 10	2 - 18	-	
400	0 - 60 - 100	160 - 400	2 - 10	2 - 12	NZMH3-4-PX400/VAR	192284
	0 - 60 - 100	160 - 400	2 - 10	2 - 12	-	
630	0 - 60 - 100	252 - 630	1.5 - 7	2 - 8	NZMH3-4-PX630/VAR	192285
	0 - 60 - 100	252 - 630	1.5 - 7	2 - 8	-	



75*	630	0 - 60 - 100	252 - 630	2 - 10	2 - 18	NZMH4-4-PX630/VAR	189646
	800	0 - 60 - 100	320 - 800	2 - 10	2 - 18	NZMH4-4-PX800/VAR	189647
	1000	0 - 60 - 100	500 - 1000	2 - 10	2 - 18	NZMH4-4-PX1000/VAR	189648
	1250	0 - 60 - 100	630 - 1250	2 - 10	2 - 15	NZMH4-4-PX1250/VAR	189649
	1600	0 - 60 - 100	800 - 1600	2 - 10	2 - 12	NZMH4-4-PX1600/VAR	189650

*For further information please contact your local Eaton sales team.

Fixed mounting with box terminals

Part no. Article no.

Plug-in/withdrawable units

Part no. Article no. Std. pack

Order base separately

For further terminal types see accessories


Terminals as accessory




NZMH2-4-PX40/VAR-SVE*	192076	1 Off
NZMH2-4-PX63/VAR-SVE*	192077	
NZMH2-4-PX100/VAR-SVE	192078	
NZMH2-4-PX160/VAR-SVE	192079	
NZMH2-4-PX250/VAR-SVE	192080	

*For availability information please contact your local Eaton sales team.

Terminals as accessory



NZMH3-4-PX250/VAR-SVE	192301
NZMH3-4-PX250/VAR-AVE	192310
NZMH3-4-PX400/VAR-SVE	192302
NZMH3-4-PX400/VAR-AVE	192311
NZMH3-4-PX630/VAR-SVE	192303
NZMH3-4-PX630/VAR-AVE	192312




NZMH4-4-PX630/VAR-AVE	189666
NZMH4-4-PX800/VAR-AVE	189667
NZMH4-4-PX1000/VAR-AVE	189668
NZMH4-4-PX1250/VAR-AVE	189669
NZMH4-4-PX1600/VAR-AVE	189670

Compact circuit breakers, switch disconnectors

Circuit breakers IEC, electronic releases with energy meter function, 4 pole
 NZM...PX...-TZ, ...-TAZ

Switching capacity 400/415V 50/60 Hz	Rated current = Rated uninterrupted current	Neutral conductor I_n x % of phase conductor %	Setting range				Fixed mounting with screw terminals	
			Overload releases	Short-circuit releases delayed	Short-circuit releases Non-delayed	Earth-fault release	Part no.	Article no.
I_{cu} kA	$I_n = I_b$ A		$I_r = I_n \times \dots$ A	$I_{sd} = I_n \times \dots$	$I_i = I_n \times \dots$	$I_g = I_n \times \dots$		



System and cable protection, selectivity, generator and earth fault protection

- Energy metering class I up to IEC61557-12
- IEC/EN 60947-2
- NZM3, NZM4: with maintenance mode (Arcflash Reduction Maintenance System™) and zone-selective interlocking ZSI
- NZM2: with zone-selective interlocking ZSI

Normal switching capacity

50	40	0 - 60 - 100	20 - 40	2 - 10	2 - 18	20 - 40	NZMN2-4-PX40/VAR-TZ*	192225
	63	0 - 60 - 100	25 - 63	2 - 10	2 - 18	20 - 63	NZMN2-4-PX63/VAR-TZ*	192226
	100	0 - 60 - 100	40 - 100	2 - 10	2 - 18	20 - 100	NZMN2-4-PX100/VAR-TZ	192227
	160	0 - 60 - 100	64 - 160	2 - 10	2 - 18	32 - 160	NZMN2-4-PX160/VAR-TZ	192228
	250	0 - 60 - 100	100 - 250	2 - 10	2 - 12	50 - 250	NZMN2-4-PX250/VAR-TZ	192229
*For availability information please contact your local Eaton sales team.								
250	250	0 - 60 - 100	100 - 250	2 - 10	2 - 18	50 - 250	NZMN3-4-PX250/VAR-TAZ	192286
	400	0 - 60 - 100	160 - 400	2 - 10	2 - 12	80 - 400	NZMN3-4-PX400/VAR-TAZ	192287
	630	0 - 60 - 100	252 - 630	1.5 - 7	2 - 8	126 - 630	NZMN3-4-PX630/VAR-TAZ	192288

630	630	0 - 60 - 100	252 - 630	2 - 10	2 - 18	126 - 630	NZMN4-4-PX630/VAR-TAZ	189651
	800	0 - 60 - 100	320 - 800	2 - 10	2 - 18	160 - 800	NZMN4-4-PX800/VAR-TAZ	189652
	1000	0 - 60 - 100	400 - 1000	2 - 10	2 - 18	200 - 1000	NZMN4-4-PX1000/VAR-TAZ	189653
	1250	0 - 60 - 100	500 - 1250	2 - 10	2 - 15	250 - 1250	NZMN4-4-PX1250/VAR-TAZ	189654
	1600	0 - 60 - 100	640 - 1600	2 - 10	2 - 12	320 - 1600	NZMN4-4-PX1600/VAR-TAZ	189655

Strong switching capacity

70	40	0 - 60 - 100	20 - 40	2 - 10	2 - 18	20 - 40	NZMS2-4-PX40/VAR-TZ*	192232
	63	0 - 60 - 100	25 - 63	2 - 10	2 - 18	20 - 63	NZMS2-4-PX63/VAR-TZ*	192233
	100	0 - 60 - 100	40 - 100	2 - 10	2 - 18	20 - 100	NZMS2-4-PX100/VAR-TZ	192234
	160	0 - 60 - 100	64 - 160	2 - 10	2 - 18	32 - 160	NZMS2-4-PX160/VAR-TZ	192235
	250	0 - 60 - 100	100 - 250	2 - 10	2 - 12	50 - 250	NZMS2-4-PX250/VAR-TZ	192236
*For availability information please contact your local Eaton sales team.								

250	250	0 - 60 - 100	100 - 250	2 - 10	2 - 18	50 - 250	NZMS3-4-PX250/VAR-TAZ	192289
	400	0 - 60 - 100	160 - 400	2 - 10	2 - 12	80 - 400	NZMS3-4-PX400/VAR-TAZ	192290
	630	0 - 60 - 100	252 - 630	1.5 - 7	2 - 8	126 - 630	NZMS3-4-PX630/VAR-TAZ	192291



Compact circuit breakers, switch disconnectors

Circuit breakers IEC, electronic releases with energy meter function, 4 pole
 NZM...PX...-TZ, ...-TAZ

Fixed mounting with box terminals	Article no.	Plug-in/withdrawable units	Article no.	Std. pack
Part no.		Part no.		
		Order base separately		

For further terminal types see accessories

Terminals as accessory			NZMN2-4-PX40/VAR-TZ-SVE*	192083	1 Off
			NZMN2-4-PX63/VAR-TZ-SVE*	192084	
			NZMN2-4-PX100/VAR-TZ-SVE	192085	
			NZMN2-4-PX160/VAR-TZ-SVE	192086	
			NZMN2-4-PX250/VAR-TZ-SVE	192087	
*For availability information please contact your local Eaton sales team.					

Terminals as accessory			NZMN3-4-PX250/VAR-TAZ-AVE	192313	
			NZMN3-4-PX400/VAR-TAZ-AVE	192314	
			NZMN3-4-PX630/VAR-TAZ-AVE	192315	

			NZMN4-4-PX630/VAR-TAZ-AVE	189671	
			NZMN4-4-PX800/VAR-TAZ-AVE	189672	
			NZMN4-4-PX1000/VAR-TAZ-AVE	189673	
			NZMN4-4-PX1250/VAR-TAZ-AVE	189674	
			NZMN4-4-PX1600/VAR-TAZ-AVE	189675	


Terminals as accessory			NZMS2-4-PX40/VAR-TZ-SVE*	192090	1 Off
			NZMS2-4-PX63/VAR-TZ-SVE*	192091	
			NZMS2-4-PX100/VAR-TZ-SVE	192092	
			NZMS2-4-PX160/VAR-TZ-SVE	192093	
			NZMS2-4-PX250/VAR-TZ-SVE	192094	
*For availability information please contact your local Eaton sales team.					

Terminals as accessory			NZMS3-4-PX250/VAR-TAZ-AVE	192316	
			NZMS3-4-PX400/VAR-TAZ-AVE	192317	
			NZMS3-4-PX630/VAR-TAZ-AVE	192318	

Compact circuit breakers, switch disconnectors

Circuit breakers IEC, electronic releases with energy meter function, 4 pole
NZM...PX...-TZ, ...-TAZ

Switching capacity 400/415V 50/60 Hz	Rated current = Rated uninterrupted current	Neutral conductor $I_n \times \%$ of phase conductor %	Setting range				Fixed mounting with screw terminals	
			Overload releases	Short-circuit releases delayed	Short-circuit releases Non-delayed	Earth-fault release	Part no.	Article no.
I_{cu} kA	$I_n = I_b$ A		$I_r = I_n \times \dots$ A	$I_{sd} = I_n \times \dots$	$I_t = I_n \times \dots$	$I_g = I_n \times \dots$		



System and cable protection, selectivity, generator and earth fault protection

- Energy metering class I up to IEC61557-12
- IEC/EN 60947-2
- NZM3, NZM4: with maintenance mode (Arcflash Reduction Maintenance System™) and zone-selective interlocking ZSI
- NZM2: with zone-selective interlocking ZSI

Normal switching capacity

150	40	0 - 60 - 100	20 - 40	2 - 10	2 - 18	20 - 40	NZMH2-4-PX40/VAR-TZ*	192055
	63	0 - 60 - 100	25 - 63	2 - 10	2 - 18	20 - 63	NZMH2-4-PX63/VAR-TZ*	192056
	100	0 - 60 - 100	40 - 100	2 - 10	2 - 18	20 - 100	NZMH2-4-PX100/VAR-TZ	192057
	160	0 - 60 - 100	64 - 160	2 - 10	2 - 18	32 - 160	NZMH2-4-PX160/VAR-TZ	192058
	250	0 - 60 - 100	100 - 250	2 - 10	2 - 12	50 - 250	NZMH2-4-PX250/VAR-TZ	192059

*For availability information please contact your local Eaton sales team.



250	0 - 60 - 100	100 - 250	2 - 10	2 - 18	50 - 250	NZMH3-4-PX250/VAR-TAZ	192292	
	400	0 - 60 - 100	160 - 400	2 - 10	2 - 12	80 - 400	NZMH3-4-PX400/VAR-TAZ	192293
	630	0 - 60 - 100	252 - 630	1.5 - 7	2 - 8	126 - 630	NZMH3-4-PX630/VAR-TAZ	192294

75*	630	0 - 60 - 100	252 - 630	2 - 10	2 - 18	126 - 630	NZMH4-4-PX630/VAR-TAZ	189656
	800	0 - 60 - 100	320 - 800	2 - 10	2 - 18	160 - 800	NZMH4-4-PX800/VAR-TAZ	189657
	1000	0 - 60 - 100	400 - 1000	2 - 10	2 - 18	200 - 1000	NZMH4-4-PX1000/VAR-TAZ	189658
	1250	0 - 60 - 100	500 - 1250	2 - 10	2 - 15	250 - 1250	NZMH4-4-PX1250/VAR-TAZ	189659
	1600	0 - 60 - 100	640 - 1600	2 - 10	2 - 12	320 - 1600	NZMH4-4-PX1600/VAR-TAZ	189660

*For further information please contact your local Eaton sales team.

Compact circuit breakers, switch disconnectors

Circuit breakers IEC, electronic releases with energy meter function, 4 pole
NZM...PX...-TZ, ...-TAZ

Fixed mounting with box terminals
Part no. Article no.

Plug-in/withdrawable units
Part no. Article no. Std. pack

Order base separately

For further terminal types
see accessories

Terminals as accessory



NZMH2-4-PX40/VAR-TZ-SVE*	192097	1 Off
NZMH2-4-PX63/VAR-TZ-SVE*	192098	
NZMH2-4-PX100/VAR-TZ-SVE	192099	
NZMH2-4-PX160/VAR-TZ-SVE	192100	
NZMH2-4-PX250/VAR-TZ-SVE	192101	

*For availability information please contact your local Eaton sales team.

Terminals as accessory





NZMH3-4-PX250/VAR-TAZ-AVE	192319
NZMH3-4-PX400/VAR-TAZ-AVE	192320
NZMH3-4-PX630/VAR-TAZ-AVE	192321

Terminals as accessory



NZMH4-4-PX630/VAR-TAZ-AVE	189676
NZMH4-4-PX800/VAR-TAZ-AVE	189677
NZMH4-4-PX1000/VAR-TAZ-AVE	189678
NZMH4-4-PX1250/VAR-TAZ-AVE	189679
NZMH4-4-PX1600/VAR-TAZ-AVE	189680

Compact circuit breakers IEC, thermomagnetic releases, 1 pole
NZM...AF

Switching capacity 230V 50/60 Hz	Rated current = Rated uninterrupted current	Setting range		Fixed mounting with box terminals		
		Overload releases	Short-circuit releases Non-delayed	Part no.	Article no.	Std. pack
I_{cu} kA	$I_n = I_u$ A	$I_r = I_n \times \dots$ A	I_s			
						

System and cable protection

- IEC/EN 60947-2

Economy switching capacity

Switching capacity	Rated current	Overload releases	Short-circuit releases	Part no.	Article no.	Std. pack
18	16	16 A fixed	320 A fixed	NZME1-1-AF16	152561	1 Off
	20	20 A fixed	320 A fixed	NZME1-1-AF20	152540	
	25	25 A fixed	320 A fixed	NZME1-1-AF25	152541	
	32	32 A fixed	340 A fixed	NZME1-1-AF32	152542	
	40	40 A fixed	340 A fixed	NZME1-1-AF40	152543	
	50	50 A fixed	600 A fixed	NZME1-1-AF50	152544	
	63	63 A fixed	600 A fixed	NZME1-1-AF63	152545	
	80	80 A fixed	1000 A fixed	NZME1-1-AF80	152546	
	100	100 A fixed	1000 A fixed	NZME1-1-AF100	152547	
	125	125 A fixed	1000 A fixed	NZME1-1-AF125	152548	

Basic switching capacity

Switching capacity	Rated current	Overload releases	Short-circuit releases	Part no.	Article no.	Std. pack
25	16	16 A fixed	320 A fixed	NZMB1-1-AF16	152560	1 Off
	20	20 A fixed	320 A fixed	NZMB1-1-AF20	152531	
	25	25 A fixed	320 A fixed	NZMB1-1-AF25	152532	
	32	32 A fixed	340 A fixed	NZMB1-1-AF32	152533	
	40	40 A fixed	340 A fixed	NZMB1-1-AF40	152534	
	50	50 A fixed	600 A fixed	NZMB1-1-AF50	152535	
	63	63 A fixed	600 A fixed	NZMB1-1-AF63	152536	
	80	80 A fixed	1000 A fixed	NZMB1-1-AF80	152537	
	100	100 A fixed	1000 A fixed	NZMB1-1-AF100	152538	
	125	125 A fixed	1000 A fixed	NZMB1-1-AF125	152539	



Switch disconnectors IEC, 3 pole
PN...

Rated current = Rated uninterrupted current	Short-circuit protection max. fuse gL-characteristic	Fixed mounting with screw terminals		Fixed mounting with box terminals	
		Part no.	Article no.	Part no.	Article no.
$I_n = I_u$ A	A gL				

Switch disconnectors

- IEC/EN 60947-2

For further terminal types
see accessories

2 switch positions I, 0

Switching capacity	Rated current	Overload releases	Short-circuit releases	Part no.	Article no.	Std. pack
63	125	-		PN1-63	259140	1 Off
	100	125		PN1-100	259141	
	125	125		PN1-125	259142	
	160	160		PN1-160	281235	
160	250	PN2-160	266005	PN2-160-BT	110308	
	200	PN2-200	266006	PN2-200-BT	110309	
	250	PN2-250	266007	PN2-250-BT	110310	
400	630	PN3-400	266017	PN3-400-BT	110314	
	630	PN3-630	266018	PN3-630-BT	110315	







Rated current = Rated uninterrupted current	Short-circuit protection max. fuse gl-characteristic	Fixed mounting with screw terminals Part no.	Article no.
$I_n = I_u$ A	A gL		

Switch disconnectors

- IEC/EN 60947-3




3 switch positions I, +, 0

Can be remotely operated with shunt release XU/XA, remote operator XR
Can be equipped with trip-indicating auxiliary contact M22-K...

	63	125	Screw terminals	
	100	125	as accessories	
	125	125		
	160	160		
	160	250	N2-160	266008
	200	250	N2-200	266009
	250	250	N2-250	266010
	400	630	N3-400	266019
			-	
	630	630	N3-630	266020
	800	1600	N4-800	266025
	1000	1600	N4-1000	266026
	1250	1600	N4-1250	266027
	1600	1600	N4-1600	266028

Fixed mounting with box terminals Part no.	Article no.	Plug-in/withdrawable units Part no.	Article no.	Std. pack
---	-------------	--	-------------	-----------

For further terminal types
see accessories

N1-63	259143		N1-63-SVE	113729	1 Off
N1-100	259144		N1-100-SVE	113730	
N1-125	259145		N1-125-SVE	113731	
N1-160	281236		-		
N2-160-BT	110311		N2-160-SVE	113733	
N2-200-BT	110312		N2-200-SVE	113734	
N2-250-BT	110313		N2-250-SVE	113735	
N3-400-BT	110316		N3-400-SVE	168544	
-			N3-400-AVE	110768	
N3-630-BT	110317		N3-630-SVE	168545	
-			N3-630-AVE	110769	
-			Withdrawable units as accessories		






Rated current = Rated uninter- rupted current	Short-circuit protection max. fuse gL- characteristic	Fixed mounting with screw terminals		Fixed mounting with box terminals		Std. pack
		Part no.	Article no.	Part no.	Article no.	
$I_n = I_u$ A	A gL					

Switch disconnectors

- IEC/EN 60947-3

For further terminal types
see accessories

2 switch positions I, 0

 <p>WA_SG168421_L Symbolphoto</p>	63	125	Screw terminals as accessories	PN1-4-63	265999	1 Off
	100	125		PN1-4-100	266000	
	125	125		PN1-4-125	266001	
	160	160		PN1-4-160	281253	
 <p>WA_SG168821_L Symbolphoto</p>	160	250	PN2-4-160	266011	PN2-4-160-BT	118880
	200	250	PN2-4-200	266012	PN2-4-200-BT	118881
	250	250	PN2-4-250	266013	PN2-4-250-BT	118882
 <p>WA_SG170621_L Symbolphoto</p>	400	630	PN3-4-400	266021	PN3-4-400-BT	111653
	630	630	PN3-4-630	266022	PN3-4-630-BT	111654

Switch disconnectors IEC, 4 pole
PN...-4, N...-4





Rated current = Rated uninterrupted current	Short-circuit protection max. fuse gl-characteristic	Fixed mounting with screw terminals Part no.	Article no.
$I_n = I_u$ A	A gL		

Switch disconnectors

- IEC/EN 60947-2

3 switch positions I, +, 0

Can be remotely operated with shunt release XU/XA, remote operator XR
Can be equipped with trip-indicating auxiliary contact M22-K...

	63	125	Screw terminals	
	100	125	as accessories	
	125	125		
	160	160		
	160	250	N2-4-160	266014
	200	250	N2-4-200	266015
	250	250	N2-4-250	266016
	400	630	N3-4-400	266023
		630	-	
	630	630	N3-4-630	266024
		630	-	
	800	1600	N4-4-800	266029
	1000	1600	N4-4-1000	266030
	1250	1600	N4-4-1250	266031
	1600	1600	N4-4-1600	266032


Switch disconnectors IEC, 4 pole
PN...-4, N...-4

Fixed mounting with box terminals Part no.	Article no.	Plug-in/withdrawable units Part no.	Article no.	Std. pack
---	-------------	--	-------------	-----------

For further terminal types
see accessories

N1-4-63	266002	-		1 Off
N1-4-100	266003	-		
N1-4-125	266004	-		
N1-4-160	281254			
N2-4-160-BT	118883		N2-4-160-SVE	113736
N2-4-200-BT	118884		N2-4-200-SVE	113737
N2-4-250-BT	118885		N2-4-250-SVE	113738
N3-4-400-BT	111651		N3-4-400-SVE	168470
-			N3-4-400-AVE	110872
N3-4-630-BT	111652		N3-4-630-SVE	168471
-			N3-4-630-AVE	110873
-		Withdrawable units as accessories		

Switching capacity				Rated current = Rated uninterrupted current	Setting range		Fixed mounting Part no.	Article no.
SCCR 480Y/277 V 60 Hz	SCCR 480 V 60 Hz	SCCR 600Y/347 V 60 Hz	SCCR 600 V 60 Hz		Overload releases	Short-circuit releases Non-delayed		
I_{cu} kA	I_{cu} kA	I_{cu} kA	I_{cu} kA	$I_n = I_u$ A	I_r A	$I_s = I_n \times \dots$		



System and cable protection

Fixed overload releases I_r

High switching capacity



I_{cu} kA	I_{cu} kA	I_{cu} kA	I_{cu} kA	$I_n = I_u$ A	I_r A	$I_s = I_n \times \dots$	Part no.	Article no.
150	150	65	-	20	15 - 20	350 A fixed	NZMH2-A20-NA	269228
				25	20 - 25	350 A fixed	NZMH2-A25-NA	269229
				32	25 - 32	350 A fixed	NZMH2-A32-NA	269230
				40	32 - 40	8 - 10	NZMH2-A40-NA	269231
				50	40 - 50	6 - 10	NZMH2-A50-NA	269232
				63	50 - 63	6 - 10	NZMH2-A63-NA	269233
				80	63 - 80	6 - 10	NZMH2-A80-NA	269234
				100	80 - 100	6 - 10	NZMH2-A100-NA	269235
				125	100 - 125	6 - 10	NZMH2-A125-NA	269236
				100	100	50	-	160
200	160 - 200	6 - 10	NZMH2-A200-NA					269238
250	200 - 250	6 - 10	NZMH2-A250-NA					271107


Fixed mounting with box terminals

Part no. Article no. Std. pack Information relevant for export to North America



Part no.	Article no.	Std. pack	Information relevant for export to North America
NZMH2-A20-BT-NA	107797	1 Off	Product Standards UL File No. E31593
NZMH2-A25-BT-NA	107798		UL Category Control No. DIVQ
NZMH2-A32-BT-NA	107799		CSA File No. 022086
NZMH2-A40-BT-NA	107800		CSA Class No. 1432-01
NZMH2-A50-BT-NA	107801		North America Certification Specially designed for NA UL listed, CSA certified
NZMH2-A63-BT-NA	107802		Yes
NZMH2-A80-BT-NA	107803		Suitable for Feeder circuits, branch circuits
NZMH2-A100-BT-NA	107804		Current Limiting Circuit breaker Yes
NZMH2-A125-BT-NA	107805		Max. Voltage Rating 600Y/347 V, 480 V
NZMH2-A160-BT-NA	107806		Degree of Protection IEC: IP20; UL/CSA Type: -
NZMH2-A200-BT-NA	107807		
NZMH2-A250-BT-NA	107808		

Switching capacity				Rated current = Rated uninterrupted current	Setting range		Fixed mounting Part no.	Article no.
SCCR 480Y/277 V 60 Hz	SCCR 480 V 60 Hz	SCCR 600Y/347 V 60 Hz	SCCR 600 V 60 Hz		Overload releases	Short-circuit releases Non-delayed		
I_{cu} kA	I_{cu} kA	I_{cu} kA	I_{cu} kA	$I_n = I_u$ A	I_r A	$I_s = I_n \times \dots$		



System and cable protection

Fixed overload releases I_r

Basic switching capacity



Switching capacity	Rated current	Setting range	Fixed mounting	Article no.
25	-	-	Screw terminals as accessories	
	20	20 A fixed	350 A fixed	
	25	25 A fixed	350 A fixed	
	30	30 A fixed	350 A fixed	
	35	35 A fixed	8 - 10	
	40	40 A fixed	8 - 10	
	45	45 A fixed	6 - 10	
	50	50 A fixed	6 - 10	
	60	60 A fixed	6 - 10	
	70	70 A fixed	6 - 10	
	80	80 A fixed	6 - 10	
	90	90 A fixed	6 - 10	
	100	100 A fixed	6 - 10	
	110	110 A fixed	6 - 10	
	125	125 A fixed	6 - 10	



Switching capacity	Rated current	Setting range	Fixed mounting	Article no.
25	25	18		
	15	15 A fixed	350 A fixed	NZMB2-AF15-NA 269142
	20	20 A fixed	350 A fixed	NZMB2-AF20-NA 269143
	25	25 A fixed	350 A fixed	NZMB2-AF25-NA 269144
	30	30 A fixed	350 A fixed	NZMB2-AF30-NA 269145
	35	35 A fixed	8 - 10	NZMB2-AF35-NA 269146
	40	40 A fixed	8 - 10	NZMB2-AF40-NA 269147
	45	45 A fixed	6 - 10	NZMB2-AF45-NA 269148
	50	50 A fixed	6 - 10	NZMB2-AF50-NA 269149
	60	60 A fixed	6 - 10	NZMB2-AF60-NA 269160
	70	70 A fixed	6 - 10	NZMB2-AF70-NA 269161
	80	80 A fixed	6 - 10	NZMB2-AF80-NA 269162
	90	90 A fixed	6 - 10	NZMB2-AF90-NA 269163
	100	100 A fixed	6 - 10	NZMB2-AF100-NA 269164
	110	110 A fixed	6 - 10	NZMB2-AF110-NA 269165
	125	125 A fixed	6 - 10	NZMB2-AF125-NA 269166
	150	150 A fixed	6 - 10	NZMB2-AF150-NA 269167
	175	175 A fixed	6 - 10	NZMB2-AF175-NA 269168
	200	200 A fixed	6 - 10	NZMB2-AF200-NA 269169
	225	225 A fixed	6 - 10	NZMB2-AF225-NA 271089
	250	250 A fixed	6 - 10	NZMB2-AF250-NA 271100

Fixed mounting with box terminals


Part no. Article no. Std. pack Information relevant for export to North America



Part no.	Article no.	Std. pack	Information relevant for export to North America
NZMB1-AF20-NA	281554	1 Off	Product Standards UL File No. E31593 UL Category Control No. DIVQ CSA File No. 022086 CSA Class No. 1432-01 North America Certification Specially designed for NA Suitable for Current Limiting Circuit breaker Max. Voltage Rating Degree of Protection
NZMB1-AF25-NA	281555	USA, CAN	UL 489; CSA-C22.2 No. 5-09; IEC 60947-2; CE marking
NZMB1-AF30-NA	281556		
NZMB1-AF35-NA	272204		
NZMB1-AF40-NA	272205		
NZMB1-AF45-NA	272206		
NZMB1-AF50-NA	272207		
NZMB1-AF60-NA	272208		
NZMB1-AF70-NA	272209		
NZMB1-AF80-NA	272250		
NZMB1-AF90-NA	272251		
NZMB1-AF100-NA	272252		
NZMB1-AF110-NA	281557		
NZMB1-AF125-NA	281558		
NZMB2-AF15-BT-NA	107611	1 Off	Product Standards UL File No. E31593 UL Category Control No. DIVQ CSA File No. 022086 CSA Class No. 1432-01 North America Certification Specially designed for NA Suitable for Current Limiting Circuit breaker Max. Voltage Rating Degree of Protection
NZMB2-AF20-BT-NA	107612	USA, CAN	UL 489; CSA-C22.2 No. 5-09; IEC 60947-2; CE marking
NZMB2-AF25-BT-NA	107613		
NZMB2-AF30-BT-NA	107614		
NZMB2-AF35-BT-NA	107615		
NZMB2-AF40-BT-NA	107616		
NZMB2-AF45-BT-NA	107617		
NZMB2-AF50-BT-NA	107618		
NZMB2-AF60-BT-NA	107619		
NZMB2-AF70-BT-NA	107620		
NZMB2-AF80-BT-NA	107621		
NZMB2-AF90-BT-NA	107622		
NZMB2-AF100-BT-NA	107623		
NZMB2-AF110-BT-NA	107624		
NZMB2-AF125-BT-NA	107625		
NZMB2-AF150-BT-NA	107626		
NZMB2-AF175-BT-NA	107627		
NZMB2-AF200-BT-NA	107628		
NZMB2-AF225-BT-NA	107629		
NZMB2-AF250-BT-NA	107630		

Circuit breakers UL/CSA, IEC, thermomagnetic releases, 3 pole
NZM...AF...NA

Switching capacity				Rated current = Rated uninterrupted current	Setting range		Fixed mounting Part no.	Article no.
SCCR 480Y/277 V 60 Hz	SCCR 480 V 60 Hz	SCCR 600Y/347 V 60 Hz	SCCR 600 V 60 Hz		Overload releases	Short-circuit releases Non-delayed		
I_{cu} kA	I_{cu} kA	I_{cu} kA	I_{cu} kA	$I_n = I_u$ A	I_t A	$I_s = I_n \times \dots$		



System and cable protection

Fixed overload releases I_t

Normal switching capacity



Switching capacity	Rated current	Setting range	Fixed mounting	Article no.
35	-	-	-	-
	20	20 A fixed	350 A fixed	Screw terminals
	25	25 A fixed	350 A fixed	as accessories
	30	30 A fixed	350 A fixed	
	35	35 A fixed	8 - 10	
	40	40 A fixed	8 - 10	
	45	45 A fixed	6 - 10	
	50	50 A fixed	6 - 10	
	60	60 A fixed	6 - 10	
	70	70 A fixed	6 - 10	
	80	80 A fixed	6 - 10	
	90	90 A fixed	6 - 10	
	100	100 A fixed	6 - 10	
	110	110 A fixed	6 - 10	
	125	125 A fixed	6 - 10	



Switching capacity	Rated current	Setting range	Fixed mounting	Article no.
35	35	25	-	-
	15	15 A fixed	350 A fixed	NZMN2-AF15-NA 269170
	20	20 A fixed	350 A fixed	NZMN2-AF20-NA 269171
	25	25 A fixed	350 A fixed	NZMN2-AF25-NA 269172
	30	30 A fixed	350 A fixed	NZMN2-AF30-NA 269173
	35	35 A fixed	8 - 10	NZMN2-AF35-NA 269174
	40	40 A fixed	8 - 10	NZMN2-AF40-NA 269175
	45	45 A fixed	6 - 10	NZMN2-AF45-NA 269176
	50	50 A fixed	6 - 10	NZMN2-AF50-NA 269177
	60	60 A fixed	6 - 10	NZMN2-AF60-NA 269178
	70	70 A fixed	6 - 10	NZMN2-AF70-NA 269179
	80	80 A fixed	6 - 10	NZMN2-AF80-NA 269180
	90	90 A fixed	6 - 10	NZMN2-AF90-NA 269181
	100	100 A fixed	6 - 10	NZMN2-AF100-NA 269182
	110	110 A fixed	6 - 10	NZMN2-AF110-NA 269183
	125	125 A fixed	6 - 10	NZMN2-AF125-NA 269184
	150	150 A fixed	6 - 10	NZMN2-AF150-NA 269185
	175	175 A fixed	6 - 10	NZMN2-AF175-NA 269186
	200	200 A fixed	6 - 10	NZMN2-AF200-NA 269187
	225	225 A fixed	6 - 10	NZMN2-AF225-NA 271101
	250	250 A fixed	6 - 10	NZMN2-AF250-NA 271102

Circuit breakers UL/CSA, IEC, thermomagnetic releases, 3 pole
NZM...AF...NA

Fixed mounting with box terminals


Part no. Article no. Std. pack Information relevant for export to North America



Part no.	Article no.	Std. pack	Information relevant for export to North America
NZMN1-AF20-NA	281565	1 Off	Product Standards UL 489; CSA-C22.2 No. 5-09; IEC 60947-2; CE marking
NZMN1-AF25-NA	281566		UL File No. E31593
NZMN1-AF30-NA	281567		UL Category Control No. DIVQ
NZMN1-AF35-NA	274220		CSA File No. Q22086
NZMN1-AF40-NA	274223		CSA Class No. 1432-01
NZMN1-AF45-NA	274230		North America Certification UL listed, CSA certified
NZMN1-AF50-NA	274231		Specially designed for NA Yes
NZMN1-AF60-NA	274232		Suitable for Feeder circuits, branch circuits
NZMN1-AF70-NA	274233		Current Limiting Circuit breaker Yes
NZMN1-AF80-NA	274234		Max. Voltage Rating 480Y/277 V
NZMN1-AF90-NA	274235		Degree of Protection IEC: IP20; UL/CSA Type: -
NZMN1-AF100-NA	274236		
NZMN1-AF110-NA	281568		
NZMN1-AF125-NA	281569		
NZMN2-AF15-BT-NA	107631	1 Off	Product Standards UL 489; CSA-C22.2 No. 5-09; IEC 60947-2; CE marking
NZMN2-AF20-BT-NA	107632		UL File No. E31593
NZMN2-AF25-BT-NA	107633		UL Category Control No. DIVQ
NZMN2-AF30-BT-NA	107634		CSA File No. Q22086
NZMN2-AF35-BT-NA	107635		CSA Class No. 1432-01
NZMN2-AF40-BT-NA	107636		North America Certification UL listed, CSA certified
NZMN2-AF45-BT-NA	107637		Specially designed for NA Yes
NZMN2-AF50-BT-NA	107638		Suitable for Feeder circuits, branch circuits
NZMN2-AF60-BT-NA	107639		Current Limiting Circuit breaker Yes
NZMN2-AF70-BT-NA	107640		Max. Voltage Rating 600Y/347 V, 480 V
NZMN2-AF80-BT-NA	107641		Degree of Protection IEC: IP20; UL/CSA Type: -
NZMN2-AF90-BT-NA	107642		
NZMN2-AF100-BT-NA	107643		
NZMN2-AF110-BT-NA	107644		
NZMN2-AF125-BT-NA	107645		
NZMN2-AF150-BT-NA	107646		
NZMN2-AF175-BT-NA	107647		
NZMN2-AF200-BT-NA	107648		
NZMN2-AF225-BT-NA	107649		
NZMN2-AF250-BT-NA	107650		

Circuit breakers UL/CSA, IEC, thermomagnetic releases, 3 pole
NzM...AF...NA

Switching capacity				Rated current = Rated uninterrupted current	Setting range		Fixed mounting Part no.	Article no.
SCCR 480Y/277 V 60 Hz	SCCR 480 V 60 Hz	SCCR 600Y/347 V 60 Hz	SCCR 600 V 60 Hz		Overload releases	Short-circuit releases Non-delayed		
I_{cu} kA	I_{cu} kA	I_{cu} kA	I_{cu} kA	$I_n = I_u$ A	I_r A	$I_s = I_n \times \dots$		



System and cable protection

Fixed overload releases I_r

High switching capacity



I_{cu}	I_{cu}	I_{cu}		$I_n = I_u$	Overload releases	Short-circuit releases	Part no.	Article no.
150	150	65	-	15	15 A fixed	350 A fixed	NZMH2-AF15-NA	269188
				20	20 A fixed	350 A fixed	NZMH2-AF20-NA	269189
				25	25 A fixed	350 A fixed	NZMH2-AF25-NA	269190
				30	30 A fixed	350 A fixed	NZMH2-AF30-NA	269191
				35	35 A fixed	8 - 10	NZMH2-AF35-NA	269192
				40	40 A fixed	8 - 10	NZMH2-AF40-NA	269193
				45	45 A fixed	6 - 10	NZMH2-AF45-NA	269194
				50	50 A fixed	6 - 10	NZMH2-AF50-NA	269195
				60	60 A fixed	6 - 10	NZMH2-AF60-NA	269196
				70	70 A fixed	6 - 10	NZMH2-AF70-NA	269197
				80	80 A fixed	6 - 10	NZMH2-AF80-NA	269198
				90	90 A fixed	6 - 10	NZMH2-AF90-NA	269199
				100	100 A fixed	6 - 10	NZMH2-AF100-NA	269200
				110	110 A fixed	6 - 10	NZMH2-AF110-NA	269201
				125	125 A fixed	6 - 10	NZMH2-AF125-NA	269202
				150	150 A fixed	6 - 10	NZMH2-AF150-NA	269203
				175	175 A fixed	6 - 10	NZMH2-AF175-NA	269204
				200	200 A fixed	6 - 10	NZMH2-AF200-NA	269205
				225	225 A fixed	6 - 10	NZMH2-AF225-NA	271103
				250	250 A fixed	6 - 10	NZMH2-AF250-NA	271104
100	100	50	-	150	150 A fixed	6 - 10	NZMH2-AF150-NA	269203
				175	175 A fixed	6 - 10	NZMH2-AF175-NA	269204
				200	200 A fixed	6 - 10	NZMH2-AF200-NA	269205
				225	225 A fixed	6 - 10	NZMH2-AF225-NA	271103
				250	250 A fixed	6 - 10	NZMH2-AF250-NA	271104

Circuit breakers UL/CSA, IEC, thermomagnetic releases, 3 pole
NzM...AF...NA

Fixed mounting with box terminals

Part no. Article no. Std. pack Information relevant for export to North America



Part no.	Article no.	Std. pack	Information relevant for export to North America
NZMH2-AF15-BT-NA	107809	1 Off	Product Standards UL File No. E31593
NZMH2-AF20-BT-NA	107810		UL Category Control No. DIVQ
NZMH2-AF25-BT-NA	107811		CSA File No. 022086
NZMH2-AF30-BT-NA	107812		CSA Class No. 1432-01
NZMH2-AF35-BT-NA	107813		North America Certification Specially designed for NA
NZMH2-AF40-BT-NA	107814		UL listed, CSA certified
NZMH2-AF45-BT-NA	107815		Yes
NZMH2-AF50-BT-NA	107816		Suitable for Feeder circuits, branch circuits
NZMH2-AF60-BT-NA	107817		Current Limiting Circuit breaker Yes
NZMH2-AF70-BT-NA	107818		Max. Voltage Rating 600Y/347 V, 480 V
NZMH2-AF80-BT-NA	107819		Degree of Protection IEC: IP20; UL/CSA Type: -
NZMH2-AF90-BT-NA	107820		
NZMH2-AF100-BT-NA	107821		
NZMH2-AF110-BT-NA	107822		
NZMH2-AF125-BT-NA	107823		
NZMH2-AF150-BT-NA	107824		
NZMH2-AF175-BT-NA	107825		
NZMH2-AF200-BT-NA	107826		
NZMH2-AF225-BT-NA	107827		
NZMH2-AF250-BT-NA	107828		

Rated current =
Rated uninterrupted current
 $I_n = I_u$
A

Setting range short-circuit release
Non-delayed
 $I_i = I_n \times \dots$



Fixed mounting with screw terminals
Part no.

Article no.

Short-circuit protection

- Motor protection in conjunction with contactor and overload relay
- with short-circuit release
 - without overload release I_r

Basic switching capacity

WA_SG168221_L Symbolphoto



Rated current (A)	Setting range short-circuit release	Terminal type	Article no.
1,2	7 - 12	Screw terminals	
2	6 - 11	as accessories	
3	6 - 11		
5	6 - 11		
8	6 - 11		
12	7 - 12		
18	7 - 12		
26	8 - 13		
33	8 - 14		
40	8 - 14		
50	8 - 14		
63	8 - 14		
80	8 - 14		
100	8 - 13		

WA_SG02322_L Symbolphoto



Rated current (A)	Setting range short-circuit release	Part no.	Article no.
1,6	8 - 14	NZMB2-S1,6-CNA	269472
2,4	8 - 14	NZMB2-S2,4-CNA	269473
5	6 - 11	NZMB2-S5-CNA	103034
8	6 - 11	NZMB2-S8-CNA	103035
12	7 - 12	NZMB2-S12-CNA	103036
18	7 - 12	NZMB2-S18-CNA	103037
26	8 - 13	NZMB2-S26-CNA	103038
33	8 - 14	NZMB2-S33-CNA	103039
40	8 - 14	NZMB2-S40-CNA	269243
50	8 - 14	NZMB2-S50-CNA	269244
63	8 - 14	NZMB2-S63-CNA	269245
80	8 - 14	NZMB2-S80-CNA	269246
100	8 - 14	NZMB2-S100-CNA	269247
125	8 - 14	NZMB2-S125-CNA	269248
160	8 - 14	NZMB2-S160-CNA	269249
200	8 - 13	NZMB2-S200-CNA	269250
250	8 - 10	NZMB2-S250-CNA	102478

Fixed mounting with box terminals
Part no.

Article no.

Std. pack

Information relevant for export to North America



For further terminal types
see accessories

Part no.	Article no.	Std. pack	Information relevant for export to North America
NZMB1-S1,2-CNA	102906	1 Off	Product Standards UL File No. UL Category Control No. CSA File No. CSA Class No. North America Certification Conditions of Acceptability
NZMB1-S2-CNA	102907		UL 489; CSA-C22.2 No. 5-09 E31593 DKPU2 022086 1432-01 UL recognized, CSA certified Only used in motor circuits in conjunction with suitable contactor and overload relay. SCCR value applies for complete combination starter only, consisting of instantaneous trip circuit breaker, contactor and overload relay.
NZMB1-S3-CNA	102908		
NZMB1-S5-CNA	102909		
NZMB1-S8-CNA	103020		
NZMB1-S12-CNA	103021		
NZMB1-S18-CNA	103022		
NZMB1-S26-CNA	103023		
NZMB1-S33-CNA	103024		
NZMB1-S40-CNA	281263		
NZMB1-S50-CNA	281264		
NZMB1-S63-CNA	281265		
NZMB1-S80-CNA	281266		
NZMB1-S100-CNA	281267		

Part no.	Article no.	Std. pack	Information relevant for export to North America
NZMB2-S1,6-BT-CNA	107651	1 Off	Product Standards UL File No. UL Category Control No. CSA File No. CSA Class No. North America Certification Conditions of Acceptability
NZMB2-S2,4-BT-CNA	107652		UL 489; CSA-C22.2 No. 5-09 E31593 DKPU2 022086 1432-01 UL recognized, CSA certified Only used in motor circuits in conjunction with suitable contactor and overload relay. SCCR value applies for complete combination starter only, consisting of instantaneous trip circuit breaker, contactor and overload relay.
NZMB2-S5-BT-CNA	107653		
NZMB2-S8-BT-CNA	107654		
NZMB2-S12-BT-CNA	107655		
NZMB2-S18-BT-CNA	107656		
NZMB2-S26-BT-CNA	107657		
NZMB2-S33-BT-CNA	107658		
NZMB2-S40-BT-CNA	107659		
NZMB2-S50-BT-CNA	107660		
NZMB2-S63-BT-CNA	107661		
NZMB2-S80-BT-CNA	107662		
NZMB2-S100-BT-CNA	107663		
NZMB2-S125-BT-CNA	107664		
NZMB2-S160-BT-CNA	107665		
NZMB2-S200-BT-CNA	107666		
NZMB2-S250-BT-CNA	107667		

Specially designed for NA
Suitable for
Current Limiting Circuit breaker
Max. Voltage Rating
Degree of Protection

Yes
Branch circuits, feeder circuits
No
600Y/347 V, 480 V
UL/CSA Type: -

Rated current = Rated uninterrupted current $I_n = I_u$ A	Setting range Short-circuit releases Non-delayed $I_r = I_n \times \dots$	Fixed mounting with screw terminals Part no.	Article no.	Std. pack
--	---	--	-------------	-----------



Short-circuit protection

- Motor protection in conjunction with contactor and overload relay
- With short-circuit releases
 - Without overload releases I_r

Normal switching capacity

WA_SG168221_L Symbolphoto



Rated current (A)	Setting range	Part no.	Article no.	Std. pack
1,2	7 - 12	NZMN1-S1,2-CNA	103025	1 Off
2	6 - 11	NZMN1-S2-CNA	103026	
3	6 - 11	NZMN1-S3-CNA	103027	
5	6 - 11	NZMN1-S5-CNA	103028	
8	6 - 11	NZMN1-S8-CNA	103029	
12	7 - 12	NZMN1-S12-CNA	103030	
18	7 - 12	NZMN1-S18-CNA	103031	
26	8 - 13	NZMN1-S26-CNA	103032	
33	8 - 14	NZMN1-S33-CNA	103033	
40	8 - 14	NZMN1-S40-CNA	281276	
50	8 - 14	NZMN1-S50-CNA	281277	
63	8 - 14	NZMN1-S63-CNA	281278	
80	8 - 14	NZMN1-S80-CNA	281279	
100	8 - 13	NZMN1-S100-CNA	281280	

WA_SG02322_L Symbolphoto



Rated current (A)	Setting range	Part no.	Article no.	Std. pack
1,6	8 - 14	NZMN2-S1,6-CNA	269478	1 Off
2,4	8 - 14	NZMN2-S2,4-CNA	269479	
5	6 - 11	NZMN2-S5-CNA	103040	
8	6 - 11	NZMN2-S8-CNA	103041	
12	7 - 12	NZMN2-S12-CNA	103042	
18	7 - 12	NZMN2-S18-CNA	103043	
26	8 - 13	NZMN2-S26-CNA	103044	
33	8 - 14	NZMN2-S33-CNA	103045	
40	8 - 14	NZMN2-S40-CNA	269255	
50	8 - 14	NZMN2-S50-CNA	269256	
63	8 - 14	NZMN2-S63-CNA	269257	
80	8 - 14	NZMN2-S80-CNA	269258	
100	8 - 14	NZMN2-S100-CNA	269259	
125	8 - 14	NZMN2-S125-CNA	269260	
160	8 - 14	NZMN2-S160-CNA	269261	
200	8 - 13	NZMN2-S200-CNA	269262	
250	8 - 10	NZMN2-S250-CNA	102479	

High switching capacity

WA_SG02322_L Symbolphoto



Rated current (A)	Setting range	Part no.	Article no.	Std. pack
1,6	8 - 14	NZMH2-S1,6-CNA	269482	1 Off
2,4	8 - 14	NZMH2-S2,4-CNA	269483	
5	6 - 11	NZMH2-S5-CNA	103046	
8	6 - 11	NZMH2-S8-CNA	103047	
12	7 - 12	NZMH2-S12-CNA	103048	
18	5 - 9	NZMH2-S18-CNA	103049	
26	8 - 13	NZMH2-S26-CNA	103050	
33	8 - 14	NZMH2-S33-CNA	103051	
40	8 - 14	NZMH2-S40-CNA	269267	
50	8 - 14	NZMH2-S50-CNA	269268	
63	8 - 14	NZMH2-S63-CNA	269269	
80	8 - 14	NZMH2-S80-CNA	269270	
100	8 - 14	NZMH2-S100-CNA	269271	
125	8 - 14	NZMH2-S125-CNA	269272	
160	8 - 13	NZMH2-S160-CNA	269273	
200	8 - 10	NZMH2-S200-CNA	269274	
250	8 - 14	NZMH2-S250-CNA	102490	

Information relevant for export to North America




Product Standards	UL 489; CSA-C22.2 No. 5-09
UL File No.	E31593
UL Category Control No.	DKPU2
CSA File No.	022086
CSA Class No.	1432-01
North America Certification	UL recognized, CSA certified
Conditions of Acceptability	Only used in motor circuits in conjunction with suitable contactor and overload relay. SCCR value applies for complete combination starter only, consisting of instantaneous trip circuit breaker, contactor and overload relay.
Specially designed for NA	Yes
Suitable for	Branch circuits, feeder circuits
Current Limiting Circuit breaker	No
Max. Voltage Rating	480Y/277 V
Degree of Protection	UL/CSA Type: -

For further terminal types see accessories

Product Standards	UL 489; CSA-C22.2 No. 5-09
UL File No.	E31593
UL Category Control No.	DKPU2
CSA File No.	022086
CSA Class No.	1432-01
NA Certification	UL recognized, CSA certified
Conditions of Acceptability	Only used in motor circuits in conjunction with suitable contactor and overload relay. SCCR value applies for complete combination starter only, consisting of instantaneous trip circuit breaker, contactor and overload relay.
Specially designed for NA	Yes
Suitable for	Branch circuits, feeder circuits
Current Limiting Circuit breaker	No
Max. Voltage Rating	600Y/347 V, 480 V
Degree of Protection	UL/CSA Type: -

Product Standards	UL 489; CSA-C22.2 No. 5-09
UL File No.	E31593
UL Category Control No.	DKPU2
CSA File No.	022086
CSA Class No.	1432-01
NA Certification	UL recognized, CSA certified
Conditions of Acceptability	Only used in motor circuits in conjunction with suitable contactor and overload relay. SCCR value applies for complete combination starter only, consisting of instantaneous trip circuit breaker, contactor and overload relay.
Specially designed for NA	Yes
Suitable for	Branch circuits, feeder circuits
Current Limiting Circuit breaker	No
Max. Voltage Rating	600Y/347 V, 480 V
Degree of Protection	UL/CSA Type: -

Switching capacity				Rated current = Rated uninter- rupted current	Setting range		Fixed mounting with screw terminals		
SCCR 480Y/277 V 60 Hz	SCCR 480 V 60 Hz	SCCR 600Y/347 V 60 Hz	SCCR 600 V 60 Hz		Part no.	Article no.	Std. pack	Overload releases	Short-circuit releases Non-delayed
I_{cu} kA	I_{cu} kA	I_{cu} kA	I_{cu} kA	$I_n = I_u$ A	I_r A		$I_t = I_n \times \dots$		



System and cable protection

Adjustable overload release I_r
R.m.s. value measurement and "thermal memory"

Normal switching capacity

	35	35	25	-	40	20 - 40	2 - 12	NZMN2-AX40-NA*	195224	1 Off
					100	40 - 100	2 - 12	NZMN2-AX100-NA	195225	
					160	64 - 160	2 - 12	NZMN2-AX160-NA	195226	
					250	100 - 250	2 - 12	NZMN2-AX250-NA	195227	
*For availability information please contact your local Eaton sales team.										
	42	42	35	35	250	100 - 250	2 - 11	NZMN3-AX250-NA	192484	1 Off
					400	160 - 400	2 - 11	NZMN3-AX400-NA	192485	
					600	240 - 600	2 - 8	NZMN3-AX600-NA	192486	
	42	42	35	35	800	320 - 800	2 - 12	NZMN4-AX800-NA	192542	1 Off
					1000	400 - 1000	2 - 12	NZMN4-AX1000-NA	192543	
					1200	480 - 1200	2 - 12	NZMN4-AX1200-NA	192544	

Information relevant for export to North America




For further terminal types
see accessories

Product Standards	UL 489; CSA-C22.2 No. 5-09; IEC 60947-2; CE marking
UL File No.	E31593
UL Category Control No.	DIVQ
CSA File No.	022086
CSA Class No.	1432-01
North America Certification	UL listed, CSA certified
Specially designed for NA	Yes
Suitable for	Feeder circuits, branch circuits
Current Limiting Circuit breaker	Yes
Max. Voltage Rating	600Y/347 V, 480 V
Degree of Protection	IEC: IP20; UL/CSA Type: -

Product Standards	UL 489; CSA-C22.2 No. 5-09; IEC 60947-2; CE marking
UL File No.	E31593
UL Category Control No.	DIVQ
CSA File No.	022086
CSA Class No.	1432-01
North America Certification	UL listed, CSA certified
Specially designed for NA	Yes
Suitable for	Feeder circuits, branch circuits
Current Limiting Circuit breaker	Yes
Max. Voltage Rating	600 V
Degree of Protection	IEC: IP20; UL/CSA Type: -

Fixed mounting with screw terminals







Switching capacity				Rated current =	Setting range		Part no.	Article no.	Std. pack
SCCR	SCCR	SCCR	SCCR	Rated	Overload	Short-circuit			
480Y/277 V	480 V	600Y/347 V	600 V	uninter-	releases	releases			
60 Hz	60 Hz	60 Hz	60 Hz	rupted		Non-delayed			
				current					
I_{cu}	I_{cu}	I_{cu}	I_{cu}	$I_n = I_u$	I_r	$I_s = I_p \times \dots$			
kA	kA	kA	kA	A	A				



System and cable protection

Adjustable overload release I_r
R.m.s. value measurement and "thermal memory"

High switching capacity

	100	100	50	-	40	20 - 40	2 - 12	NZMH2-AX40-NA*	195228	1 Off	
					100	40 - 100	2 - 12	NZMH2-AX100-NA	195229		
					160	64 - 160	2 - 12	NZMH2-AX160-NA	195230		
					250	100 - 250	2 - 12	NZMH2-AX250-NA	195231		
*For availability information please contact your local Eaton sales team.											
	100	100	50	50	250	100 - 250	2 - 11	NZMH3-AX250-NA	192496	1 Off	
					400	160 - 400	2 - 11	NZMH3-AX400-NA	192497		
					600	240 - 600	2 - 8	NZMH3-AX600-NA	192498		
	65*	65*	50	50	800	320 - 800	2 - 12	NZMH4-AX800-NA	192560	1 Off	
					1000	400 - 1000	2 - 12	NZMH4-AX1000-NA	192561		
					1200	480 - 1200	2 - 12	NZMH4-AX1200-NA	192562		

*For further information please contact your Eaton sales person

Information relevant for export to North America




For further terminal types
see accessories

Product Standards	UL 489; CSA-C22.2 No. 5-09; IEC 60947-2; CE marking
UL File No.	E31593
UL Category Control No.	DIVQ
CSA File No.	022086
CSA Class No.	1432-01
North America Certification	UL listed, CSA certified
Specially designed for NA	Yes
Suitable for	Feeder circuits, branch circuits
Current Limiting Circuit breaker	Yes
Max. Voltage Rating	600Y/347 V, 480 V
Degree of Protection	IEC: IP20; UL/CSA Type: -

Product Standards	UL 489; CSA-C22.2 No. 5-09; IEC 60947-2; CE marking
UL File No.	E31593
UL Category Control No.	DIVQ
CSA File No.	022086
CSA Class No.	1432-01
North America Certification	UL listed, CSA certified
Specially designed for NA	Yes
Suitable for	Feeder circuits, branch circuits
Current Limiting Circuit breaker	Yes
Max. Voltage Rating	600 V
Degree of Protection	IEC: IP20; UL/CSA Type: -

Circuit breakers UL/CSA, IEC, electronic releases, 3 pole
NZM...MX...NA

Switching capacity				Rated current = Rated uninterrupted current	Setting range		Fixed mounting Part no.	Article no.
SCCR 480Y/277 V 60 Hz	SCCR 480 V 60 Hz	SCCR 600Y/347 V 60 Hz	SCCR 600 V 60 Hz		Overload releases	Short-circuit releases Non-delayed		
I_{cu} kA	I_{cu} kA	I_{cu} kA	I_{cu} kA	$I_n = I_u$ A	I_r A	$I_s = I_p \times \dots$		



Motor protection 100 % rated

Adjustable overload releases
For use in motor circuits with contactor.
Additional motor protective characteristics (calibration) to UL508, CSA-C22.2 No. 14-05.

Normal switching capacity

I_{cu}	I_{cu}	I_{cu}	I_{cu}	$I_n = I_u$	I_r	$I_s = I_p \times \dots$	Part no.	Article no.
35	35	-	-	90	36-90	2 - 18	NZMN2-MX90-NA	192523
				140	56-140	2 - 18	NZMN2-MX140-NA	192524
				200	80-200	2 - 15	NZMN2-MX200-NA	192439



High switching capacity

I_{cu}	I_{cu}	I_{cu}	I_{cu}	$I_n = I_u$	I_r	$I_s = I_p \times \dots$	Part no.	Article no.
100	100	-	-	90	36-90	2 - 18	NZMH2-MX90-NA	192462
				140	56-140	2 - 18	NZMH2-MX140-NA	192463
				200	80-200	2 - 15	NZMH2-MX200-NA	192464



I_{cu}	I_{cu}	I_{cu}	I_{cu}	$I_n = I_u$	I_r	$I_s = I_p \times \dots$	Part no.	Article no.
100	100	-	-	250	100 - 250	2 - 18	NZMH3-MX250-NA	193347
				350	140 - 350	2 - 15	NZMH3-MX350-NA	193348
				450	180 - 450	2 - 12	NZMH3-MX450-NA	193349



Circuit breakers UL/CSA, IEC, electronic releases, 3 pole
NZM...MX...NA

Fixed mounting with box terminals

Part no. Article no. Std. pack Information relevant for export to North America




Part no.	Article no.	Std. pack	Information relevant for export to North America
NZMN2-MX90-BT-NA	192440	1 Off	Product Standards UL File No. UL CCN CSA File No. CSA Class No. NA Certification Specially designed for NA Suitable for Current Limiting CB Max. Voltage Rating Degree of Protection
NZMN2-MX140-BT-NA	192441		UL 489; CSA-C22.2 No. 5-09; IEC 60947-2; CE marking E31593 DIVQ 022086 1432-01 UL Listed, CSA certified Yes, additionally calibrated according to UL 508 Feeder circuits, branch circuits Yes 480 V IEC: IP20; UL/CSA Type: -
NZMN2-MX200-BT-NA	192442		

Part no.	Article no.	Std. pack	Information relevant for export to North America
NZMH2-MX90-BT-NA	192465	1 Off	Product Standards UL File No. UL CCN CSA File No. CSA Class No. NA Certification Specially designed for NA Suitable for Current Limiting CB Max. Voltage Rating Degree of Protection
NZMH2-MX140-BT-NA	192466		UL 489; CSA-C22.2 No. 5-09; IEC 60947-2; CE marking E31593 DIVQ 022086 1432-01 UL Listed, CSA certified Yes, additionally calibrated according to UL 508 Feeder circuits, branch circuits Yes 480 V IEC: IP20; UL/CSA Type: -
NZMH2-MX200-BT-NA	192467		

Part no.	Article no.	Std. pack	Information relevant for export to North America
Terminals as accessory		1 Off	Product Standards UL File No. UL CCN CSA File No. CSA Class No. NA Certification Specially designed for NA Suitable for Current Limiting CB Max. Voltage Rating Degree of Protection
			UL 489; CSA-C22.2 No. 5-09; IEC 60947-2; CE marking E31593 DIVQ 022086 1432-01 UL Listed, CSA certified Yes, additionally calibrated according to UL 508 Feeder circuits, branch circuits Yes 600 V IEC: IP20; UL/CSA Type: -

Switching capacity				Rated current = Rated uninterrupted current	Setting range		Fixed mounting Part no.	Article no.
SCCR 480Y/277 V 60 Hz	SCCR 480 V 60 Hz	SCCR 600Y/347 V 60 Hz	SCCR 600 V 60 Hz		Overload releases	Short-circuit releases Non-delayed		
I_{cu} kA	I_{cu} kA	I_{cu} kA	I_{cu} kA	$I_n = I_u$ A	I_r A	$I_s = I_n \times \dots$		



System and cable protection, selectivity and generator protection

Adjustable overload release I_r
R.m.s. value measurement and "thermal memory"

Normal switching capacity

WA_SG02622_L Symbolphoto	35	35	25	-	100	40 - 100	2 - 18	NZMN2-VX100-NA	192448
					160	64 - 160	2 - 18	NZMN2-VX160-NA	192449
					250	100 - 250	2 - 12	NZMN2-VX250-NA	192450



SG09021_L Symbolphoto	42	42	35	35	250	100 - 250	2 - 18	NZMN3-VX250-NA	192502
					400	160 - 400	2 - 12	NZMN3-VX400-NA	192503
					600	240 - 600	2 - 8	NZMN3-VX600-NA	192504



WA_SG01022_L Symbolphoto	42	42	35	35	800	320 - 800	2 - 18	NZMN4-VX800-NA	192551
					1000	400 - 1000	2 - 18	NZMN4-VX1000-NA	192552
					1200	480 - 1200	2 - 15	NZMN4-VX1200-NA	192553



Fixed mounting with box terminals

Part no. Article no. Std. pack Information relevant for export to North America




NZMN2-VX100-BT-NA	192517	1 Off		Product Standards	UL 489; CSA-C22.2 No. 5-09; IEC 60947-2; CE marking
NZMN2-VX160-BT-NA	192518			UL File No.	E31593
NZMN2-VX250-BT-NA	192519			UL Category Control No.	DIVQ
				CSA File No.	022086
				CSA Class No.	1432-01
				North America Certification	UL listed, CSA certified
				Specially designed for NA	Yes
				Suitable for	Feeder circuits, branch circuits
				Current Limiting Circuit breaker	Yes
				Max. Voltage Rating	600Y/347 V, 480 V
				Degree of Protection	IEC: IP20; UL/CSA Type: -

Terminals as accessory		1 Off		Product Standards	UL 489; CSA-C22.2 No. 5-09; IEC 60947-2; CE marking
				UL File No.	E31593
				UL Category Control No.	DIVQ
				CSA File No.	022086
				CSA Class No.	1432-01
				North America Certification	UL listed, CSA certified
				Specially designed for NA	Yes
				Suitable for	Feeder circuits, branch circuits
				Current Limiting Circuit breaker	Yes
				Max. Voltage Rating	600 V
				Degree of Protection	IEC: IP20; UL/CSA Type: -

-		1 Off		Product Standards	UL 489; CSA-C22.2 No. 5-09; IEC 60947-2; CE marking
				UL File No.	E31593
				UL Category Control No.	DIVQ
				CSA File No.	022086
				CSA Class No.	1432-01
				North America Certification	UL listed, CSA certified
				Specially designed for NA	Yes
				Suitable for	Feeder circuits, branch circuits
				Current Limiting Circuit breaker	No
				Max. Voltage Rating	600 V
				Degree of Protection	IEC: IP20; UL/CSA Type: -

Switching capacity				Rated current = Rated uninterrupted current	Setting range		Fixed mounting Part no.	Article no.
SCCR 480Y/277 V 60 Hz	SCCR 480 V 60 Hz	SCCR 600Y/347 V 60 Hz	SCCR 600 V 60 Hz		Overload releases	Short-circuit releases Non-delayed		
I_{cu} kA	I_{cu} kA	I_{cu} kA	I_{cu} kA	$I_n = I_u$ A	I_r A	$I_s = I_n \times \dots$		



System and cable protection, selectivity and generator protection

Adjustable overload release I_r
R.m.s. value measurement and "thermal memory"

Normal switching capacity

WA_SG02622_L Symbolphoto	I_{cu}	I_{cu}	I_{cu}	I_{cu}	Rated current	Overload releases	Short-circuit releases	Part no.	Article no.
	35	35	25	-	100	40 - 100	2 - 18	NZMN2-VX100-T-NA	306506
					160	64 - 160	2 - 18	NZMN2-VX160-T-NA	306507
					250	100 - 250	2 - 12	NZMN2-VX250-T-NA	306508

SG09021_L Symbolphoto	I_{cu}	I_{cu}	I_{cu}	I_{cu}	Rated current	Overload releases	Short-circuit releases	Part no.	Article no.
	42	42	35	35	250	100 - 250	2 - 18	NZMN3-VX250-T-NA	306530
					400	160 - 400	2 - 12	NZMN3-VX400-T-NA	306543
					600	240 - 600	2 - 8	NZMN3-VX600-T-NA	306556

WA_SG01022_L Symbolphoto	I_{cu}	I_{cu}	I_{cu}	I_{cu}	Rated current	Overload releases	Short-circuit releases	Part no.	Article no.
	42	42	35	35	800	320 - 800	2 - 18	NZMN4-VX800-T-NA	306569
					1000	400 - 1000	2 - 18	NZMN4-VX1000-T-NA	306574
					1200	480 - 1200	2 - 15	NZMN4-VX1200-T-NA	306585

Information relevant for export to North America




Product Standards	UL 489; CSA-C22.2 No. 5-09; IEC 60947-2; CE marking
UL File No.	E31593
UL Category Control No.	DIVQ
CSA File No.	022086
CSA Class No.	1432-01
North America Certification	UL listed, CSA certified
Specially designed for NA	Yes, additionally calibrated according to UL 508
Suitable for	Feeder circuits, branch circuits
Current Limiting Circuit breaker	Yes
Max. Voltage Rating	480 V
Degree of Protection	IEC: IP20; UL/CSA Type: -

Product Standards	UL 489; CSA-C22.2 No. 5-09; IEC 60947-2; CE marking
UL File No.	
UL Category Control No.	
CSA File No.	
CSA Class No.	
North America Certification	UL listed, CSA certified
Specially designed for NA	Yes, additionally calibrated according to UL 508
Suitable for	Feeder circuits, branch circuits
Current Limiting Circuit breaker	Yes
Max. Voltage Rating	600 V
Degree of Protection	IEC: IP20; UL/CSA Type: -

Product Standards	UL 489; CSA-C22.2 No. 5-09; IEC 60947-2; CE marking
UL File No.	
UL Category Control No.	
CSA File No.	
CSA Class No.	
North America Certification	UL listed, CSA certified
Specially designed for NA	Yes, additionally calibrated according to UL 508
Suitable for	Feeder circuits, branch circuits
Current Limiting Circuit breaker	Yes
Max. Voltage Rating	480 V
Degree of Protection	IEC: IP20; UL/CSA Type: -

Switching capacity				Rated current = Rated uninterrupted current	Setting range		Fixed mounting Part no.	Article no.
SCCR 480Y/277 V 60 Hz	SCCR 480 V 60 Hz	SCCR 600Y/347 V 60 Hz	SCCR 600 V 60 Hz		Overload releases	Short-circuit releases Non-delayed		
I_{cu} kA	I_{cu} kA	I_{cu} kA	I_{cu} kA	$I_n = I_u$ A	I_r A	$I_s = I_p \times \dots$		



System and cable protection, selectivity and generator protection

Adjustable overload release Ir
R.m.s. value measurement and "thermal memory"

High switching capacity

WA_SG02622_L Symbolphoto	100	100	50	-	100	40 - 100	2 - 18	NZMH2-VX100-NA	192473
					160	64 - 160	2 - 18	NZMH2-VX160-NA	192474
					250	100 - 250	2 - 12	NZMH2-VX250-NA	192475

SG09021_L Symbolphoto	100	100	50	50	250	100 - 250	2 - 18	NZMH3-VX250-NA	192533
					400 <td>160 - 400 <td>2 - 12 <td>NZMH3-VX400-NA <td>192534</td> </td></td></td>	160 - 400 <td>2 - 12 <td>NZMH3-VX400-NA <td>192534</td> </td></td>	2 - 12 <td>NZMH3-VX400-NA <td>192534</td> </td>	NZMH3-VX400-NA <td>192534</td>	192534
					600 <td>240 - 600 <td>2 - 8 <td>NZMH3-VX600-NA <td>192535</td> </td></td></td>	240 - 600 <td>2 - 8 <td>NZMH3-VX600-NA <td>192535</td> </td></td>	2 - 8 <td>NZMH3-VX600-NA <td>192535</td> </td>	NZMH3-VX600-NA <td>192535</td>	192535

WA_SG01022_L Symbolphoto	65*	65*	50	50	800	320 - 800	2 - 18	NZMH4-VX800-NA	192569
					1000 <td>400 - 1000 <td>2 - 18 <td>NZMH4-VX1000-NA <td>192570</td> </td></td></td>	400 - 1000 <td>2 - 18 <td>NZMH4-VX1000-NA <td>192570</td> </td></td>	2 - 18 <td>NZMH4-VX1000-NA <td>192570</td> </td>	NZMH4-VX1000-NA <td>192570</td>	192570
					1200 <td>480 - 1200 <td>2 - 15 <td>NZMH4-VX1200-NA <td>192571</td> </td></td></td>	480 - 1200 <td>2 - 15 <td>NZMH4-VX1200-NA <td>192571</td> </td></td>	2 - 15 <td>NZMH4-VX1200-NA <td>192571</td> </td>	NZMH4-VX1200-NA <td>192571</td>	192571

*For further information please contact your local Eaton sales team.

Fixed mounting with box terminals


Part no.	Article no.	Std. pack	Information relevant for export to North America

NZMH2-VX100-BT-NA	192459	1 Off	Product Standards UL File No.	UL 489; CSA-C22.2 No. 5-09; IEC 60947-2; CE marking E31593
NZMH2-VX160-BT-NA	192460		UL Category Control No.	DIVQ
NZMH2-VX250-BT-NA	192461		CSA File No.	022086
			CSA Class No.	1432-01
			North America Certification	UL listed, CSA certified
			Specially designed for NA	Yes
			Suitable for	Feeder circuits, branch circuits
			Current Limiting Circuit breaker	Yes
			Max. Voltage Rating	600Y/347 V, 480 V
			Degree of Protection	IEC: IP20; UL/CSA Type: -

Terminals as accessory		1 Off	Product Standards	UL 489; CSA-C22.2 No. 5-09; IEC 60947-2; CE marking
			UL File No.	E31593
			UL Category Control No.	DIVQ
			CSA File No.	022086
			CSA Class No.	1432-01
			North America Certification	UL listed, CSA certified
			Specially designed for NA	Yes
			Suitable for	Feeder circuits, branch circuits
			Current Limiting Circuit breaker	Yes
			Max. Voltage Rating	600 V
			Degree of Protection	IEC: IP20; UL/CSA Type: -

-		1 Off	Product Standards	UL 489; CSA-C22.2 No. 5-09; IEC 60947-2; CE marking
			UL File No.	E31593
			UL Category Control No.	DIVQ
			CSA File No.	022086
			CSA Class No.	1432-01
			North America Certification	UL listed, CSA certified
			Specially designed for NA	Yes
			Suitable for	Feeder circuits, branch circuits
			Current Limiting Circuit breaker	No
			Max. Voltage Rating	600 V
			Degree of Protection	IEC: IP20; UL/CSA Type: -

Switching capacity				Rated current = Rated uninterrupted current	Setting range		Fixed mounting Part no.	Article no.
SCCR 480Y/277 V 60 Hz	SCCR 480 V 60 Hz	SCCR 600Y/347 V 60 Hz	SCCR 600 V 60 Hz		Overload releases	Short-circuit releases Non-delayed		
I_{cu} kA	I_{cu} kA	I_{cu} kA	I_{cu} kA	$I_n = I_u$ A	I_r A	$I_s = I_p \times \dots$		



System and cable protection, selectivity and generator protection

Adjustable overload release I_r
R.m.s. value measurement and "thermal memory"

Normal switching capacity

WA_SG02622_L Symbolphoto	I_{cu}	I_{cu}	I_{cu}	I_{cu}	$I_n = I_u$	Overload releases	Short-circuit releases	Part no.	Article no.
	100	100	50	-	100	40 - 100	2 - 18	NZMH2-VX100-T-NA	306518
					160	64 - 160	2 - 18	NZMH2-VX160-T-NA	306528
					250	100 - 250	2 - 12	NZMH2-VX250-T-NA	306529

SG09021_L Symbolphoto	I_{cu}	I_{cu}	I_{cu}	I_{cu}	$I_n = I_u$	Overload releases	Short-circuit releases	Part no.	Article no.
	100	100	50	50	250	100 - 250	2 - 18	NZMH3-VX250-T-NA	306557
					400	160 - 400	2 - 12	NZMH3-VX400-T-NA	306558
					600	240 - 600	2 - 8	NZMH3-VX600-T-NA	306560

WA_SG01022_L Symbolphoto	I_{cu}	I_{cu}	I_{cu}	I_{cu}	$I_n = I_u$	Overload releases	Short-circuit releases	Part no.	Article no.
	65*	65*	50	50	800	320 - 800	2 - 18	NZMH4-VX800-T-NA	306586
					1000	400 - 1000	2 - 18	NZMH4-VX1000-T-NA	306587
					1200	480 - 1200	2 - 15	NZMH4-VX1200-T-NA	306588

*For further information please contact your local Eaton sales team.

Information relevant for export to North America




Product Standards	UL 489; CSA-C22.2 No. 5-09; IEC 60947-2; CE marking
UL File No.	E31593
UL Category Control No.	DIVQ
CSA File No.	022086
CSA Class No.	1432-01
North America Certification	UL listed, CSA certified
Specially designed for NA	Yes, additionally calibrated according to UL 508
Suitable for	Feeder circuits, branch circuits
Current Limiting Circuit breaker	Yes
Max. Voltage Rating	480 V
Degree of Protection	IEC: IP20; UL/CSA Type: -

Product Standards	UL 489; CSA-C22.2 No. 5-09; IEC 60947-2; CE marking
UL File No.	
UL Category Control No.	
CSA File No.	
CSA Class No.	
North America Certification	UL listed, CSA certified
Specially designed for NA	Yes, additionally calibrated according to UL 508
Suitable for	Feeder circuits, branch circuits
Current Limiting Circuit breaker	Yes
Max. Voltage Rating	600 V
Degree of Protection	IEC: IP20; UL/CSA Type: -

Product Standards	UL 489; CSA-C22.2 No. 5-09; IEC 60947-2; CE marking
UL File No.	
UL Category Control No.	
CSA File No.	
CSA Class No.	
North America Certification	UL listed, CSA certified
Specially designed for NA	Yes, additionally calibrated according to UL 508
Suitable for	Feeder circuits, branch circuits
Current Limiting Circuit breaker	Yes
Max. Voltage Rating	480 V
Degree of Protection	IEC: IP20; UL/CSA Type: -

Fixed mounting with screw terminals

Switching capacity				Rated current =	Setting range		Part no.	Article no.	Std. pack
SCCR 480Y/277 V 60 Hz	SCCR 480 V 60 Hz	SCCR 600Y/347 V 60 Hz	SCCR 600 V 60 Hz	Rated uninter- rupted current	Overload releases	Short-circuit releases Non-delayed			
I_{cu} kA	I_{cu} kA	I_{cu} kA	I_{cu} kA	$I_n = I_u$ A	I_r A	$I_s = I_n \times \dots$			



Motor protection

100% rated
Adjustable overload releases
For use in motor circuits with contactor.
Additional motor protective characteristics (calibration) to UL508, CSA-C22.2 No. 14-05.

Normal switching capacity

WA_SG02422_L Symbolphoto	35	35	25	-	90	36 - 90	2 - 18	NZMN2-PMX90-NA	192580	1 Off
					140	56 - 140	2 - 18	NZMN2-PMX140-NA	192581	
					200	80 - 200	2 - 15	NZMN2-PMX220-NA	192582	



WA_SG00822_L Symbolphoto	42	42	35	35	250	100 - 250	2 - 18	NZMN3-PMX250-NA	193350	1 Off
					350	140 - 350	2 - 15	NZMN3-PMX350-NA	193351	
					450	180 - 450	2 - 12	NZMN3-PMX450-NA	193352	



High switching capacity

WA_SG02422_L Symbolphoto	100	100	50	-	90	36 - 90	2 - 18	NZMH2-PMX90-NA	192583	1 Off
					140	56 - 140	2 - 18	NZMH2-PMX140-NA	192584	
					200	80 - 200	2 - 15	NZMH2-PMX200-NA	192585	



WA_SG00822_L Symbolphoto	100	100	50	50	250	100 - 250	2 - 18	NZMH3-PMX250-NA	193353	1 Off
					350	140 - 350	2 - 15	NZMH3-PMX350-NA	193354	
					450	180 - 450	2 - 12	NZMH3-PMX450-NA	193355	



Information relevant for export to North America



For further terminal types
see accessories


Product Standards	UL 489; CSA-C22.2 No. 5-09; IEC 60947-2; CE marking
UL File No.	E31593
UL Category Control No.	DIVQ
CSA File No.	022086
CSA Class No.	1432-01
North America Certification	UL listed, CSA certified
Specially designed for NA	Yes, additionally calibrated according to UL 508
Suitable for	Feeder circuits, branch circuits
Current Limiting Circuit breaker	Yes
Max. Voltage Rating	480 V
Degree of Protection	IEC: IP20; UL/CSA Type: -

Product Standards	UL 489; CSA-C22.2 No. 5-09; IEC 60947-2; CE marking
UL File No.	E31593
UL Category Control No.	DIVQ
CSA File No.	022086
CSA Class No.	1432-01
North America Certification	UL listed, CSA certified
Specially designed for NA	Yes, additionally calibrated according to UL 508
Suitable for	Feeder circuits, branch circuits
Current Limiting Circuit breaker	Yes
Max. Voltage Rating	600 V
Degree of Protection	IEC: IP20; UL/CSA Type: -

Product Standards	UL 489; CSA-C22.2 No. 5-09; IEC 60947-2; CE marking
UL File No.	E31593
UL Category Control No.	DIVQ
CSA File No.	022086
CSA Class No.	1432-01
North America Certification	UL listed, CSA certified
Specially designed for NA	Yes, additionally calibrated according to UL 508
Suitable for	Feeder circuits, branch circuits
Current Limiting Circuit breaker	Yes
Max. Voltage Rating	480 V
Degree of Protection	IEC: IP20; UL/CSA Type: -

Product Standards	UL 489; CSA-C22.2 No. 5-09; IEC 60947-2; CE marking
UL File No.	E31593
UL Category Control No.	DIVQ
CSA File No.	022086
CSA Class No.	1432-01
North America Certification	UL listed, CSA certified
Specially designed for NA	Yes, additionally calibrated according to UL 508
Suitable for	Feeder circuits, branch circuits
Current Limiting Circuit breaker	Yes
Max. Voltage Rating	600 V
Degree of Protection	IEC: IP20; UL/CSA Type: -

Switching capacity				Rated current =			Setting range			Fixed mounting with screw terminals		
SCCR	SCCR	SCCR	SCCR	Rated	Overload	Short-circuit	Part no.	Article no.	Std. pack			
480Y/277 V	480 V	600Y/347 V	600 V	uninterrupted	releases	releases						
60 Hz	60 Hz	60 Hz	60 Hz	current	Non-delayed	Non-delayed						
I_{cu}	I_{cu}	I_{cu}	I_{cu}	$I_n = I_u$	I_r	$I_s = I_n \times \dots$						
kA	kA	kA	kA	A	A							



System and cable protection, selectivity and generator protection For further terminal types see accessories

Fixed overload releases I_r

Normal switching capacity

WA_SG02422_L Symbolphoto	35	35	25	-	40	20 - 40	2 - 18	NZMN2-PX40-NA*	192572	1 Off	
					100	40 - 100	2 - 18	NZMN2-PX100-NA	192573		
					160	64 - 160	2 - 18	NZMN2-PX160-NA	192574		
					250	100 - 250	2 - 12	NZMN2-PX250-NA	192575		


*For availability information please contact your local Eaton sales team.

WA_SG00822_L Symbolphoto	42	42	35	35	250	100 - 250	2 - 18	NZMN3-PX250-NA	192586	1 Off	
					400	160 - 400	2 - 12	NZMN3-PX400-NA	192587		
					600	240 - 600	2 - 8	NZMN3-PX600-NA	192588		

SG10321_L Symbolphoto	42	42	35	35	800	320 - 800	2 - 18	NZMN4-PX800-NA	192592	1 Off	
					1000	400 - 1000	2 - 18	NZMN4-PX1000-NA	192593		
					1200	480 - 1200	2 - 15	NZMN4-PX1200-NA	192594		

Product Standards	UL 489; CSA-C22.2 No. 5-09; IEC 60947-2; CE marking
UL File No.	E31593
UL Category Control No.	DIVQ
CSA File No.	022086
CSA Class No.	1432-01
North America Certification	UL listed, CSA certified
Specially designed for NA	Yes
Suitable for	Feeder circuits, branch circuits
Current Limiting Circuit breaker	No
Max. Voltage Rating	600 V
Degree of Protection	IEC: IP20; UL/CSA Type: -

Switching capacity				Rated current =			Setting range			Fixed mounting with screw terminals		
SCCR	SCCR	SCCR	SCCR	Rated	Overload	Short-circuit	Part no.	Article no.	Std. pack			
480Y/277 V	480 V	600Y/347 V	600 V	uninter-	releases	releases						
60 Hz	60 Hz	60 Hz	60 Hz	rupted	Non-delayed	Non-delayed						
I_{cu}	I_{cu}	I_{cu}	I_{cu}	current								
kA	kA	kA	kA		A	A						



System and cable protection For further terminal types see accessories

Fixed overload releases I_r

High switching capacity

WA_SG02422_L Symbolphoto	100	100	50	-	40	20 - 40	2 - 18	NZMH2-PX40-NA*	192576	1 Off	
					100	40 - 100	2 - 18	NZMH2-PX100-NA	192577		
					160	64 - 160	2 - 18	NZMH2-PX160-NA	192578		
					250	100 - 250	2 - 12	NZMH2-PX250-NA	192579		

*For availability information please contact your local Eaton sales team.


WA_SG00822_L Symbolphoto	100	100	50	50	250	100 - 250	2 - 18	NZMH3-PX250-NA	192589	1 Off	
					400	160 - 400	2 - 12	NZMH3-PX400-NA	192590		
					600	240 - 600	2 - 8	NZMH3-PX600-NA	192591		

SG10321_L Symbolphoto	65*	65*	50	50	800	320 - 800	2 - 18	NZMH4-PX800-NA	192595	1 Off	
					1000	400 - 1000	2 - 18	NZMH4-PX1000-NA	192596		
					1200	480 - 1200	2 - 15	NZMH4-PX1200-NA	192597		

*SCCR values valid only until Q1/2023

Product Standards	UL 489; CSA-C22.2 No. 5-09; IEC 60947-2; CE marking
UL File No.	E31593
UL Category Control No.	DIVQ
CSA File No.	022086
CSA Class No.	1432-01
North America Certification	UL listed, CSA certified
Specially designed for NA	Yes
Suitable for	Feeder circuits, branch circuits
Current Limiting Circuit breaker	No
Max. Voltage Rating	600 V
Degree of Protection	IEC: IP20; UL/CSA Type: -

Switching capacity				Rated current = Rated uninterrupted current	Setting range			Fixed mounting	Article no.
SCCR 480Y/277 V 60 Hz	SCCR 480 V 60 Hz	SCCR 600Y/347 V 60 Hz	SCCR 600 V 60 Hz		Neutral conductor I_n , x % of phase conductor	Overload releases I_r	Short-circuit releases Non-delayed $I_s = I_n \times \dots$	Part no.	
I_{cu} kA	I_{cu} kA	I_{cu} kA	I_{cu} kA	$I_n = I_b$ A	I_r A				



System and cable protection

Fixed overload releases I_r

Basic switching capacity



25	25	-	-	60	100	60 A fixed	6 - 10	-
70	100	70 A fixed	6 - 10	-				
80	100	80 A fixed	6 - 10	-				
90	100	90 A fixed	6 - 10	-				
100	100	100 A fixed	6 - 10	-				
110	100	110 A fixed	6 - 10	-				
125	100	125 A fixed	6 - 10	-				
150	100	150 A fixed	6 - 10	-				
175	100	175 A fixed	6 - 10	-				
200	100	200 A fixed	6 - 10	-				
225	100	225 A fixed	6 - 10	-				
250	100	250 A fixed	6 - 10	-				

Normal switching capacity



35	35	-	-	60	100	60 A fixed	6 - 10	NZMN2-4-AF60-NA	190347
70	100	70 A fixed	6 - 10	-					
80	100	80 A fixed	6 - 10	-				NZMN2-4-AF80-NA	190348
90	100	90 A fixed	6 - 10	-					
100	100	100 A fixed	6 - 10	-				NZMN2-4-AF100-NA	190349
110	100	110 A fixed	6 - 10	-					
125	100	125 A fixed	6 - 10	-				NZMN2-4-AF125-NA	190350
150	100	150 A fixed	6 - 10	-				NZMN2-4-AF150-NA	190351
175	100	175 A fixed	6 - 10	-					
200	100	200 A fixed	6 - 10	-				NZMN2-4-AF200-NA	190352
225	100	225 A fixed	6 - 10	-				NZMN2-4-AF225-NA	190353
250	100	250 A fixed	6 - 10	-				NZMN2-4-AF250-NA	190354

High switching capacity



150	150	-	-	60	100	60 A fixed	6 - 10	-	
70	100	70 A fixed	6 - 10	-					
80	100	80 A fixed	6 - 10	-					
90	100	90 A fixed	6 - 10	-					
100	100	100 A fixed	6 - 10	-					
110	100	110 A fixed	6 - 10	-					
125	100	125 A fixed	6 - 10	-					
150	100	150 A fixed	6 - 10	-					
175	100	175 A fixed	6 - 10	-					
200	100	200 A fixed	6 - 10	-					
225	100	225 A fixed	6 - 10	-					
250	100	250 A fixed	6 - 10	-				NZMH2-4-AF250-NA	172967

Fixed mounting with box terminals

Part no. Article no. Std. pack Information relevant for export to North America



For further terminal types see accessories

NZMB2-4-AF60-BT-NA	153380	1 Off		Product Standards	UL 489; CSA-C22.2 No. 5-09; IEC 60947-2; CE marking
NZMB2-4-AF70-BT-NA	153381			UL File No.	E31593
NZMB2-4-AF80-BT-NA	153382			UL Category Control No.	DIVQ
NZMB2-4-AF90-BT-NA	153383			CSA File No.	-
NZMB2-4-AF100-BT-NA	153384			CSA Class No.	-
NZMB2-4-AF110-BT-NA	153385			North America Certification	UL listed
NZMB2-4-AF125-BT-NA	113011			Specially designed for NA	Yes
NZMB2-4-AF150-BT-NA	113012			Suitable for	Feeder circuits, branch circuits
NZMB2-4-AF175-BT-NA	113013			Current Limiting Circuit breaker	Yes
NZMB2-4-AF200-BT-NA	113014			Max. Voltage Rating	480 V
NZMB2-4-AF225-BT-NA	113015			Degree of Protection	IEC: IP20; UL/CSA Type: -
NZMB2-4-AF250-BT-NA	113016				

NZMN2-4-AF60-BT-NA	153386	1 Off		Product Standards	UL 489; CSA-C22.2 No. 5-09; IEC 60947-2; CE marking
NZMN2-4-AF70-BT-NA	153387			UL File No.	E31593
NZMN2-4-AF80-BT-NA	153388			UL Category Control No.	DIVQ
NZMN2-4-AF90-BT-NA	153389			CSA File No.	-
NZMN2-4-AF100-BT-NA	153390			CSA Class No.	-
NZMN2-4-AF110-BT-NA	153391			North America Certification	UL listed
NZMN2-4-AF125-BT-NA	113005			Specially designed for NA	Yes
NZMN2-4-AF150-BT-NA	113006			Suitable for	Feeder circuits, branch circuits
NZMN2-4-AF175-BT-NA	113007			Current Limiting Circuit breaker	Yes
NZMN2-4-AF200-BT-NA	113008			Max. Voltage Rating	480 V
NZMN2-4-AF225-BT-NA	113009			Degree of Protection	IEC: IP20; UL/CSA Type: -
NZMN2-4-AF250-BT-NA	113010				


NZMH2-4-AF60-BT-NA	153392	1 Off		Product Standards	UL 489; CSA-C22.2 No. 5-09; IEC 60947-2; CE marking
NZMH2-4-AF70-BT-NA	153393			UL File No.	E31593
NZMH2-4-AF80-BT-NA	153394			UL Category Control No.	DIVQ
NZMH2-4-AF90-BT-NA	153395			CSA File No.	-
NZMH2-4-AF100-BT-NA	153396			CSA Class No.	-
NZMH2-4-AF110-BT-NA	153397			North America Certification	UL listed
NZMH2-4-AF125-BT-NA	113017			Specially designed for NA	Yes
NZMH2-4-AF150-BT-NA	113018			Suitable for	Feeder circuits, branch circuits
NZMH2-4-AF175-BT-NA	113019			Current Limiting Circuit breaker	Yes
NZMH2-4-AF200-BT-NA	113020			Max. Voltage Rating	480 V
NZMH2-4-AF225-BT-NA	113021			Degree of Protection	IEC: IP20; UL/CSA Type: -
NZMH2-4-AF250-BT-NA	113022				


Switching capacity				Rated current =	Setting range	Fixed mounting	Article no.
SCCR	SCCR	SCCR	SCCR	Rated	Short-circuit	Part no.	
480Y/277 V	480 V	600Y/347 V	600 V	uninterrupted	release		
60 Hz	60 Hz	60 Hz	60 Hz	current			
I_{cu}	I_{cu}	I_{cu}	I_{cu}	$I_n = I_u$	I_i		
kA	kA	kA	kA	A	A		


Molded case switches for North America


With permanently set short-circuit release (self-protection)
Can be remotely operated with shunt release XU/XA, remote operator XR,
Can be equipped with trip-indicating auxiliary contact M22-K...

3 switch positions I, +, 0

	35	-	-	-	63	1250 A fixed	Screw terminals	
					100	1250 A fixed	as accessories	
					125	1250 A fixed		

	100	100	50	-	160	2500 A fixed	NS2-160-NA	102684
					200	2500 A fixed	NS2-200-NA	102685
					250	2500 A fixed	NS2-250-NA	102686

	100	100	50	50	400	6600 A fixed	NS3-400-NA	102687
					600	6600 A fixed	NS3-600-NA	102688

	65	65	42	42	800	25000 A fixed	NS4-800-NA	102689
					1000	25000 A fixed	NS4-1000-NA	102690
					1200	25000 A fixed	NS4-1200-NA	102691

Fixed mounting with box terminals

Part no. Article no. Std. pack Information relevant for export to North America



For further terminal types
see accessories

NS1-63-NA	102681	1 Off		Product Standards	UL 489; CSA-C22.2 No. 5-09; IEC 60947-2; CE marking
NS1-100-NA	102682			UL File No.	E148671
NS1-125-NA	102683			UL Category Control No.	WJAZ
				CSA File No.	022086
				CSA Class No.	4652-06
				North America Certification	UL listed, CSA certified
				Specially designed for NA	Yes
				Suitable for	Feeder circuits, branch circuits
				Current Limiting Circuit breaker	No
				Max. Voltage Rating	480Y/277 V
				Degree of Protection	IEC: IP20; UL/CSA Type: -

NS2-160-BT-NA	107578			Product Standards	UL 489; CSA-C22.2 No. 5-09; IEC 60947-2; CE marking
NS2-200-BT-NA	107579			UL File No.	E148671
NS2-250-BT-NA	107610			UL Category Control No.	WJAZ
				CSA File No.	022086
				CSA Class No.	4652-06
				North America Certification	UL listed, CSA certified
				Specially designed for NA	Yes
				Suitable for	Feeder circuits, branch circuits
				Current Limiting Circuit breaker	No
				Max. Voltage Rating	600Y/347 V
				Degree of Protection	IEC: IP20; UL/CSA Type: -



Terminals as accessory				Product Standards	UL 489; CSA-C22.2 No. 5-09; IEC 60947-2; CE marking
				UL File No.	E148671
				UL Category Control No.	WJAZ
				CSA File No.	022086
				CSA Class No.	4652-06
				North America Certification	UL listed, CSA certified
				Specially designed for NA	Yes
				Suitable for	Feeder circuits, branch circuits
				Current Limiting Circuit breaker	No
				Max. Voltage Rating	600 V
				Degree of Protection	IEC: IP20; UL/CSA Type: -

				Product Standards	UL 489; CSA-C22.2 No. 5-09; IEC 60947-2; CE marking
				UL File No.	E148671
				UL Category Control No.	WJAZ
				CSA File No.	022086
				CSA Class No.	4652-06
				North America Certification	UL listed, CSA certified
				Specially designed for NA	Yes
				Suitable for	Feeder circuits, branch circuits
				Current Limiting Circuit breaker	No
				Max. Voltage Rating	600 V
				Degree of Protection	IEC: IP20; UL/CSA Type: -

3.1

Compact circuit breakers, switch disconnectors

Circuit breakers IEC for 1000 V AC, 3 pole
NZM... Releases

Switching capacity 1000 V 50/60 Hz	Rated current = Rated uninterrupted current	Setting range		Fixed mounting Part no.	Article no.	Std. pack
		Overload releases	Short-circuit releases Non-delayed			
I_{cu} kA	$I_n = I_b$ A	I_r A	$I_{sd} = I_x \dots$			
						

System and cable protection

Thermomagnetic releases



10	20	15 - 20	350 A fixed	NZMH2-A20-S1	290355	1 Off
	25	20 - 25	350 A fixed	NZMH2-A25-S1	290356	
	32	25 - 32	350 A fixed	NZMH2-A32-S1	290357	
	40	32 - 40	8 - 10	NZMH2-A40-S1	290358	
	50	40 - 50	6 - 10	NZMH2-A50-S1	290359	
	63	50 - 63	6 - 10	NZMH2-A63-S1	290360	
	80	63 - 80	6 - 10	NZMH2-A80-S1	290361	
	100	80 - 100	6 - 10	NZMH2-A100-S1	290362	
	125	100 - 125	6 - 10	NZMH2-A125-S1	290363	
	160	125 - 160	6 - 10	NZMH2-A160-S1	290364	
	200	160 - 200	6 - 10	NZMH2-A200-S1	290365	
	250	200 - 250	6 - 10	NZMH2-A250-S1	290366	
	300	240 - 300	5 - 8.3	NZMH2-A300-S1	107577	

3.2

Switch disconnectors IEC for 1000 V DC, 1/2 pole
N...DC

Rated current = Rated uninterrupted current	Rated operating voltage	Rated short-time withstand current	Short-circuit protection max. fuse gR characteristic	Fixed mounting Part no.	Article no.	Std. pack
I_n A	U_e V	I_{cw} (N2/N3: t=1s, N4: t=0.1s) kA	A			

Switch disconnectors for 1000 V DC



160	1000	3.6	200	N2-4-160-S1-DC	127732	1 Off
200	1000	3.6	200	N2-4-200-S1-DC	127733	
250	1000	3.6	200	N2-4-250-S1-DC	154940	



320	1000	6.6	2x250	N3-4-320-S1-DC	127734	1 Off
400	1000	6.6	2x250	N3-4-400-S1-DC	142267	
500	1000	6.6	2x250	N3-4-500-S1-DC	142268	
550	1000	6.6	2x250	N3-4-550-S1-DC	168567	



800	1000	34	-	N4-4-800-S1-DC	119890	1 Off
1000	1000	34	-	N4-4-1000-S1-DC	119891	
1250	1000	34	-	N4-4-1250-S1-DC	119886	
1400	1000	34	-	N4-4-1400-S1-DC	119887	
1600	1000	34	-	N4-4-1600-S1-DC	152552	







800	1000	34	-	N4-4-800-S1-PV-NA	179325	1 Off
1000	1000	34	-	N4-4-1000-S1-PV-NA	179326	
1100	1000	34	-	N4-4-1100-S1-PV-NA	179591	
1200	1000	34	-	N4-4-1200-S1-PV-NA	179327	

Switch disconnectors IEC for 1500 V DC, 1/2 pole
N...DC

Rated current =				Short-circuit protection	Fixed mounting	Article no.	Std. pack
Rated uninterrupted current	Rated operating voltage	Rated short-time withstand current		max. fuse gR characteristic	Part no.		
I_n	U_e	I_{cw} (N2/N3: t=1s, N4: t=0.1s)					
A	V	kA		A			

Switch disconnectors for 1500 V DC

	160	1500	3.6	-	N2-4-160-S15-DC	167688	1 Off
	200	1500	3.6	-	N2-4-200-S15-DC	167689	
	250	1500	3.6	-	N2-4-250-S15-DC	167690	
	320	1500	6.6	-	N3-4-320-S15-DC	166407	1 Off
	400	1500	6.6	-	N3-4-400-S15-DC	166408	
	500	1500	6.6	-	N3-4-500-S15-DC	166409	
	550	1500	6.6	-	N3-4-550-S15-DC	168568	
	800	1500	34	-	N4-4-800-S15-DC	166413	1 Off
	1000	1500	34	-	N4-4-1000-S15-DC	166414	
	1250	1500	34	-	N4-4-1250-S15-DC	166415	
	1400	1500	34	-	N4-4-1400-S15-DC	166416	
	1600	1500	34	-	N4-4-1600-S15-DC	166417	
	800	1500	34	-	N4-4-800-S15-PV-NA	179328	1 Off
	1000	1500	34	-	N4-4-1000-S15-PV-NA	179329	
	1100	1500	34	-	N4-4-1100-S15-PV-NA	179592	
	1200	1500	34	-	N4-4-1200-S15-PV-NA	179330	



Circuit breakers EC for 500/750 V DC, 1/2 pole
NZM... -A Releases

Switching capacity 1000 V 50/60 Hz	Rated current = Rated uninterrupted current	Setting range		Fixed mounting	Article no.	Std. pack
		Overload releases	Short-circuit releases Non-delayed	Part no.		
I_{cu} kA	$I_n = I_u$ A	I_r A	$I_{sd} = I_r \dots$			



System and cable protection

Thermomagnetic -A Releases

	30	400	320 - 400	2150 A DC fixed	NZMN3-A400-S07-DC	189599	1 Off
	30	400	320 - 400	2150 A DC fixed	NZMN3-A400-S07-DC-PIT	189600	1 Off



Rated current =	Protection class	For use with	Notes	Part no.	Article no.	Std. pack
2 pole (+ and -) on one side						
I_n A						

Bridge kits NZM...-XKV...2P...

Model contains parts for upper or lower row of switchgear side for 4 pole switches N4-4...-S1(S15)... that are used as 2 pole switches for DC


The links each connect two contacts in series

Incoming unit and outgoing at bottom according to the switching diagrams

N4-4... $\geq 1250A$ at 65°C alternate connection at bottom through module plates NZM4-4-XKM2S-1600

For IEC application: For N4-4...-S15-PV-NA, feed only from below in connection with NZM4-4-XKV(I)2P(-K).

1230PIC-690, 1230PIC-1015 Symbolphoto



Incl. cover						
225 (40°C), 170 (65°C)	IP2X	N2-4...-S1(-S15)-DC		NZM2-4-XKV2P	131730	1 Off
250 (40°C), 190 (65°C)	IP2X	N2-4...-S1(-S15)-DC	Incl. cooling unit	NZM2-4-XKV2P-K	168585	
517 (40°C), 435 (65°C)	IP2X	N3-4...-S1(-S15)-DC		NZM3-4-XKV2P	131731	
550 (40°C), 468 (65°C)	IP2X	N3-4...-S1(-S15)-DC	Incl. cooling unit	NZM3-4-XKV2P-K	142271	
1400 (40°C), 1260 (65°C)	IP2X	N4-4...-S1(-S15)-DC N4-4...-S1(-S15)-PV-NA		NZM4-4-XKV2P	119888	

1230PIC-1016, 1230PIC-1017 Symbolphoto




Incl. insulation plates and phase separator						
238 (40°C), 180 (65°C)	IP00	N2-4...-S1(-S15)-DC		NZM2-4-XKV12P	168586	1 Off
250 (40°C), 213 (65°C)	IP00	N2-4...-S1(-S15)-DC	Incl. cooling unit	NZM2-4-XKV12P-K	168587	
400 (40°C), 338 (65°C)	IP2X	N3-4...-S1(-S15)-DC		NZM3-4-XKV2POU	168589	
550 (40°C), 501 (65°C)	IP00	N3-4...-S1(-S15)-DC	Incl. cooling unit	NZM3-4-XKV12P-K	142270	
1400A (40°C), 1260A (65°C)	IP00	N4-4-800(1000)(1250)(1400)-S1(S15)-DC N4-4...-S1(S15)-PV-NA		NZM4-4-XKV12P	180020	
1600 (40°C), 1500 (65°C)	IP00	N4-4...-S1(-S15)-DC N4-4...-S1(-S15)-PV-NA	Incl. cooling unit	NZM4-4-XKV2P-K	152553	

3.4

Compact circuit breakers, switch disconnectors

Photovoltaic - Switch disconnectors up to 1500 V
Bridge kits

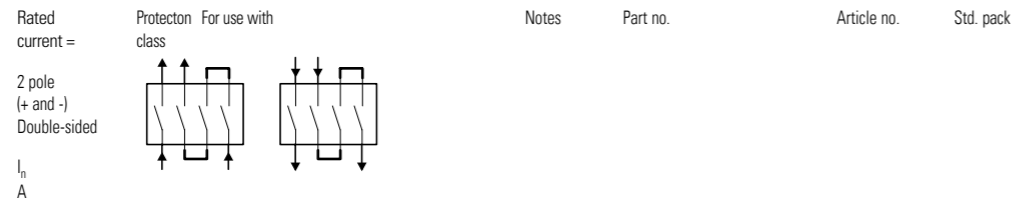

Bridge kits NZM...-XKV...2POU...


Model contains parts for upper and lower row of switchgear side for 4 pole switches N...-S1(S15)-DC that are used as 2 pole switches for DC
The links each connect three contacts in series
Incoming unit and outgoer at bottom or top, according to the switching diagrams

1230PIC-1138, 1230PIC-1311 Symbolphoto



Incl. cover						
200 (40°C) 160 (65°C)	IP2X	N2-4-...-S1(-S15)-DC		NZM2-4-XKV2POU	144070	1 Off
225 (40°C) 170 (65°C)	IP2X	N2-4-...-S1(-S15)-DC	Incl. cooling unit	NZM2-4-XKV2POU-K	168588	
400 (40°C) 388 (65°C)	IP2X	N3-4-...-S1(S15)-DC		NZM3-4-XKV2POU	168589	
517 (40°C) 435 (65°C)	IP2X	N3-4-...-S1(-S15)-DC	Incl. cooling unit	NZM3-4-XKV2POU-K	168590	

1230PIC-1144, 1230PIC-1146 Symbolphoto




Incl. insulation plates and phase separator						
213 (40°C) 160 (65°C)	IP00	N2-4-...-S1(-S15)-DC		NZM2-4-XKVI2POU	170118	1 Off
238 (40°C) 180 (65°C)	IP00	N2-4-...-S1(-S15)-DC	Incl. cooling unit	NZM2-4-XKVI2POU-K	170119	
501 (40°C) 418 (65°C)	IP00	N3-4-...-S1(-S15)-DC		NZM3-4-XKVI2POU	170120	
534 (40°C) 451 (65°C)	IP00	N3-4-...-S1(-S15)-DC	Incl. cooling unit	NZM3-4-XKVI2POU-K	170121	

3.4

Compact circuit breakers, switch disconnectors

Photovoltaic - Switch disconnectors up to 1500 V
Bridge kits

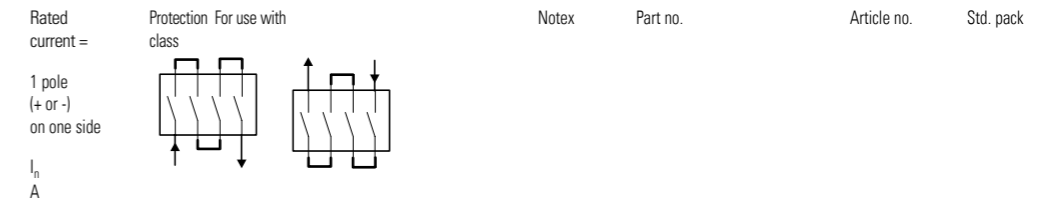

Bridge kits NZM...-XKV...1P...


Model contains parts for upper and lower row of switchgear side for 4 pole switches N4-4...-S1(S15)... that are used as 1 pole switches for DC
The links each connect four contact in series (plus or minus)
Incoming unit and outgoer at bottom or top, according to the switching diagrams

1230PIC-1313, 1230PIC-1310 Symbolphoto








Incl. cover						
200 (40°C) 160 (65°C)	IP2X	N2-4-160(200)-S1 (-S15)-DC		NZM2-4-XKV1P	168591	1 Off
225 (40°C) 170 (65°C)	IP2X	N2-4-...-S1(-S15)-DC	Incl. cooling unit	NZM2-4-XKV1P-K	168592	
400 (40°C) 338 (65°C)	IP2X	N3-4-320(400)-S1(-S15)-DC		NZM3-4-XKV1P	168593	
517 (40°C) 435 (65°C)	IP2X	N3-4-400(500)-S1(-S15)-DC	Incl. cooling unit	NZM3-4-XKV1P-K	168594	
1274 (40°C) 1138 (65°C)	IP2X	N4-4-...-S1(-S15)-DC N4-4-800(1000)(1100)-S1(-S15)-PV-NA		NZM4-4-XKV1P	119889	


1230PIC-1145, 1230PIC-1315 Symbolphoto












Incl. insulation plates						
213 (40°C) 160 (65°C)	IP00	N2-4-...-S1(-S15)-DC		NZM2-4-XKVI1P	168595	1 Off
238 (40°C) 180 (65°C)	IP00	N2-4-200(250)-S1(-S15)-DC	Incl. cooling unit	NZM2-4-XKVI1P-K	168596	
501 (40°C) 418 (65°C)	IP00	N3-4-...-S1(S15)-DC		NZM3-4-XKVI1P	168597	
534 (40°C) 451 (65°C)	IP00	N3-4-...-S1(S15)-DC	Incl. cooling unit	NZM3-4-XKVI1P-K	168598	
1260 (40°C) 1138 (65°C)	IP00	N4-4-(800)(1000)(1250)(1400)-S1(-S15)-DC N4-4-...-S1(-S15)-PV-NA		NZM4-4-XKVI1P	180019	
1552 (40°C) 1448 (65°C)	IP00	N4-4-...-S1(-S15)-DC N4-4-...-S1(-S15)-PV-NA	Incl. cooling unit	NZM4-4-XKV1P-K	179331	


Max. cable connection area	Number of poles	For use with	Terminal capacity		Terminal capacity		
			Cable lugs	Terminal capacity	AWG/kcmil	Copper strip No. of discs x width x disc thickness	Copper bar Width x thickness
				mm ²		mm	mm
Box terminal							
Standard equipment							
 	3 pole	NZM1, PN1, N(S)1	Copper cable	1 x 10 - 70 2 x 6 - 25 ¹⁾	1 x 12 - 2/0	≥ 2 x 9 x 0.8	-
	4 pole	NZM1-4, PN1-4, N1-4	Copper cable	1 x 10 - 70 2 x 6 - 25 ¹⁾	1 x 12 - 2/0	≥ 2 x 9 x 0.8	-
Screw terminals							
 	1 pole	NZM1-1	Copper cable lugs	1 x 10 - 70 2 x 6 - 25	1 x 12 - 2/0	-	≥ 12 x 5
			Aluminium cable lugs	1 x 10 - 35 2 x 10 - 35 ¹⁾			
	3 pole	NZM1, PN1, N(S)1	Copper cable lugs	1 x 10 - 70 2 x 6 - 25	1 x 12 - 2/0	-	≥ 12 x 5
	4 pole	NZM1-4, PN1-4, N1-4	Aluminium cable lugs	1 x 10 - 35 2 x 10 - 35 ¹⁾	1 x 12 - 2/0	-	≥ 12 x 5








Notes: ¹⁾ Up to 95 mm² can be connected depending on make of cable




Part no.	Article no.	Std. pack	Notes	Information relevant for export to North America
Article no. when ordered separately				
				
NZM1-XKC	260015	1 set	Standard connection with all NZM1, PN1 and N(S)1 switches. Conversion kit for circuit breaker with screw terminal. Contains parts for a 3 or 4 pole switch side. Fitted within the switch housing. Use ferrules with flexible and highly flexible conductors. Max. cross section shown can only be connected when flexible and without ferrules.	Product Standards UL 489; CSA-C22.2 No. 5-09; IEC 60947; CE marking UL File No. E31593 UL CCN DIHS CSA File No. 022086 CSA Class No. 1437-01 NA Certification UL Listed, CSA certified Suitable for Refer to main component information
NZM1-4-XKC	267075	1 set		
NZM1-1-XKS	152620	1 set	Contains parts for a terminal located at top or bottom for 1 pole circuit breaker. Flush mounting outside the switch housing. Cover NZM1(-4)-XKSA must be fitted (included as standard).	
NZM1-XKS	260019	1 set	Contains parts for a terminal located at top or bottom for 3 or 4 pole circuit breakers. Flush mounting outside the switch housing. Cover NZM1(-4)-XKSA must be fitted (included as standard).	Product Standards UL 489; CSA-C22.2 No. 5-09; IEC 60947; CE marking UL File No. E31593 UL CCN DIHS CSA File No. 022086 CSA Class No. 1437-01 NA Certification UL Listed, CSA certified Suitable for Refer to main component information
NZM1-4-XKS	266725	1 set		







Max. cable connection area	Number of poles	For use with	Terminal capacity			Terminal capacity		
			Cable Cable lugs	Terminal capacity mm ²	AWG/kcmil	Copper strip No. of discs x width x disc thickness mm	Copper bar Width x thickness mm	
Tunnel terminal								
		3 pole	NZM1, PN1, N(S)1	☉☿	6 x 2.5 - 16	6 x 14 - 6	-	-
				☉☿				
			NZM1, PN1, N(S)1	☉☿	1 x 16 - 95	1 x 6 - 3/0	-	-
				☉☿				
		4 pole	NZM1-4, PN1-4, N1-4	☉☿	6 x 2.5 - 16	6 x 14 - 6	-	-
				☉☿				
			NZM1-4, PN1-4, N1-4	☉☿	1 x 16 - 95	1 x 6 - 3/0	-	-
				☉☿				
Rear terminal bolts Not UL/CSA approved								
		3 pole	NZM1, PN1, N1	Copper cable lugs	-	1 x 10 - 70	-	min. 12 x 5
				Aluminium cable lugs		2 x 6 - 25		max. 16 x 5
						1 x 10 - 35		
						2 x 10 - 35		
						1)		
		4 pole	NZM1-4, PN1-4, N1-4	Copper cable lugs	-	1 x 10 - 70	-	min. 12 x 5
				Aluminium cable lugs		2 x 6 - 25		max. 16 x 5
						1 x 10 - 35		
						2 x 10 - 35		
						1)		
Control cable terminals								
		3 and 4 pole	NZM1(-4), PN1(-4), N(S)1(-4)	Screw terminals	1 x 0.75 - 2.5 2 x 0.75 - 1.5	1 x 18 - 14 2 x 18 - 16	-	-
		3 and 4 pole	NZM1(-4), PN1(-4), N(S)1(-4)	Box terminals	1 x 0.75 - 2.5 2 x 0.75 - 1.5	1 x 18 - 14 2 x 18 - 16	-	-


Notes: ¹⁾ Up to 95 mm² can be connected depending on make of cable





Part no.	Article no.	Std. pack	Notes	Information relevant for export to North America
Article no. when ordered separately				
				
NZM1-XKAM	144112	1 set	Contains parts for a terminal located at top or bottom for 3 or 4 pole switches. With control circuit terminal for 1 x 0.75 - 2.5 mm ² (18 - 14 AWG) or 2 x 0.75 - 1.5 mm ² (18 - 14 AWG) copper conductor. Flush mounting outside the switch housing. Use ferrules with flexible and highly flexible conductors. Max. cross section shown can only be connected when flexible and without ferrules. Cover NZM1(-4)-XKSA must be fitted (included as standard).	Product Standards UL 489; CSA-C22.2 No. 5-09; IEC 60947; CE marking UL File No. E31593 UL CCN DIHS CSA File No. 022086 CSA Class No. 1437-01 NA Certification UL Listed, CSA certified Suitable for Refer to main component information
NZM1-XKA	266730			
NZM1-4-XKAM	144114	1 set		
NZM1-4-XKA	266731			
NZM1-XKR	266734	1 set	Contains parts for a terminal located at top or bottom for 3 or 4 pole circuit breakers.	
NZM1-4-XKR	266737	1 set		
NZM1-XSTS	260150	1 set	Contains for two terminal locations located at top or bottom for 3 or 4 pole circuit breakers. Included as standard with tunnel terminal. Degree of protection IP1X NZM-XSTK cannot be combined with NZM1(-4)-XIPK IP2X protection against contact with a finger. Height or thickness of connections: NZM-XSTK = 2 mm NZM-XSTS = 2 mm	Product Standards UL 489; CSA-C22.2 No. 5-09; IEC 60947; CE marking UL File No. E140305 UL CCN DIHS CSA File No. 022086 CSA Class No. 1437-01 NA Certification UL Listed, CSA certified Suitable for Refer to main component information
NZM-XSTK	266739			

	Max. cable connection area	Number of poles	For use with	Connection	Terminal capacity	AWG/kcmil
Terminal covers knockout Not UL/CSA approved. For box terminal						
	-	3 pole	NZM1, PN1, N1	-	-	-
	-	4 pole	NZM1-4, PN1-4, N1-4	-	-	-
Cover						
	-	1 pole	NZM1-1	-	-	-
	-	3 pole	NZM1, PN1, N1	-	-	-
	-	4 pole	NZM1-4, PN1-4, N1-4	-	-	-
Phase isolators						
	-	3 pole	NZM1, PN1, N(S)1	-	-	-
	-	4 pole	NZM1-4, PN1-4, N1-4	-	-	-

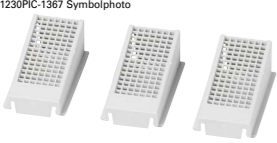


Part no.	Article no.	Std. pack	Notes	Information relevant for export to North America
Article no. when ordered separately				
				
NZM1-XKSFA	100780	1 Off	Contains parts for a terminal located at top or bottom for 3 or 4 pole circuit breakers.	UL/CSA certification not required
NZM1-XKSFA-GVP	112632	50 Off	Enhanced contact protection (simplified finger protection). Cannot be combined with NZM-XSTK control circuit terminal.	
NZM1-4-XKSFA	100781	1 Off		
NZM1-1-XKSA	152549	1 Off	Contains parts for a terminal located at top or bottom for 1 pole switches. Contact protection against direct contact where cable lugs, bars or tunnel terminals are used. When using insulated conductor material to degree of protection IP1X.	
NZM1-XKSA	260021	1 Off 	Contains parts for a terminal located at top or bottom for 3 or 4 pole switches. Contact protection against direct contact where cable lugs, bars or tunnel terminals are used. Contained in the set with tunnel terminals and screw terminals. When using insulated conductor material to degree of protection IP1X	Product Standards UL 489; CSA-C22.2 No. 5-09; IEC 60947; CE marking
NZM1-4-XKSA	266741	1 Off		UL File No. E31593 UL CCN DIHS CSA File No. 022086 CSA Class No. 1437-01 NA Certification UL Listed, CSA certified Suitable for Refer to main component information
NZM1-XKP	119862	1 set 	Contains parts, including insulating plate for mounting plate, for a terminal located at top or bottom for 3 or 4 pole circuit breakers. Can not be combined with connection on rear NZM1/2(-4)-XKR. Insulation protection up to a rated operating voltage U _e von 415V AC when minimum distances are not maintained.	UL/CSA certification not required
NZM1-4-XKP	119863	1 set		



	Max. cable connection area	Number of poles	For use with	Connection	Terminal capacity	AWG/kcmil
IP2X Protection against contact with finger For box terminal						
1230PIC-1360 Symbolphoto 	-	1 pole	NZM1-1	-	-	-
1230PIC-1368 Symbolphoto 	-	3 pole	NZM1, PN1, N1	-	-	-
1230PIC-675 Symbolphoto 	-	4 pole	NZM1-4, PN1-4, N1-4	-	-	-
IP2X Protection against contact with finger For covers NZM1(-4)-XKSA or NZM1...(C)NA, N(S)1...NA						
1230PIC-1359 Symbolphoto 	-	1 pole	NZM1-1	-	-	-
1230PIC-1367 Symbolphoto 	-	3 pole	NZM1, PN1, N1	-	-	-
1230PIC-720 Symbolphoto 	-	4 pole	NZM1-4, PN1-4, N1-4	-	-	-






Part no.	Article no.	Std. pack	Notes	Information relevant for export to North America
Article no. when ordered separately 				
NZM1-1-XIPK	152551	1 set	Contains parts for a terminal located at top or bottom for 1 pole switches. Enhanced contact protection to IP2X. Protection when reaching into the cable connection area with the connection of cables in the box terminal. Cannot be combined with NZM-XSTK control circuit terminal.	UL/CSA certification not required
NZM1-XIPK	266744	1 set	Contains parts for a terminal located at top or bottom for 3 or 4 pole switches. Enhanced contact protection to IP2X. Protection when reaching into the cable connection area with the connection of cables in the box terminal. Cannot be combined with NZM-XSTK control circuit terminal.	UL/CSA certification not required
NZM1-4-XIPK	266745	1 set		-
NZM1-1-XIPA	152550	1 set	Contains parts for a terminal located at top or bottom for 1 pole switches. Enhanced contact protection to IP2X.	UL/CSA certification not required
NZM1-XIPA	266748	1 set	Contains parts for a terminal located at top or bottom for 3 or 4 pole switches. Enhanced contact protection to IP2X.	UL/CSA certification not required
NZM1-4-XIPA	266749	1 set		-

Max. cable connection area	Number of poles	For use with	Terminal capacity		Terminal capacity		
			Cable Cable lugs	Terminal capacity mm ²	AWG/kcmil	Copper strip No. of discs x width x disc thickness mm	Copper bar Width x thickness mm
Box terminal							
 	3 pole	NZM2, PN2, N(S)2 ≤ 160 A	Copper cable	1 x 10 - 185 2 x 4 - 70	1 x 12 - 350	≥ 2 x 9 x 0.8	-
			Copper cable	1 x 10 - 185 2 x 4 - 70	1 x 12 - 350	≥ 2 x 9 x 0.8	-
 	4 pole	NZM2-4, PN2-4, N2-4 ≤ 160 A	Copper cable	1 x 10 - 185 2 x 4 - 70	1 x 12 - 350	≥ 2 x 9 x 0.8	-
			Copper cable	1 x 10 - 185 2 x 4 - 70	1 x 12 - 350	≥ 2 x 9 x 0.8	-

Screw terminals
Standard equipment



 	3 pole	NZM2, PN2, N(S)2	Copper cable lugs	1 x 10 - 185 2 x 4 - 70	1 x 12 - 350	≥ 2 x 16 x 0.8	≥ 16 x 5
			Aluminium cable lugs	1 x 10 - 50 2 x 10 - 50			
	4 pole	NZM2-4, PN2-4, N2-4	Copper cable lugs	1 x 10 - 185 2 x 4 - 70	1 x 12 - 350	≥ 2 x 16 x 0.8	≥ 16 x 5
			Aluminium cable lugs	1 x 10 - 50 2 x 10 - 50			

Part no. suffix	Article no.	Part no.	Article no.	Std. pack	Notes	Information relevant for export to North America
Article no. for ordering with basic device		Article no. when ordering separately				
+NZM2-160-XKCO	262218	NZM2-160-XKC	262240	1 set	Part no. suffix and part no. contain parts for a circuit breaker side at top or bottom for 3 or 4 pole switches. Conversion kit for circuit breaker with screw terminal. Fitted within the switch housing. O = for fitting at the top U = for fitting at the bottom U _b ≥ 525 V AC: Use NZM2(-4)-XKSA cover. Use ferrules with flexible and highly flexible conductors. Max. cross section shown can only be connected when flexible and without ferrules.	Product Standards UL 489; CSA-C22.2 No. 5-09; IEC 60947; CE marking UL File No. E31593 UL CCN DIHS CSA File No. 022086 CSA Class No. 1432-01 NA Certification UL Listed, CSA certified Suitable for Refer to main component information
+NZM2-160-XKCU	262223	-				
+NZM2-250-XKCO	262242	NZM2-250-XKC	262244	1 set		
+NZM2-250-XKCU	262243	-				
+NZM2-4-160-XKCO	266751	NZM2-4-160-XKC	266755			
+NZM2-4-160-XKCU	266753	-				
+NZM2-4-250-XKCO	266752	NZM2-4-250-XKC	266756			
+NZM2-4-250-XKCU	266754	-				
-		NZM2-XKS	260030	1 set	Contains parts for a terminal located at top or bottom for 3 or 4 pole circuit breakers. Standard connection with all NZM2, PN2 and N2 circuit breakers. Conversion kit for circuit breaker with box terminal. Use special cable lugs narrow version → 059775 Fitted within the switch housing. If a bar is used, insulation (400 mm) e.g. sleeving and a NZM2(-4)-XKSA cover are required. U _b ≥ 525 V AC: With all other connection materials, e.g. cables and strips, use cover NZM2(-4)-XKSA.	Product Standards UL 489; CSA-C22.2 No. 5-09; IEC 60947; CE marking UL File No. E31593 UL CCN DIHS CSA File No. 022086 CSA Class No. 1432-01 NA Certification UL Listed, CSA certified Suitable for Refer to main component information
-		NZM2-4-XKS	266750	1 set		



Max. cable connection area	Number of poles	For use with	Terminal capacity			Terminal capacity		
			Cable lugs	Terminal capacity mm ²	AWG/kcmil	Copper strip No. of discs x width x disc thickness mm	Copper bar Width x thickness mm	
Tunnel terminal								
 	3 pole	NZM2, PN2, N(S)2	Copper cable ☉▽ 6 x 2.5 - 35	6 x 14 - 2	-	-	-	-
			Aluminium cable plugs ☉▽	-	-	-	-	-
		NZM2, PN2, N(S)2	Copper cable ☉▽ 1 x 16 - 185	1 x 6 - 350	-	-	-	-
			Aluminium cable ☉▽	Up to 240 mm ² can be connected depending on the cable manufacturer	1 x 16 - 185	-	-	-
	4 pole		Copper cable ☉▽ 6 x 2.5 - 35	6 x 14 - 2	-	-	-	-
			Aluminium cable ☉▽	-	-	-	-	-
		NZM2-4, PN2-4, N2-4	Copper cable ☉▽ 1 x 16 - 185	1 x 6 - 350	-	-	-	-
			Aluminium cable ☉▽	Up to 240 mm ² can be connected depending on the cable manufacturer	-	-	-	-


Rear terminal bolts









Not UL/CSA approved
When using cable lugs without NZM3(-4)-XKSA cover, they must be insulated.






	3 pole	NZM2, PN2, N(S)2	Copper cable lugs 1 x 10 - 185	-	≧ 2 x 16 x 0.8	≧ 16 x 5
			Aluminium cable lugs 1 x 10 - 50	2 x 4 - 70	≧ 6 x 24 x 0.5	≧ 20 x 5
	4 pole	NZM2-4, PN2-4, N2-4	Copper cable lugs 1 x 10 - 185	-	≧ 2 x 16 x 0.8	≧ 16 x 5
			Aluminium cable lugs 1 x 10 - 50	2 x 4 - 70	≧ 6 x 24 x 0.5	≧ 20 x 5







Control cable terminals




	3 and 4 pole	NZM2(-4), PN2(-4), N(S)2(-4)	Screw terminals	1 x 0.75 - 2.5	1 x 18 - 14	-
				2 x 0.75 - 1.5	2 x 18 - 16	-
	3 and 4 pole	NZM2(-4), PN2(-4), N(S)2(-4)	Box terminal	1 x 0.75 - 2.5	1 x 18 - 14	-
				2 x 0.75 - 1.5	2 x 18 - 16	-

Part no.	Article no.	Std. pack	Notes	Information relevant for export to North America	
Article no. when ordered separately					
					
NZM2-XKAM	144113	1 set	Contains parts for a terminal located at top or bottom for 3 or 4 pole switches. With control circuit terminal for 1 x 0.75 - 2.5 mm ² (18 - 14 AWG) or 2 x 0.75 - 1.5 mm ² (18 - 16 AWG) copper conductor. Flush mounting outside the switch housing. Use ferrules with flexible and highly flexible conductors. Max. cross section shown can only be connected when flexible and without ferrules Cover NZM2(-4)-XKSA must be fitted (included as standard).	Product Standards UL 489; CSA-C22.2 No. 5-09; IEC 60947; CE marking UL File No. E31593 UL CCN DIHS CSA File No. 022086 CSA Class No. 1437-01 NA Certification UL Listed, CSA certified Suitable for Refer to main component information	
NZM2-XKA	271457				
NZM2-4-XKAM	144115	1 set			
NZM2-4-XKA	271458				
+NZM2-XKRO	266763	NZM2-XKR	266765	1 set	Part no. suffix and part no. contain parts for a circuit breaker side at top or bottom for 3 or 4 pole switches. O = for fitting at the top U = for fitting at the bottom
+NZM2-XKRU	266764	-			
+NZM2-4-XKRO	266766	NZM2-4-XKR	266768		
+NZM2-4-XKRU	266767	-			
NZM2-XSTS	260156	1 set	Contains parts for two terminal locations located at top or bottom for 3 or 4 pole switches. Included as standard with tunnel terminal Degree of protection IP1X NZM-XSTK cannot be combined with IP2X protection against contact with a finger and NZM1(-4)-XIPK. Height or thickness of connections:	Product Standards UL 489; CSA-C22.2 No. 5-09; IEC 60947; CE marking UL File No. E140305 UL CCN DIHS CSA File No. 022086 CSA Class No. 1437-01 NA Certification UL Listed, CSA certified Suitable for Refer to main component information	
NZM-XSTK	266739	1 set	NZM-XSTK = 2 mm NZM-XSTS = 2 mm		

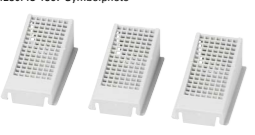Number of poles	For use with	Terminal capacity		AWG/kcmil	Part no. suffix	Article no.
		Connection	Terminal capacity mm ²			
Cable lug cover						
1230PIC-694 Symbolphoto 	3 pole	NZM2, PN2, N(S)2	Copper cable lugs Aluminium cable lugs	1 x 10-185 2 x 4-70 1 x 10-50 2 x 10-50	-	-
1230PIC-688 Symbolphoto 	4 pole	NZM2-4, PN2-4, N2-4	Copper cable lugs Aluminium cable lugs	1 x 10-185 2 x 4-70 1 x 10-50 2 x 10-50	-	-
Cover						
1230PIC-686 Symbolphoto 	3 pole	NZM2, PN2, N(S)2	-	-	-	-
wa_sg07018 Symbolphoto 	4 pole	NZM2-4, PN2-4, N2-4	-	-	-	-
Phase isolators						
sg08915 Symbolphoto 	3 pole	NZM2, PN2, N(S)2	-	-	-	-
sg09015 Symbolphoto 	4 pole	NZM2-4, PN2-4, N2-4	-	-	-	-
Terminal covers, knockout						
1230PIC-696 Symbolphoto 	3 pole	NZM2, PN2, N(S)2	-	-	-	+NZM2-XKSFA0 108269 +NZM2-XKSFAU 108270
1230PIC-689 Symbolphoto 	4 pole	NZM2-4, PN2-4, N2-4	-	-	-	+NZM2-4-XKSFA0 108271 +NZM2-4-XKSFAU 108272


Part no.	Article no.	Std. pack	Notes	Information relevant for export to North America
Article no. when ordered separately				
				
NZM2-XKSFAE	119868	1 set 	Contains parts for a terminal located at top or bottom for 3 or 4 pole switches. Contact protection where cable lugs are used on screw terminals. When using insulated conductor material, degree of protection IP2X.	UL/CSA certification not required
NZM2-4-XKSFAE	119870	1 set	-	-
NZM2-XKSA	260038	1 Off 	Contains parts for a terminal located at top or bottom for 3 or 4 pole switches. Contact protection where cable lugs, bars or tunnel terminals are used. Included in set with tunnel terminals. When using insulated conductor material, degree of protection IP1X	Product Standards UL 489; CSA-C22.2 No. 5-09; IEC 60947; CE marking UL File No. E140305 UL CCN DIHS CSA File No. 022086 CSA Class No. 1432-01 NA Certification UL Listed, CSA certified Suitable for Refer to main component information
NZM2-4-XKSA	266770	1 Off	-	-
NZM2-XKP	119864	1 set 	Contains parts, including insulating plate for mounting plate, for a terminal located at top or bottom for 3 or 4 pole circuit breakers. Can not be combined with connection on rear NZM1/2(-4)-XKR. Insulation protection up to a rated operating voltage U _e of 415V AC when minimum distances are not maintained.	UL/CSA certification not required
NZM2-4-XKP	119865	1 set	-	-
NZM2-XKSFA	104640	1 set 	Contains parts for a terminal located at top or bottom for 3 pole switches. Enhanced contact protection (simplified finger protection).	UL/CSA certification not required
NZM2-4-XKSFA	104641	1 Off	-	-

Number of poles	For use with	Terminal capacity		Part no. suffix	Article no.
		Connection	Terminal capacity mm ²		
IP2X Protection against contact with finger For box terminal					
1230PIC-1377 Symbolphoto 	3 pole	NZM2, PN2, N(S)2	-	-	-
1230PIC-675 Symbolphoto 	4 pole	NZM2-4, PN2-4, N2-4	-	-	-
For covers NZM2(-4)-XKSA or NZM2(-4) or NZM2... (C)NA and N(S)2...NA					
1230PIC-1367 Symbolphoto 	3 pole	NZM2, PN2, N(S)2	-	-	-
1230PIC-1375 Symbolphoto 	4 pole	NZM2-4, PN2-4, N2-4	-	-	-
Copper cable lug Not UL/CSA approved When using cable lugs without NZM3(-4)-XKSA cover, they must be insulated.					
1230PIC-693 Symbolphoto 	3 and 4 pole	NZM2(-4), PN2(-4), N2(-4)	-	150 mm ² 120 mm ² 95 mm ² 185 mm ²	- - - -
Mounting adapter plate					
1230PIC-316 Symbolphoto 	3 pole	NZM2 PN2 N2	-	-	-

Part no.	Article no.	Std. pack	Notes	Information relevant for export to North America
Article no. when ordered separately				
				
NZM2-XIPK	266773	1 set 	Contains parts for a terminal located at top or bottom for 3 switches. Enhanced contact protection to IP2X. Protection on grasping terminal chamber when connecting cables in box terminals. With two conductors maximum cross-section 25 mm ² or AWG4.	UL/CSA certification not required
NZM2-4-XIPK	266774	1 set	Can not be combined with control cable terminal NZM-XSTK.	-
NZM2-XIPA	266777	1 set 	Contains parts for a terminal located at top or bottom for 3 switches. Enhanced contact protection to IP2X. When fitting to NZM2... (C)NA or NZM... -NA: With 2 conductors maximum cross-section 25 mm ² or AWG4.	UL/CSA certification not required
NZM2-4-XIPA	266778	1 set		-
KS150-NZM7	059777	3 Off	In order to crimp cable lugs when using stranded conductors, e.g., VDE 0295 Class 2 and rounded stranded sector-shaped conductors, you will need a Klauke K22, HK60/22, or EK22 crimping tool with the following crimping dies: R22/95 for 95 mm ² R22/120 for 120 mm ² R22/150 for 150 mm ² R22/185 for 185 mm ² R22/240 for 240 mm ² R22/300 for 300 mm ² Flexible conductors are adequate to a limited extent. They must be indent-crimped with a Klauke series 13 or series 25 crimping die.	-
KS120-NZM7	059776			
KS95-NZM7	059775			
NZM2-XKS185	260032			
NZM2-XAP7	119381	1 set	The replacement device can be positioned identically either with the connection side or the actuation shaft. NZM7 door coupling rotary handle can continue to be used if there is a minimum dimension of 213 mm between the mounting plate and the inside of the door. Otherwise, use new handle NZM2-XTVD...-0 with the new shaft.	UL/CSA certification not required

Max. cable connection area	Number of poles	For use with	Rated current I_n	Terminal capacity		Terminal capacity		
				Cable	Cable lugs	Terminal capacity	AWG/kcmil	Copper strip No. of discs x width x disc thickness
				mm ²	mm ²	mm	mm	mm

Box terminal




3 pole	NZM3(-4), PN3(-4), N(S)3(-4)	max. 500	Copper cable	1 x 35 - 240	1 x 2 - 350	min. 6 x 16 x 0.8	-
		400 UL/CSA	Copper cable	2 x 16 - 120		max. 10 x 24 x 1.0	
		630	Copper cable	1 x 35 - 240	1 x 2 - 350	10 x 24 x 1.0	-
				2 x 16 - 120		+ 5 x 24 x 1.0	
						oder	
						(2 x) 8 x 24 x 1.0	




4 pole	NZM3(-4), PN3(-4), N(S)3(-4)	max. 500	Copper cable	1 x 35 - 240	1 x 2 - 350	min. 6 x 16 x 0.8	-
		400 UL/CSA	Copper cable	2 x 16 - 120		max. 10 x 24 x 1.0	
		630	Copper cable			10 x 24 x 1.0	-
						+ 5 x 24 x 1.0	
						oder	
						(2 x) 8 x 24 x 1.0	

Screw connection
Standard



3 pole	NZM3, PN3, N(S)3	630	Copper cable lugs	1 x 16 - 300	1 x 4 - 350	10 x 32 x 1.0	30 x 10
		max. 400	Aluminium cable lugs	2 x 16 - 240	2 x 350	+ 5 x 32 x 130	+ 30 x 5
				1 x 10 - 120	1 x 4 - 350		
				2 x 10 - 120	2 x 350		



4 pole	NZM3-4, PN3-4, N(S)3-4	630	Copper cable lugs	1 x 16 - 300	1 x 4 - 350	10 x 32 x 1.0	30 x 10
		max. 400	Aluminium cable lugs	2 x 16 - 240	2 x 350	+ 5 x 32 x 1.0	+ 30 x 5
				1 x 10 - 120	1 x 4 - 350		
				2 x 10 - 120	2 x 350		

Part no. suffix	Article no.	Part no.	Article no.	Std. pack	Notes	Information relevant for export to North America
-----------------	-------------	----------	-------------	-----------	-------	--

Article no. for ordering with basic device

Article no. when ordering separately




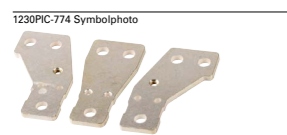
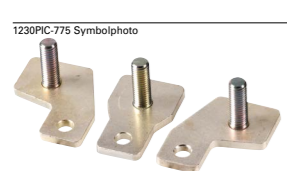


+NZM3-XKCO	262246	-		1 set	Part no. suffix and part no. contain parts for a circuit breaker side at top or bottom for 3 or 4 pole switches. Conversion kit for circuit breaker with screw terminal. Fitted within the switch housing O = for fitting at the top U = for fitting at the bottom U ₀ ≥ 525 V AC. Use NZM3(-4)-XKSA cover.	Product Standards UL 489; CSA-C22.2 No. 5-09; IEC 60947; CE marking UL File No. E31593 UL CCN DIHS CSA File No. 022086 CSA Class No. 1437-01 NA Certification UL Listed, CSA certified Suitable for Refer to main component information
+NZM3-XKCU	262245	-		1 set		
-		NZM3-XKC	260042			
+NZM3-4-XKCU	266782	-		1 set	Use ferrules with flexible and highly flexible conductors. Observe limited cable cross-section through sleeve.	
+NZM3-4-XKCO	266781	NZM3-4-XKC	266783			

-		NZM3-XKS	260039	1 set	Contains parts for a terminal located at top or bottom for 3 or 4 pole switches. Standard connection with all NZM3, PN3 and N3 circuit breakers. Conversion kit for circuit breaker with box terminal. Use special cable lugs narrow version, → 059775 Fitted within the switch housing. If a bar is used, insulation (400 mm) heat-shrink tubing and a cover NZM3(-4)-XKSA are required. U ₀ ≥ 525 V AC. For all other connection types use cover NZM3(-4)-XKSA.	Product Standards UL 489; CSA-C22.2 No. 5-09; IEC 60947; CE marking UL File No. E31593 UL CCN DIHS CSA File No. 022086 CSA Class No. 1437-01 NA Certification UL Listed, CSA certified Suitable for Refer to main component information
-		NZM3-4-XKS	266780	1 set		

Max. cable connection area	Number of poles	For use with	Rated current I_n	Terminal capacity		Terminal capacity		
				Cable lugs	Terminal capacity	AWG/kcmil	Copper strip No. of discs x width x disc thickness	Copper bar Width x thickness
				mm ²	mm	mm	mm	mm

Connection width extension
One hole, for screws or terminals

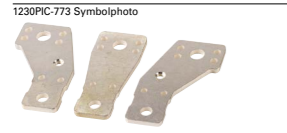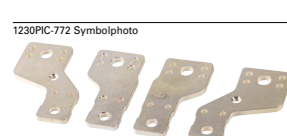	3 pole	NZM3, PN3, N(S)3	630	Copper cable lugs	2 x 300	2 x 500	2 x 10 x 50 x 1.0	(2 x) 10 x 50
	4 pole	NZM3-4, PN3-4, N3-4	630	Copper cable lugs	2 x 300	2 x 500	2 x 10 x 50 x 1.0	(2 x) 10 x 50
	3 pole	NZM3, PN3, N(S)3	630	Copper cable lugs	NZM3-XKV70-2: 4 x 35 - 185 NZM3-XKV70-2 + NZM4-XKA: 4 x 50 - 240	NZM3-XKV70-2: 2 x 350 NZM3-XKV70-2 + NZM4-XKA: 4 x 500	NZM3-XKV70-2 + NZM4-XKB: \cong 6 x 16 - 0.8 \cong (2 x) 10 x 32 x 1	(2 x) 10 x 50
	4 pole	NZM3-4, PN3-4, N(S)3-4	630	Copper cable lugs	2 x 300	2 x 500	(2 x) 10 x 50 x 1.0	(2 x) 10 x 50
	3 pole	NZM3, PN3, N(S)3	630	Copper cable lugs	2 x 95 - 300	2 x 500	(2x) 10 x 32 x 1.0	(2 x) 10 x 40









Part no. suffix	Article no.	Part no.	Article no.	Std. pack	Notes	Information relevant for export to North America
-----------------	-------------	----------	-------------	-----------	-------	--

Article no. for ordering with basic device





Article no. when ordering separately

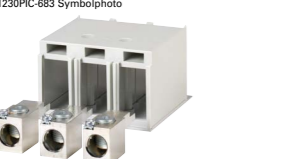

-		NZM3-XKV70	100514	1 set	Contains parts for a terminal located at top or bottom for 3 or 4 pole switches. Central drilling for e.g. up to 2 cable lugs per phase. For fitting to switches with screw terminal. Phase isolator and insulation plate are included as standard. Distance between pole centres with NZM3(-4)-XKV70: 70 mm. Hole for control wire exists. Connection terminals NZM3(-4)-XK300 and NZM3(-4)-XK22X21 can be installed.	Product Standards UL 489; CSA-C22.2 No. 5-09; IEC 60947; CE marking UL File No. E140305 UL CCN DIHS CSA File No. 022086 CSA Class No. 1432-01 NA Certification UL Listed, CSA certified
-		NZM3-4-XKV70	100515	1 set		
-		NZM3-XKV70-2	119860	1 set	Contains parts for a terminal located at top or bottom for 3 pole circuit breakers. Double hole fitting for up to four 185 mm ² cable lugs, 50 mm bar or large flat cable terminal NZM4-XKB or large tunnel terminal NZM4-XKA. For fitting to switches with screw terminal. Phase isolator, insulation plate and 2 control circuit terminals supplied.	Product Standards UL 489; CSA-C22.2 No. 5-09; IEC 60947; CE marking NA Certification Request filed for UL and CSA Suitable for Refer to main component information
-		NZM3-4-XKV70-2	132673	1 set	Contains parts for a terminal located at top or bottom for 3 pole circuit breakers. Double hole fitting for up to four 185 mm ² cable lugs, 50 mm bar or large flat cable terminal NZM4-XKB or large tunnel terminal NZM4-XKA. For fitting to switches with screw terminal. Phase isolator, insulation plate and 2 control circuit terminals supplied.	
-		NZM3-XKV70KB	112884	1 set	Contains parts for a terminal located at top or bottom for 3 pole circuit breakers. Threaded stud for cable lugs up to 2 x 300mm ² . For fitting to switches with screw terminal. Phase isolator, insulation plate and 2 control circuit terminals supplied.	Product Standards UL 489; CSA-C22.2 No. 5-09; IEC 60947; CE marking NA Certification Request filed for UL and CSA Suitable for Refer to main component information



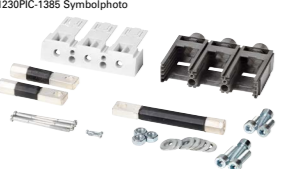

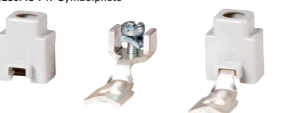Max. cable connection area	Number of poles	For use with	Rated current I _n	Terminal capacity		Terminal capacity		
				Cable lugs	Terminal capacity	AWG/kcmil	Copper strip No. of discs x width x disc thickness	Copper bar Width x thickness
				A	mm ²		mm	mm
Terminals for connection width extension								
1230PIC-1432 Symbolphoto 	3 pole	NZM3, PN3, N(S)3	max. 500	Copper cable	1 x 120 - 300 -	-	-	-
1230PIC-868 Symbolphoto 	4 pole	NZM3-4, PN3-4, N3-4	max. 500	Copper cable	1 x 120 - 300 -	-	-	-
1230PIC-1431 Symbolphoto 	3 pole	NZM3, PN3, N(S)3	630	-	-	-	(2 x) 11 x 21 x 1.0	-
1230PIC-867 Symbolphoto 	4 pole	NZM3-4, PN3-4, N3-4	630	-	-	-	(2 x) 11 x 21 x 1.0	-
Tunnel terminal								
1230PIC-683 Symbolphoto 	3 pole	NZM3, PN3, N(S)3	max. 350	Copper cable ⊕ ⊖ Aluminium cable ⊕ ⊖	1 x 16 - 185	1 x 6 - 350	-	-
1230PIC-683 Symbolphoto 	4 pole	NZM3-4, PN3-4, N3-4	max. 350	Copper cable ⊕ ⊖ Aluminium cable ⊕ ⊖	1 x 16 - 185	1 x 6 - 350	-	-
1230PIC-1433 Symbolphoto 	3 pole	NZM3, PN3, N(S)3	max. 630	Copper cable ⊕ ⊖ Aluminium cable ⊕ ⊖	1 x 50 - 240 2 x 50 - 240	1 x 0 - 500 2 x 0 - 500	-	-
1230PIC-771 Symbolphoto 	4 pole	NZM3-4, PN3-4, N3-4	max. 630	Copper cable ⊕ ⊖ Aluminium cable ⊕ ⊖	1 x 50 - 240 2 x 50 - 240	1 x 0 - 500 2 x 0 - 500	-	-









Part no. suffix	Article no.	Part no.	Article no.	Std. pack	Notes	Information relevant for export to North America
Article no. for ordering with basic device			Article no. when ordering separately			
-		NZM3-XK300	100782	1 set	Contains parts for a terminal located at top or bottom for 3 or 4 pole switches. Only in combination with connection width extension NZM3(-4)-XKV70. Use ferrules with flexible and highly flexible conductors. With control cable terminal for 1 x 0.75 - 2.5 mm ² or 2 x 0.75 - 1.5 mm ² copper conductor.	Product Standards UL 489; CSA-C22.2 No. 5-09; IEC 60947; CE marking UL File No. E31593 UL CCN DIHS CSA File No. 022086 CSA Class No. 1432-01 NA Certification UL Listed, CSA certified Suitable for Refer to main component information
-		NZM3-4-XK300	100783	1 set		-
-		NZM3-XK22X21	100784	1 set	Contains parts for a terminal located at top or bottom for 3 or 4 pole switches. Only in combination with connection width extension NZM3(-4)-XKV70. Use ferrules with flexible and highly flexible conductors. With control cable terminal for 1 x 0.75 - 2.5 mm ² or 2 x 0.75 - 1.5 mm ² copper conductor.	Not UL/CSA approved
-		NZM3-4-XK22X21	100785	1 set		Not UL/CSA approved
-		NZM3-XKA1	271459	1 set	Contains parts for a terminal located at top or bottom for 3 or 4 pole circuit breakers. With control cable terminal for 1 x 0.75 - 2.5 mm ² (18 - 14 AWG) or 2 x 0.75 - 1.5 mm ² (18 - 16 AWG) copper conductor.	-
-		NZM3-4-XKA1	271460	1 set	Fitting outside switch housing. Use ferrules with flexible and highly flexible conductors. Max. cross section shown can only be connected when flexible and without ferrules. Cover NZM3(-4)-XKSA must be fitted (included as standard).	-
-		NZM3-XKA2	271461	1 set	Contains parts for a terminal located at top or bottom for 3 or 4 pole circuit breakers. With control cable terminal for 1 x 0.75 - 2.5 mm ² (18 - 14 AWG) or 2 x 0.75 - 1.5 mm ² (18 - 16 AWG) copper conductor. Fitting outside switch housing. Use ferrules with flexible and highly flexible conductors. Max. cross section shown can only be connected when flexible and without ferrules. Cover NZM3(-4)-XKSA must be fitted (included as standard).	Product Standards UL 489; CSA-C22.2 No. 5-09; IEC 60947; CE marking UL File No. E31593 UL CCN DIHS CSA File No. 022086 CSA Class No. 1432-01 NA Certification UL Listed, CSA certified Suitable for Refer to main component information
-		NZM3-4-XKA2	271462	1 set		-







Max. cable connection area	Number of poles	For use with	Rated current I _n	Terminal capacity		Terminal capacity		
				Cable lugs	Terminal capacity	AWG/kcmil	Copper strip No. of discs x width x disc thickness	Copper bar Width x thickness
				A	mm ²		mm	mm
Rear terminal bolts								
1230PIC-1385 Symbolphoto 	3 pole	NZM3, PN3, N3	max. 630	Copper cable lugs	1 x 16 - 240	-	min. 6 x 16 x 0.8	min.
			max. 500	Aluminium cable lugs	1 x 10 - 120	2 x 10 - 120	max. 10 x 32 x 1.0	20 x 5 max. 30 - 10
1230PIC-1380 Symbolphoto 	4 pole	NZM3-4, PN3-4, N3-4	max. 630	Copper cable lugs	1 x 16 - 240	-	min. 6 x 16 x 0.8	min.
			max. 500	Aluminium cable lugs	1 x 10 - 120	2 x 10 - 120	max. 10 x 32 x 1.0	20 x 5 max. 30 - 10
Control cable terminals								
1230PIC-729 Symbolphoto 	3 and 4 pole	NZM3, PN3, N(S)3	-	Screw terminals	1 x 0.75 - 2.5	1 x 18 - 14	-	-
						2 x 0.75 - 1.5	2 x 18 - 16	
1230PIC-747 Symbolphoto 	3 and 4 pole	NZM3-4, PN3, N(S)3-4	-	Box terminal	1 x 0.75 - 2.5	1 x 18 - 14	-	-
						2 x 0.75 - 1.5	2 x 18 - 16	



Part no. suffix	Article no.	Part no.	Article no.	Std. pack	Notes	Information relevant for export to North America
Article no. for ordering with basic device	Article no. when ordering separately					
+NZM3-XKRO	266790	NZM3-XKR	266792	1 set	Part no. suffix and part no. contain parts for a circuit breaker side at top or bottom for 3 or 4 pole switches. O = for fitting at the top U = for fitting at the bottom	Not UL/CSA approved
+NZM3-XKRU	266791	-				
+NZM3-4-XKRO	266793	NZM3-4-XKR	266795	1 set		Not UL/CSA approved
+NZM3-4-XKRU	266794	-				
-		NZM3/4-XSTS	266797	1 set	Contains for two terminal locations located at top or bottom for 3 or 4 pole circuit breakers. Included as standard with tunnel terminal. Degree of protection IP1X Height or thickness of connections NZM-XSTS = 2 mm	Product Standards UL 489; CSA-C22.2 No. 5-09; IEC 60947; CE marking E140305 UL File No. E140305 UL CCN DIHS CSA File No. 022086 CSA Class No. 1437-01 NA Certification UL Listed, CSA certified Suitable for
-		NZM-XSTK	266739	1 set		


	Max. cable connection area	Number of poles	For use with	Part no.	Article no.
				Article no. when ordering separately	
Cable lug cover					
1230PIC-694 Symbolphoto 	-	3 pole	NZM3, PN3, N(S)3	NZM3-XKSAE	119869
1230PIC-688 Symbolphoto 	-	4 pole	NZM3-4, PN3-4, N3-4	NZM3-4-XKSAE	119871
Cover					
1230PIC-1352 Symbolphoto 	-	3 pole	NZM3(-4), PN3(-4), N(S)3(-4)	NZM3-XKSA	260045
1230PIC-1353 Symbolphoto 	-	4 pole	NZM3-4, PN3-4, N3-4	NZM3-4-XKSA	266801
Phase isolators					
sg08715 Symbolphoto 	-	3 pole	NZM3-4, PN3-4, N(S)3-4	NZM3-XKP	100512
sg08815 Symbolphoto 	-	4 pole	NZM3-4, PN3-4, N3-4	NZM3-4-XKP	100513

Std. pack	Notes	Information relevant for export to North America
		
1 set 	Contains parts for a terminal located at top or bottom for 3 or 4 pole switches. Contact protection where cable lugs are used on screw terminals. When using insulated conductor material, degree of protection IP2X.	UL/CSA certification not required
1 set	-	-
1 Off 	Contains parts for a terminal located at top or bottom for 3 pole switches. Insulation/protection against direct contact where cable lugs, bars or tunnel terminals are used. Included in set with tunnel terminals. When using insulated conductor material to degree of protection IP1X.	Product Standards UL 489; CSA-C22.2 No. 5-09; IEC 60947; CE marking UL File No. E31593 UL CCN DIHS CSA File No. 022086 CSA Class No. 1437-01 NA Certification UL Listed, CSA certified Suitable for Refer to main component information
1 Off	-	-
1 set 	Contains parts, including insulating plate for mounting plate, for a terminal located at top or bottom for 3 or 4 pole circuit breakers. Included with the connection width extension. Cannot be combined with the NZM3(-4)-XKA tunnel terminal, NZM3(-4)-XKR connection on rear. Insulation protection where cable lugs, bars, or flat conductor are used.	Product Standards UL 489; CSA-C22.2 No. 5-09; IEC 60947; CE marking UL File No. E31593 UL CCN DIHS CSA File No. 022086 CSA Class No. 1432-01 NA Certification UL Listed, CSA certified Suitable for Refer to main component information
1 set	-	-

	Max. cable connection area	Number of poles	For use with	Part no. Article no. when ordering separately	Article no.
Terminal covers, knockout					
1230PIC-696 Symbolphoto 	-	3 pole	NZM3-4, PN3-4, N(S)3-4	NZM3-XKSFA	104642
1230PIC-689 Symbolphoto 	-	4 pole	NZM3-4, PN3-4, N3-4	NZM3-4-XKSFA	104643
Large cover for connection width extension					
1230PIC-699 Symbolphoto 	-	3 pole	NZM3, PN3, N3 + NZM3-XKV70(-2)	NZM3-XKSAV	119858
1230PIC-696 Symbolphoto 	-	4 pole	NZM3-4, PN3-4, N3-4 + NZM3-4-XKV70	NZM3-4-XKSAV	132675
IP2X Protection against contact with finger For box terminal					
1230PIC-1384 Symbolphoto 	-	3 pole	NZM3, PN3, N3	NZM3-XIPK	266804
1230PIC-675 Symbolphoto 	-	4 pole	NZM3-4, PN3-4, N3-4	NZM3-4-XIPK	266805
For covers NZM3(-4)-XKSA or NZM3...(C)NA and N(S)3...NA					
wa_sg07118 Symbolphoto 	-	3 pole	NZM3, PN3, N(S)3	NZM3-XIPA	266808
1230PIC-1379 Symbolphoto 	-	4 pole	NZM3-4, PN3-4, N3-4	NZM3-4-XIPA	266809

Part no. suffix	Article no.	Std. pack	Notes	Information relevant for export to North America
+NZM3-XKSFAO	108273	1 Off	Contains parts for a terminal located at top or bottom for 3 or 4 pole switches. Enhanced contact protection (simplified finger protection).	UL/CSA certification not required
+NZM3-XKSFAU	108274	 		
+NZM3-4-XKSFAO	108275	1 Off	-	-
+NZM3-4-XKSFAU	108276			
-	-	1 Off	Contains parts for a terminal located at top or bottom for 3 pole circuit breakers. Insulation protection/protection against direct contact for connection of cable lugs or bars to connection width extension. Can also be used for connection width extension NZM3-XKV70 or NZM3-XKV70-2 with terminals NZM3-XK300 or NZM3-XK22x21 or NZM4-XKA. Cannot be combined with connection width NZM3-XKV70KB. When using insulated conductor material, degree of protection IP2X.	-
-	-	1 Off		
-	-	1 set	Contains parts for a terminal located at top or bottom for 3 or 4 pole circuit breakers. Enhanced contact protection to IP2X. Protection when reaching into the cable connection area with the connection of cables in the box terminal. With 2 conductors max. cross section 70mm². Cannot be combined with NZM-XSTK control circuit terminal.	UL/CSA certification not required
-	-	 		
-	-	1 set	Contains parts for a terminal located at top or bottom for 3 or 4 pole switches. Enhanced contact protection to IP2X. When fitting to NZM3...(C)NA or N3...-NA: with 2 conductors max. cross section 70 mm².	UL/CSA certification not required
-	-	 		
-	-	1 set		

	Max. cable connection area	Number of poles	For use with	Part no.	Article no.
Copper cable lug					
Not UL/CSA approved					
When using cable lugs without NZM3(-4)-XKSA cover, they must be insulated.					
	185 mm ²	-	3 and 4 pole	NZM3(-4), PN3(-4), N3(-4)	NZM3-XKS185 260040
	240 mm ²	-			NZM3-XKS240 260041
	300 mm ²	-		NZM3(-4), PN3(-4), N3(-4), NZM4(-4), N(-4)	NZM3-XKS300 153186
Mounting adapter plate					
	-	-	3 pole	NZM3 PN3 N3	NZM3-XAP10 119382

Std. pack	Notes	Information relevant for export to North America
		
3 Off	In order to crimp cable lugs when using stranded conductors, e.g., VDE 0295 Class 2 and rounded stranded sector-shaped conductors, you will need a Klauke K22, HK60/22, or EK22 crimping tool with the following crimping dies: <ul style="list-style-type: none"> • R22/95 for 95 mm² • R22/120 for 120 mm² • R22/150 for 150 mm² • R22/185 for 185 mm² • R22/240 for 240 mm² • R22/300 for 300 mm² Flexible conductors are adequate to a limited extent. They must be indent-crimped with a Klauke series 13 or series 25 crimping die.	-
1 set	The replacement device can be positioned identically either with the connection side or the actuation shaft. The NZM10 door coupling rotary handle can continue to be used if the shaft has a thickness of 12 mm. Otherwise, use new handle NZM3 with the new shaft.	UL/CSA certification not required

Space requirement	Number of poles	For use with	Rated current ¹⁾ I _n	Terminal capacity			Terminal capacity	
				Cable Cable lugs	Terminal capacity	AWG/kcmil	Copper strip No. of discs x width x disc thickness mm	Copper bar Width x thickness mm
			A		mm ²			

Screw terminals



Threaded stud standard equipment

Screws








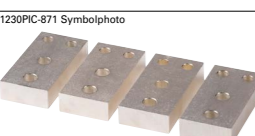
1230PIC-731 Symbolphoto



Space requirement	Number of poles	For use with	Rated current ¹⁾ I _n	Terminal capacity	Terminal capacity	Terminal capacity	Terminal capacity	
				Cable Cable lugs	Terminal capacity	AWG/kcmil	Copper strip No. of discs x width x disc thickness mm	Copper bar Width x thickness mm
2-hole	3 pole	NZM4, N(S)4	max. 1600	Copper cable- lugs	1 x 120 - 185 4 x 50 - 185	1 x 250 - 350 4 x 0 - 350	(2 x) 10 x 50 x 1.0	(2 x) 50 x 10
2-hole	4 pole	NZM4-4, N4-4	max. 1600	Copper cable- lugs	1 x 120 - 185 4 x 50 - 185	1 x 250 - 350 4 x 0 - 350	(2 x) 10 x 50 x 1.0	(2 x) 50 x 10




Part no.	Article no.	Std. pack	Notes	Information relevant for export to North America
Article no. when ordering separately				
NZM4-XKS	127736	1 set	Double hole fitting with M10 threaded stud at 25 mm spacing. Use special cable lug narrow version. M10x50 socket cap screw + M10x40 socket cap screw + self locking nut.	UL/CSA certification not required
NZM4-4-XKS	127737	1 set		

Space requirement	Number of poles	For use with	Rated current ¹⁾ I _n	Terminal capacity			Terminal capacity		
				Cable lugs	Terminal capacity	AWG/kcmil	Copper strip No. of discs x width x disc thickness	Copper bar Width x thickness	
				A	mm ²		mm	mm	
Module plate									
1230PIC-744 Symbolphoto 	1-hole	3 pole	NZM4, N(S)4	max. 1250	Copper cable- lugs	1 x 120 - 300 2 x 95 - 300	1 x 250 - 600 2 x 000 - 600	(2 x) 10 x 40 x 1.0 (2 x) 10 x 50 x 1.0	(2 x) 40 x 10 (2 x) 50 x 10
1230PIC-742 Symbolphoto 	1-hole	4 pole	NZM4-4, N4-4	max. 1250	Copper cable- lugs	1 x 120 - 300 2 x 95 - 300	1 x 250 - 600 2 x 000 - 600	(2 x) 10 x 40 x 1.0 (2 x) 10 x 50 x 1.0	(2 x) 40 x 10 (2 x) 50 x 10
1230PIC-1407 Symbolphoto 	2-hole	3 pole	NZM4, N(S)4	max. 1400	Copper cable- lugs	2 x 95 - 185 4 x 35 - 185	2 x 000 - 350 4 x 2 - 350	(2 x) 10 x 50 x 1.0	(2 x) 10 x 50 x 1.0
1230PIC-870 Symbolphoto 	2-hole	4 pole	NZM4-4, N4-4	max. 1400	Copper cable- lugs	2 x 95 - 185 4 x 35 - 185	2 x 000 - 350 4 x 2 - 350	(2 x) 10 x 50 x 1.0	(2 x) 10 x 50 x 1.0
1230PIC-1408 Symbolphoto 	2-hole	3 pole	NZM4, N(S)4	max. 1250	Copper cable- lugs	2 x 95 - 300	2 x 000 - 600	(2 x) 10 x 40 x 1.0 (2 x) 10 x 50 x 1.0	(2 x) 40 x 10 (2 x) 50 x 10
sg08515 Symbolphoto 	2-hole	4 pole	NZM4-4, N4-4	max. 1250	Copper cable- lugs	2 x 95 - 300	2 x 000 - 600	(2 x) 10 x 40 x 1.0 (2 x) 10 x 50 x 1.0	(2 x) 40 x 10 (2 x) 50 x 10
1230PIC-1408 Symbolphoto 	2-hole	3 pole	NZM4, N(S)4	max. 1600	Copper cable- lugs	2 x 95 - 300	2 x 000 - 600	(2 x) 10 x 40 x 1.0 (2 x) 10 x 50 x 1.0	(2 x) 40 x 10 (2 x) 50 x 10
1230PIC-871 Symbolphoto 	2-hole	4 pole	NZM4-4, N4-4	max. 1600	Copper cable- lugs	2 x 95 - 300	2 x 000 - 600	(2 x) 10 x 40 x 1.0 (2 x) 10 x 50 x 1.0	(2 x) 40 x 10 (2 x) 50 x 10

Part no.	Article no.	Std. pack	Notes	Information relevant for export to North America
Article no. when ordering separately				
				
NZM4-XKM1	266814	1 set 	Contains parts for a terminal located at top or bottom for 3 or 4 pole switches. For M10 screws. Can be enlarged for M12 screws. Use special cable lug narrow version. Can be fitted to circuit breaker with screw terminal. Insulation using cover NZM4(-4)-XKSA or phase divider NZM4(-4)-XKP necessary.	Product Standards UL489; CSA-C22.2 No. 5-09; IEC60947, CE marking UL File No. E31593 UL CCN DIHS CSA File No. 22086 CSA Class No. 1432-01 NA Certification UL listed, CSA certified Suitable for Refer to main component information
NZM4-4-XKM1	266815	1 set		-
NZM4-XKM2	266820	1 set 	Contains parts for a terminal located at top or bottom for 3 or 4 pole switches. For M10 screws. Can be enlarged for M12 screws. Use special cable lug narrow version. Can be fitted to circuit breaker with screw terminal. Insulation using cover NZM4(-4)-XKSA or phase divider NZM4(-4)-XKP necessary.	Product Standards UL489; CSA-C22.2 No. 5-09; IEC60947, CE marking UL File No. E31593 UL CCN DIHS CSA File No. 22086 CSA Class No. 1432-01 NA Certification UL listed, CSA certified Suitable for Refer to main component information
NZM4-4-XKM2	266821	1 set		-
NZM4-XKM2S-1250	284471	1 set 	Contains parts for a terminal located at top or bottom for 3 or 4 pole circuit breakers. Insulation using cover NZM4(-4)-XKSA or phase divider NZM4(-4)-XKP necessary.	Product Standards UL489; CSA-C22.2 No. 5-09; IEC60947, CE marking UL File No. E31593 UL CCN DIHS CSA File No. 22086 CSA Class No. 1432-01 NA Certification UL listed, CSA certified Suitable for Refer to main component information
NZM4-4-XKM2S-1250	284472	1 set		-
NZM4-XKM2S-1600	284473	1 set 	Contains parts for a terminal located at top or bottom for 3 or 4 pole circuit breakers. Insulation using cover NZM4(-4)-XKSA or phase divider NZM4(-4)-XKP necessary.	Product Standards UL489; CSA-C22.2 No. 5-09; IEC60947, CE marking UL File No. E31593 UL CCN DIHS CSA File No. 22086 CSA Class No. 1432-01 NA Certification UL listed, CSA certified Suitable for Refer to main component information
NZM4-4-XKM2S-1600	284474	1 set		-

Number of poles	For use with	Rated current ¹⁾ I _n	Terminal capacity			Terminal capacity	
			Cable Cable lugs	Terminal capacity mm ²	AWG/kcmil	Copper strip No. of discs x width x disc thickness mm	Copper bar Width x thickness mm
Flat cable terminal							
3 pole	NZM4, N(S)4	max. 1100	-	-	-	min. 6 x 16 x 0.8 max. (2 x) 10 x 32 x 1.0	-
4 pole	NZM4-4, N4-4	max. 1100	-	-	-	min. 6 x 16 x 0.8 max. (2 x) 10 x 32 x 1.0	-
Tunnel terminal							
3 pole	NZM4, N(S)4	max. 1400	Copper cable ⊙▽ Aluminium cable ⊙▽	1 x 50 - 240 4 x 50 - 240	1 x 0 - 500 4 x 0 - 500	-	-
4 pole	NZM4-4, N4-4	max. 1400	Copper cable ⊙▽ Aluminium cable ⊙▽	1 x 50 - 240 4 x 50 - 240	1 x 0 - 500 4 x 0 - 500	-	-
Rear terminal bolts							
3 pole	NZM4, N4	max. 1250	Copper cable- lugs Aluminium cable lugs	1 x 120 - 185 2 x 95 - 185 4 x 35 - 185 1 x 185 2 x 70 - 185 4 x 50 - 185	-	(2 x) 10 x 50 x 1.0	(2 x) 50 x 10
4 pole	NZM4(-4), N4(-4)	max. 1250	Copper cable- lugs Aluminium cable lugs	1 x 120 - 185 2 x 95 - 185 4 x 35 - 185 1 x 185 2 x 70 - 185 4 x 50 - 185	-	(2 x) 10 x 50 x 1.0	(2 x) 50 x 10



Part no.	Article no.	Std. pack	Notes	Information relevant for export to North America
Article no. when ordering separately				
NZM4-XKB	266829	1 set 	Contains parts for a terminal located at top or bottom for 3 or 4 pole switches. Conversion kit for circuit breaker with screw terminal. Insulation using cover NZM4(-4)-XKSA or phase divider NZM4(-4)-XKP necessary. When the circuit breaker is installed on a conductive mounting plate, cover NZM4(-4)-XKSA must be used. With control circuit terminal for 1 x 0.75 - 2.5 mm ² or 2x 0.75 - 1.5 mm ² copper conductors as standard.	Product Standards CSA-C22.2 No. 5-09; IEC60947, CE marking NA Certification Request filed for CSA
NZM4-4-XKB	266831	1 set		-
NZM4-XKA	266836	1 set 	Contains parts for a terminal located at top or bottom for 3 or 4 pole switches. With control circuit terminal for 1 x 0.75 - 2.5 mm ² (18 - 14 AWG) or 2 x 0.75 - 1.5 mm ² (18 - 16 AWG) copper cable as standard. Can be fitted to circuit breaker with screw terminal. Use ferrules with flexible and highly flexible conductors. Cover NZM4(-4)-XKSA must be fitted (included as standard).	Product Standards UL489; CSA-C22.2 No. 5-09; IEC60947, CE marking UL File No. E31593 UL CCN DIHS CSA File No. 22086 CSA Class No. 1432-01 NA Certification UL listed, CSA certified Suitable for Refer to main component information
NZM4-4-XKA	266837	1 set		-
NZM4-XKR	266842	1 set	Contains parts for a terminal located at top or bottom for 3 or 4 pole switches. Can also be retrofitted: Module plate NZM4...-XKM... or connection width extension NZM4...-XKV...	Not UL/CSA approved
NZM4-4-XKR	266843	1 set		Not UL/CSA approved

Space requirement	Number of poles	For use with	Rated current ¹⁾ I _n	Terminal capacity		Terminal capacity	
				Cable lugs	Terminal capacity	AWG/kcmil	Copper strip No. of discs x width x disc thickness
				A	mm ²	mm	mm

Connection width extension

1230PIC-1412 Symbolphoto

-	3 pole	NZM4 N(S)4	max. 1600	Copper cable lugs	4 x 300 - 6 x 95 - 240	4 x 600 - 6 x 000 - 500	max. (2 x) 10 x 80 x 1.0	max. (2 x) 80 x 10
---	--------	------------	-----------	-------------------	------------------------	-------------------------	--------------------------	--------------------

wa_sg02416 Symbolphoto

-	4 pole	NZM4-4, N4-4	max. 1600	Copper cable lugs	4 x 300 - 6 x 95 - 240	4 x 600 - 6 x 000 - 500	max. (2 x) 10 x 80 x 1.0	max. (2 x) 80 x 10
---	--------	--------------	-----------	-------------------	------------------------	-------------------------	--------------------------	--------------------

With two threaded studs

1230PIC-1411 Symbolphoto

-	3 pole	NZM4, N(S)4	1600	Copper cable lugs	4 x 95 - 300	4 x 500	(2 x) 10 x 80 x 1.0	(2 x) 10 x 80
---	--------	-------------	------	-------------------	--------------	---------	---------------------	---------------

1230PIC-1147 Symbolphoto

-	4 pole	NZM4-4, N4-4	1600	Copper cable lugs	4 x 95 - 300	4 x - 500	(2 x) 10 x 80 x 1.0	(2 x) 10 x 80
---	--------	--------------	------	-------------------	--------------	-----------	---------------------	---------------






Part no.	Article no.	Std. pack	Notes	Information relevant for export to North America
----------	-------------	-----------	-------	--






Article no. when ordering separately










NZM4-XKV95	281591	1 set	Contains parts for a terminal located at top or bottom for 3 or 4 pole switches Five-hole fitting, for example, for up to nine cable lugs per phase. Can be fitted to circuit breaker with screw terminal. Phase isolator included as standard. Distance between pole centers: 95 mm Installation conditions for current transformer up to 130 mm width with 80 mm busbar width. 4 mm holes predrilled for control circuit terminal. Contains hole for large cover NZM4(-4)-XKSAV	Product Standards UL489; CSA-C22.2 No. 5-09; IEC60947, CE marking UL File No. E31593 UL CCN DIHS CSA File No. 022086 CSA Class No. 1432-01 NA Certification UL listed, CSA certified Suitable for Refer to main component information
NZM4-XKV110	281593			
NZM4-4-XKV95	281592	1 set		
NZM4-4-XKV120	281594			

NZM4-XKV95-2KB	119861	1 set	Type contains parts for 3 to 4-pole switches on top or bottom of switch. Double stud bolts M12 for e. g. up to 4 cable lugs 300 mm ² per phase. For fitting to switches with screw connection. Distance between pole centers if 95 mm Can be fitted to current transformers up to 130 mm in width and with a bar width of 80 mm. 4 mm drilling dimensions for control circuit terminal available. Hole for large cover NZM4(-4)-XKSAV included	Product Standards UL489; CSA-C22.2 No. 5-09; IEC60947, CE marking UL File No. E31593 UL CCN DIHS CSA File No. 022086 CSA Class No. 1432-01 NA Certification UL listed, CSA certified Suitable for Refer to main component information
NZM4-4-XKV95-2KB	132674	1 set		









Number of poles	For use with	Terminal capacity		AWG/kcmil
		Connection	Terminal capacity mm ²	
Cover				
1230PIC-1354 Symbolphoto 	3 pole	NZM4, N(S)4	-	-
1230PIC-1355 Symbolphoto 	4 pole	NZM4-4 N4-4	-	-
Cover size				
For connection width extension				
1230PIC-699 Symbolphoto 	3 pole	NZM4, N(S)4 + NZM4-XKV95(KB)	-	-
1230PIC-696 Symbolphoto 	4 pole	NZM4-4, N(S)4-4 + NZM4-4-XKV95(KB)	-	-
Insulation plate				
1230PIC-315 Symbolphoto 	3 pole	NZM4, - N(S)4 + NZM4-XKV...	-	-
	4 pole	NZM4-4 N4-4 + NZM4-4-XKV...	-	-

Part no.	Article no.	Std. pack	Notes	Information relevant for export to North America
Article no. when ordering separately				
NZM4-XKSA	266846	1 set 	Type contains parts for a terminal located at top or bottom for 3 pole circuit breakers. Insulation/protection against direct contact where cable lugs or busbars are connected or tunnel terminals are used. Included in the set with tunnel terminals. When using insulated conductor material to IP1X.	Product Standards UL 489; CSA-C22.2 No. 5-09; IEC 60947; CE marking UL File No. E31593 UL CCN DIHS CSA File No. 022086 CSA Class No. 1432-01 NA Certification UL listed, CSA certified Suitable for UL listed, CSA certified
NZM4-4-XKSA	266847	1 set		-
NZM4-XKSAV	119876	1 set 	Type contains parts for a terminal located at top or bottom for 3 pole circuit breakers. Insulation protection/busbar tag shroud for connection of cable lugs or busbars to connection width extension. When using insulated conductor material to IP2X. Cannot be combined with connection width extension NZM4-XKV110.	UL/CSA certification not required
NZM4-4-XKSAV	132676	1 set 	Type contains parts for a terminal located at top or bottom for 4 pole circuit breakers. Insulation protection / busbar tag shroud for connection of cable lugs or busbars to connection width extension. Cannot be combined with connection width extension NZM4-4-XKV120. When using insulated conductor material to IP2X.	-
NZM4-XISP	119866	1 set 	Type contains parts for a terminal located at top or bottom for 3 or 4 pole circuit breakers. Insulation protection to mounting plate when minimum clearances are not maintained. Included with the connection width extension.	Product Standards UL 489; CSA-C22.2 No. 5-09; IEC 60947; CE marking NA Certification Request filed for UL and CSA Suitable for Refer to main component information
NZM4-4-XISP	119867	1 set		-









	Number of poles	For use with	Terminal capacity		AWG/kcmil
			Connection	Terminal capacity mm ²	
Terminal covers, knockout					
1230PIC-745 Symbolphoto 	3 pole	NZM4, N(S)4	-	-	-
wa_sg07218 Symbolphoto 	4 pole	NZM4-4, N4-4	-	-	-
Phase isolators					
sg09215 Symbolphoto 	3 pole	NZM4, N(S)4	-	-	-
sg08815 Symbolphoto 	4 pole	NZM4-4, N4-4	-	-	-

Part no.	Article no.	Std. pack	Notes	Information relevant for export to North America
Article no. when ordering separately 				
NZM4-XKSFA	292193	1 set 	Part no. includes parts for a top or bottom terminal for 3 pole circuit breakers, including in combination with NZM4-XKSA cover. Increased busbar tag shroud with connection of insulated bars or flat band.	UL/CSA certification not required
NZM4-4-XKSFA	292194	1 set		
NZM4-XKP	281595	1 set 	Type contains parts for a terminal located at top or bottom for 3 or 4-pole circuit breakers. Included with the connection width extension. Cannot be combined with the tunnel terminal NZM4(-4)-XKA, connection NZM4-XKR on rear. Insulation protection where cable lugs, busbars, module plates or flat cable terminals are used.	Product Standards UL 489; CSA-C22.2 No. 5-09; IEC 60947; CE marking UL File No. E31593 UL CCN DIHS CSA File No. 022086 CSA Class No. 1432-01 NA Certification UL listed, CSA certified Suitable for Refer to main component information
NZM4-4-XKP	281596	1 set		






Terminals
NZM4

	For use with	Rated current I _n	Number of poles	Part no. Article no. when ordering separately	Article no.	Std. pack	Notes
Adapter set N(ZM)4/N(ZM)12							
Not UL/CSA approved							
	N4	max. 1000	3 pole	N4-XAS12-1000	285609	1 set	Conversion kit from N(ZM)12 to N(ZM)4. With the terminal lugs of the replacement kit all three-pole NZM12 and N12 can be adapted to the connection dimensions of the NZM4 or N4 supplied from model year 1983. 4 pole basic devices, withdrawable units and basic devices with remote operator can not be replaced. Contents of replacement kits N(ZM)4-XAS12...: 3 connection extensions on outlet side 3 connection extensions on trip block side 2 mounting brackets 4 fixing screws 4 phase isolators 6 fixing screws, nuts and washers Paper drilling template in the instructional leaflet (AWA) The replacement kits have the same dimensions as models N(ZM)12..., which correspond to production status 02/97 to the present.
	N4	max. 1250	3 pole	N4-XAS12-1250	285610		
	N4	max. 1600	3 pole	N4-XAS12-1600	285611		
	NZM4	max. 1000	3 pole	NZM4-XAS12-1000	285612	1 set	Special feature: Prior to 02/97 the N(ZM)12-800 was supplied with 10 mm instead of 8 mm terminal lugs. With these models the customer must determine the device's year of manufacture by measuring the thickness of the terminal lug and order replacement kit N(ZM)4-XAS12-1250. Example: N(ZM)12-800... (1000) > N(ZM)4-XAS12-1000 N(ZM)12-800 before 02/97 > N(ZM)4-XAS12-1250 N(ZM)12-1250 > N(ZM)4-XAS12-1250 N(ZM)12-1600 > N(ZM)4-XAS12-1600 Addition for devices constructed prior to 1983! Here the replacement kit for switch-disconnectors can be used in full. For circuit-breakers with "long" ZM design, the adapter fit only at the top! At the bottom the devices are about 65 mm longer and the lower connection is about 26 mm deeper. Consequently the bottom adapters are too short and the heights do not correspond.
	NZM4	max. 1250	3 pole	NZM4-XAS12-1250	285613		
	NZM4	max. 1600	3 pole	NZM4-XAS12-1600	285614		
	NZM4, N4	max. 1250	3 pole	NZM4-XAS14-1250	283291	1 set	Conversion kit for NZM14 to NZM4. Same connections as NZM14. Contains for both sides of switch. 3 connection extensions on outlet side 3 connection extensions on trip block side. 1 long shroud for the outlet side Paper drilling template in the instructional leaflet (AWA) Cannot be combined with the module plate (NZM4-XKM...), flat cable terminal (NZM4-XKB), connection width extension (NZM4-XKV...), tunnel terminal (NZM4-XKA), connection on rear (NZM4-XKR) and withdrawable unit (NZM4-XAV...)
	NZM4, N4	1600	3 pole	NZM4-XAS14-1600	283292		






Plug-in units, withdrawable units
NZM1, NZM2, NZM3, NZM4

	For use with	Number of poles	Part no.	Article no.	Std. pack	Notes
Plug-in units						
For circuit breakers NZM and switch disconnectors N Not UL/CSA approved Not for U _g > 690 V						
Plug-in socket						
	Completion through N1	NZM1 3 pole	NZM1-XSVS	109777	1 Off	Mounting position: vertical, 90° right, 90° left Order control circuit plug unit separately!
		NZM2 3 pole	NZM2-XSVS	266699	1 Off	
		NZM2-4 4 pole	NZM2-4-XSVS	266700	1 Off	
		NZM3 3 pole	NZM3-XSVS	168472		Mounting position: vertical, 90° right, 90° left Order control circuit plug unit separately! Lockable base
		NZM3-4 4 pole	NZM3-4-XSVS	168473		
Control circuit plug unit						
	-	NZM1, N1 For auxiliary contact, shunt/ N2(2-4) overvoltage release	NZM2-XSVHI	266705	1 Off	10 terminals
	-	NZM2(-4) For remote operator	NZM2-XSVR	266706	1 Off	
	-	NZM2(-4) For Interface N2(2-4) Module	NZM2-XSVBSM	500016	1 Off	

Plug-in units, withdrawable units
NZM1, NZM2, NZM3, NZM4

For use with	Number of poles	Part no. Article no. when ordering separately	Article no.	Std. pack	Notes
Withdrawable unit					
For circuit breakers NZM and switch disconnectors N Not UL/CSA approved Not for $U_g > 690$ V					
Socket base					
For switches with withdrawable carrier. Also for reserved compartments.					
	NZM3 N3	3 pole NZM3-XAVS	266711	1 Off	I_{nmax} at: 20°C: 605 A (NZM3), 1600 A (NZM4) 40°C: 550 A (NZM3), 1500 A (NZM4) Mounting position: NZM3: vertical, 90° left NZM4: vertical 3 positions: Connected, test, disconnected Position indication is mechanical with pointers. Additional electrical indication with auxiliary contacts possible. One N/O or NC contact M22-(C)K01 or M22-(C)K10 each per position. Alternatively also double contacts M22-CK... Complete with control circuit plug unit. All auxiliary contact (HIA, HIN, HIV) and shunt release connections to the control circuit plug unit are already present.
	NZM3-4 N3-4	4 pole NZM3-4-XAVS	266712	1 Off	Maximum configuration: 3 contacts HIN, 2 contacts HIA, 2 contacts HIV Cannot be combined with adapter set NZM4/NZM14 (NZM4-XSAS14-...) or N(ZM)4/N(ZM)12.
	NZM4 N4	3 pole NZM4-XAVS	266713	1 Off	
	NZM4-4 N4-4	4 pole NZM4-4-XAVS	266714	1 Off	
Withdrawable carrier					
Suitable for socket base Only in combination with switch					
	NZM4 N4	3 pole +NZM4-XAVE	266717	1 Off	
	NZM4-4 N4-4	4 pole +NZM4-4-XAVE	266718	1 Off	

Auxiliary contacts with screw terminals/spring-cage terminals
M22-...








For use with	Contact configuration: ⊕ = safety function by positive opening according to IEC/EN 60947-5-1	Contact sequences	Part no. Article no. when ordering separately	Article no.	Std. pack
Auxiliary contacts					
Standard auxiliary contacts (HIN) Switches with the main contacts. Used for indicating and interlocking tasks.					
	Single contact with screw terminal	NZM1(-4), 2(-4), 3(-4), 4(-4) PN1(-4), 2(-4), 3(-4) N(S)1(-4), 2(-4), 3(-4), 4(-4)	1 N/O 1 NC	M22-K10 M22-K01	216376 216378 20 Off 
	Single contact with spring-cage terminal	NZM1(-4), 2(-4), 3(-4), 4(-4) PN1(-4), 2(-4), 3(-4) N(S)1(-4), 2(-4), 3(-4), 4(-4)	1 N/O 1 NC	M22-CK10 M22-CK01	216384 216385
	Double contact with spring cage terminal	NZM1(-4), 2(-4), 3(-4), 4(-4) PN1(-4), 2(-4), 3(-4) N(S)1(-4), 2(-4), 3(-4), 4(-4)	2 N/O 1 NC 2 NC 2 N/O	M22-CK11 M22-CK02 M22-CK20	107940 107899 107898
Notes			Information relevant for export to North America 		
The following can be clipped into the switch:			Product Standards IEC/EN 60947-5; UL 508;		
• NZM1: One standard auxiliary contact			CSA-C22.2 No. 14-05;		
• NZM2: Up to 2 standard auxiliary contacts M22-(C)K...			CSA-C22.2 No. 94-91; CE marking		
• NZM3: Up to 3 standard auxiliary contacts M22-(C)K...			UL File No. E29184		
• NZM4: Up to 3 standard auxiliary contacts M22-(C)K...			UL CCN NKCR		
Any combinations of the auxiliary contact types are possible.			CSA File No. 012528		
Marking on switch: HIN			CSA Class No. 3211-03		
On combination with remote operator NZM-XR... the right mounting location of standard auxiliary contact HIN can be fitted only with individual contacts.			NA Certification UL Listed, CSA certified		

For use with
 Contact configuration:
 ⊕ = safety function by positive opening according to IEC/EN 60947-5-1
 N/O = normally open contact NC = normally closed contact
 Contact sequences
 Part no. Article no. Std. pack
 Article no. when ordering separately

Auxiliary contacts

Trip-indicating auxiliary contact (HIA), (HIAFI)¹

General trip-indication "+", when tripped by shunt release, overload release, short-circuit release or earth-fault release due to fault current.

	Single contact with screw terminal	NZM1(-4), 2(-4), 3(-4), 4(-4) PN1(-4), 2(-4), 3(-4) N(S)1(-4), 2(-4), 3(-4), 4(-4)	1 N/O		M22-K10	216376	20 Off	
			1 NC		M22-K01	216378		
	Single contact with spring-cage terminal	NZM1(-4), 2(-4), 3(-4), 4(-4) PN1(-4), 2(-4), 3(-4) N(S)1(-4), 2(-4), 3(-4), 4(-4)	1 N/O		M22-CK10	216384		
			1 NC		M22-CK01	216385		
	Double contact with spring-cage terminal	NZM1(-4), 2(-4), 3(-4), 4(-4) PN1(-4), 2(-4), 3(-4) N(S)1(-4), 2(-4), 3(-4), 4(-4)	1 NC		M22-CK11	107940		
			2 NC		M22-CK02	107899		
			2 N/O	M22-CK20	107898			

Notes

The following can be clipped into the switch:
 • NZM1: One trip-indicating auxiliary switch
 • NZM2: One trip-indicating auxiliary switch M22-(C)K...
 • NZM3: One trip-indicating auxiliary switch M22-(C)K...
 • NZM4: Up to 2 trip-indicating auxiliary switches M22-(C)K...
 Any combinations of the auxiliary contact types are possible.
 Not in combination with switch-disconnector PN...
 Marking on switch: HIA.
 Labeling in residual current-block: HIAFI.
 If the trip-indicating auxiliary contacts are used in the residual current-block, the NC contacts operate as N/O contacts and the N/O contact operates as an NC contact.

Information relevant for export to North America












 Product Standards IEC/EN 60947-5; UL 508; CSA-C22.2 No. 14-05; CSA-C22.2 No. 94-91; CE marking
 UL File No. E29184
 UL CCN NKCR
 CSA File No. 012528
 CSA Class No. 3211-03
 NA Certification UL Listed, CSA certified

For use with
 Contact configuration:
 ⊕ = safety function by positive opening according to IEC/EN 60947-5-1
 N/O = normally open contact NC = normally closed contact
 Contact sequences
 Part no. Article no. Std. pack
 Article no. when ordering separately

Auxiliary contacts

Early-make auxiliary contact

For interlocking and load shedding circuits, as well as for early make of the undervoltage release in main switch/emergency switching off applications

	With clamp terminal on left switch side	NZM1(-4), PN1(-4), N1(-4)	-		NZM1-XHIV	259426	1 Off	
	With clamp terminal on right switch side.		2 N/O		NZM1-XHIVR	292195		
	With 3 m connection cable instead of screw connection.		2 N/O		NZM1-XHIVL	259432		
		NZM2(-4), 3(-4) PN2(-4), 3(-4) N(S)2(-4), 3(-4)	2 N/O		NZM2/3-XHIV	259430 ¹⁾		
			1 N/O			NZM2/3-XHIV-PI	189748 ¹⁾	
		NZM4(-4) N(S)4(-4)	2 N/O		NZM4-XHIV	266172 ²⁾		

Notes

Not in conjunction with undervoltage release NZM...-XU... or shunt release NZM...-XA...
 Early make with switch on and switch off (manual actuation): approx. 20 ms

Information relevant for export to North America

 Product Standards UL489; CSA-C22.2 No. 5-09; IEC60947, CE marking
 UL File No. E140305
 UL CCN DIHS
 CSA File No. 022086
 CSA Class No. 1437-01
 NA Certification UL Listed, CSA certified

Notes

¹⁾ Not in conjunction with undervoltage release NZM...-XU..., shunt releases NZM...-XA...
 Early make with switch on and switch off (manual actuation): approx. 20 ms
²⁾ Not in conjunction with undervoltage release NZM...-XU..., shunt releases NZM...-XA... or remote operator NZM...-XR...
 Early make (manual operation): approx. ca. 90 ms

Information relevant for export to North America

 Product Standards UL489; CSA-C22.2 No. 5-09; IEC60947, CE marking
 UL File No. E140305
 UL CCN DIHS
 CSA File No. 022086
 CSA Class No. 1437-01
 NA Certification UL Listed, CSA certified

For use with	Rated control voltage	Part no.	Article no.	Std. pack	Notes
	U_s	Article no. when ordering separately			
	V				

Undervoltage releases

Without auxiliary contacts

Non-delayed disconnection of circuit breaker NZM or switch disconnector N when control voltage drops below 35 – 70 % U_s .
For use with emergency switching off devices in conjunction with emergency switching off button.

1230PIC-1127 Symbolphoto



With clamp terminal on left switch side.	Rated control voltage	Part no.	Article no.	Std. pack	Notes
NZM1(-4), N(S)1(-4)	24 V 50/60 Hz	NZM1-XU24AC	259434	1 Off	When the undervoltage release is de-energized, accidental contact with the main contacts of the switch during attempts to switch on is reliably prevented. Undervoltage releases cannot be installed simultaneously with early-make auxiliary contact NZM...-XHIV... or shunt release NZM...-XA...
	48 V 50/60 Hz	NZM1-XU48AC	259436	1 Off	
	60 V 50/60 Hz	NZM1-XU60AC	259438	1 Off	
	110 V - 130 V 50/60 Hz	NZM1-XU110-130AC	259440	1 Off	
	208 V - 240 V 50/60 Hz	NZM1-XU208-240AC	259442	1 Off	
	380 V - 440 V 50/60 Hz	NZM1-XU380-440AC	259444	1 Off	
	480 V - 525 V 50/60 Hz	NZM1-XU480-525AC	259446	1 Off	
	600 V 50/60 Hz	NZM1-XU600AC	259448	1 Off	
	12 V DC	NZM1-XU12DC	259450	1 Off	
	18 V DC	NZM1-XU18DC	171798	1 Off	
	24 V DC	NZM1-XU24DC	259452	1 Off	
	48 V DC	NZM1-XU48DC	262631	1 Off	
	60 V DC	NZM1-XU60DC	259454	1 Off	
	110 V - 130 V DC	NZM1-XU110-130DC	259458	1 Off	
	220 V - 250 V DC	NZM1-XU220-250DC	259460	1 Off	

1230PIC-1131 Symbolphoto



With 3 m connection cable instead of screw terminal.	Rated control voltage	Part no.	Article no.	Std. pack	Notes
NZM1(-4), N(S)1(-4)	24 V 50/60 Hz	NZM1-XUL24AC	259462	1 Off	When the undervoltage release is de-energized, accidental contact with the main contacts of the switch during attempts to switch on is reliably prevented. Undervoltage releases cannot be installed simultaneously with early-make auxiliary contact NZM...-XHIV... or shunt release NZM...-XA...
	110 V - 130 V 50/60 Hz	NZM1-XUL110-130AC	259468	1 Off	
	208 V - 240 V 50/60 Hz	NZM1-XUL208-240AC	259471	1 Off	
	380 V - 440 V 50/60 Hz	NZM1-XUL380-440AC	259473	1 Off	
	480 V - 525 V 50/60 Hz	NZM1-XUL480-525AC	259475	1 Off	
	600 V 50/60 Hz	NZM1-XUL600AC	259477	1 Off	
	12 V DC	NZM1-XUL12DC	259479	1 Off	
	18 V DC	NZM1-XUL18DC	171799	1 Off	
	24 V DC	NZM1-XUL24DC	259481	1 Off	
	110 V - 130 V DC	NZM1-XUL110-130DC	259487	1 Off	
	220 V - 250 V DC	NZM1-XUL220-250DC	259489	1 Off	

Information relevant for export to North America



Product Standards	UL489; CSA-C22.2 No. 5-09; IEC60947, CE marking
UL File No.	E140305
UL CCN	DIHS
CSA File No.	022086
CSA Class No.	1437-01
NA Certification	UL Listed, CSA certified

For use with	Rated control voltage	Part no.	Article no.	Std. pack	Notes
	U_s	Article no. when ordering separately			
	V				

Undervoltage releases

Without auxiliary contacts

Non-delayed disconnection of circuit breaker NZM or switch disconnector N when control voltage drops below 35 – 70 % U_s .
For use with emergency switching off devices in conjunction with emergency switching off button.

1230PIC-1133 Symbolphoto



Rated control voltage	Part no.	Article no.	Std. pack	Notes	
NZM2(-4), N(S)2(-4) NZM3(-4), N(S)3(-4)	24 V 50/60 Hz	NZM2/3-XU24AC	259491	1 Off	When the undervoltage release is de-energized, accidental contact with the main switches of the switch during attempts to switch on is reliably prevented. Undervoltage release cannot be installed simultaneously with early-make auxiliary contact NZM...-XHIV... or undervoltage release NZM...-XA...
	48 V 50/60 Hz	NZM2/3-XU48AC	259493	1 Off	
	60 V 50/60 Hz	NZM2/3-XU60AC	259495	1 Off	
	110 V - 130 V 50/60 Hz	NZM2/3-XU110-130AC	259497	1 Off	
	208 V - 240 V 50/60 Hz	NZM2/3-XU208-240AC	259499	1 Off	
	380 V - 440 V 50/60 Hz	NZM2/3-XU380-440AC	259501	1 Off	
	480 V - 525 V 50/60 Hz	NZM2/3-XU480-525AC	259503	1 Off	
	600 V 50/60 Hz	NZM2/3-XU600AC	259505	1 Off	
	12 V DC	NZM2/3-XU12DC	259507	1 Off	
	18 V DC	NZM2/3-XU18DC	171802	1 Off	
	24 V DC	NZM2/3-XU24DC	259509	1 Off	
	48 V DC	NZM2/3-XU48DC	259511	1 Off	
	60 V DC	NZM2/3-XU60DC	259513	1 Off	
	110 V - 130 V DC	NZM2/3-XU110-130DC	259515	1 Off	
	220 V - 250 V DC	NZM2/3-XU220-250DC	259517	1 Off	

1230PIC-1148 Symbolphoto



Rated control voltage	Part no.	Article no.	Std. pack	Notes	
NZM4(-4), N(S)4(-4)	24 V 50/60 Hz	NZM4-XU24AC	266189	1 Off	When the undervoltage release is de-energized, accidental contact with the main switches of the switch during attempts to switch on is reliably prevented. Undervoltage release cannot be installed simultaneously with early-make auxiliary contact NZM...-XHIV... or undervoltage release NZM...-XA...
	48 V 50/60 Hz	NZM4-XU48AC	266190	1 Off	
	60 V 50/60 Hz	NZM4-XU60AC	266191	1 Off	
	110 V - 130 V 50/60 Hz	NZM4-XU110-130AC	266192	1 Off	
	208 V - 240 V 50/60 Hz	NZM4-XU208-240AC	266193	1 Off	
	380 V - 440 V 50/60 Hz	NZM4-XU380-440AC	266194	1 Off	
	480 V - 525 V 50/60 Hz	NZM4-XU480-525AC	266195	1 Off	
	600 V 50/60 Hz	NZM4-XU600AC	266196	1 Off	
	12 V DC	NZM4-XU12DC	266203	1 Off	
	18 V DC	NZM4-XU18DC	171804	1 Off	
	24 V DC	NZM4-XU24DC	266204	1 Off	
	48 V DC	NZM4-XU48DC	266205	1 Off	
	60 V DC	NZM4-XU60DC	266206	1 Off	
	110 V - 130 V DC	NZM4-XU110-130DC	266207	1 Off	
	220 V - 250 V DC	NZM4-XU220-250DC	266208	1 Off	

Information relevant for export to North America




Product Standards	UL489; CSA-C22.2 No. 5-09; IEC60947, CE marking
UL File No.	E140305
UL CCN	DIHS
CSA File No.	022086
CSA Class No.	1437-01
NA Certification	UL Listed, CSA certified

For use with	Rated control voltage	Part no.	Article no.	Std. pack	Notes
	U_s	Article no. when ordering separately			
	V				

Undervoltage releases


With two early-make auxiliary contacts

For interlocking and load-shedding circuits, as well as for early-make of the undervoltage release in main-switch applications. For use with emergency switching off devices in conjunction with emergency switching off button.




With clamp terminal on left switch side.

NZM1(-4), 24 V 50/60 Hz	NZM1-XUHIV24AC	259531	1 Off	When the undervoltage release is de-energized, accidental contact with the main contacts of the switch during attempts to switch on is reliably prevented. Early-make of auxiliary contacts on switching on and off (manual operation): approx. 20 ms. Undervoltage releases cannot be installed simultaneously with early-make auxiliary contact NZM...-XHIV... or shunt release NZM...-XA...
N(S)1(-4), 48 V 50/60 Hz	NZM1-XUHIV48AC	259533	1 Off	
60 V 50/60 Hz	NZM1-XUHIV60AC	259535		
110 V - 130 V 50/60 Hz	NZM1-XUHIV110-130AC	259537		
208 V - 240 V 50/60 Hz	NZM1-XUHIV208-240AC	259539		
380 V - 440 V 50/60 Hz	NZM1-XUHIV380-440AC	259541		
480 V - 525 V 50/60 Hz	NZM1-XUHIV480-525AC	259543		
12 V DC	NZM1-XUHIV12DC	259545		
18 V DC	NZM1-XUHIV18DC	171800		
24 V DC	NZM1-XUHIV24DC	259547		
48 V DC	NZM1-XUHIV48DC	259549		
60 V DC	NZM1-XUHIV60DC	259551		
110 V - 130 V DC	NZM1-XUHIV110-130DC	259553		
220 V - 250 V DC	NZM1-XUHIV220-250DC	259555		



With 3 m connection cable instead of screw connection.

NZM1(-4), 24 V 50/60 Hz	NZM1-XUHIVL24AC	259557	1 Off	When the undervoltage release is de-energized, accidental contact with the main contacts of the switch during attempts to switch on is reliably prevented. Early-make of auxiliary contacts on switching on and off (manual operation): approx. 20 ms. Cannot be used in conjunction with remote operator NZM...-XR.... Undervoltage releases cannot be installed simultaneously with early-make auxiliary contact NZM...-XHIV... or shunt release NZM...-XA...
N(S)1(-4), 110 V - 130 V 50/60 Hz	NZM1-XUHIVL110-130AC	259563	1 Off	
208 V - 240 V 50/60 Hz	NZM1-XUHIVL208-240AC	259565		
380 V - 440 V 50/60 Hz	NZM1-XUHIVL380-440AC	259567		
480 V - 525 V 50/60 Hz	NZM1-XUHIVL480-525AC	259569		
12 V DC	NZM1-XUHIVL12DC	259571		
18 V DC	NZM1-XUHIVL18DC	171801		
24 V DC	NZM1-XUHIVL24DC	259573		
110 V - 130 V DC	NZM1-XUHIVL110-130DC	259579		
220 V - 250 V DC	NZM1-XUHIVL220-250DC	259581		



NZM2(-4), 24 V 50/60 Hz	NZM2/3-XUHIV24AC	259583	1 Off	When the undervoltage release is de-energized, accidental contact with the main contacts of the switch during attempts to switch on is reliably prevented. Early-make of auxiliary contacts on switching on and off (manual operation): approx. 20 ms. Cannot be used in conjunction with remote operator NZM...-XR.... Undervoltage releases cannot be installed simultaneously with early-make auxiliary contact NZM...-XHIV... or shunt release NZM...-XA...
N(S)2(-4), 48 V 50/60 Hz	NZM2/3-XUHIV48AC	259585	1 Off	
NZM3(-4), 60 V 50/60 Hz	NZM2/3-XUHIV60AC	259587		
N(S)3(-4), 110 V - 130 V 50/60 Hz	NZM2/3-XUHIV110-130AC	259589		
208 V - 240 V 50/60 Hz	NZM2/3-XUHIV208-240AC	259591		
380 V - 440 V 50/60 Hz	NZM2/3-XUHIV380-440AC	259594		
480 V - 525 V 50/60 Hz	NZM2/3-XUHIV480-525AC	259598		
12 V DC	NZM2/3-XUHIV12DC	259600		
18 V DC	NZM2/3-XUHIV18DC	171803		
24 V DC	NZM2/3-XUHIV24DC	259602		
48 V DC	NZM2/3-XUHIV48DC	259604		
60 V DC	NZM2/3-XUHIV60DC	259606		
110 V - 130 V DC	NZM2/3-XUHIV110-130DC	259608		
220 V - 250 V DC	NZM2/3-XUHIV220-250DC	259610		

Information relevant for export to North America




Product Standards	UL489; CSA-C22.2 No. 5-09; IEC60947, CE marking
UL File No.	E140305
UL CCN	DIHS
CSA File No.	022086
CSA Class No.	1437-01
NA Certification	UL Listed, CSA certified

For use with	Rated control voltage	Part no.	Article no.	Std. pack	Notes
	U_s	Article no. when ordering separately			
	V				

Undervoltage releases

With two early-make auxiliary contacts

For interlocking and load-shedding circuits, as well as for early-make of the undervoltage release in main-switch applications. For use with emergency switching off devices in conjunction with emergency switching off button.




NZM4(-4), N(S)4(-4)

24 V 50/60 Hz	NZM4-XUHIV24AC	266217	1 Off	When the undervoltage release is de-energized, accidental contact with the main contacts of the switch during attempts to switch on is reliably prevented. Early make of auxiliary contacts on switching on (manual operation): approx. 90 ms. Cannot be used in conjunction with remote operator NZM...-XR.... Undervoltage release cannot be installed together with early-make auxiliary contact NZM...-XHIV... or shunt release NZM...-XA...
48 V 50/60 Hz	NZM4-XUHIV48AC	266218	1 Off	
60 V 50/60 Hz	NZM4-XUHIV60AC	266219		
110 V - 130 V 50/60 Hz	NZM4-XUHIV110-130AC	266220		
208 V - 240 V 50/60 Hz	NZM4-XUHIV208-240AC	266221		
380 V - 440 V 50/60 Hz	NZM4-XUHIV380-440AC	266222		
480 V - 525 V 50/60 Hz	NZM4-XUHIV480-525AC	266223		
12 V DC	NZM4-XUHIV12DC	266231		
18 V DC	NZM4-XUHIV18DC	171805		
24 V DC	NZM4-XUHIV24DC	266232		
48 V DC	NZM4-XUHIV48DC	266233		
60 V DC	NZM4-XUHIV60DC	266234		
110 V - 130 V DC	NZM4-XUHIV110-130DC	266235		
220 V - 250 V DC	NZM4-XUHIV220-250DC	266236		



With 2 separate early-make auxiliary contacts

With 3 m connection cable instead of screw terminal.



NZM1(-4), 24 V 50/60 Hz	NZM1-XUHIV20L24AC	259612	1 Off	When the undervoltage release is de-energized, accidental contact with the main contacts of the switch during attempts to switch on is reliably prevented. Early make of auxiliary contacts on switching on (manual operation): approx. 20 ms. Cannot be used in conjunction with remote operator NZM...-XR.... Undervoltage release cannot be installed together with early-make auxiliary contact NZM...-XHIV... or shunt release NZM...-XA...
N(S)1(-4), 110 V - 130 V 50/60 Hz	NZM1-XUHIV20L110-130AC	259620	1 Off	
208 V - 240 V 50/60 Hz	NZM1-XUHIV20L208-240AC	259622		
380 V - 440 V 50/60 Hz	NZM1-XUHIV20L380-440AC	259624		
420 - 480 V 50/60 Hz	NZM1-XUHIV20L420-480VAC	105946		
24 V DC	NZM1-XUHIV20L24DC	259630		
18 V DC	NZM1-XUHIV20L18DC	171807		

Contacts 3.23 and 3.24 with separate 3 m connection cables.

NZM2(-4), 24 V 50/60 Hz	NZM2/3-XUHIV2024AC	259640	1 Off	When the undervoltage release is de-energized, accidental contact with the main contacts of the switch during attempts to switch on is reliably prevented. Early make of auxiliary contacts on switching on (manual operation): approx. 20 ms. Cannot be used in conjunction with remote operator NZM...-XR.... Undervoltage release cannot be installed together with early-make auxiliary contact NZM...-XHIV... or shunt release NZM...-XA...
N(S)2(-4), 48 V 50/60 Hz	NZM2/3-XUHIV2048AC	259643	1 Off	
NZM3(-4), 110 V - 130 V 50/60 Hz	NZM2/3-XUHIV20110-130AC	259648		
N(S)3(-4), 208 V - 240 V 50/60 Hz	NZM2/3-XUHIV20208-240AC	259651		
380 V - 440 V 50/60 Hz	NZM2/3-XUHIV20380-440AC	259653		
420 - 480 V 50/60 Hz	NZM2/3-XUHIV20420-480VAC	105947		
24 V DC	NZM2/3-XUHIV2024DC	259659		
18 V DC	NZM2/3-XUHIV2018DC	171808		

Information relevant for export to North America



Product Standards	UL489; CSA-C22.2 No. 5-09; IEC60947, CE marking
UL File No.	E140305
UL CCN	DIHS
CSA File No.	022086
CSA Class No.	1437-01
NA Certification	UL Listed, CSA certified


For use with	Rated control voltage	Part no.	Article no.	Std. pack	Notes
	U_s	Article no. when ordering separately			
	V				

Undervoltage releases


With 2 separate early-make auxiliary contacts

For use with emergency switching off devices in conjunction with emergency switching off button.

Coil connections wired to clamp terminals, auxiliary contact connections with 3 m loose connection cables.




NZM1(-4),	24 V 50/60 Hz	NZM1-XUHIV20KL24AC	284388	1 Off	When the undervoltage release is de-energized, accidental contact with the main contacts of the switch during attempts to switch on is reliably prevented. Early make of auxiliary contacts on switching on and off (manual operation): approx. 20 ms Cannot be used in conjunction with remote operator NZM...-XR...
N(S)1(-4)	110 V - 130 V 50/60 Hz	NZM1-XUHIV20KL110-130AC	284389	1 Off	
	208 V - 240 V 50/60 Hz	NZM1-XUHIV20KL208-240AC	284400	1 Off	
	24 V DC	NZM1-XUHIV20KL24DC	284387	1 Off	



Coil connections with 3 m loose connection cables, auxiliary contact connections wired to clamp terminals

NZM1(-4),	24 V 50/60 Hz	NZM1-XUHIV20LK24AC	284402	1 Off	Undervoltage release cannot be installed simultaneously with early-make auxiliary contact NZM...-XHIV... or shunt release NZM...-XA...
N(S)1(-4)	110 V - 130 V 50/60 Hz	NZM1-XUHIV20LK110-130AC	284403	1 Off	
	208 V - 240 V 50/60 Hz	NZM1-XUHIV20LK208-240AC	284404	1 Off	
	24 V DC	NZM1-XUHIV20LK24DC	284401	1 Off	



Contacts 3.23 and 3.24 with separate 3 m connection cables

NZM4(-4),	24 V 50/60 Hz	NZM4-XUHIV2024AC	266244	1 Off	Information relevant for export to North America
N(S)4(-4)	110 V - 130 V 50/60 Hz	NZM4-XUHIV20110-130AC	266247	1 Off	
	208 V - 240 V 50/60 Hz	NZM4-XUHIV20208-240AC	266248	1 Off	
	380 V - 440 V 50/60 Hz	NZM4-XUHIV20380-440AC	266249	1 Off	
	18 V DC	NZM4-XUHIV2018DC	171809	1 Off	
	24 V DC	NZM4-XUHIV2024DC	266258	1 Off	

Information relevant for export to North America



Product Standards	UL489; CSA-C22.2 No. 5-09; IEC60947, CE marking
UL File No.	E140305
UL CCN	DIHS
CSA File No.	022086
CSA Class No.	1437-01
NA Certification	UL Listed, CSA certified

For use with	Rated control voltage	Part no.	Article no.	Std. pack	Notes
	U_s	Article no. when ordering separately			
	V				

Undervoltage releases

Without auxiliary contact - with push in terminal

Instantaneous shut-off of the NZM circuit breaker when the control voltage drops below 35 - 70 % U_s .

For use with emergency-stop devices in connection with an emergency-stop button.



NZM2(-4),	24 V AC 50/60 Hz	NZM2/3-XU24AC-PI	189750	1 Off	If the shunt trip is live, contact with the circuit breaker's primary contacts is prevented when switched on. Undervoltage release modules cannot be installed simultaneously with early-make contact NZM...-XHIV, shunt release NZM...-XA... or relais modules NZM...-X2A...
N(S)2(-4)	48 V AC 50/60 Hz	NZM2/3-XU48AC-PI	189751	1 Off	
NZM3(-4),	60 V AC 50/60 Hz	NZM2/3-XU60AC-PI	189752	1 Off	
N(S)3(-4)	110 - 130 V AC 50/60 Hz	NZM2/3-XU110-130AC-PI	189753	1 Off	
	208 - 240 V AC 50/60 Hz	NZM2/3-XU208-240AC-PI	189754	1 Off	
	12 V DC	NZM2/3-XU12DC-PI	189755	1 Off	
	18 V DC	NZM2/3-XU18DC-PI	189756	1 Off	
	24 V DC	NZM2/3-XU24DC-PI	189757	1 Off	
	48 V DC	NZM2/3-XU48DC-PI	189758	1 Off	
	60 V DC	NZM2/3-XU60DC-PI	189759	1 Off	
	110 - 130 V DC	NZM2/3-XU110-130DC-PI	189760	1 Off	
	220 - 250 V DC	NZM2/3-XU220-250DC-PI	189761	1 Off	



NZM4(-4),	24 V AC 50/60 Hz	NZM4-XU24AC-PI	189762	1 Off	Information relevant for export to North America
N(S)4(-4)	48 V AC 50/60 Hz	NZM4-XU48AC-PI	189763	1 Off	
	60 V AC 50/60 Hz	NZM4-XU60AC-PI	189764	1 Off	
	110 - 130 V AC 50/60 Hz	NZM4-XU110-130AC-PI	189765	1 Off	
	208 - 240 V AC 50/60 Hz	NZM4-XU208-240AC-PI	189766	1 Off	
	12 V DC	NZM4-XU12DC-PI	189767	1 Off	
	18 V DC	NZM4-XU18DC-PI	189768	1 Off	
	24 V DC	NZM4-XU24DC-PI	189769	1 Off	
	48 V DC	NZM4-XU48DC-PI	189770	1 Off	
	60 V DC	NZM4-XU60DC-PI	189771	1 Off	
	110 - 130 V DC	NZM4-XU110-130DC-PI	189772	1 Off	
	220 - 250 V DC	NZM4-XU220-250DC-PI	189773	1 Off	

Information relevant for export to North America



Product Standards	UL489; CSA-C22.2 No. 5-09; IEC60947, CE marking
UL File No.	E140305
UL CCN	DIHS
CSA File No.	022086
CSA Class No.	1437-01
NA Certification	UL Listed, CSA certified


For use with	Rated control voltage	Part no.	Article no.	Std. pack	Notes
	U_s	Article no. when ordering separately			
	V				

Undervoltage releases

With one early-make auxiliary contact - with Push-In terminals

For interlocking and load-shedding circuits, as well as for early-make of the undervoltage release in main-switch applications. For use with emergency switching off devices in conjunction with emergency switching off button.

wa_sg07518 Symbolphoto



NZM2(-4), N(S)2(-4)	24 V AC 50/60 Hz	NZM2/3-XUHIV24AC-PI	189774	1 Off	When the undervoltage release is de-energized, accidental contact with the main contacts of the switch during attempts to switch on is reliably prevented. Early-make of auxiliary contacts on switching on and off (manual operation): approx. 20 ms Undervoltage releases cannot be installed simultaneously with early-make auxiliary contact NZM...-XHIV... or shunt release NZM...-XA....
NZM2(-4), N(S)2(-4)	48 V AC 50/60 Hz	NZM2/3-XUHIV48AC-PI	189775		
NZM3(-4), N(S)3(-4)	60 V AC 50/60 Hz	NZM2/3-XUHIV60AC-PI	189776		
NZM2(-4), N(S)2(-4)	110 - 130 V AC 50/60 Hz	NZM2/3-XUHIV110-130AC-PI	189777		
NZM2(-4), N(S)2(-4)	208 - 240 V AC 50/60 Hz	NZM2/3-XUHIV208-240AC-PI	189778		
NZM2(-4), N(S)2(-4)	12 V DC	NZM2/3-XUHIV12DC-PI	189779		
NZM2(-4), N(S)2(-4)	18 V DC	NZM2/3-XUHIV18DC-PI	189780		
NZM2(-4), N(S)2(-4)	24 V DC	NZM2/3-XUHIV24DC-PI	189781		
NZM2(-4), N(S)2(-4)	48 V DC	NZM2/3-XUHIV48DC-PI	189782		
NZM2(-4), N(S)2(-4)	60 V DC	NZM2/3-XUHIV60DC-PI	189783		
NZM2(-4), N(S)2(-4)	110 - 130 V DC	NZM2/3-XUHIV110-130DC-PI	189784		
NZM2(-4), N(S)2(-4)	220 - 250 V DC	NZM2/3-XUHIV220-250DC-PI	189785		

Information relevant for export to North America



Product Standards	UL489; CSA-C22.2 No. 5-09; IEC60947, CE marking
UL File No.	E140305
UL CCN	DIHS
CSA File No.	022086
CSA Class No.	1437-01
NA Certification	UL Listed, CSA certified

For use with	Part no.	Article no.	Std. pack	Notes
	Article no. when ordering separately			

Undervoltage releases, off-delayed

Combination of separate delay unit and special releases.

For use with emergency switching off devices in conjunction with emergency switching off button. Not UL/CSA approved.

Delay unit

Voltage dips of less than 0.06 – 16 s do not cause disconnection of the NZM circuit breaker or N switch disconnector.

NZM1(-4), 2(-4), 3(-4), 4(-4)	UVU-NZM	260154	1 Off	Delay time can be set from 70 ms - 4 s. With additional external capacitor: • 30.000 µF ≥ 35 V up to 8 s • 90.000 µF ≥ 35 V up to 16 s Cannot be installed simultaneously with early-make auxiliary contact NZM...-XHIV... or shunt release NZM...-XA.... Delay unit for separate installation (mounting: top-hat rail or screws). For other operating voltages use a control transformer.
N(S)1(-4), 2(-4), 3(-4), 4(-4)				
50/60 Hz				
220 V - 240 V				
380 V - 440 V				
480 V - 550 V				
DC/AC				
24 V				

1230PIC-795 Symbolphoto



Special trip block

For combination with separate delay unit

Without auxiliary contacts

NZM1 with 3 m loose connection cables instead of screw terminal, NZM2, 3, and 4 with screw terminals.

NZM1(-4), N(S)1(-4)	NZM1-XUVL	271607	1 Off	Delay unit UVU-NZM is additionally required.
NZM2(-4), N(S)2(-4)	NZM2/3-XUV	259527		Cannot be installed simultaneously with separate early-make auxiliary contact NZM...-XHIV... or shunt release NZM...-XA....
NZM3(-4), N(S)3(-4)				
NZM4(-4), N(S)4(-4)	NZM4-XUV	266588		


1230PIC-1148 Symbolphoto



With two early-make auxiliary contacts

NZM1(-4), N(S)1(-4)	NZM1-XUVHIVL	271608	1 Off	Cannot be used in conjunction with remote operator NZM...-XR.... Delay unit UVU-NZM is additionally required.
NZM2(-4), N(S)2(-4)	NZM2/3-XUVHIV	259684		Cannot be installed simultaneously with separate early-make auxiliary contact NZM...-XHIV... or shunt release NZM...-XA....
NZM3(-4), N(S)3(-4)				
NZM4(-4), N(S)4(-4)	NZM4-XUVHIV	266596		

1230PIC-1149 Symbolphoto




With two independently operating early-make auxiliary contacts

NZM1 with 3 m separate connection cables instead of screw terminal, NZM2, 3 and 4 with screw terminal, contact 3.23 and 3.24 with 3 m separate connection cables				NZM1, 2, 3: Early make of auxiliary contacts on switching on and off (manual operation): approx. 20 ms. NZM4: Early make of auxiliary contacts on switching on (manual operation): approx. 90 ms.
--	--	--	--	--

NZM1(-4), N(S)1(-4)	NZM1-XUVHIV20L	271609	1 Off	
NZM2(-4), N(S)2(-4)	NZM2/3-XUVHIV20	259688		
NZM3(-4), N(S)3(-4)				
NZM4(-4), N(S)4(-4)	NZM4-XUVHIV20	266604		

1230PIC-1319 Symbolphoto





For use with	Rated control voltage	Part no.	Article no.	Std. pack	Notes
	U _s	Article no. when ordering separately			
	V				

Shunt releases

Without auxiliary contacts



Switches are tripped by a voltage pulse or by the application of uninterrupted voltage.

1230PIC-756 Symbolphoto



With clamp terminal on left switch side	Part no.	Rated control voltage	Article no.	Std. pack	Notes
NZM1(-4)	12 V AC/DC	NZM1-XA12AC/DC	259706	1 Off	When the shunt release is live, contact with the switch's main contacts on switching on is reliably prevented. Undervoltage releases cannot be installed simultaneously with early-make auxiliary contact NZM...XHIV... or shunt release NZM...XU...
N(S)1(-4)	24 V AC/DC	NZM1-XA24AC/DC	259708	1 Off	
	48 V AC/DC	NZM1-XA48AC/DC	259720	1 Off	
	60 V AC/DC	NZM1-XA60AC/DC	259722	1 Off	
	110 V - 130 V AC/DC	NZM1-XA110-130AC/DC	259724	1 Off	
	208 V - 250 V AC/DC	NZM1-XA208-250AC/DC	259726	1 Off	
	380 V - 440 V AC/DC	NZM1-XA380-440AC/DC	259728	1 Off	
	480 V - 525 V AC/DC	NZM1-XA480-525AC/DC	259730	1 Off	

1230PIC-838 Symbolphoto



With 3 m connection cable instead of screw terminal	Part no.	Rated control voltage	Article no.	Std. pack	Notes
NZM1(-4)	12 V AC/DC	NZM1-XAL12AC/DC	259734	1 Off	When the shunt release is live, contact with the switch's main contacts on switching on is reliably prevented. Undervoltage releases cannot be installed simultaneously with early-make auxiliary contact NZM...XHIV... or shunt release NZM...XU...
N(S)1(-4)	24 V AC/DC	NZM1-XAL24AC/DC	259736	1 Off	
	110 V - 130 V AC/DC	NZM1-XAL110-130AC/DC	259742	1 Off	
	208 V - 250 V AC/DC	NZM1-XAL208-250AC/DC	259744	1 Off	
	380 V - 440 V AC/DC	NZM1-XAL380-440AC/DC	259746	1 Off	
	480 V - 525 V AC/DC	NZM1-XAL480-525AC/DC	259748	1 Off	

1230PIC-1370 Symbolphoto

Part no.	Rated control voltage	Article no.	Std. pack	Notes
NZM2(-4)	12 V AC/DC	NZM2/3-XA12AC/DC	259752	1 Off
N(S)2(-4)	24 V AC/DC	NZM2/3-XA24AC/DC	259754	
NZM3(-4)	48 V AC/DC	NZM2/3-XA48AC/DC	259756	
N(S)3(-4)	60 V AC/DC	NZM2/3-XA60AC/DC	259758	
	110 V - 130 V AC/DC	NZM2/3-XA110-130AC/DC	259760	
	208 V - 250 V AC/DC	NZM2/3-XA208-250AC/DC	259763	
	380 V - 440 V AC/DC	NZM2/3-XA380-440AC/DC	259766	
	480 V - 525 V AC/DC	NZM2/3-XA480-525AC/DC	259768	

1230PIC-1387 Symbolphoto

Part no.	Rated control voltage	Article no.	Std. pack	Notes
NZM4(-4)	12 V AC/DC	NZM4-XA12AC/DC	266446	1 Off
N(S)4(-4)	24 V AC/DC	NZM4-XA24AC/DC	266447	
	48 V AC/DC	NZM4-XA48AC/DC	266448	
	60 V AC/DC	NZM4-XA60AC/DC	266449	
	110 V - 130 V AC/DC	NZM4-XA110-130AC/DC	266450	
	208 V - 250 V AC/DC	NZM4-XA208-250AC/DC	266451	
	380 V - 440 V AC/DC	NZM4-XA380-440AC/DC	266452	
	480 V - 525 V AC/DC	NZM4-XA480-525AC/DC	266453	

Information relevant for export to North America




Product Standards	UL489; CSA-C22.2 No. 5-09; IEC60947, CE marking
UL File No.	E140305
UL CCN	DIHS
CSA File No.	022086
CSA Class No.	1437-01
NA Certification	UL Listed, CSA certified

For use with	Part no.	Article no.	Std. pack	Notes
	Mit Screw terminals			

Shunt releases

Capacitor unit 230 V 50/60 Hz in conjunction with shunt release NZM...-XA208-250 AC/DC
Enclosure: degree of protection IP20
Not UL/CSA approved

1230PIC-788 Symbolphoto





Part no.	Rated control voltage	Article no.	Std. pack	Notes
NZM1(-4), N(S)1(-4), NZM2(-4), N(S)2(-4), NZM3(-4), N(S)3(-4), NZM4(-4), N(S)4(-4)	230 V AC	NZM-XCM	229413	1 Off

Enables the reliable use of circuit breakers as mesh network circuit breakers in the range from 0 – 110 % U_n with constant switch-off time of 40 ms. If the mains voltage is absent, the installed capacitor supplies power for actuating the shunt release for at least 12 hours. The capacitor unit is arranged independently of the circuit breaker. Connect NZM-XCM to the power feed side. Note on engineering: Connect a standard auxiliary contact (HIN) as N/O in series with the coil of the shunt release! Standard auxiliary contact not included as standard



Shunt releases

For mesh network circuit breakers
For intermittent operation
Maximum On-time = 1 s
Operating range 10-110 % U_s
Not UL/CSA approved


1230PIC-1382 Symbolphoto

sg07615 Symbolphoto

Without auxiliary contacts	Part no.	Article no.	Std. pack	Notes
NZM3-XA-230AC-MNS	274097	274097	1 Off	Rated control voltage 230 V AC For use with NZM3(-4), N3(-4) and NZM4(-4), N4(-4) Cannot be installed simultaneously with early-make auxiliary contact NZM...XHIV... or undervoltage release NZM...XU...
With early-make auxiliary contact	NZM3-XAHIV-230AC-MNS	274141	1 Off	
Without auxiliary contacts	NZM4-XA-230AC-MNS	274138	1 Off	Intermittent operation guaranteed by series connection of a make contact M22-(C)K10. The maximum duty factor of the shunt releases for mesh network circuit breakers is 1 s.
With early-make auxiliary contact	NZM4-XAHIV-230AC-MNS	274143	1 Off	



- ① Reverse power relay contact from mesh network relay
- S11 Remote off
- Q Standard auxiliary contacts
- Q1 Shunt releases

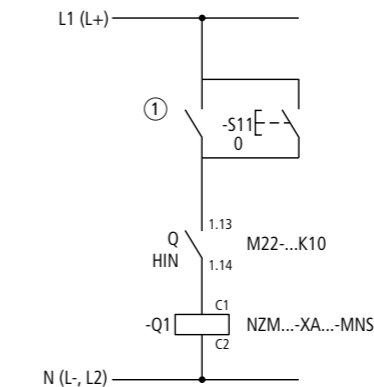
For use with	Rated control voltage	Part no.	Article no.	Std. pack	Notes
	U _s	Article no. when ordering separately			
	V				

Shunt releases

With early-make auxiliary contact


Not in combination with remote operator.

1230PIC-1364 Symbolphoto

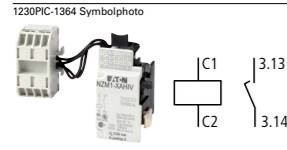


With clamp terminal on left switch side.	NZM1(-4), N(S)1(-4)	12 V AC/DC 24 V AC/DC 48 V AC/DC 60 V AC/DC 110 V - 130 V AC/DC 208 V - 250 V AC/DC 380 V - 440 V AC/DC	NZM1-XAHIV12AC/DC NZM1-XAHIV24AC/DC NZM1-XAHIV48AC/DC NZM1-XAHIV60AC/DC NZM1-XAHIV110-130AC/DC NZM1-XAHIV208-250AC/DC NZM1-XAHIV380-440AC/DC	259772 259774 259776 259778 259780 259782 259784	1 Off	When the shunt release is live, contact with the switch's main contacts on switching on is reliably prevented. Early make of auxiliary contact on switching on and off (manual operation): approx. 20 ms.

1230PIC-1366 Symbolphoto

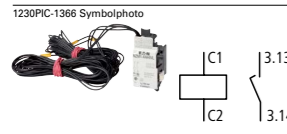


With 3 m connection cable instead of screw terminal	NZM1(-4), N(S)1(-4)	12 V AC/DC 24 V AC/DC 110 V - 130 V AC/DC 208 V - 250 V AC/DC 380 V - 440 V AC/DC	NZM1-XAHIV12AC/DC NZM1-XAHIV24AC/DC NZM1-XAHIV110-130AC/DC NZM1-XAHIV208-250AC/DC NZM1-XAHIV380-440AC/DC	259790 259792 259798 259800 259802	1 Off	Shunt release cannot be installed simultaneously with early-make auxiliary contact NZM...-XHIV... or undervoltage release NZM...-XU...

1230PIC-1374 Symbolphoto

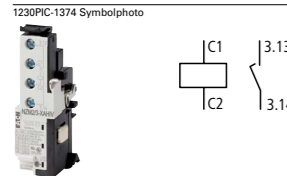

with Screw terminals	NZM2(-4), N(S)2(-4) NZM3(-4), N(S)3(-4)	12 V AC/DC 24 V AC/DC 48 V AC/DC 60 V AC/DC 110 V - 130 V AC/DC 208 V - 250 V AC/DC 380 V - 440 V AC/DC	NZM2/3-XAHIV12AC/DC NZM2/3-XAHIV24AC/DC NZM2/3-XAHIV48AC/DC NZM2/3-XAHIV60AC/DC NZM2/3-XAHIV110-130AC/DC NZM2/3-XAHIV208-250AC/DC NZM2/3-XAHIV380-440AC/DC	259808 259810 259812 259814 259816 259818 259820	1 Off	

1230PIC-1388 Symbolphoto

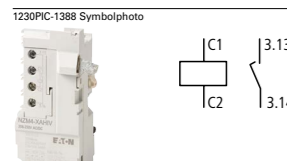

with Screw terminals	NZM4(-4), N(S)4(-4)	12 V AC/DC 24 V AC/DC 48 V AC/DC 60 V AC/DC 110 V - 130 V AC/DC 208 V - 250 V AC/DC 380 V - 440 V AC/DC	NZM4-XAHIV12AC/DC NZM4-XAHIV24AC/DC NZM4-XAHIV48AC/DC NZM4-XAHIV60AC/DC NZM4-XAHIV110-130AC/DC NZM4-XAHIV208-250AC/DC NZM4-XAHIV380-440AC/DC	266470 266471 266472 266473 266474 266475 266476	1 Off	When the shunt release is live, contact with the switch's main contacts on switching on is reliably prevented. Early make of auxiliary contact on switching on (manual operation): approx. 90 ms. Cannot be used in conjunction with remote operator NZM...-XR... Shunt release cannot be installed simultaneously with early-make auxiliary contact NZM...-XHIV... or undervoltage release NZM...-XU...

Information relevant for export to North America



Product Standards	UL489; CSA-C22.2 No. 5-09; IEC60947, CE marking
UL File No.	E140305
UL CCN	DIHS
CSA File No.	022086
CSA Class No.	1437-01
NA Certification	UL Listed, CSA certified


For use with	Rated control voltage	Part no.	Article no.	Std. pack	Notes
	U _s	Article no. when ordering separately			
	V				

Shunt releases

Without auxiliary contacts - with push in terminal


Instantaneous shut-off of the NZM circuit breaker when the control voltage drops below 35 - 70 % U_s. For use with emergency-stop devices in connection with an emergency-stop button.

SG06121.L Symbolphoto

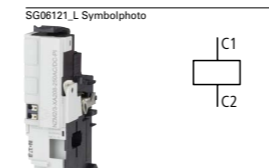

NZM2(-4), N(S)2(-4) NZM3(-4), N(S)3(-4)	12 V AC/DC 24 V AC/DC 48 V AC/DC 60 V AC/DC 110 V - 130 V AC/DC 208 V - 250 V AC/DC	NZM2/3-XA12AC/DC-PI NZM2/3-XA24AC/DC-PI NZM2/3-XA48AC/DC-PI NZM2/3-XA60AC/DC-PI NZM2/3-XA110-130AC/DC-PI NZM2/3-XA208-250AC/DC-PI	189798 189799 189800 189801 189802 189803	1 Off	When the shunt release is live, contact with the circuit breaker's main contacts on switching on is reliably prevented. Shunt release modules cannot be installed simultaneously with early-make contact NZM...-XHIV, undervoltage release NZM...-XU..., or relays modules NZM...-X2A...

SG06321.L Symbolphoto

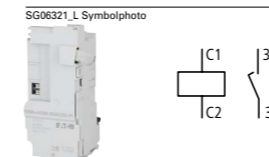


NZM4(-4), N(S)4(-4)	12 V AC/DC 24 V AC/DC 48 V AC/DC 60 V AC/DC 110 V - 130 V AC/DC 208 V - 250 V AC/DC	NZM4-XA12AC/DC-PI NZM4-XA24AC/DC-PI NZM4-XA48AC/DC-PI NZM4-XA60AC/DC-PI NZM4-XA110-130AC/DC-PI NZM4-XA208-250AC/DC-PI	189804 189805 189806 189807 189808 189809		

With early-make auxiliary contact - with push in terminal

Instantaneous shut-off of the NZM circuit breaker when the control voltage drops below 35 - 70 % U_s. For use with emergency-stop devices in connection with an emergency-stop button.

SG05821.L Symbolphoto

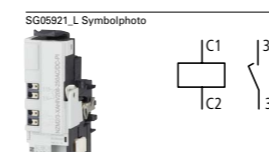

NZM2(-4), NZM3(-4), N(S)2(-4), N3(-4)	12 V AC/DC 24 V AC/DC 48 V AC/DC 60 V AC/DC 110 V - 130 V AC/DC 208 V - 250 V AC/DC	NZM2/3-XAHIV12AC/DC-PI NZM2/3-XAHIV24AC/DC-PI NZM2/3-XAHIV48AC/DC-PI NZM2/3-XAHIV60AC/DC-PI NZM2/3-XAHIV110-130AC/DC-PI NZM2/3-XAHIV208-250AC/DC-PI	189810 189811 189812 189813 189814 189815	1 Off	When the shunt release is live, contact with the circuit breaker's main contacts on switching on is reliably prevented. Early-make of auxiliary contacts on switching on and off (manual operation): approx. 20 ms (NZM2/3) and 90 ms (NZM4). Shunt release modules cannot be installed simultaneously with early-make contact NZM...-XHIV, undervoltage release NZM...-XU..., relays modules NZM...-X2A..., or remote operator NZM...-XR...

Information relevant for export to North America



Product Standards	UL489; CSA-C22.2 No. 5-09; IEC60947, CE marking
UL File No.	E140305
UL CCN	DIHS
CSA File No.	022086
CSA Class No.	1437-01
NA Certification	UL Listed, CSA certified

For use with	Part no.	Article no.	Std. pack	Notes
	Article no. when ordering separately			

Relay modules



Undervoltage releases with two relays

For use with	Part no.	Article no.	Std. pack	Notes
PXR20(25)	NZM2/3-XU2A24AC	189724	1 Off	Instantaneous shut-off of the NZM circuit breaker when the control voltage drops below 35 - 70 % U _s . For use with emergency-stop devices in connection with an emergency-stop button. For signaling commands or different states of the circuit breaker. Two relays per unit. The activation criteria can be configured in the trip unit. Configuration via communication or circuit breaker display or front USB port and Eaton Power Xpert Protection Manager. When the under-voltage trip is switched off, accidental contact with the circuit breaker's primary contacts is prevented when switched on. Only for use in combination with circuit breakers with electronic trips. Under-voltage trip relay modules cannot be installed simultaneously with make-before-break auxiliary contact NZM...-XHIV, under-voltage trip NZM...-XU... or shunt trip NZM...-XA. Relay contacts for control wiring. Control wiring on push-in clamps. Cannot be used with the PXR10 NZM-AX electronic trip.
NZM2(-4)-...X...	NZM2/3-XU2A24DC	189725	 	
PXR20(25)	NZM2/3-XU2A110-130AC	189726		
NZM3(-4)-...X...	NZM2/3-XU2A208-240AC	189727		



For use with	Part no.	Article no.	Std. pack	Notes
PXR20(25)	NZM4-XU2A24AC	189728		Configuration via communication or circuit breaker display or front USB port and Eaton Power Xpert Protection Manager. When the under-voltage trip is switched off, accidental contact with the circuit breaker's primary contacts is prevented when switched on. Only for use in combination with circuit breakers with electronic trips. Under-voltage trip relay modules cannot be installed simultaneously with make-before-break auxiliary contact NZM...-XHIV, under-voltage trip NZM...-XU... or shunt trip NZM...-XA. Relay contacts for control wiring. Control wiring on push-in clamps. Cannot be used with the PXR10 NZM-AX electronic trip.
NZM4(-4)-...X...	NZM4-XU2A24DC	189729		
	NZM4-XU2A110-130AC	189730		
	NZM4-XU2A208-240AC	189731		

Undervoltage releases and 1 early-make auxiliary contact and 2 Relays

For use with	Part no.	Article no.	Std. pack	Notes
PXR20(25)	NZM2/3-XUHIV2A24AC	189732	1 Off	For interlock circuits and load-shedding circuits as well as make-before-break interruption of the shunt trip for primary breaker use. Instantaneous shut-off of the NZM circuit breaker when the control voltage drops below 35 - 70 % U _s . For use with emergency-stop devices in connection with an emergency-stop button.
NZM2(-4)-...X...	NZM2/3-XUHIV2A24DC	189733	 	
PXR20(25)	NZM2/3-XUHIV2A110-130AC	189734		
NZM3(-4)-...X...	NZM2/3-XUHIV2A208-240AC	189735		



Information relevant for export to North America





Product Standards	UL489; CSA-C22.2 No. 5-09; IEC60947, CE marking
UL File No.	E140305
UL CCN	DIHS
CSA File No.	022086
CSA Class No.	1437-01
NA Certification	UL Listed, CSA certified

For use with	Part no.	Article no.	Std. pack	Notes
	Article no. when ordering separately			

Relay modules

Shunt release with two relays

For use with	Part no.	Article no.	Std. pack	Notes
PXR20(25)	NZM2/3-XA2A24AC/DC	189740	1 Off	The breakers are actuated by a voltage pulse or by applying a no-break current. For signaling commands or different states of the circuit breaker. Two relays per unit. The activation criteria can be configured in the trip unit. Configuration via communication or circuit breaker display or front USB port and Eaton Power Xpert Protection Manager. If the shunt trip is live, contact with the circuit breaker's primary contacts is prevented when switched on. Only for use in combination with circuit breakers with electronic trips. Shunt trip relay modules cannot be installed simultaneously with make-before-break auxiliary contact NZM...-XHIV, under-voltage trip NZM...-XU... or shunt trip NZM...-XA. Relay coil is controlled by trip unit. Relay contacts for control wiring. Control wiring on push-in clamps. Cannot be used with the PXR10 NZM-AX electronic trip.
NZM2(-4)-...X...	NZM2/3-XA2A110-130AC	189742	 	
PXR20(25)	NZM2/3-XA2A208-240AC	189743		
NZM3(-4)-...X...				



For use with	Part no.	Article no.	Std. pack	Notes
PXR20(25)	NZM4-XA2A24AC/DC	189744		Configuration via communication or circuit breaker display or front USB port and Eaton Power Xpert Protection Manager. When the under-voltage trip is switched off, accidental contact with the circuit breaker's primary contacts is prevented when switched on. Only for use in combination with circuit breakers with electronic trips. Under-voltage trip relay modules cannot be installed simultaneously with make-before-break auxiliary contact NZM...-XHIV, under-voltage trip NZM...-XU... or shunt trip NZM...-XA. Relay contacts for control wiring. Control wiring on push-in clamps. Cannot be used with the PXR10 NZM-AX electronic trip.
NZM4(-4)-...X...	NZM4-XA2A110-130AC	189746		
	NZM4-XA2A208-240AC	189747		

Relay module

For use with	Part no.	Article no.	Std. pack	Notes
PXR20(25)	NZM2/3-X2A	189722	1 Off	For signaling commands or different states of the circuit breaker. Two relays per unit. The activation criteria can be configured in the trip unit. Configuration via communication or circuit breaker display or front USB port and Eaton Power Xpert Protection Manager. 24 V DC, 24 - 240 V 50/60 Hz. Only for use in combination with circuit breakers with electronic trips. Relay components cannot be installed simultaneously with make-before-break auxiliary breaker NZM...-XHIV, the under-voltage trip NZM...-XU... or the shunt trip NZM...-XA.... Relay contacts for control wiring. Control wiring on push-in clamps. Cannot be used with the PXR10 NZM-AX electronic trip.
NZM2(-4)-...X...				
PXR20(25)				



For use with	Part no.	Article no.	Std. pack	Notes
PXR20(25)	NZM4-X2A	189723		Configuration via communication or circuit breaker display or front USB port and Eaton Power Xpert Protection Manager. 24 V DC, 24 - 240 V 50/60 Hz. Only for use in combination with circuit breakers with electronic trips. Relay components cannot be installed simultaneously with make-before-break auxiliary breaker NZM...-XHIV, the under-voltage trip NZM...-XU... or the shunt trip NZM...-XA.... Relay contacts for control wiring. Control wiring on push-in clamps. Cannot be used with the PXR10 NZM-AX electronic trip.
NZM4(-4)-...X...				

Information relevant for export to North America



Product Standards	UL489; CSA-C22.2 No. 5-09; IEC60947, CE marking
UL File No.	E140305
UL CCN	DIHS
CSA File No.	022086
CSA Class No.	1437-01
NA Certification	UL Listed, CSA certified

Door coupling rotary handles NZM1, NZM2, NZM3, NZM4

Product view	For use with	Standard Part no.	Article no.	Std. pack	Notes
		Article no. when ordering separately			

Door coupling rotary handles

Complete including rotary drive and coupling parts
An additional extension shaft is necessary with the NZM...-XT(V)D(V)(R)(-60) part numbers.
Degree of protection IP66/UL/CSA type 4X, 12

Standard, black/grey



Lockable in 0 position on handle with up to 3 padlocks. With door interlock	NZM1(-4), PN1(-4), N(S)1(-4)	NZM1-XTVD	260166	1 Off	Circuit breaker can also be installed in a horizontal position 90° left/right, with the handle still in the same position.
	NZM2(-4), PN2(-4), N(S)2(-4)	NZM2-XTVD	260168		
	NZM3(-4), PN3(-4), N(S)3(-4)	NZM3-XTVD	260170		
	NZM4(-4), N(S)4(-4)	NZM4-XTVD	266614		



Lockable on handle and switch with up to 3 padlocks. Can be locked in 0 position, with adequate modification also in I position. With door interlock. Lockable on switch in 0 position.	NZM1(-4), PN1(-4), N(S)1(-4)	NZM1-XTVDV	260172	
	NZM2(-4), PN2(-4), N(S)2(-4)	NZM2-XTVDV	260174	
	NZM3(-4), PN3(-4), N(S)3(-4)	NZM3-XTVDV	260176	
	NZM4(-4), N(S)4(-4)	NZM4-XTVDV	266616	

Red-yellow for emergency switching off



Lockable on handle and switch with up to 3 padlocks. Lockable in 0 position on handle. With door interlock. Lockable on switch in 0 position.	NZM1(-4), PN1(-4), N(S)1(-4)	NZM1-XTVDVR	260178	1 Off	Circuit breaker can also be installed in a horizontal position 90° left/right, with the handle still in the same position.
	NZM2(-4), PN2(-4), N(S)2(-4)	NZM2-XTVDVR	260180		
	NZM3(-4), PN3(-4), N(S)3(-4)	NZM3-XTVDVR	260182		
	NZM4(-4), N(S)4(-4)	NZM4-XTVDVR	266618		

Information relevant for export to North America

Product Standards	UL489; CSA-C22.2, No. 5-09; IEC60947, CE marking
UL File No.	E140305
UL CCN	DIHS
CSA File No.	022086
CSA Class No.	1437-01
NA Certification	UL Listed, CSA certified
Degree of Protection	IEC: IP66, UL/CSA Type 4X, 12

Door coupling rotary handles NZM1, NZM2, NZM3, NZM4

Part no.	Article no.	Std. pack	Notes	Extremely narrow fittings	Article no.	Std. pack	Notes
Article no. when ordering separately				Article no. when ordering separately			

NZM1-XTVD-60	271504	1 Off	Door interlock • Can not be defeated in the locked OFF and ON positions • Can be modified such that it can be defeated from the outside using a screwdriver, when it is in the unlocked ON position. • Door can be opened in OFF NZM...-XTVD(V)-60 • For maximum shaft length 60 mm • Without shaft support • Cannot be combined with additional handle NZM...-XDZ • External warning plate/ designation label can be clipped on.	NZM1-XTVD-0	279392	1 Off	Circuit breaker can also be installed in a horizontal position 90° left/right, with the handle still in the same position.
NZM2-XTVD-60	271505			NZM2-XTVD-0	279393		
NZM3-XTVD-60	271506			NZM3-XTVD-0	279394		
NZM4-XTVD-60	271507			NZM4-XTVD-0	279395		
NZM1-XTVDV-60	271508			NZM1-XTVDV-0	279396		
NZM2-XTVDV-60	271509			NZM2-XTVDV-0	279397		
NZM3-XTVDV-60	271510			NZM3-XTVDV-0	279398		
NZM4-XTVDV-60	271511			NZM4-XTVDV-0	279399		

NZM1-XTVDVR-60	271512	1 Off	Door interlock • Can not be defeated in the locked OFF position. • Can be modified such that it can be defeated from the outside using a screwdriver, when it is in the unlocked ON position. • Door can be opened in OFF NZM...-XTVDVR-60 • For maximum shaft length 60 mm • Without shaft support • Cannot be combined with additional handle NZM...-XDZ • External warning plate/ designation label can be clipped on.	NZM1-XTVDVR-0	279400	1 Off	Circuit breaker can also be installed in a horizontal position 90° left/right, with the handle still in the same position.
NZM2-XTVDVR-60	271513			NZM2-XTVDVR-0	279401		
NZM3-XTVDVR-60	271514			NZM3-XTVDVR-0	279402		
NZM4-XTVDVR-60	271515			NZM4-XTVDVR-0	279403		

4.10

Compact circuit breakers, switch disconnectors

Door coupling rotary handles
NZM1, NZM2, NZM3, NZM4

For use with	Standard Part no.	Article no.	Std. pack	Notes
	Article no. when ordering separately			
Extension shaft				
UL/CSA certification not required				
400 mm max. mounting depth	NZM1(-4), PN1(-4), NZM1/2-XV4 N(S)1(-4) NZM2(-4), PN2(-4), N(S)2(-4)	261232	1 Off	Length 290 mm, can be cut to required length.
	NZM3(-4), PN3(-4), NZM3/4-XV4 N(S)3(-4) NZM4(-4), N(S)4(-4)	261234		
600 mm max. mounting depth	NZM1(-4), PN1(-4), NZM1/2-XV6 N(S)1(-4) NZM2(-4), PN2(-4), N(S)2(-4)	260191		Length 425 mm, can be cut to required length.
	NZM3(-4), PN3(-4), NZM3/4-XV6 N(S)3(-4) NZM4(-4), N(S)4(-4)	260193		

1230PIC-153 Symbolphoto



4.11

Door coupling rotary handle with key lock
NZM1, NZM2, NZM3, NZM4

For use with	Part no.	Article no.	Std. pack	Notes
	Article no. when ordering separately			

Door coupling rotary handle with key lock

Door coupling rotary handle for operating the switch through a closed control panel door.

Standard, black/grey

1230PIC-1159 Symbolphoto



Lockable in position 0 using cylinder lock and key withdrawable
Also possible: lockable on the 0 position on the handle using up to 3 padlocks

NZM1(-4), PN1(-4), N(S)1(-4)	NZM1-XTVDKL	172528	1 Off	Circuit breaker can also be installed in a lying position 90° left/right, with the handle still in the same position.
NZM1(-4), PN1(-4), N(S)1(-4)	NZM1-XTVDKLR	172529	1 Off	

With door interlock

Not defeatable in the locked OFF and ON positions with padlock on the handle.

NZM2(-4), PN2(-4), N(S)2(-4)	NZM2-XTVDKL	172530	1 Off	Cannot be combined with: • Remote operator • Side panel mounting • Mechan. interlock • Insulating surround
NZM2(-4), PN2(-4), N(S)2(-4)	NZM2-XTVDKLR	172531	1 Off	

Can be modified in the unlocked ON position.

Can be modified such that it can be defeated from the outside using a screwdriver.

NZM3(-4), PN3(-4), N(S)3(-4)	NZM3-XTVDKL	172532	1 Off	
NZM3(-4), PN3(-4), N(S)3(-4)	NZM3-XTVDKLR	172533	1 Off	

Door to be opened in the OFF position when not locked.

External warning plate/designation label can be clipped on.

Complete including rotary drive and coupling parts.

1230PIC-1161 Symbolphoto



Extension shaft additionally required. obtainable in two lengths.

NZM4(-4), PN4(-4), N(S)4(-4)	NZM4-XTVDKL	172534	1 Off	
NZM4(-4), PN4(-4), N(S)4(-4)	NZM4-XTVDKLR	172535	1 Off	

1230PIC-1162 Symbolphoto



Information relevant for export to North America



Product Standards	UL489; CSA-C22.2 No. 5-09; IEC60947, CE marking
UL File No.	E140305
UL CCN	DIHS
CSA File No.	022086
CSA Class No.	1437-01
NA Certification	UL Listed, CSA certified

Door coupling rotary handles for North America NZM1, NZM2, NZM3, NZM4

For use with	Standard Part no.	Article no.	Std. pack	Notes
	Article no. when ordering separately			



Door coupling rotary handles

Complete including rotary drive and coupling parts. Extension shaft additionally required. Degree of protection IP66/UL/CSA type 4X, 12. Difference to normal IEC handles: Door opening only possible with active rotation beyond the 0 position.

Standard, black/grey

1230PIC-681, sg06315, 1230PIC-1419 Symbolphoto



Lockable in 0 position on handle. With door interlock.	NZM1 N1	NZM1-XTVD-NA	271445	1 Off  	Door interlock • Can not be defeated in the locked OFF position. • Door opening with active rotation beyond the 0 position. • Cannot be combined with mechanical interlock • External warning plate/designation label can be clipped on
	NZM2, N2	NZM2-XTVD-NA	271446		
	NZM3, N3	NZM3-XTVD-NA	271447		
	NZM4, N4	NZM4-XTVD-NA	271448		

1230PIC-681, sg06115, 1230PIC-1419 Symbolphoto





Lockable on handle and switch with up to 3 padlocks. Lockable in 0 position on handle. With door interlock. Lockable on switch in 0 position	NZM1, N(S)1	NZM1-XTVDV-NA	100683		Door interlock • Can not be defeated in the locked OFF position. • Door opening possible with active rotation beyond the 0 position. Can be defeated from the outside using a screwdriver. • Cannot be combined with mechanical interlock • External warning plate/designation label can be clipped on.
	NZM2, N(S)2	NZM2-XTVDV-NA	100684		
	NZM3, N(S)3	NZM3-XTVDV-NA	100685		
	NZM4, N(S)4	NZM4-XTVDV-NA	100686		

Red-yellow for emergency switching off

1230PIC-682, 1230PIC-698, sg05315 Symbolphoto



Lockable on handle and switch with up to 3 padlocks. Lockable in 0 position on handle. With door interlock. Lockable on switch in 0 position	NZM1, N(S)1	NZM1-XTVDVR-NA	271449	1 Off  	Door interlock • Can not be defeated in the locked OFF position. • Door opening with active rotation beyond the 0 position. • Cannot be combined with mechanical interlock • External warning plate/designation label can be clipped on.
	NZM2, N(S)2	NZM2-XTVDVR-NA	271450		
	NZM3, N(S)3	NZM3-XTVDVR-NA	271451		
	NZM4, N(S)4	NZM4-XTVDVR-NA	271452		



Information relevant for export to North America







Product Standards	UL489; CSA-C22.2, No. 5-09; IEC60947, CE marking
UL File No.	E140305
UL CCN	DIHS
CSA File No.	022086
CSA Class No.	1437-01
NA Certification	UL Listed, CSA certified
Degree of Protection	IEC: IP66, UL/CSA Type 4X, 12

Door coupling rotary handles NZM1, NZM2, NZM3, NZM4

For maximum shaft length 60 mm Part no.	Article no.	Std. pack	Notes	Extremely narrow fittings Part no.	Article no.	Std. pack	Notes
Article no. when ordering separately				Article no. when ordering separately			













NZM1-XTVDV-60-NA	100667	1 Off  	Door interlock • Can not be defeated in the locked OFF position • Door opening possible with active rotation beyond the 0 position. Can be defeated from the outside using a screwdriver. • Cannot be combined with mechanical interlock NZM...-XTVDV-60-NA • For a maximum shaft length of 60 mm • Without shaft support • Cannot be combined with additional handle NZM...-XDZ • External warning plate/designation label can be clipped on.	NZM1-XTVDV-0-NA	100675		Door interlock • Can not be defeated in the locked OFF position • Door opening possible with active rotation beyond the 0 position. Can be defeated from the outside using a screwdriver. • Cannot be combined with mechanical interlock NZM...-XTVDV-0-NA For extremely narrow fittings • With special short extension shaft • Cannot be combined with additional handle NZM...-XDZ • External warning plate/designation label can be clipped on.
NZM2-XTVDV-60-NA	100668			NZM2-XTVDV-0-NA	100676		
NZM3-XTVDV-60-NA	100669			NZM3-XTVDV-0-NA	100677		
NZM4-XTVDV-60-NA	100670			NZM4-XTVDV-0-NA	100678		

NZM1-XTVDVR-60-NA	100671	1 Off  	Door interlock • Can not be defeated in the locked OFF position • Door opening possible with active rotation beyond the 0 position. Can be defeated from the outside using a screwdriver. • Door can be opened in OFF NZM...-XTVDVR-60 • For a maximum shaft length of 60 mm • Without shaft support • Cannot be combined with additional handle NZM...-XDZ • External warning plate/designation label can be clipped on.	NZM1-XTVDVR-0-NA	100679	1 Off  	Door interlock • Can not be defeated in the locked OFF position • Door opening possible with active rotation beyond the 0 position. Can be defeated from the outside using a screwdriver. • Door can be opened in OFF NZM...-XTVDVR-0 • For extremely narrow fittings • With special short extension shaft • Cannot be combined with additional handle NZM...-XDZ • External warning plate/designation label can be clipped on.
NZM2-XTVDVR-60-NA	100672			NZM2-XTVDVR-0-NA	100680		
NZM3-XTVDVR-60-NA	100673			NZM3-XTVDVR-0-NA	100681		
NZM4-XTVDVR-60-NA	100674			NZM4-XTVDVR-0-NA	100682		

4.13

Compact circuit breakers, switch disconnectors

Rotary handles
NZM...-XDV

For use with	Part no.	Article no.	Std. pack	Notes
	Article no. when ordering separately			
Rotary handle on circuit breaker				
Complete with rotary drive				
Standard, black/grey				
	Lockable in 0 position on switch with up to 3 padlocks.	NZM1(-4), PN1(-4), N(S)1(-4)	NZM1-XDV 260125	1 Off   Circuit breaker can also be installed in a lying position 90° left/right, with the handle still in the same position.
		NZM2(-4), PN2(-4), N(S)2(-4)	NZM2-XDV 260127	
		NZM3(-4), PN3(-4), N(S)3(-4)	NZM3-XDV 260129	
		NZM4(-4), N(S)4(-4)	NZM4-XDV 266608	
	Lockable in 0 position on handle with up to 3 padlocks.	NZM1(-4), PN1(-4), N(S)1(-4)	NZM1-XDVG 285247	1 Off   Circuit breaker can also be installed in a lying position 90° left/right, with the handle still in the same position.
		NZM2(-4), PN2(-4), N(S)2(-4)	NZM2-XDVG 285248	
		NZM3(-4), PN3(-4), N(S)3(-4)	NZM3-XDVG 165716	
		NZM4(-4), N(S)4(-4)	NZM4-XDVG 165718	
Red-yellow for emergency switch off				
	Lockable in 0 position on switch with up to 3 padlocks.	NZM1(-4), PN1(-4), N(S)1(-4)	NZM1-XDVR 260135	1 Off   Circuit breaker can also be installed in a lying position 90° left/right, with the handle still in the same position.
		NZM2(-4), PN2(-4), N(S)2(-4)	NZM2-XDVR 260137	
		NZM3(-4), PN3(-4), N(S)3(-4)	NZM3-XDVR 260140	
		NZM4(-4), N(S)4(-4)	NZM4-XDVR 266610	
	Lockable in 0 position on switch with up to 3 padlocks.	NZM1(-4), PN1(-4), N(S)1(-4)	NZM1-XDVGR 285249	1 Off   Circuit breaker can also be installed in a lying position 90° left/right, with the handle still in the same position.
		NZM2(-4), PN2(-4), N(S)2(-4)	NZM2-XDVGR 285280	
		NZM3(-4), PN3(-4), N(S)3(-4)	NZM3-XDVGR 165717	
		NZM4(-4), N(S)4(-4)	NZM4-XDVGR 165719	

Information relevant for export to North America











Product Standards	UL489; CSA-C22.2, No. 5-09; IEC60947, CE marking
UL File No.	E140305
UL CCN	DIHS
CSA File No.	022086
CSA Class No.	1437-01
NA Certification	UL Listed, CSA certified

Compact circuit breakers, switch disconnectors

Rotary handles with key lock
NZM...XDKL

4.14

For use with	Part no.	Article no.	Std. pack	Notes
	Article no. when ordering separately			
Rotary handles with key lock				
Complete with rotary drive				
Standard, black/grey				
	Lockable in position 0 using cylinder lock and key withdrawable	NZM1(-4), PN1(-4), N(S)1(-4)	NZM1-XDKL 172536	1 Off   Circuit breaker can also be installed in a lying position 90° left/right, with the handle still in the same position. Cannot be combined with: • Remote operator • Side panel mounting • Mechan. interlock • Insulating surround
		NZM2(-4), PN2(-4), N(S)2(-4)	NZM2-XDKL 172537	1 Off  
		NZM3(-4), PN3(-4), N(S)3(-4)	NZM3-XDKL 172538	1 Off  
		NZM4(-4), N(S)4(-4)	NZM4-XDKL 172539	

Information relevant for export to North America



IP66
UL/CSA Type 4X, Type 12

Rotary handles with door interlock NZM...XDTV

For use with	Part no.	Article no.	Std. pack	Notes
	Article no. when ordering separately			

Rotary handles on switch with door interlock

Complete with rotary drive and insulating surround

Standard, black/grey

1230PIC-840 Symbolphoto



Lockable in 0 position on handle with up to 3 padlocks, can also be modified for the I position.

Also available with door interlock e.g. for MCC service distribution.

NZM1(-4), PN1(-4), N(S)1(-4)	NZM1-XDTV	260131	1 Off	Circuit breaker can also be installed in a lying position 90° left/right, with the handle still in the same position.
NZM2(-4), PN2(-4), N(S)2(-4)	NZM2-XDTV	260133		

Red-yellow for emergency switching off

1230PIC-758 Symbolphoto



NZM1(-4), PN1(-4), N(S)1(-4)	NZM1-XDTV	260142	1 Off	
NZM2(-4), PN2(-4), N(S)2(-4)	NZM2-XDTV	260144		

Also available with door interlock e.g. for MCC service distribution.

Rotary handles on switch with door interlock for UL/CSA approved NA switches

Difference to normal IEC handles: Door opening only possible with active rotation beyond the 0 position.

Complete with rotary drive and insulating surround

Standard, black/grey

1230PIC-840 Symbolphoto



NZM1, N(S)1	NZM1-XDTV-NA	271453	1 Off	Door interlock
NZM2, N(S)2	NZM2-XDTV-NA	271454		

Lockable in 0 position on handle with up to 3 padlocks, can also be modified for the I position.

Also available with door interlock e.g. for MCC service distribution.

Red-yellow for emergency switching off

1230PIC-758 Symbolphoto



NZM1, N(S)1	NZM1-XDTV-NA	271455	1 Off	
NZM2, N(S)2	NZM2-XDTV-NA	271456		

Lockable in 0 position on handle with up to 3 padlocks.

Also available with door interlock e.g. for MCC service distribution.

Information relevant for export to North America



Product Standards	UL489; CSA-C22.2, No. 5-09; IEC60947, CE marking
UL File No.	E140305
UL CCN	DIHS
CSA File No.	022086
CSA Class No.	1437-01
NA Certification	UL Listed, CSA certified

Main switch assembly kit NZM...XHB...

Model	For use with	Part no.	Article no.	Std. pack
		Article no. when ordering separately		

Main switch assembly kit

Equipment supplied:

- Door coupling rotary handle
- External warning plate/designation label in German/English
- Extension shaft NZM...-XV4
- Black and yellow flash

For enhanced protection against direct contact on the incomer side, IP2X protection against contact with a finger can be ordered.

Other external warning plates/designation labels can be clipped on.

Degree of protection IP66/UL/CSA type 4X, 12.

With black door coupling rotary handle

1230PIC-739 Symbolphoto



Lockable in 0 position on handle with up to 3 padlocks, can also be modified for the I position.	-	NZM1(-4), PN1(-4), N(S)1(-4)	NZM1-XHB	266626	1 Off	
With door interlock	-	NZM2(-4), PN2(-4), N(S)2(-4)	NZM2-XHB	266627		

	-	NZM3(-4), PN3(-4), N(S)3(-4)	NZM3-XHB	266628	
	-	NZM4(-4), N(S)4(-4)	NZM4-XHB	271779	

With red door coupling rotary handle for use of switch as emergency switching off device to IEC/EN 60204-1

1230PIC-698 Symbolphoto



Lockable in 0 position on handle with up to 3 padlocks.	-	NZM1(-4), PN1(-4), N(S)1(-4)	NZM1-XHBR	266632	
---	---	------------------------------	-----------	--------	--

Lockable door as additional feature, locking facility on circuit breaker in 0 position:	-	NZM2(-4), PN2(-4), N(S)2(-4)	NZM2-XHBR	266633	
---	---	------------------------------	-----------	--------	--

	-	NZM3(-4), PN3(-4), N(S)3(-4)	NZM3-XHBR	266634	
--	---	------------------------------	-----------	--------	--

	-	NZM4(-4), N(S)4(-4)	NZM4-XHBR	271842	
--	---	---------------------	-----------	--------	--

Information relevant for export to North America



Product Standards	UL489; CSA-C22.2, No. 5-09; IEC60947, CE marking
UL File No.	E140305
UL CCN	DIHS
CSA File No.	022086
CSA Class No.	1437-01
NA Certification	UL Listed, CSA certified
Degree of Protection	IEC: IP66, UL/CSA Type 4X, 12

Model	For use with	Part no.	Article no.	Std. pack
		Article no. when ordering separately		

Main switch assembly kit

Equipment supplied:

- Door coupling rotary handle
- External warning plate/designation label in German/English
- Extension shaft NZM...-XV4
- Black and yellow flash

For enhanced protection against direct contact on the incomer side, IP2X protection against contact with a finger can be ordered.

Other external warning plates/designation labels can be clipped on.

Degree of protection IP66/UL/CSA type 4X, 12.

For side wall installation

Actuation of the switch on the control panel side wall

Switch mounting on mounting plate

Standard, black/grey

Lockable in 0 position on handle with up to 3 padlocks, with adequate modification also in 1 position.	For operation on the left	NZM1(-4) PN1(-4), N(S)1(-4)	NZM1-XS-L	266641	1 Off
		NZM2(-4) PN2(-4), N(S)2(-4)	NZM2-XS-L	266642	
		NZM3(-4) PN3(-4), N(S)3(-4)	NZM3-XS-L	266643	
		NZM4(-4) N(S)4(-4)	NZM4-XS-L	289806	

	For operation on the right	NZM1(-4) PN1(-4), N(S)1(-4)	NZM1-XS-R	266644	
		NZM2(-4) PN2(-4), N(S)2(-4)	NZM2-XS-R	266645	
		NZM3(-4) PN3(-4), N(S)3(-4)	NZM3-XS-R	266646	
		NZM4(-4) N(S)4(-4)	NZM4-XS-R	289807	

Red-yellow for emergency switching off

Lockable in 0 position on handle with up to 3 padlocks.	For operation on the left	NZM1(-4) PN1(-4), N(S)1(-4)	NZM1-XSR-L	266653	1 Off
		NZM2(-4) PN2(-4), N(S)2(-4)	NZM2-XSR-L	266654	
		NZM3(-4) PN3(-4), N(S)3(-4)	NZM3-XSR-L	266655	
		NZM4(-4) N(S)4(-4)	NZM4-XSR-L	289808	





	For operation on the right	NZM1(-4) PN1(-4), N(S)1(-4)	NZM1-XSR-R	266656	
		NZM2(-4) PN2(-4), N(S)2(-4)	NZM2-XSR-R	266657	
		NZM3(-4) PN3(-4), N(S)3(-4)	NZM3-XSR-R	266658	
		NZM4(-4) N(S)4(-4)	NZM4-XSR-R	289809	

Information relevant for export to North America



Product Standards	UL489; CSA-C22.2, No. 5-09; IEC60947, CE marking
UL File No.	E140305
UL CCN	DIHS
CSA File No.	022086
CSA Class No.	1437-01
NA Certification	UL Listed, CSA certified
Degree of Protection	IEC: IP66, UL/CSA Type 4X, 12

NZM4-XS types



Model	For use with	Part no.	Article no.	Std. pack	Information relevant for export to North America
		Article no. when ordering separately			

Main switch assembly kit for side wall installation with mounting bracket

For direct mounting of circuit breaker and handle in the side wall of the control cabinet.

Equipment supplied:

- Door coupling rotary handle
- Special short extension shaft
- Mounting bracket
- Black and yellow flash

For enhanced protection against direct contact on the incomer side, IP2X protection against contact with a finger can be ordered.

Other external warning plates/designation labels can be clipped on.

Degree of protection IP66/UL/CSA type 4X, 12.

Standard, black/grey

Lockable in 0 position, with adequate modification also in 1 position. Minimum clearance between control panel side walls and circuit breaker is defined by mounting bracket. Extension cannot be used	For operation on the left	NZM1(-4) PN1(-4), N(S)1(-4)	NZM1-XSM-L	266663	1 Off	Product Standards
		NZM2(-4) PN2(-4), N(S)2(-4)	NZM2-XSM-L	266664		UL489; CSA-C22.2 No. 5-09; IEC60947, CE marking UL File No. E140305 UL CCN DIHS CSA File No. 022086 CSA Class No. 1437-01 NA Certification UL Listed, CSA certified
	For operation on the right	NZM1(-4) PN1(-4), N(S)1(-4)	NZM1-XSM-R	266665		Degree of Protection IEC: IP66, UL/CSA Type 4X, 12
		NZM2(-4) PN2(-4), N(S)2(-4)	NZM2-XSM-R	266666		



Red-yellow for emergency switching off


Lockable in 0 position on handle. Minimum clearance between control panel side walls and circuitbreaker is defined by mounting bracket. Extension cannot be used.	For operation on the left	NZM1(-4) PN1(-4), N(S)1(-4)	NZM1-XSRM-L	266671	1 Off	Product Standards
		NZM2(-4) PN2(-4), N(S)2(-4)	NZM2-XSRM-L	266672		UL489; CSA-C22.2 No. 5-09; IEC60947, CE marking UL File No. E140305 UL CCN DIHS CSA File No. 022086 CSA Class No. 1437-01 NA Certification UL Listed, CSA certified
	For operation on the right	NZM1(-4) PN1(-4), N(S)1(-4)	NZM1-XSRM-R	266673		Degree of Protection IEC: IP66, UL/CSA Type 4X, 12
		NZM2(-4) PN2(-4), N(S)2(-4)	NZM2-XSRM-R	266674		



Additional plate

For fitting to the mounting bracket when using neutral conductor or PE conductor terminals K25, K50, K95 or K150.

		NZM1, NZM1-4, N1, N1-4, PN1, PN1-4, NS1, NZM2, NZM2-4, N2, N2-4, PN2, PN2-4, NS2, NZM1-NA, NZM2-NA	NZM1/2-XZB	266676	1 Off	UL/CSA certification not required
--	--	--	------------	--------	-------	--------------------------------------



Main switch assembly kit NZM...-XHB...

Model	For use with	Part no.	Article no.	Std. pack	Information relevant for export to North America
		Article no. when ordering separately			

Main switch assembly kit with additional rotary handle

Main switch assembly kit with additional rotary handle for switching with opened control panel door.

Equipment supplied:

- Door coupling rotary handle
 - Additional rotary handle on switch with "Deliberate Action" operation
 - External warning plate/designation label in German/English
 - Extension shaft NZM...-XV6 for mounting depth 600 mm, NZM1/2-XV4 with NZM1 for mounting depth 400 mm
 - Black and yellow flash
- For enhanced protection against direct contact on the incomer side, IP2X protection against contact with a finger can be ordered. Other external warning plates/designation labels can be clipped on.
- Degree of protection IP66/UL/CSA type 4X, 12.

With black door coupling rotary handle

	Lockable in 0 position on handle with up to 3 padlocks, can also be modified for the I position. Lockable door as additional feature, locking facility on circuit breaker in 0 position.	IEC	NZM1(-4) PN1(-4), N1(-4)	NZM1-XHB-DA	125956	1 Off		Product Standards UL489; CSA-C22.2 No. 5-09; IEC60947, CE marking
		UL/CSA	NZM1(-4) PN1(-4), N(S)1(-4)	NZM1-XHB-DA-NA	125958			UL File No. E140305
		IEC	NZM2(-4) PN2(-4), N(S)2(-4)	NZM2-XHB-DA	116895			UL CCN DIHS
		UL/CSA	NZM2(-4) PN2(-4), N(S)2(-4)	NZM2-XHB-DA-NA	116897			CSA File No. 022086
		IEC	NZM3(-4) PN3(-4), N(S)3(-4)	NZM3-XHB-DA	118988			CSA Class No. 1437-01
		UL/CSA	NZM3(-4) PN3(-4), N(S)3(-4)	NZM3-XHB-DA-NA	119000			NA Certification
		IEC	NZM4(-4) PN4(-4), N(S)4(-4)	NZM4-XHB-DA	119002			UL Listed, CSA certified
		UL/CSA	NZM4(-4) PN4(-4), N(S)4(-4)	NZM4-XHB-DA-NA	119004			Degree of Protection IEC: IP66, UL/CSA Type 4X, 12

Information relevant for export to North America



Product Standards	UL489; CSA-C22.2, No. 5-09; IEC60947, CE marking
UL File No.	E140305
UL CCN	DIHS
CSA File No.	022086
CSA Class No.	1437-01
NA Certification	UL Listed, CSA certified
Degree of Protection	IEC: IP66, UL/CSA Type 4X, 12

Main switch assembly kit with additional handle NZM...-XHB...

Model	For use with	Part no.	Article no.	Std. pack	Information relevant for export to North America
		Article no. when ordering separately			

Main switch assembly kit with additional rotary handle

Main switch assembly kit with additional rotary handle for switching with opened control panel door.

Equipment supplied:

- Door coupling rotary handle
 - Additional rotary handle on switch with "Deliberate Action" operation
 - External warning plate/designation label in German/English
 - Extension shaft NZM...-XV6 for mounting depth 600 mm, NZM1/2-XV4 with NZM1 for mounting depth 400 mm
 - Black and yellow flash
- For enhanced protection against direct contact on the incomer side, IP2X protection against contact with a finger can be ordered. Other external warning plates/designation labels can be clipped on.
- Degree of protection IP66/UL/CSA type 4X, 12.

With red door coupling rotary handle for use of switch as emergency switching off device

	Lockable in 0 position on handle with up to 3 padlocks. With door interlock and lockable on switch in 0 position.	IEC	NZM1(-4) PN1(-4), N1(-4)	NZM1-XHB-DAR	125957	1 Off		Product Standards UL489; CSA-C22.2 No. 5-09; IEC60947, CE marking
		UL/CSA	NZM1(-4) PN1(-4), N(S)1(-4)	NZM1-XHB-DAR-NA	125959			UL File No. E140305
		IEC	NZM2(-4) PN2(-4), N(S)2(-4)	NZM2-XHB-DAR	116896			UL CCN DIHS
		UL/CSA	NZM2(-4) PN2(-4), N(S)2(-4)	NZM2-XHB-DAR-NA	116898			CSA File No. 022086
		IEC	NZM3(-4) PN3(-4), N(S)3(-4)	NZM3-XHB-DAR	118989			CSA Class No. 1437-01
		UL/CSA	NZM3(-4) PN3(-4), N(S)3(-4)	NZM3-XHB-DAR-NA	119001			NA Certification
		IEC	NZM4(-4) PN4(-4), N(S)4(-4)	NZM4-XHB-DAR	119003			UL Listed, CSA certified
		UL/CSA	NZM4(-4) PN4(-4), N(S)4(-4)	NZM4-XHB-DAR-NA	119005			Degree of Protection IEC: IP66, UL/CSA Type 4X, 12

Main switch assembly kit with additional rotary handle

External warning plate/designation label can be clipped on.

For enhanced busbar tag shroud on the incomer side, please order IP2X protection against contact with a finger. IP66; UL/CSA Type 4X, Type 12.

Handle black + additional handle black, shaft 600 mm

			NZM1(-4) PN1(-4), N(S)1(-4)	NZM1-XHB-DA-V6 NZM1-XHB-DA-V6-NA	144905 144906	1 Off		Product Standards UL489; CSA-C22.2 No. 5-09; IEC60947, CE marking
								UL File No. E140305

Handle red + additional handle red, shaft 600 mm

			NZM1(-4) PN1(-4), N(S)1(-4)	NZM1-XHB-DAR-V6 NZM1-XHB-DAR-V6-NA	144907 144908	1 Off		Product Standards UL489; CSA-C22.2 No. 5-09; IEC60947, CE marking
								UL File No. E140305

4.16


Compact circuit breakers, switch disconnectors

Main switch assembly kit, Rear-mounted drives
 NZM...-XS..., NZM...-XRAV...

For use with	Part no.	Article no.	Std. pack	Notes	Information relevant for export to North America
	Article no. when ordering separately				


Main switch assembly kit, bottom

External warning plate/designation label can be clipped on.
 For enhanced busbar tag shroud on the incomer side, please order IP2X protection against contact with a finger.
 IP66; UL/CSA Type 4X, Type 12.



UL/CSA, IEC	NZM1-XS-U	110106	1 Off		Product Standards
-------------	-----------	--------	-------	--	-------------------


UL489;
 CSA-C22.2
 No. 5-09;
 IEC60947,
 CE marking
 UL File No. E140305
 UL CCN DIHS
 CSA File No. 022086
 CSA Class No. 1437-01
 NA Certification
 UL Listed,
 CSA certified
 Degree of Protection
 IEC: IP66,
 UL/CSA
 Type 4X, 12



UL/CSA, IEC	NZM1-XSR-U	110107	1 Off		Product Standards
-------------	------------	--------	-------	--	-------------------

Rear-mounted drives

For direct rear connection of the switch to the side of the control panel or control panel door.
 Switch actuation on rear through side wall or control panel door. For switch with toggle lever.
 For enhanced protection against direct contact on the incomer side, IP2X protection against contact with a finger can be ordered.
 Degree of protection IP66, UL/CSA type 4X, 12.



Standard, black/grey

Lockable in 0 position on handle with up to 3 padlocks.	NZM1, N1, NS1, PN1	NZM1-XRAV	107245	1 Off		External warning plate can be clipped on	Product Standards
---	--------------------	-----------	--------	-------	--	--	-------------------

UL489;
 CSA-C22.2
 No. 5-09;
 IEC60947,
 CE marking
 UL File No. E140305
 UL CCN DIHS
 CSA File No. 022086
 CSA Class No. 1437-01
 NA Certification
 UL Listed,
 CSA certified
 Degree of Protection
 IEC: IP66,
 UL/CSA
 Type 4X, 12

	NZM1-4, N1-4, PN1-4	NZM1-4-XRAV	107246				
--	---------------------	-------------	--------	--	--	--	--

	NZM2, N2, NS2, PN2	NZM2-XRAV	107247				
--	--------------------	-----------	--------	--	--	--	--

	NZM2-4, N2-4, PN2-4	NZM2-4-XRAV	107248				
--	---------------------	-------------	--------	--	--	--	--

Red-yellow for emergency switching off

Lockable in 0 position on handle with up to 3 padlocks.	NZM1, N1, NS1, PN1	NZM1-XRAVR	107249	1 Off		External warning plate can be clipped on	Product Standards
---	--------------------	------------	--------	-------	--	--	-------------------

	NZM1-4, N1-4, PN1-4	NZM1-4-XRAVR	107260				
--	---------------------	--------------	--------	--	--	--	--

	NZM2, N2, NS2, PN2	NZM2-XRAVR	107261				
--	--------------------	------------	--------	--	--	--	--

	NZM2-4, N2-4, PN2-4	NZM2-4-XRAVR	107262				
--	---------------------	--------------	--------	--	--	--	--

4.17

Side-mounted handle
 NZM...-XSH...-NA

For use with	Part no.	Article no.	Std. pack	Notes	Information relevant for export to North America
	Article no. when ordering separately				

Side mounted handle

Complete kit, includes handle, mechanical system, and Bowden cable (Length: 48, 72, 84 and 120 Inch).

1230PIC-1424 Symbolphoto



UL/CSA Type 4X, Type 12	NZM2...-NA, NS2...-NA	NZM2-XSH-12-48-NA, NZM2-XSH-12-84-NA, NZM2-XSH-12-120-NA	155482, 155483, 155484	1 Off		Lockable in the 0 position using up to 3 padlocks on the handle For 1 door on an American-style control panel (door plus wide bar next to door)	Caution! Intended exclusively for use outside the scope of application of IEC/EN 60947.
-------------------------	-----------------------	--	------------------------	-------	--	--	---

1230PIC-1406 Symbolphoto



	NZM3...-NA, NS3...-NA	NZM3-XSH-12-48-NA, NZM3-XSH-12-84-NA, NZM3-XSH-12-120-NA	155488, 155489, 155500				
--	-----------------------	--	------------------------	--	--	--	--

1230PIC-1425 Symbolphoto



	NZM4...-NA, NS4...-NA	NZM4-XSH-12-48-NA, NZM4-XSH-12-72-NA, NZM4-XSH-12-120-NA	155504, 155505, 155506				
--	-----------------------	--	------------------------	--	--	--	--

1230PIC-1404 Symbolphoto



UL/CSA Type 4X	NZM2...-NA, NS2...-NA	NZM2-XSH-4X-48-NA, NZM2-XSH-4X-84-NA, NZM2-XSH-4X-120-NA	155485, 155486, 155487	1 Off		Lockable in the 0 position using up to 3 padlocks on the handle For 1 door on an American-style control panel (door plus wide bar next to door)	Caution! Intended exclusively for use outside the scope of application of IEC/EN 60947.
----------------	-----------------------	--	------------------------	-------	--	--	---

1230PIC-1405 Symbolphoto



	NZM3...-NA, NS3...-NA	NZM3-XSH-4X-48-NA, NZM3-XSH-4X-84-NA, NZM3-XSH-4X-120-NA	155501, 155502, 155503				
--	-----------------------	--	------------------------	--	--	--	--

1230PIC-1426 Symbolphoto



	NZM4...-NA, NS4...-NA	NZM4-XSH-4X-48-NA, NZM4-XSH-4X-72-NA, NZM4-XSH-4X-120-NA	155507, 155508, 155509				
--	-----------------------	--	------------------------	--	--	--	--

Remote operators NZM1, NZM2/3, NZM4

For use with	Rated control voltage	Part no.	Article no.	Std. pack	Notes
	U _s	Article no. when ordering separately			
	V				

Remote operators

For remote switching of circuit breakers and switch disconnectors.
ON and OFF switching and resetting by means of two-wire or three-wire control.
Local switching by hand possible.
Lockable in the 0 position of the remote operator with up to 3 padlocks (hasp thickness: 4 – 8 mm).
When mounting the remote drive NZM2(3)-XR(D)... on 4 pole switch an additional cover NZM...-XAVPR is required.

Closing delay 110 – 170 ms, opening delay 110 – 170 ms

NZM2(-4)	110 - 130 V 50/60 Hz	NZM2-XRD110-130AC	115390	1 Off	Sliding switch for „Auto“ or „Manual“ Max. number auxiliary contacts: 2 standard auxiliary contacts, 1 trip-indicating auxiliary switches Cannot be combined with switch-disconnector PN... Cannot be combined with mechanical interlock. Do not install M22-CK11(20/02) dual auxiliary contacts in the center auxiliary contact slot in NZM2-XRD. 1) Not UL/CSA approved
N(S)2(-4)	208 - 240 V 50/60 Hz	NZM2-XRD208-240AC	115391		
	380 - 440 V 50/60 Hz ¹⁾	NZM2-XRD380-440AC	115392		
	24 - 30 V DC	NZM2-XRD24-30DC	115393		
	110 - 130 V DC	NZM2-XRD110-130DC	115394		
	220 - 250 V DC	NZM2-XRD220-250DC	115395		

Closing delay 60 – 100 ms, opening delay 300 – 3000 ms

Can be synchronized

NZM2(-4)	110 - 130 V 50/60 Hz	NZM2-XR110-130AC	259830		Cannot be combined with switch disconnector PN... Dual auxiliary switch M 22-CK11 (20/02) can not be combined with remote operator NZM3-XR...
N(S)2(-4)	208 - 240 V 50/60 Hz	NZM2-XR208-240AC	259832		
	380 - 440 V 50/60 Hz	NZM2-XR380-440AC	259834		
	24 - 30 V DC	NZM2-XR24-30DC	259836		
	48 - 60 V DC	NZM2-XR48-60DC	259838		
	110 - 130 V DC110 - 130 V DC	NZM2-XR110-130DC	259840		
	220 - 250 V DC	NZM2-XR220-250DC	259842		

NZM3(-4)	110 - 130 V 50/60 Hz	NZM3-XR110-130AC	259848	
N(S)3(-4)	208 - 240 V 50/60 Hz	NZM3-XR208-240AC	259850	
	380 - 440 V 50/60 Hz	NZM3-XR380-440AC	259852	
	24 - 30 V DC	NZM3-XR24-30DC	259854	
	48 - 60 V DC	NZM3-XR48-60DC	259856	
	110 - 130 V DC110 - 130 V DC	NZM3-XR110-130DC	259858	
	220 - 250 V DC	NZM3-XR220-250DC	259860	

NZM4(-4)	110 - 130 V 50/60 Hz	NZM4-XR110-130AC	266684	
N(S)4(-4)	208 - 240 V 50/60 Hz	NZM4-XR208-240AC	266685	
	380 - 440 V 50/60 Hz	NZM4-XR380-440AC	266686	
	24 - 30 V DC	NZM4-XR24-30DC	266691	
	48 - 60 V DC	NZM4-XR48-60DC	266692	
	110 - 130 V DC110 - 130 V DC	NZM4-XR110-130DC	266693	
	220 - 250 V DC	NZM4-XR220-250DC	266694	

Information relevant for export to North America



Product Standards	UL489; CSA-C22.2 No. 5-09; IEC60947, CE marking
UL File No.	E140305
UL CCN	DIHS
CSA File No.	022086
CSA Class No.	1437-01
NA Certification	UL Listed, CSA certified



Remote operators NZM1, NZM2/3, NZM4

For use with	Part no.	Article no.	Std. pack	Notes
	Article no. when ordering separately			

Plug screw terminal for remote operator

Plug with screw terminals for remote operator.

wa_sg06118 Symbolphoto



NZM...-XR...	NZM-XRS	180429	1 Off	
--------------	---------	--------	-------	--

Cover, 4 pole for remote operator

Additional shroud for mounting the NZM2(3)-XR(D)... on a 4 pole switch is required.

NZM2-4, N2-4	NZM2-XAVPR	266677	1 Off	-
N2-4-...-DC	NZM2-XAVPR-S1-DC	158477		
NZM3-4, N3-4	NZM3-XAVPR	266678	1 Off	
N3-4-...-DC	NZM3-XAVPR-S1-DC	158478		

1230PIC-732 Symbolphoto



Sealing device, for NZM2-XRD

Manual operation possible only after removing seal.

NZM2(-4)	NZM2-XRDPL	137305	1 Off	Suitable for remote operator NZM2-XRD
N(S)2(-4)				

1230PIC-1429 Symbolphoto



Enclosure Cover

Degree of protection IP65
For increasing the mounting depth by 105 mm
For switching devices that shall not be operated by laymen
Transparent
Also usable for NZM remote operators

CI44...	NZM-RTR	194557	1 Off	Width: 265 mm
CI45...				Height: 253 mm
CI48...				

v119318_r Symbolphoto



Model	For use with	Part no.	Article no.	Std. pack	Notes
External warning plate/designation label					
Main switch – open in 0 position	german/english	NZM1(-4), PN1(-4), N(S)1(-4)	ZFS61/62-NZM7	272525	A bilingual external warning plate/designation label in German/English is already included in the main switch assembly kit.
	german	NZM2(-4), PN2(-4), chinese/english	ZFS61-NZM7	051089	
	english	NZM3(-4), PN3(-4), chinese	ZFS62-NZM7	065957	
	french	N(S)2(-4)	ZFS63-NZM7	065958	
	chinese/english	N(S)3(-4)	ZFS82-NZM	104910	
Symbol	chinese/english	NZM4(-4), PN4(-4)	ZFS83-NZM	105945	1 Off
	Circuit breaker symbol	N(S)3(-4), NZM4(-4)	ZFS-LS-NZM	104829	
	Switch disconnector symbol	N(S)4(-4)	ZFS-LTS-NZM	104828	
Disconnector symbol	Disconnector symbol		ZFS-TS-NZM	115365	
	Blanko	Blank (for engraving or printing)	ZFS60-NZM7	065896	10 Off
Lightning symbol					
Including terminal marking for main switch					
small	german/english	NZM1(-4), PN1(-4), english/spanish	ZFS61/62-NZM-NA	144901	A bilingual external warning plate/designation label in German/English is already included in the main switch assembly kit.
	english/spanish	N(S)1(-4), NZM2(-4), PN2(-4), N(S)2(-4), NZM3(-4), PN3(-4), N(S)3(-4), NZM4(-4), N(S)4(-4)	ZFS62/77-NZM-NA	144903	
large	english/french	NZM2(-4), PN2(-4), N(S)2(-4), NZM3(-4), PN3(-4), N(S)3(-4), NZM4(-4), N(S)4(-4)	ZFS62/63-NZM-NA	144904	
		NZM3(-4), PN3(-4), N(S)3(-4), NZM4(-4), N(S)4(-4)	BPF-NZM10	231363	

115A023 Symbolphoto



1230PIC-294 Symbolphoto



For use with	Part no.	Article no.	Std. pack	Notes
Additional handle				
Enables switching when control panel door is open				
NZM1(-4), PN1(-4), N(S)1(-4), NZM2(-4), PN2(-4), N(S)2(-4)	NZM1/2-XDZ	266621	1 Off	Push-fits on to the extension shaft. 100 mm free extension shaft required. Cannot be combined with door coupling rotary handles UL File No. E140305 UL CCN DIHS CSA File No. 022086 CSA Class No. 1437-01 NA Certification UL Listed, CSA certified
NZM3(-4), PN3(-4), N(S)3(-4), NZM4(-4), N(S)4(-4)	NZM3/4-XDZ	266622		NZM...-XT...-60 or NZM...-XT...0.
Insulating surround				
For toggle levers, rotary handles with rotary drive and remote operators. Degree of protection IP40				
NZM1(-4), PN1(-4), N(S)1(-4)	NZM1-XBR	260195	1 Off	For rectangular cut-out on doors and enclosures with material thicknesses of 1.5 – 5 mm. External warning plate/designation label can be clipped on. NZM4-XBR can not be combined with rotary handle with NZM2(-4) rotary mechanism Product Standards IEC60947, CE marking
NZM2(-4), PN2(-4), N(S)2(-4)	NZM2-XBR	260197		
NZM3(-4), PN3(-4), N(S)3(-4)	NZM3-XBR	284645		
NZM4(-4), N(S)4(-4)	NZM4-XBR	284646		
For toggle lever, narrow. Degree of protection IP40				
NZM1(-4), PN1(-4), N(S)1(-4)	NZM1-XBRS	115274		For rectangular cutouts on doors and enclosures with a material thickness of 1 - 3 mm. Product Standards IEC60947, CE marking
NZM2(-4), NZM3(-4), PN2(-4), N(S)2(-4), PN3(-4), N(S)3(-4)	NZM2/3-XBRS	115275		Clip-in external warning plate/marketing plate. Switches with slim insulating surrounds can be placed in a row next to each other. The required minimum clearance must be observed when doing so
NZM4(-4), N(S)4(-4)	NZM4-XBRS	115277		
Toggle lever locking device				
Lockable in Off position with up to three padlocks (hasp thickness 4 – 8 mm).				
NZM1(-4), NZM1(-1), PN1(-4), N(S)1(-4)	NZM1-XKAV	260199	1 Off	Cannot be combined with insulating surround. UL File No. E140305 UL CCN DIHS CSA File No. 022086 CSA Class No. 1437-01 NA Certification UL Listed, CSA certified
NZM2(-4), PN2(-4), N(S)2(-4), NZM3(-4), PN3(-4), N(S)3(-4)	NZM2/3-XKAV	260201		

1230PIC-753 Symbolphoto



1230PIC-679 Symbolphoto



1230PIC-691 Symbolphoto



1230PIC-722 Symbolphoto



sg00711 Symbolphoto



1230PIC-684 Symbolphoto



4.19

Compact circuit breakers, switch disconnectors

Accessories

NZM...-XDZ, NZM...-XBR, NZM...-X...

For use with	Part no.	Article no.	Std. pack	Notes	Information relevant for export to North America
--------------	----------	-------------	-----------	-------	--

Spacers

Enables fast and attractively priced offsetting of varying construction sizes with/without rotary handle or remote operator to the same front depth.



For use with	Part no.	Article no.	Std. pack	Notes	Information relevant for export to North America
NZM1(-4), PN1(-4), N(S)1(-4) NZM2(-4), PN2(-4), N(S)2(-4)	NZM1/2-XAB	260203	1 Off	Grid depth 17.5 mm, M4 thread One set contains 4 spacers Maximum component fitting: NZM1: 4 off per fixing screw, NZM2: 2 off per fixing screw, 2 (NZM1) or 4 (NZM2) fixing screws contained per switch	Product Standards UL489; CSA-C22.2 No. 5-09; IEC60947, CE marking E140305 UL File No. UL CCN DIHS CSA File No. 022086 CSA Class No. 1437-01 NA Certification UL Listed, CSA certified

For use with	Part no.	Article no.	Std. pack	Notes	Information relevant for export to North America
NZM3(-4), PN3(-4), N(S)3(-4) NZM4(-4), N(S)4(-4)	NZM3-XAB	260211	1 Off	Grid depth 17.5 mm, M5 thread One set contains 4 spacers NZM3, NZM4: 1 off per fixing screw 4 fixing screws per switch included	

Clips

Allows switches to be clipped onto DIN rails.



For use with	Part no.	Article no.	Std. pack	Notes	Information relevant for export to North America
NZM1(-4), PN1(-4), N(S)1(-4)	NZM1-XC35	260213	1 Off	For 35 mm top-hat rails. Cannot be combined with plug-in units	Product Standards UL489; CSA-C22.2 No. 5-09; IEC60947, CE marking E140305 UL File No. UL CCN DIHS CSA File No. 022086 CSA Class No. 1437-01 NA Certification UL Listed, CSA certified
NZM2(-4), PN2(-4), N(S)2(-4)	NZM2-XC75	260215		For 75 mm top-hat rails. Cannot be combined with remote operator and plug-in units.	

Compact circuit breakers, switch disconnectors

Mechanical interlock NZM...XMV(R)(L), NZM-XBZ...

4.20

For use with	Part no.	Article no.	Std. pack	Notes	Information relevant for export to North America
--------------	----------	-------------	-----------	-------	--

Mechanical interlock for (door coupling) rotary handles

1230PIC-766 Symbolphoto



For use with	Part no.	Article no.	Std. pack	Notes	Information relevant for export to North America
NZM1(-4), PN1(-4), N(S)1(-4)	NZM1-XMV	281581	1 Off	Cannot be combined with NZM...-XTV...-NA door coupling rotary handles. At least 2 interlock modu- les are required in order to assemble a mechanical interlock. Possible combinations and interlock versions Engineering Order Bowden cable separately	Product Standards UL489; CSA-C22.2 No. 5-09; IEC60947, CE marking E140305 UL File No. UL CCN DIHS CSA File No. 022086 CSA Class No. 1437-01 NA Certification UL Listed, CSA certified

sg07515 Symbolphoto



For use with	Part no.	Article no.	Std. pack	Notes	Information relevant for export to North America
NZM2(-4), PN2(-4), N(S)2(-4)	NZM2-XMV	281582			

sg07415 Symbolphoto



For use with	Part no.	Article no.	Std. pack	Notes	Information relevant for export to North America
NZM3(-4), PN3(-4), N(S)3(-4)	NZM3-XMV	281583			

sg07415 Symbolphoto



For use with	Part no.	Article no.	Std. pack	Notes	Information relevant for export to North America
NZM4(-4), PN4(-4), N(S)4(-4)	NZM4-XMV	281584			

Bowden cables

For mechanical interlock for (door coupling) rotary handles

1230PIC-807 Symbolphoto



For use with	Part no.	Article no.	Std. pack	Notes	Information relevant for export to North America
Length: 225 mm NZM1(-4), PN1(-4), N(S)1(-4)	NZM-XBZ225	281585	1 Off	Selection and combina- tions of Bowden cables	Product Standards UL489; CSA-C22.2 No. 5-09; IEC60947, CE marking E140305 UL File No. UL CCN DIHS CSA File No. 022086 CSA Class No. 1437-01 NA Certification UL Listed, CSA certified
Length: 600 mm NZM2(-4), PN2(-4), N(S)2(-4)	NZM-XBZ600	281586			
Length: 1000 mm NZM3(-4), PN3(-4), N(S)3(-4) NZM4(-4), PN4(-4), N(S)4(-4)	NZM-XBZ1000	281587			

4.20/21 Compact circuit breakers, switch disconnectors

Mechanical interlock / Paralleling mechanism
 NZM...XMV(R)(L), NZM-XBZ...

For use with	Part no.	Article no.	Std. pack	Notes	Information relevant for export to North America
	Article no. when ordering separately				

Mechanical interlock for remote operator

For 2 switches of the same or different construction size with opposed operation. Adjacent mounting.

1230PIC-734 Symbolphoto



NZM2(-4), N(S)2(-4) +NZM2(-4), N(S)2(-4)	NZM2-XMVR	104543	1 Off	Contains parts for both switch sides. - Extension shaft additionally required. Maximum switch spacing Can not be combined with rotary handles, door coupling rotary handles, early-make auxiliary contacts, and direct- switching remote operator NZM2-XRD.
NZM2(-4), N(S)2(-4) +NZM3(-4), N(S)3(-4)	NZM2/3-XMVR	104544		
NZM3(-4), N(S)3(-4) +NZM3(-4), N(S)3(-4)	NZM3-XMVR	104545		
NZM3(-4), N(S)3(-4) +NZM4(-4), N(S)4(-4)	NZM3/4-XMVR	104546		
NZM4(-4), N(S)4(-4) +NZM4(-4), N(S)4(-4)	NZM4-XMVR	104547		

For 2 switches of the same or different construction size with opposed operation.
 Extra long Bowden cable for mounting one above the other or in adjacent enclosures.

NZM2(-4), N(S)2(-4) +NZM2(-4), N(S)2(-4)	NZM2-XMVRL	104548	1 Off	Contains parts for both switch sides. - Extension shaft additionally required. Maximum switch spacing Can not be combined with rotary handles, door coupling rotary handles, early-make auxiliary contacts, and direct- switching remote operator NZM2-XRD.
NZM2(-4), N(S)2(-4) +NZM3(-4), N(S)3(-4)	NZM2/3-XMVRL	104549		
NZM3(-4), N(S)3(-4) +NZM3(-4), N(S)3(-4)	NZM3-XMVRL	104550		
NZM3(-4), N(S)3(-4) +NZM4(-4), N(S)4(-4)	NZM3/4-XMVRL	104551		
NZM4(-4), N(S)4(-4) +NZM4(-4), N(S)4(-4)	NZM4-XMVRL	104552		

Paralleling mechanism

Simultaneous actuation of 2 PN switch disconnectors of the same type mounted side-by-side.

1230PIC-749 Symbolphoto



PN1(-4) + PN1(-4)	PN1-XPA	283471	1 Off	PN1, PN2 • 1 x rotary handle on circuit (-XD) supplied. • 1 x door coupling rotary handle (-XTVD) supplied.	Not UL/CSA approved
PN2(-4) + PN2(-4)	PN2-XPA	283472			

1230PIC-750 Symbolphoto



PN3(-4) + PN3(-4)	PN3-XPA	283473		PN3 • 1 x rotary handle on switch (not lockable) supplied. • 1 x door coupling rotary handle (not lockable) supplied. • Not suitable for use as a main switch.
----------------------	---------	--------	--	--

Compact circuit breakers, switch disconnectors

Earth-fault release
 NZM...FI

4.22

Number of poles	Rated current = Rated uninterrupted current	Setting range			Part no.	Article no.	Std. pack
		Overload releases	Short-circuit releases delayed	Short-circuit releases Non-delayed			
	$I_n = I_u$ A	$I_r = I_n \times \dots$ A	$I_{sd} = I_n \times \dots$	$I_t = I_n \times \dots$			

Circuit breakers with earth-fault release, 3 pole For apparatus with power electronics, such as power inverters and frequency inverters



AC/DC sensitive according to core-balance principle in range of 0 – 100 kHz residual-current frequency.
 Not UL/CSA approved.

Suitable for use in three-phase systems.
 Rated operating voltage: 400 V (50/60 Hz)
 Rated fault current $I_{\Delta n} = 0.03$ A

Internal power supply $U_e = 50 - 400$ V
 Turnkey combination of current-limiting circuit breaker and residual-current device.
 Adjusting buttons can be sealed.













Depending on the cable manufacturer up to 240 mm² can be connected.




High switching capacity 150 kA; 415 V 50/60 Hz




WA_SG168521_L Symbolphoto



3 pole	Rated current	Overload releases	Short-circuit releases delayed	Short-circuit releases Non-delayed	Part no.	Article no.	Std. pack
100	80 - 100	600 - 1000	6 - 10	NZMH2-A100-FIA30	158530	1 Off	
125	100 - 125	750...1250	6 - 10	NZMH2-A125-FIA30	129710		
160	125 - 160	960...1600	6 - 10	NZMH2-A160-FIA30	112627		
200	160 - 200	1200...2000	6 - 10	NZMH2-A200-FIA30	112628		
250	200 - 250	1500...2500	6 - 10	NZMH2-A250-FIA30	112629		
100	80 - 100	600 - 1000	6 - 10	NZMH2-A100-FIA30-BT	158531		
125	100 - 125	750...1250	6 - 10	NZMH2-A125-FIA30-BT	129711		
160	125 - 160	960...1600	6 - 10	NZMH2-A160-FIA30-BT	116304		
200	160 - 200	1200...2000	6 - 10	NZMH2-A200-FIA30-BT	116305		
250	200 - 250	1500...2500	6 - 10	NZMH2-A250-FIA30-BT	116306		
100	80 - 100	600 - 1000	6 - 10	NZMH2-A100-FIA30-500AC	184959		
125	100 - 125	750...1250	6 - 10	NZMH2-A125-FIA30-500AC	184960		
160	125 - 160	960...1600	6 - 10	NZMH2-A160-FIA30-500AC	184961		
200	160 - 200	1200...2000	6 - 10	NZMH2-A200-FIA30-500AC	184962		
250	200 - 250	1500...2500	6 - 10	NZMH2-A250-FIA30-500AC	184963		

For use with	Number of conductors	Part no. Article no. when ordering separately	Article no.	Std. pack	Notes	
Earth-fault release						
To IEC/EN 60947-2						
Not UL/CSA approved						
Suitable for use in three- and single-phase systems						
Pulse-current sensitive according to core-balance principle 						
For 3 and 4 pole NZM1(-4) circuit breakers and N1(-4) switch disconnectors, dependant on mains power $U_b = 200 \dots 415 \text{ V } 50/60 \text{ Hz}$						
Mounting on right side up to $I_n = 160 \text{ A}$ at $I_{cu} = 50 \text{ kA}$						
	Rated fault current $I_{\Delta n} = 0.03 \text{ A}$	NZM1 N(S)1	3 pole	NZM1-XFI30R	104603 1 Off	At $I_{\Delta n} = 0.03 \text{ A}$: delay time t_v always fixed at 10 ms. Alarm indication $> 30 \% I_{\Delta n}$ by yellow LED. Trip indication by up to 2 auxiliary contacts (HIAFI) can be retrofitted: N/O = M22-K01, NC = M22-K10 are reset with the reset toggle lever. If the trip-indicating auxiliary contact in the fault current block is used, the NC contacts operates as a N/O contact and the NC contact operates as N/O contacts. Double contact not permissible. Not in combination with insulated enclosure or main switch assembly kit for side wall installation with mounting bracket.
		NZM1-4 N1-4	4 pole	NZM1-4-XFI30R	104606	
	Rated fault current $I_{\Delta n} = 0.3 \text{ A}$	NZM1 N(S)1	3 pole	NZM1-XFI300R	104604	At $I_{\Delta n} = 0.03 \text{ A}$: delay time t_v always fixed at 10 ms. Alarm indication $> 30 \% I_{\Delta n}$ by yellow LED. Trip indication by up to 2 auxiliary contacts (HIAFI) can be retrofitted: N/O = M22-K01, NC = M22-K10 are reset with the reset toggle lever. If the trip-indicating auxiliary contact in the fault current block is used, the NC contacts operates as a N/O contact and the NC contact operates as N/O contacts. Double contact not permissible. Not in combination with insulated enclosure or main switch assembly kit for side wall installation with mounting bracket.
		NZM1-4 N1-4	4 pole	NZM1-4-XFI300R	104607	
	Rated fault current $I_{\Delta n} = 0.03 - 0.1 - 0.3 - 0.5 - 1 - 3 \text{ A}$	NZM1 N(S)1	3 pole	NZM1-XFIR	104605	At $I_{\Delta n} = 0.03 \text{ A}$: delay time t_v always fixed at 10 ms. Alarm indication $> 30 \% I_{\Delta n}$ by yellow LED. Trip indication by up to 2 auxiliary contacts (HIAFI) can be retrofitted: N/O = M22-K01, NC = M22-K10 are reset with the reset toggle lever. If the trip-indicating auxiliary contact in the fault current block is used, the NC contacts operates as a N/O contact and the NC contact operates as N/O contacts. Double contact not permissible. Not in combination with insulated enclosure or main switch assembly kit for side wall installation with mounting bracket.
	Delay time $t_v = 10 - 60 - 150 - 300 - 450 \text{ ms}$	NZM1-4 N1-4	4 pole	NZM1-4-XFIR	104608	
Bottom assembly up to 100 A						
	Rated fault current $I_{\Delta n} = 0.03 \text{ A}$	NZM1 N(S)1	3 pole	NZM1-XFI30U	104609 1 Off	At $I_{\Delta n} = 0.03 \text{ A}$: delay time t_v always fixed at 10 ms. Alarm indication $> 30 \% I_{\Delta n}$ by yellow LED. Trip indication by up to 2 auxiliary contacts (HIAFI) can be retrofitted: N/O = M22-K01, NC = M22-K10 are reset with the reset toggle lever. If the trip-indicating auxiliary contact in the fault current block is used, the NC contacts operates as a N/O contact and the NC contact operates as N/O contacts. Double contact not permissible. Not in combination with insulated enclosure or main switch assembly kit for side wall installation with mounting bracket.
		NZM1-4 N1-4	4 pole	NZM1-4-XFI30U	104612	
	Rated fault current $I_{\Delta n} = 0.3 \text{ A}$	NZM1 N(S)1	3 pole	NZM1-XFI300U	104610	At $I_{\Delta n} = 0.03 \text{ A}$: delay time t_v always fixed at 10 ms. Alarm indication $> 30 \% I_{\Delta n}$ by yellow LED. Trip indication by up to 2 auxiliary contacts (HIAFI) can be retrofitted: N/O = M22-K01, NC = M22-K10 are reset with the reset toggle lever. If the trip-indicating auxiliary contact in the fault current block is used, the NC contacts operates as a N/O contact and the NC contact operates as N/O contacts. Double contact not permissible. Not in combination with insulated enclosure or main switch assembly kit for side wall installation with mounting bracket.
		NZM1-4 N1-4	4 pole	NZM1-4-XFI300U	104613	
	Rated fault current $I_{\Delta n} = 0.03 - 0.1 - 0.3 - 0.5 - 1 - 3 \text{ A}$	NZM1 N(S)1	3 pole	NZM1-XFIU	104611	At $I_{\Delta n} = 0.03 \text{ A}$: delay time t_v always fixed at 10 ms. Alarm indication $> 30 \% I_{\Delta n}$ by yellow LED. Trip indication by up to 2 auxiliary contacts (HIAFI) can be retrofitted: N/O = M22-K01, NC = M22-K10 are reset with the reset toggle lever. If the trip-indicating auxiliary contact in the fault current block is used, the NC contacts operates as a N/O contact and the NC contact operates as N/O contacts. Double contact not permissible. Not in combination with insulated enclosure or main switch assembly kit for side wall installation with mounting bracket.
	Delay time $t_v = 10 - 60 - 150 - 300 - 450 \text{ ms}$	NZM1-4 N1-4	4 pole	NZM1-4-XFIU	104614	
Mounting below up to 250 A						
 Pulse-current sensitive according to core-balance principle						
For 4 pole circuit breakers NZM2-4 and Switch disconnectors N2-4, independant of mains voltage $U_b = 280 \dots 690 \text{ V } 50/60 \text{ Hz}$						
	Rated fault current $I_{\Delta n} = 0.03 \text{ A}$	NZM2-4 N2-4	4 pole	NZM2-4-XFI30	292343 1 Off	Auxiliary contacts (1 N/O, 1 NC built-in) are reset with the reset button. Not in combination with plug-in units, insulated enclosure or main switch assembly kit for side wall installation with mounting bracket. Rated ultimate short-circuit breaking capacity is determined by fitted NZM2 and, when using a switch-disconnector N2, by the back-up fuse used. Adjusting buttons can be sealed.
	Rated fault current $I_{\Delta n} 0.1 - 0.3 - 1 - 3 \text{ A}$	NZM2-4 N2-4	4 pole	NZM2-4-XFI	292344	
	Delay time $t_v = 60 - 150 - 300 - 450 \text{ ms}$					
	 Core-balance principle with AC/DC current sensitivity (in range 0... 100 kHz)					
	For 4 pole circuit breakers NZM2-4 and Switch disconnectors N2-4, internal voltage supply $U_e = 50 \dots 400 \text{ V}$					
	Rated fault current $I_{\Delta n} = 0.03 \text{ A}$	NZM2-4 N2-4	4 pole	NZM2-4-XFIA30	292345 1 Off	Observe response threshold dependence on frequency! See Frequency response characteristic curve. Adjusting Buttons can be sealed.
	Rated fault current $I_{\Delta n} 0.3 - 0.5 - 1 \text{ A}$	NZM2-4 N2-4	4 pole	NZM2-4-XFIA	292346 1 Off	
	Delay time $t_v = 60 - 150 - 300 - 450 \text{ ms}$					

For use with	Part no. Article no. when ordering separately	Article no.	Std. pack	Notes	
Power supply module, 24 VDC					
24 V DC supply to the electronic trip.					
	NZM2(-4)-VX(MX)...	NZM2-XPS24DC	189822	1 Off	Mechanical pass-through of the switch's status (I, O) for use by the remote operator.
	NZM3(-4)-VX(MX)...	NZM3-XPS24DC	189823		
	NZM4(-4)-VX(MX)...	NZM4-XPS24DC	189824		
Interface module, PXR20/25, connection for communication					
For universal connection of optional circuit breaker functions. Required for communication. The connection types depend on the design of the interface module. Circuit breaker status detection (I, +, 0) for the electronic trip unit. The switch's status can be communicated. 24 V DC auxiliary power connection. Optional ECAM available for various Fieldbus communication systems (SmartWire-DT, Ethernet-based Fieldbus). Connection to optional, internal Modbus RTU module. The interface module is included in the standard delivery of PXR25 trip units, following items to be ordered separately as replacements.					
	NZM2(-4)-VX(MX)(PX)(PMX)...	NZM2-XBSM	189825	1 Off	Mechanical pass-through of the switch's status (I, O) for use by the remote operator.
	NZM3(-4)-VX(MX)(PX)(PMX)...	NZM3-XBSM	189826		
	NZM4(-4)-VX(MX)..., NZM4-4-PX(PMX)...	NZM4-XBSM	189827		
NZM4-PX(PMX)...	NZM4-XBSM-N	189830			Connection to neutral voltage Vn. Mechanical pass-through of the switch's status (I, O) for use by the remote operator
Interface module, PXR25, connection for communication, zone selectivity, Arcflash Reduction Maintenance System™					
For universal connection of optional circuit breaker functions. Required for communication. The connection types depend on the design of the interface module. Circuit breaker status detection (I, +, 0) for the electronic trip unit. The switch's status can be communicated. 24 V DC auxiliary power connection. Optional ECAM available for various Fieldbus communication systems (SmartWire-DT, Ethernet-based Fieldbus). Connection to optional, internal Modbus RTU module. Connector for Logical Zone Selectivity (ZSI) function. Mechanical pass-through of the switch's status (I, O) for use by the remote operator. The interface module is included in the standard delivery of PXR25 trip units, following items to be ordered separately as replacements.					
	NZM2(-4)-PX...-TZ	NZM2-XBSM-TZ	189832	1 Off	Connection for maintenance mode (Arcflash Reduction Maintenance System™).
	NZM3(-4)-PX...-TAZ	NZM3-XBSM-TAZ	189833		
	NZM4-4-PX...-TAZ	NZM4-XBSM-TAZ	189835		
NZM4-PX...-TAZ	NZM4-XBSM-TAZ-N	189834			Connection to neutral voltage Vn. Connection for maintenance mode (Arcflash Reduction Maintenance System™).

For use with	Part no.	Article no.	Std. pack	Notes	
	Article no. when ordering separately				
Internal communication module					
For the Fieldbus connection. The module is mounted in the right hand accessory pocket of the circuit breaker. For connection to Modbus RTU, RS485 interface.					
	NZM2(3)(4)(-4)-VX(MX)(PX)(PMX)	PXR-RCAM-MRTU-I	189836	1 Off	Cannot be used with the PXR10 NZM-AX electronic trip.
Communication module					
For Industrial Ethernet connection to NZM circuit breakers. Requires PXR-RCAM-MRTU-I module for connection to the circuit breaker.					
	NZM2(3)(4)(-4)-VX(MX)(PX)(PMX)	PXR-ECAM-PNET	302050	1 Off	For connection to Profinet. Cannot be used with the PXR10 NZM-AX electronic trip.
	NZM2(3)(4)(-4)-VX(MX)(PX)(PMX)	PXR-ECAM-IP	302051		For connection to EtherNet/IP™. Cannot be used with the PXR10 NZM-AX electronic trip.
	NZM2(3)(4)(-4)-VX(MX)(PX)(PMX)	PXR-ECAM-ECT	302052		For connection to EtherCAT®. Cannot be used with the PXR10 NZM-AX electronic trip.
	NZM2(3)(4)(-4)-VX(MX)(PX)(PMX)	PXR-RCAM-SWD	199860	1 Off	For connection to SmartWire-DT Cannot be used with the PXR10 NZM-AX electronic trip.

*Attention: PXR-RCAM-SWD must only be used with the following firmware versions (or later versions)

NZM2(3)(4)(-4)-VX(MX)(PX)(PMX)	V1.1.XX
NZM2(3)(4)(-4)-VX(MX)(PX)(PMX)...-NA	V2.1.XX
NZM2(3)(4)-XBSM(-TZ)(-TAZ)(-N)	V1.1.XX

Max. Rated Operational Current I _e (A)	Rated Operational Voltage U _e (V)	Adapter Width (mm)	Adapter Length (mm)	Special Features	For use with	Notes	Part no.	Article no.	Std. pack (Stk.)
--	---	-----------------------	------------------------	------------------	--------------	-------	----------	-------------	------------------

NZM Busbar Adapter, 3-pole

Busbar Adapter NZM

- For use on flat copper bars 12 - 30 x 5/10, Double-T-Profiles and Triple-T-Profiles.
- Self-extinguishing according to UL 94.
- Track resistance CTI 200.
- Temperature-resistant up to 120 °C.

160	690	92	200	For connecting to the system at PN1 the top or bottom through fixed connection bars included in the scope of delivery. ¹⁾²⁾	NZM1 NS1	For switches with standard connection frame-type terminals. To be snapped onto the busbar by means of a combi-base.	NZM1-XAD160	104554	1
250	690	106	190	For connecting to the system at PN2 the top/bottom through a tube-type of connection at the rear. Tube included in the scope of delivery. ³⁾	NZM2 NS2	Use only in combination with auxiliary type (+)NZM2-XKR4. To be screwed onto the busbar by means of a clawtype of clamp.	NZM2-XAD250	104555	1
630	690	140	300	For connecting to the system at the top/bottom through a tube-type of connection at the rear. Tube included in the scope of delivery. ³⁾	NZM3 N3	Use only in combination with auxiliary type (+)NZM3-XKR13. To be screwed onto the busbar by means of a claw-type of clamp.	NZM3-XAD630	107206	1

Terminal for Device Adapter NZM

250	690	-	-	To cover the connection to the system at the top/bottom.	NZM2 NS2	For device combination NZM2 use with auxiliary type +NZM2-XKR40 or +NZM2-XKR4U.	NZM2-XKR4	281666	1
630	690	-	-	To cover the connection to the system at the top/bottom.	NZM3 N3	For device combination NZM3 use with auxiliary type +NZM3-XKR130 or +NZM3-XKR13U.	NZM3-XKR13	281668	1

¹⁾ To be snapped onto the voltage-free busbar.

²⁾ Thanks to the combi-base it can be adjusted to a bar width of both 5 and 10 mm.

³⁾ To be screwed onto the voltage-free busbar.

Max. Rated Operational Current I_b (A)	Rated Operational Voltage U_b (V)	Adapter Width (mm)	Adapter Length (mm)	Special Features	For use with	Notes	Part no.	Article no.	Std. pack (Stk.)
---	--	-----------------------	------------------------	------------------	--------------	-------	----------	-------------	------------------

NZM Busbar Adapter, 4-pole

Busbar Adapter NZM

- For use on fl at copper bars 12 - 30 x 5/10, Double-T-Profiles and Triple-T-Profiles.
- Self-extinguishing according to UL 94.
- Track resistance CTI 200.
- Temperature-resistant up to 120 °C.

250	690	140	–	For connecting to the system at the top through a tubetype of connection at the rear. Tube included in the scope of delivery. ³⁾	NZM2(-4) PN2(-4) N2(-4) NS2(-4)	Use only in combination with auxiliary type (+)NZM2-4-XKR4. To be screwed onto the busbar by means of a claw-type of clamp.	NZM2-4-XAD250	138388	1
-----	-----	-----	---	---	--	---	---------------	--------	---


630	690	185	–	For connecting to the system at the top through a tube-type of connection at the rear. Tube included in the scope of delivery. ³⁾	NZM3(-4) PN3(-4) N3(-4) NS3(-4)	Use only in combination with auxiliary type (+)NZM3-4-XKR13. To be screwed onto the busbar by means of a clawtype of clamp.	NZM3-4-XAD630	138389	1
-----	-----	-----	---	--	--	---	---------------	--------	---

Terminal for Device Adapter NZM

250	690	–	–	To cover the connection to the system at the top.	NZM2-4 PN2-4 N2-4 NS2-4	For device combination NZM2 use with auxiliary type +NZM2-4-XKR40.	NZM2-4-XKR4	118907	1
-----	-----	---	---	---	----------------------------------	--	-------------	--------	---

630	690	–	–	To cover the connection to the system at the top.	NZM3-4 PN3-4 N3-4 NS3-4	For device combination NZM3 use with auxiliary type +NZM3-4-XKR130.	NZM3-4-XKR13	119020	1
-----	-----	---	---	---	----------------------------------	---	--------------	--------	---

01063591_0



01063598_0



NZM2-4-XKR4



NZM2-4-XKR4



Busbar Adapter NZM

	NZM1-XAD160	NZM2-XAD250	NZM3-XAD630
Design	3-pole, 690 V~	3-pole, 690 V~	3-pole, 690 V~
Bar system	60 mm	60 mm	60 mm
Bar contacting	combi-base	claw-type terminal	claw-type terminal
Connection of the switchgear	top/bottom	top or bottom	top or bottom
Short circuit current rating SCCR	32 kA at 480 V	35 kA at 480 V 50 kA at 600 V	65 kA at 480 V 50 kA at 600 V

Base body:

	Thermoplastic	Thermoplastic	Thermoplastic
	Temperature resistant up to 120 °C	Temperature resistant up to 120 °C	Temperature resistant up to 120 °C
	Self-extinguishing according to UL 94	Self-extinguishing according to UL 94	Self-extinguishing according to UL 94
	Track resistance CTI 200	Track resistance CTI 200	Track resistance CTI 200
	Halogen-free	Halogen-free	Halogen-free

NZM1-XAD160

Derating:

Ambient temperature	25	30	35	40	45	50	55
Permissible rated current	160	155	150	146	141	136	130
Derating to 160 A	1	0.97	0.94	0.91	0.88	0.85	0.81

NZM2-XAD250

No derating

NZM3-XAD630

Derating:

Ambient temperature	20	30	40	50	60	65	70
Permissible rated current	630	605	580	554	529	517	504
Derating to 630 A	1	0.96	0.92	0.88	0.84	0.82	0.80

Notes:

Please observe the de-rating coefficients listed in the table above to determine the maximum ampacity allowed at different ambient temperatures!

Example:

An NZM3...3...630... device with an NZM3-XAD630 device adapter should be operated at an ambient temperature of 50 °C.

Question:

What is the maximum rated operating current I_b allowed I_b ? =>

Solution:

At an ambient temperature of 50 °C, the de-rating coefficient is 0.88. This means that $I_b = 630 \text{ A} \times 0.88 = 544 \text{ A}$.

At an ambient temperature of 50 °C, the device can therefore be operated at a maximum of $I_b = 544 \text{ A}$.

¹⁾ To be snapped onto the voltage-free busbar.

²⁾ Thanks to the combi-base it can be adjusted to a bar width of both 5 and 10 mm, cross-section of conductor 6 x 9 x 0.8.

³⁾ To be screwed onto the voltage-free busbar.

5.1


Compact circuit breakers, switch disconnectors

Construction size 1: Basic devices
NZM1, PN1, N1, NS1

Dimensions (mm)

3 pole


NZMB1
NZMC1
NZMN1
NZMH1
PN1
N1
NS1

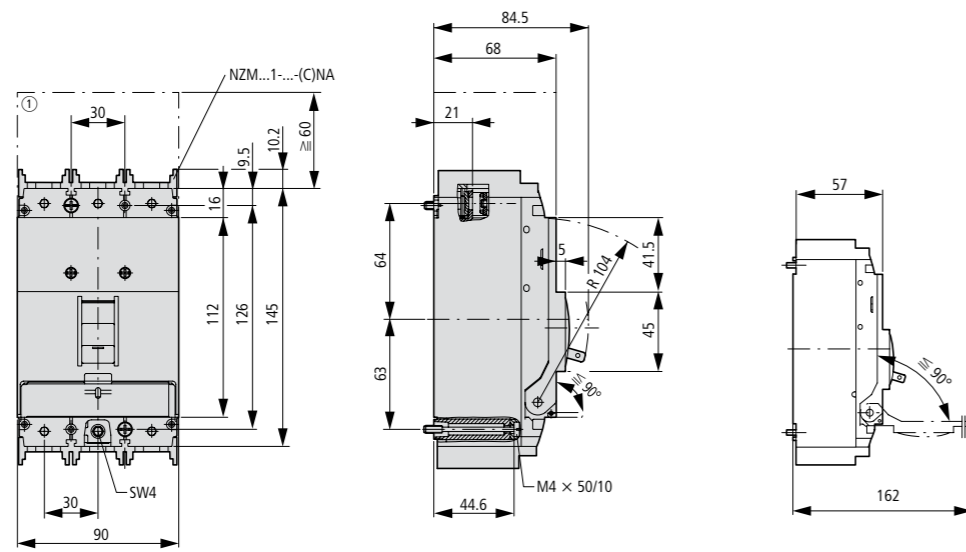

① Blow-out area, minimum distance to other parts ≥ 60 mm

4 pole

NZMB1-4
NZMC1-4
NZMN1-4
NZMH1-4
PN1-4
N1-4

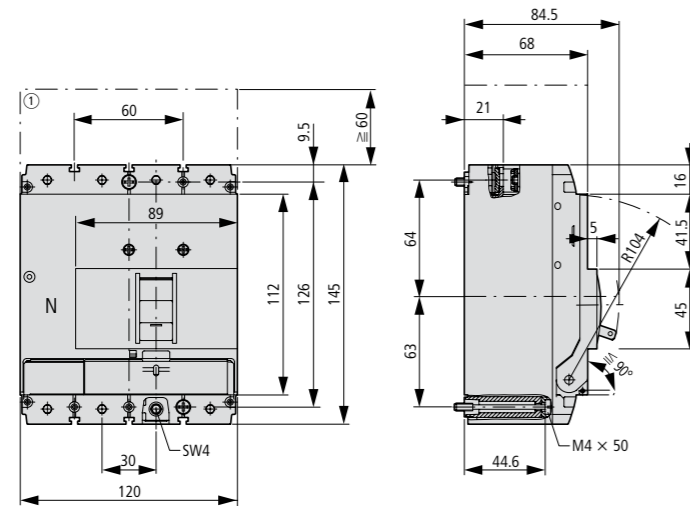

① Blow-out area, minimum distance to other parts ≥ 60 mm


5.2

Construction size 2: Basic devices
NZM2, PN2, N2, NS2

Dimensions (mm)

3 pole


NZMB2
NZMC2
NZMN2
NZMH2
PN2
N2
NS2

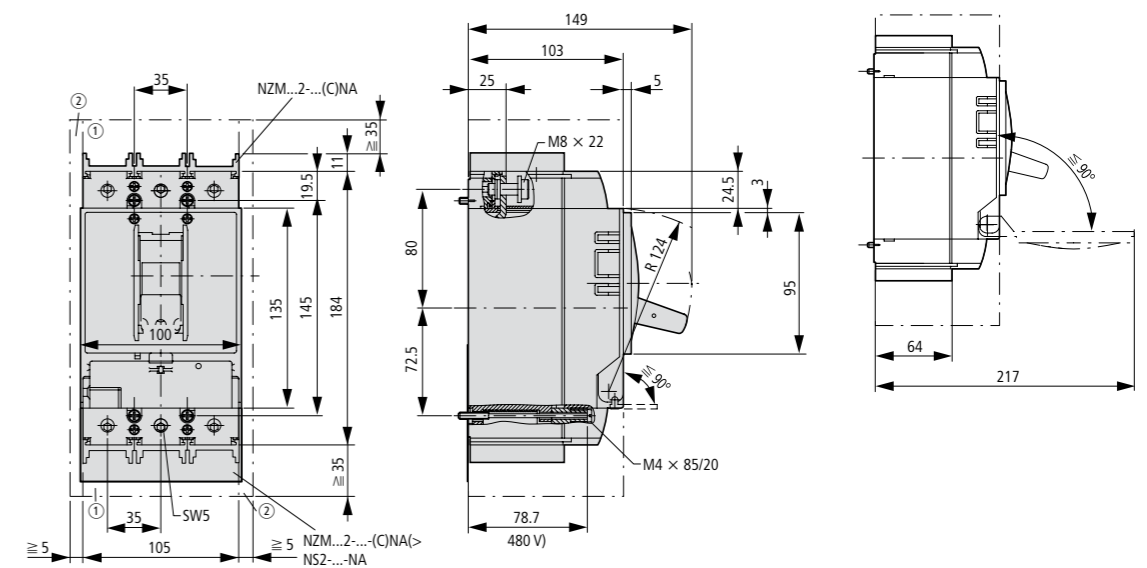

① Blow-out area, minimum distance to other parts ≥ 35 mm
② Minimum distance to adjacent parts ≥ 5 mm

4 pole

NZMB2-4
NZMC2-4
NZMN2-4
NZMH2-4
PN2-4
N2-4

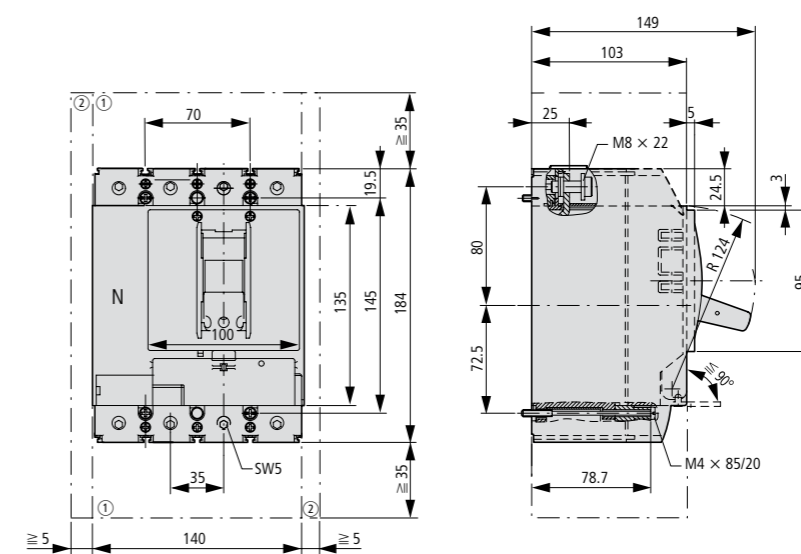


① Blow-out area, minimum distance to other parts ≥ 35 mm
② Minimum distance to adjacent parts ≥ 5 mm

Construction size 3: Basic devices
NZM3, PN3, N3, NS3

Dimensions (mm)

3 pole


NZMC3
PN3
N3
NS3

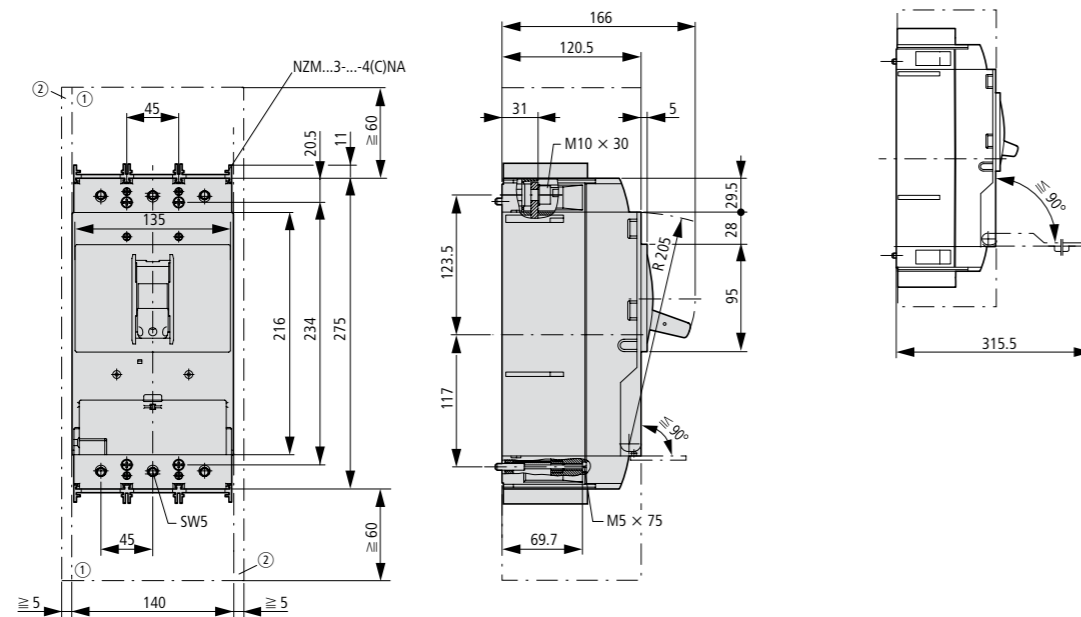

- ① Blow-out area, minimum distance to other parts ≥ 60 mm
- ② Minimum distance to adjacent parts ≥ 5 mm

4 pole

NZMC3-4
NZMN3-4
NZMH3-4
PN3-4
N3-4

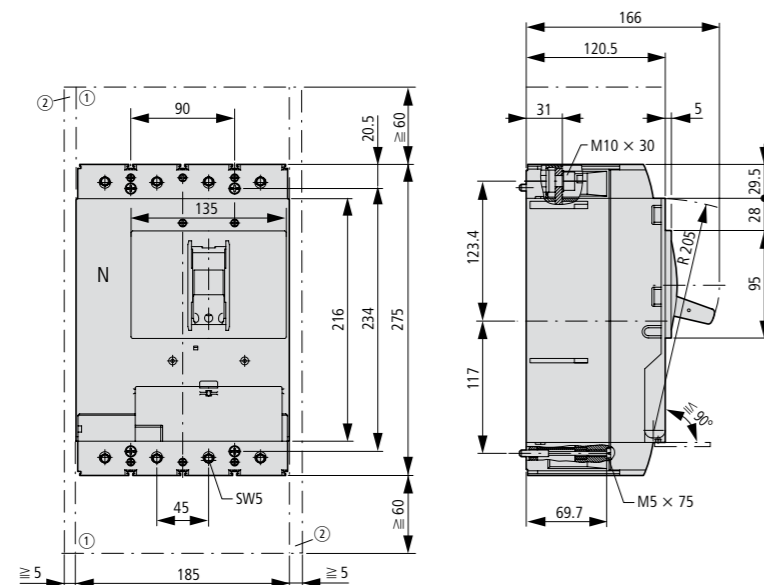


- ① Blow-out area, minimum distance to other parts ≥ 60 mm
- ② Minimum distance to adjacent parts ≥ 5 mm

Construction size 4: Basic devices
NZM, N4, NS4

Dimensions (mm)

3 pole


NZMN4
NZMH4
N4
NS4

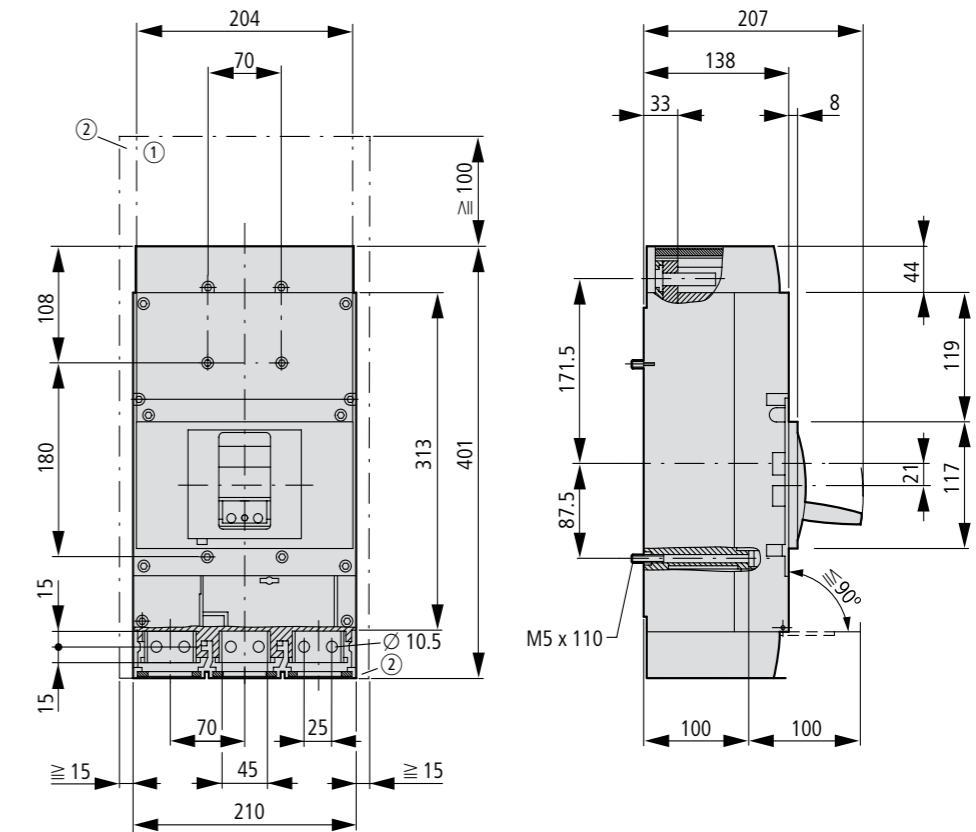

- ① Blow-out area, minimum distance to other parts ≥ 100 mm up to 690V; ≥ 200 mm up to 1000V
- ② Minimum distance to adjacent parts ≥ 15 mm

4 pole

NZMN4-4
NZMH4-4
N4-4

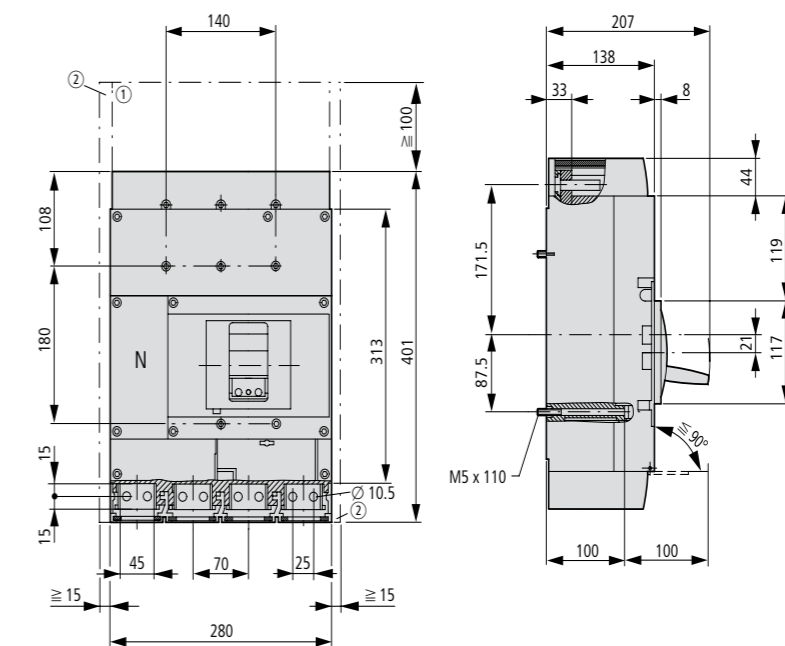

- ① Blow-out area, minimum distance to other parts ≥ 100 mm
- ② Minimum distance to adjacent parts ≥ 15 mm




xSpider

xSpider creates your networks


The xSpider software is a graphic-oriented design system for dimensioning of low-voltage networks fitted with Eaton brand circuit protection equipment.

The software is intended primarily for designers and computational engineers. It includes a new graphics and computing core as well as a new user interface.

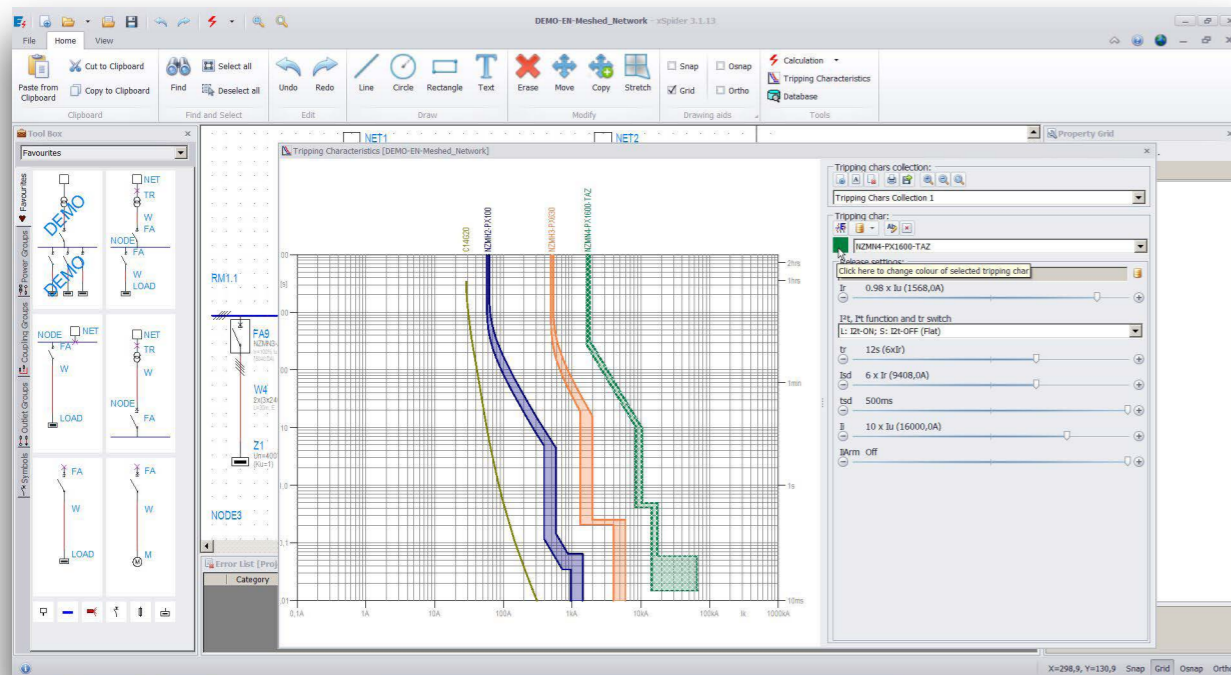

General Features

- Suitable for TN / IT / TT network systems of different voltage systems up to 1,000 V.
- Design of radial as well as meshed networks.
- Operating status manager for simulating various operating states of the network (ON/OFF status of sources and loads).
- Database of components with transparent tree structure, allowing user-defined additions.
- All calculations are based on IEC standards.
- Coordination of protective devices (selectivity, backup protection).
- Tripping characteristics available for all protective devices.
- Generation of documentation (wiring diagram with calculation results, calculation report etc.).

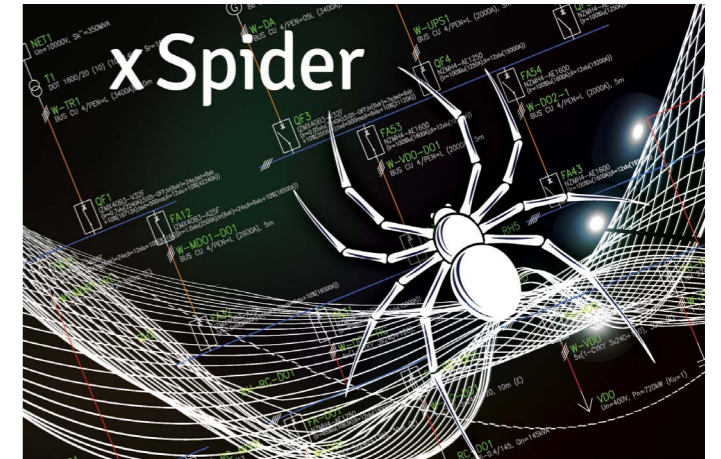

Calculations


- **Voltage drops** in nodal points of the network.
- Load distribution in the network lines.
- Power factor calculation for meshed networks.
- **Three-phase symmetric short circuit** according to IEC 60909.
- Backup protection – checking the breaking capacities of the out-going protective components at the outgoers.

- Selectivity assessment of circuit breakers according to tripping characteristics and selectivity tables.
- **Single-phase asymmetrical short circuit current.**
- Calculation of the disconnection time and check on compliance with the requirements of IEC 60364-4-41.

Displaying of results


- Calculation is followed by a display of the list of non-compliant elements (in parallel with the wiring diagram).
- After the calculation has been performed, the calculated values will be displayed for the individual components in the network wiring diagram.
- The results diagram is printable. It can be printed on any

- output device, for which a driver is available in Windows (printer, plotter).
- After calculation, a comprehensive report on the calculation can be generated and printed.

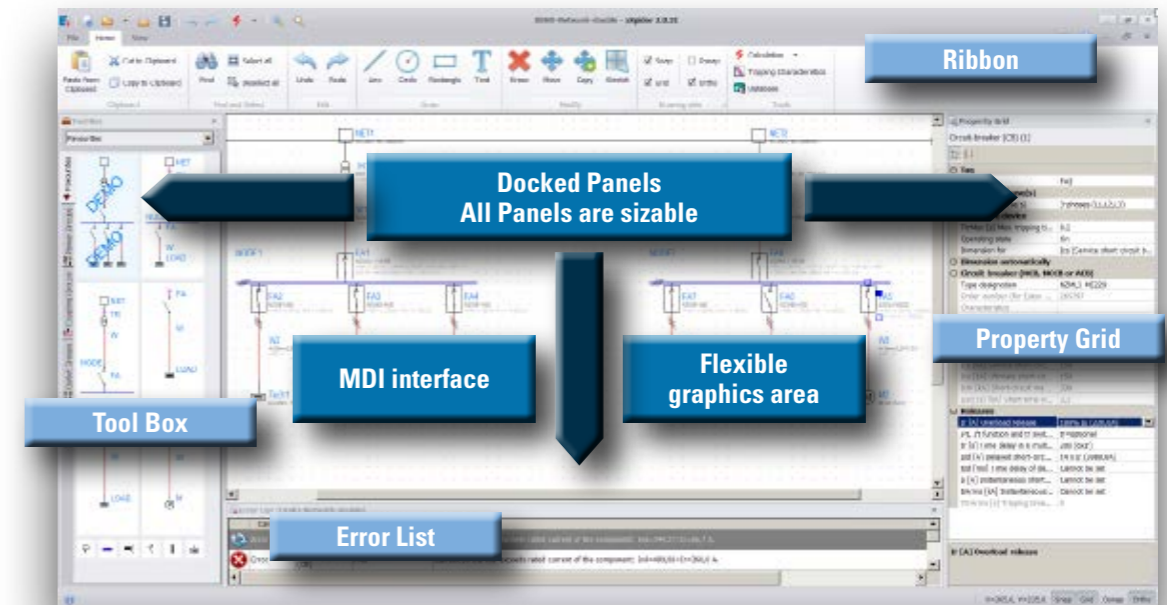


User operation similar to standard CAD systems (AutoCAD)

Working with tripping characteristics

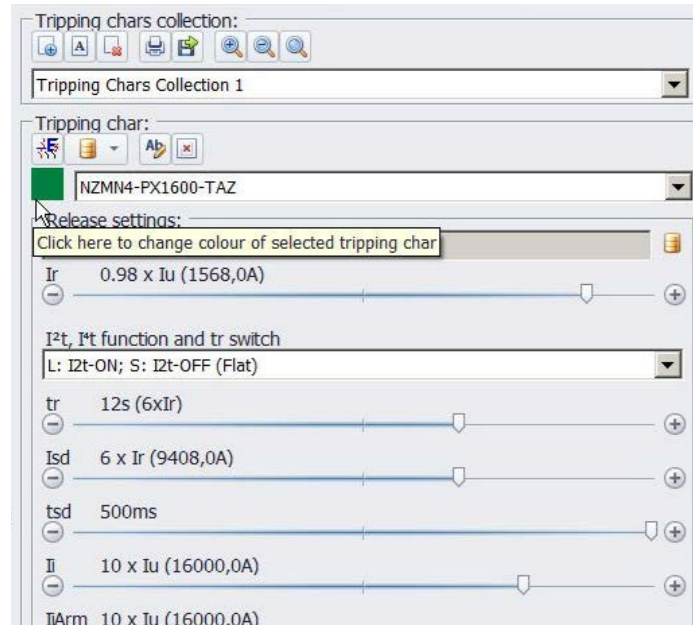


Setting of parameters for selected circuit breaker tripping characteristic


- The dialogue box with the tripping characteristics is shown in parallel with the wiring diagram.
- Selection of a protective device from the database and rendering of its tripping characteristic (including tolerance range if the necessary data is available).
- Selection of protective equipment from the network wiring diagram and drawing of its tripping characteristics – selectivity assessment possible.
- If a circuit protection device is equipped with adjustable releases, it is possible to modify all available parameters. If this was a device from the wiring diagram, the change of the release parameter setting is transferred back into the wiring diagram.
- It is also possible to work with the tripping characteristics independently, i.e. without drawing a wiring diagram.

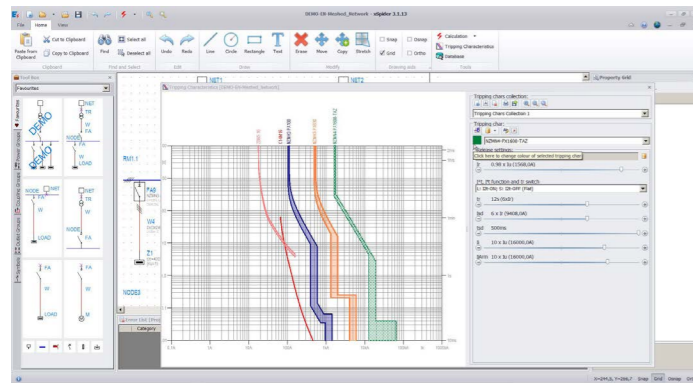


Tripping characteristic of NZM breakers

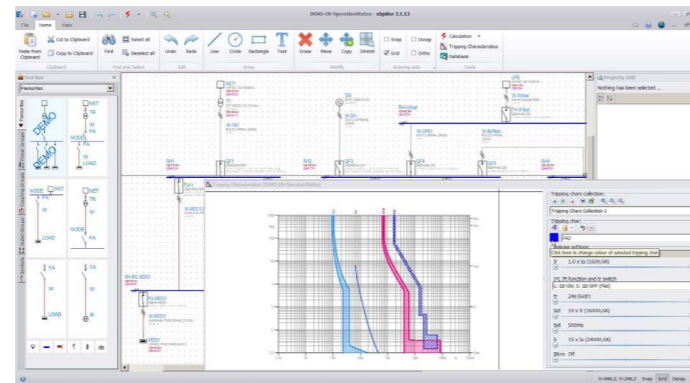

Tripping characteristic of NZM4 with activated Arcflash Reduction Maintenance System™

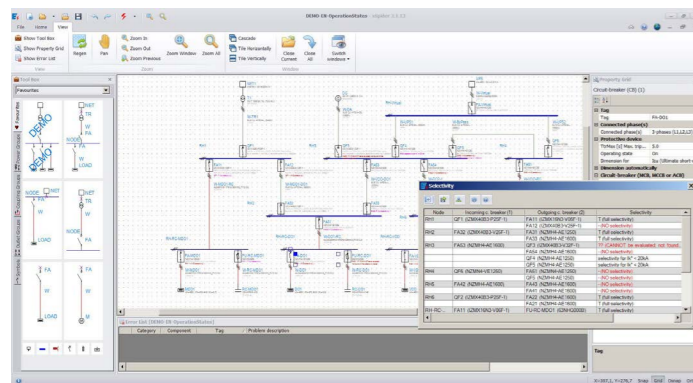

Complex evaluation of selectivity and backup protection

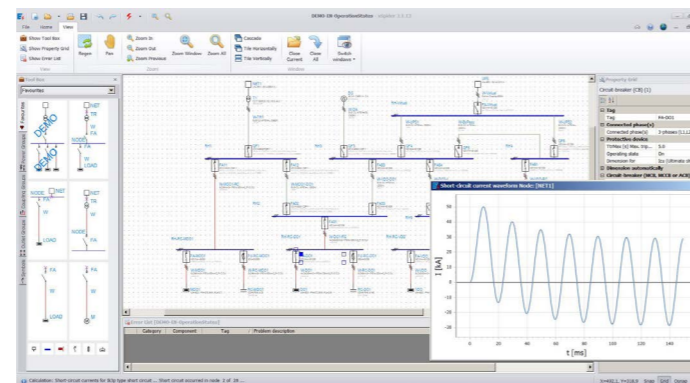

Tripping characteristic of NZM breakers with complex evaluation of selectivity and backup protection in the project


How to obtain the xSpider software

- Go to the xSpider homepage:
- 1) www.eaton.com/xspider
 - 2) Search with any explorer (Google) for terms such as: xSpider, or xSpider Eaton etc.

- Download the xSpider software *)
- Installation of xSpider to a computer
- xSpider icon is displayed on the screen – click on it
- Start

*) available also:

- PowerPoint presentations – quick overview of features
- User manual is part of installation or available separately as a PDF file
- Instruction videos help to quickly understand operation.

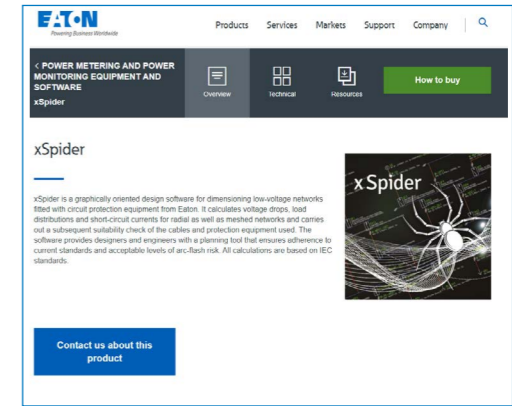

How to start the first job

The most effective way for quick learning is to start with the selected "DEMO Network" drawing, then look at Videos and follow the User manual, Part III.

1 DEMO drawing

Ready drawings with explanation of basic features. The DEMO drawing contains all basic components and allows immediate work with all xSpider features.


2 Videos

Typical situations in the everyday use of xSpider

3 User manual

Step-by-step explanation in Part III:
Part I: Theoretical Introduction
Part II: Program Operation
Part III: Solved Examples



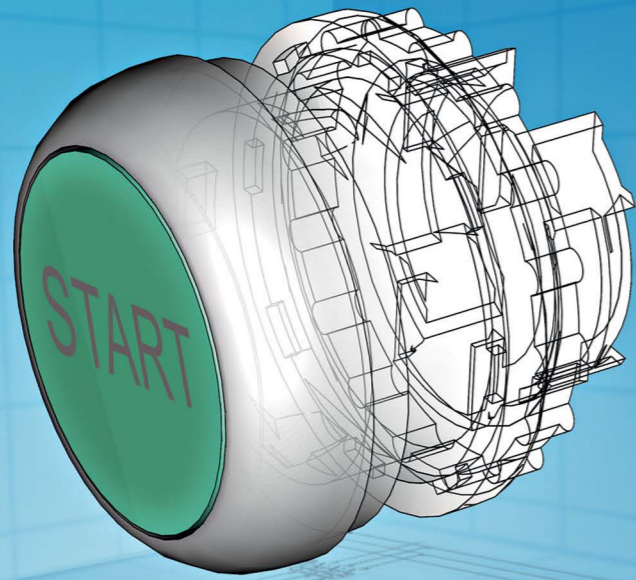

Planning safety and process optimization: eCAD & mCAD data at the click of a mouse!



- 22,000 article data items and macros
- Download from EPLAN Data Portal
- Available for version P8



- Models for approx. 20,000 products
- 80 different neutral & native formats

Eaton is providing its customers with CAD data to offer optimum support during planning. Both electrical and mechanical design data can be called up quickly and conveniently from the Internet at any time. This reduces processing times, minimizes errors and thus already reduces costs in the engineering phase of control panels, systems and machinery.

eCAD: Eaton has product data and macros for EPLAN Electric P8 available in the EPLAN Data Portal.

More than 22,000 products can be found and downloaded from there.

mCAD: Eaton makes 2D and 3D data available for more than 20,000 products.

Over 80 different neutral and native formats guarantee compatibility with the project engineering systems of the customer. The models can either be integrated directly into the planning software from the Partcommunity Portal on the Internet or via the CADENAS Partsolution software.

Build it in.



XV HMI/PLC: Systematic visualization and control



All devices can also be used in portrait format

With the XV system of HMI-PLC touch panels, Eaton offers machine builders and system integrators a coordinated product range that can be precisely matched to various performance classes. In combination with powerful processors, the intelligent implementation of the PLC runtime as part of a lean and efficient embedded platform strategy leads to modern, scalable and cost-effective automation concepts. The use of CODESYS programming standard and the comprehensive interfaces illustrate the openness of the system. Display sizes from 3.5" to 15", plastic and metal versions, and the option of using capacitive, resistive, or infrared touch panels allow for an extremely wide range of applications. A unique technology: XV panel with integrated SmartWire-DT master interface. The control wiring has been replaced by a single cable, which makes it easy to connect the switching, signaling and operating devices as well as any sensors and actuators outside the control panel.

XV300 – The new face of modern industry

Intuitive user guidance, precise gesture control, multimedia integration - industrial applications that offer the same ease of use that we have come to expect from smartphones and tablets.

The new XV300 panels with capacitive multi-touch or infrared technology are not only easy to operate, but are also redefining the possibilities of human-machine interaction. Modern, high-resolution devices that meet your needs - even in harsh industrial environments.

General features

- Can be used either in portrait or landscape mode
- Removeable SD card
- Interface combinations: 1 or 2 Ethernet interfaces 10/100Mbps, CAN, PROFIBUS-DP/MPI
- SmartWire-DT, RS232, RS485
- Integrated web server
- HMI / HMI/PLC functionality
- High system performance and a powerful graphics processing unit
- PLC function programmable with CODESYS V2 and V3
- Visualization via GALILEO, CODESYS or Visual Designer
- UL approval
- Marine approval for the 7" and 10" XV-303/313 devices



XV-303

- Capacitive multi-touch panel for front mounting
- Display sizes 7", 10.1" and 15" in 16:9 format
- Flat front panel made from non-reflective tempered glass
- Plastic housing
- Interfaces: 1 or 2 x Ethernet, 1 x CAN, 1 x RS232, 1 x RS485
- Optional: 1 x Profibus-DP, SmartWire-DT



XV-313

- Capacitive multi-touch panel for rear mounting
- Display sizes: 7" and 10.1" in 16:9 format
- Flat front panel made from non-reflective tempered glass
- Plastic housing with aluminum bezel
- Flush-mounted, resulting in a flat surface without any sharp edges
- Interfaces: 1 or 2 x Ethernet, 1 x CAN, 1 x RS232, 1 x RS485
- Optional: 1 x Profibus-DP, SmartWire-DT




XV-363

- Infrared touch panel for front mounting
- Display sizes: 5.7", 10.4" and 12.1" in 4:3 format
- Laminated safety glass, non-reflective
- Metal housing with aluminum bezel
- The dimensions are identical to those of the XV(S)400 series
- PLC function can be added later by means of Y7-181585 (LIC-PLC-A)
- Communication options: 2 x Ethernet, 1 x CAN, 1 x RS232, 1 x RS485
- Optional: 1 x Profibus-DP

SmartWire-DT on board


SmartWire-DT is an integral component of Eaton's automation concept, which is characterized by flexible solutions with fewer components and less engineering: SmartWire-DT supports the integration of the communication and I/O level directly into the control, display and switching devices. In addition to executing control commands, the PLC can thus directly access digital and analog data, from sensors all the way to circuit breakers. This eliminates the need for a separate gateway and I/O layer.

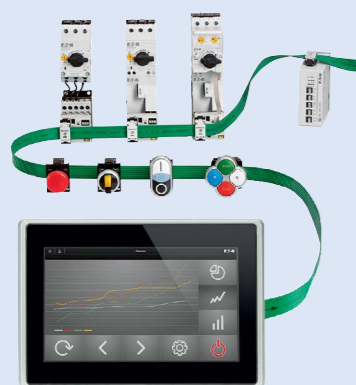


Build it in.



CODESYS

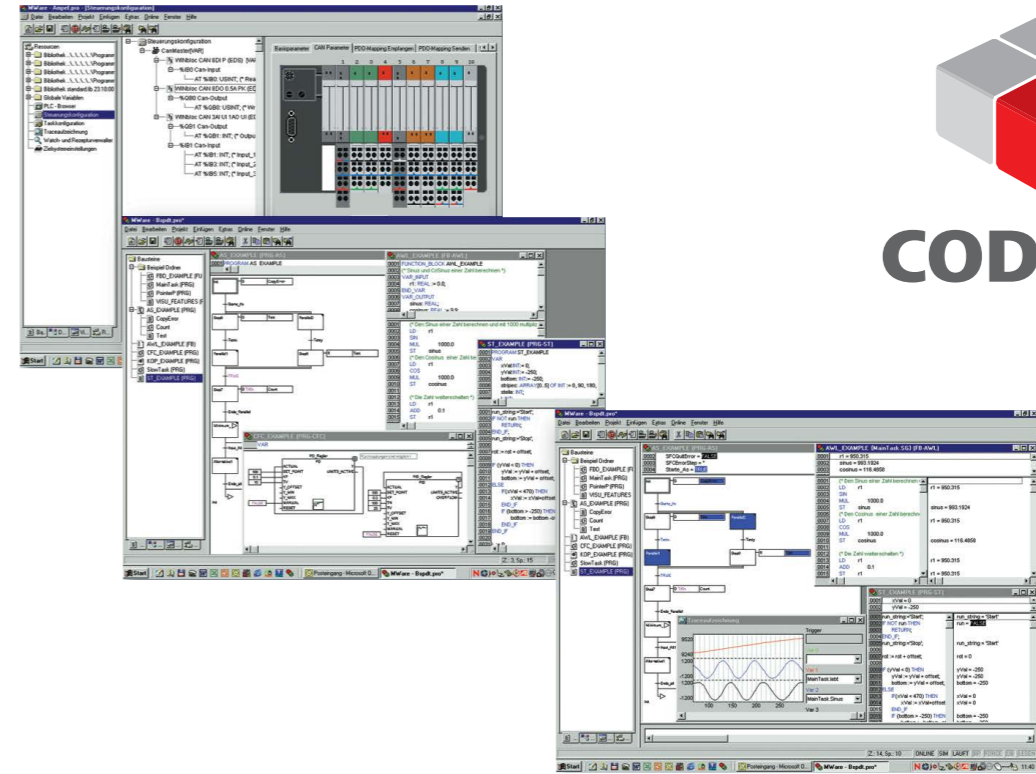

XSOFT-CODESYS – PLC programming to international standards

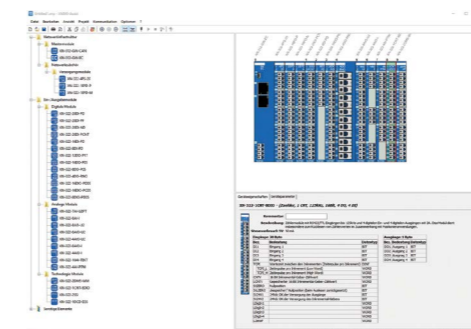

CODESYS is a programming system based on the 3S' CODESYS standard. And with its sophisticated technical features, ease of use, and popularity as a programming system for automation components from a wide variety of manufacturers, it is no surprise that it has become the system of choice for many a successful company. Eaton offers both **CODESYS Version 2** and **Version 3**, and most XV/XC controllers can be programmed with either version.

CODESYS is the ideal programming tool for applications in which a powerful PLC or HMI PLC with various field bus connections is required. The reason why is its integrated field bus configurators for PROFIBUS, CAN, SmartWire-DT, Modbus TCP/RTU (in Version 3), and EtherNet/IP™ (in Version 3), which make it possible to quickly, intuitively, and easily connect devices to the field bus of your choice. In short, the software is the ideal programming tool for all machine and process-relevant applications in mechanical and plant engineering environments.

Software tools simplify both project execution and commissioning:

- XN300 Assist
- I/O-Assist
- SWD-Assist

Download free of charge at www.eaton.com/software



CODESYS-2	CODESYS-2 Webvisu	CODESYS-3	CODESYS-3 Webvisu	XN300 Assist	I/O-Assist	SWD-Assist
•	•	•	•	•	•	•
•	•	•	•	•	•	•
•	•	•	•	•	•	•
•	•	•	•	•	•	•
	•	•	•	•	•	•
	•	•	•	•	•	•
	•	•	•	•	•	•
	•	•	•	•	•	•
	•	•	•	•	•	•
	•	•	•	•	•	•
	•	•	•	•	•	•
	•	•	•	•	•	•
	•	•	•	•	•	•
	•	•	•	•	•	•

* for devices with SmartWire-DT interface

Maximum flexibility

CODESYS is the programming tool for all Eaton XV/XC controllers. It enables users to program systems as per IEC-1131-3 with the following programming languages: instruction list (IL), ladder diagram (LD), function block diagram (FBD), sequential function chart (SFC), structured text (ST), continuous function chart (CFC).
Eaton offers targets for the XV100, XV300, XC-152, and XC-CPU202 automation systems both for CODESYS V3 and CODESYS V2, meaning that the same hardware can be used in new (configured with CODESYS 3) and existing (programmed with CODESYS 2) machine generations.

Multitasking

The structuring of the application into several user-defined runtime programs (multitasking) optimizes your PLC's resources and simplifies the implementation of time-critical requirements. This gives high-speed processes priority and slower processes as much processing time as necessary.

Web visualization

XSOFT-CODESYS can generate an XML description based on visualization information. In CODESYS V2, this description will be stored on the controller together with a Java applet. In CODESYS V3, HTML5-based pages (CODESYS V3) will be generated instead. These pages can then be displayed on a browser via TCP/IP.



Application libraries

Eaton Automation offers several ready-to-use libraries for programming PLCs with XSOFT-CODESYS for a wide range of applications:

- Control technology toolbox
- Motion control toolbox
- FTP server
- FTP client
- UDP and TCP/IP
- Modbus RTU/TCP master/slave
- OS functions
- File handling

XSOFT-CODESYS Version 3 features:

- A programming tool that can be expanded using plugins to handle customer-specific adaptations
- Expanded language options (object-oriented programming)
- Know-how protection for targets and the programming tool
- Multiple PLC programs in one project
- New and improved TargetVisu functions
- Improved IT safety functions
- Websites based on HTML5
- Field bus configurations: Modbus TCP/RTU, Replace by: EtherNet/IP™
- SAE J1939 protocol

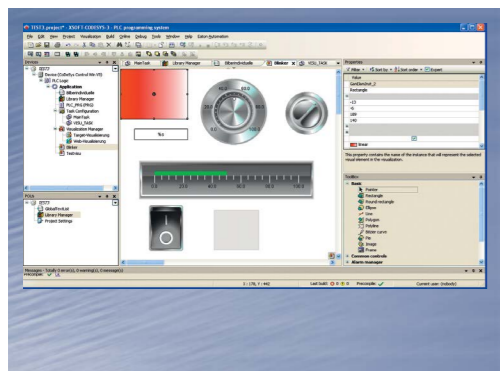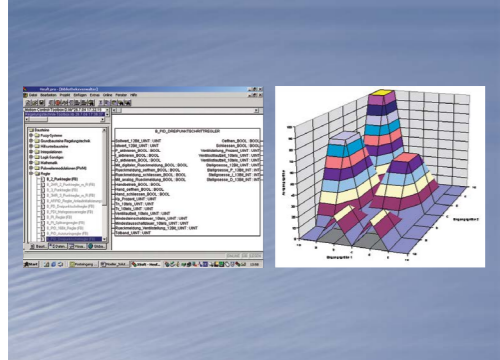

Functional safety to protect people, machines and the environment



Safety Technology
Control the unexpected




Throughout their entire life cycle, machines pose risks to people, other machinery and the environment. For this reason, it is vital to identify any hazards during the design phase of the machine and to reduce them by taking appropriate measures.

The Machinery Directive 2006/42/EC stipulates that machines should not pose any danger. However, as there is no such thing as 100 % safety in engineering, the objective is to minimize dangers and to achieve tolerable levels of residual risk. The overall safety of a machine defines the state in which it either poses no unacceptable risks to people or can be considered hazard-free. Functional safety refers to the part of the overall safety of a system which depends on the correct functioning of the safety-related systems and the external risk-reduction devices.

Risk reduction through the use of safety-related parts in control systems

In international standards, the safety components of machine controls are referred to as “safety-related parts of control systems” (SPR/CS). Safety-related control components cover the entire functional chain of a safety function. In each case, they consist of the input level (sensor), the integrated logic (safe signal processing) and the output level (actuator).

The general objective is to design these components in such way that the control functions reduce the level or risk in line with the results of the risk analysis, even in the event that the control system malfunctions. The higher the level of risk reduction that the safety-related parts of a control system need to achieve, the higher the required safety level/technical safety performance level.

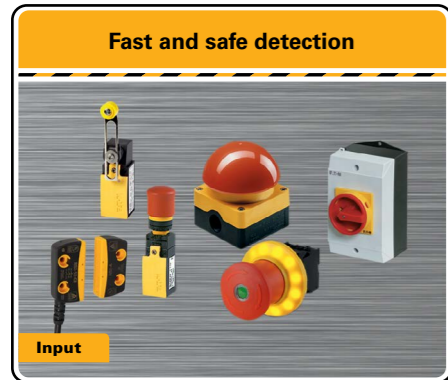


Safety Manual for machines and systems in accordance with EN ISO 13849-1 and IEC 62061

Information about machine safety can be found in Eaton’s “Safety Manual”, which is aimed at machine builders and system integrators, as well as at teachers and students and anyone else who is interested in the topic.

This manual provides an introduction to the comprehensive literature on safety technology. The Eaton Safety Manual provides an overview of the interplay between the relevant directives, standards and regulations that must be taken into account when designing safety equipment for machines. The safety-related contents of this manual have been certified by TÜV Rheinland Industrie Service GmbH.

Based on example circuits, the manual shows how functional safety can be implemented in safety applications by means of electrical, electronic and programmable components and systems.

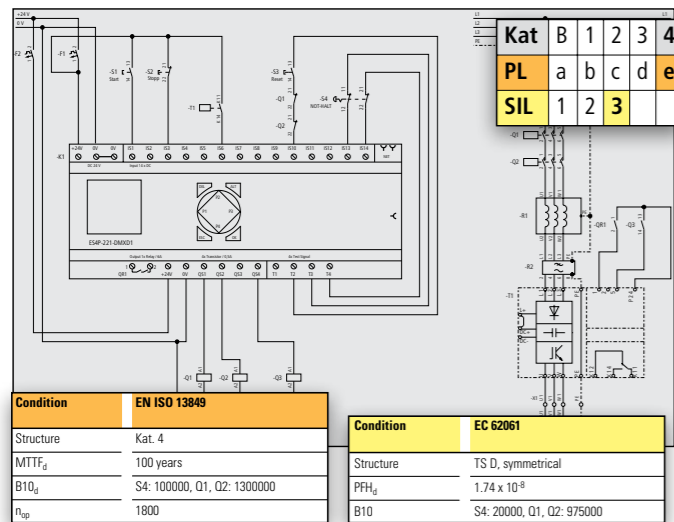


In addition, the Safety Manual also describes the functioning of each example circuit and contains a clear overview of the possible evaluations.

The calculated variables are based on standard assumptions about the safety applications and safety-related switchgear being used.

Register now at www.eaton.com/shb to download our Safety Manual free of charge.

The safety-relevant variables for our products are available at www.eaton.com/safety

Eaton xEnergy configurator

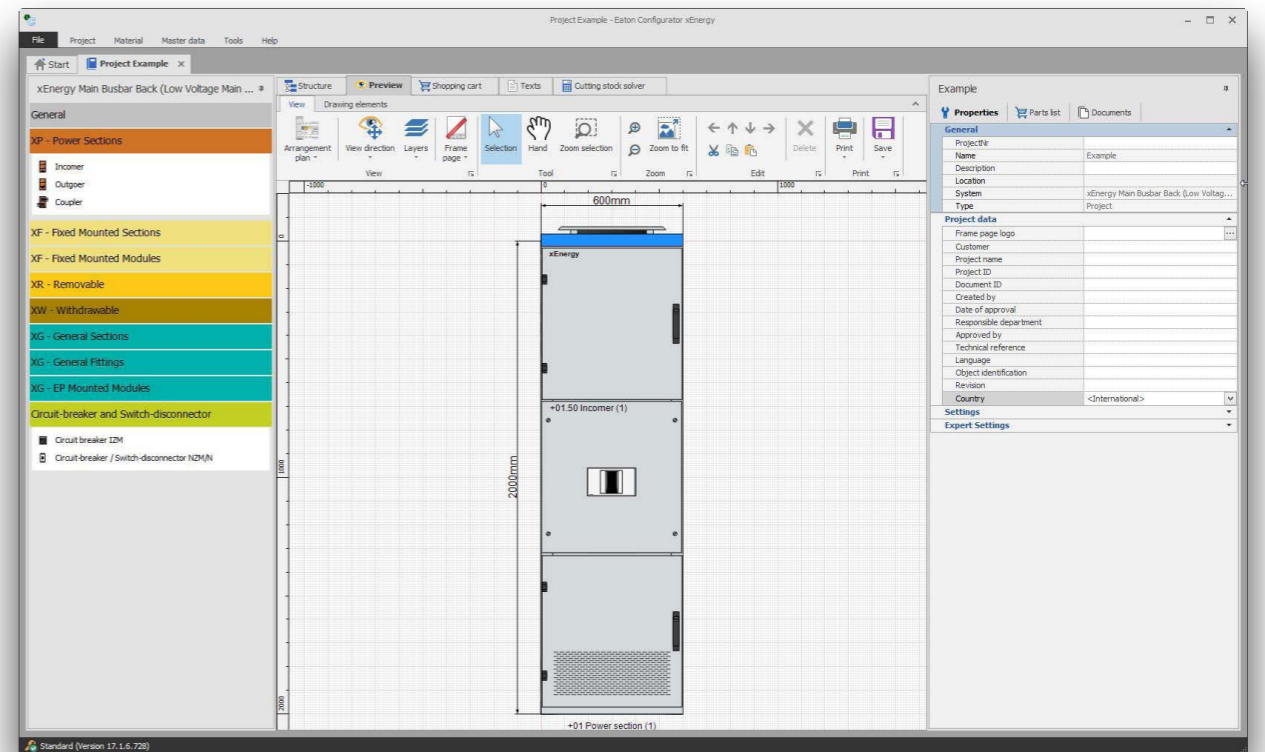

Eaton’s xEnergy configurator is a pricing and configuration software that enables panel builders to design and calculate the cost of low-voltage switchgear assemblies using Eaton’s xEnergy enclosure families and IZM and NZM circuit breaker families.

Main features


Distribution board configuration

- Fast and reliable configuration of distribution boards systems and circuit protection devices.
- Define technical properties with continuous validation check.
- Function-oriented dimensioning of the distribution board by means of neutral properties.
- Optional transfer of the configured distribution board to ProPlan (detail engineering).

Preview

- View of the distribution board from different directions.
- View of sections, modules and busbars including dimensioning and drawing sheet.
- Move components via drag/drop.
- Export as DXF file.

Configurator contents

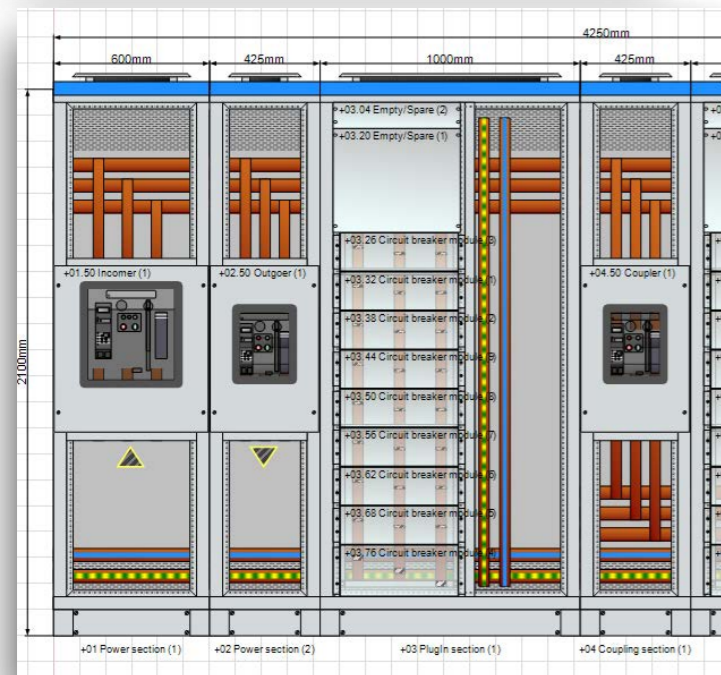

Part lists

- Expandable with any user defined material (including material from "MatClass").

Documentation

- Access to xEnergy assembly manuals and installation instructions.

Shopping cart

- As structure and summary parts list.
- Includes the calculation of metal surcharges.
- Considers exchange rates.
- Export to Microsoft Excel.
- Includes recommendations for additionally required busbar material (copper lengths).


The xEnergy configurator allows you to price and design Eaton switchgear for your project within minutes.

Use Eaton's xEnergy configurator to design the following types of circuit breakers and low-voltage switchgear systems and calculate their costs:

- xEnergy **Elite** and Modan S
- xEnergy **Main**
- xEnergy **Safety**
- xEnergy **Light**
- xEnergy **Basic**
- IZM air circuit breakers
- NZM and PDE molded case circuit breakers

You can generate both a bill of materials (for steel work, device fitting kits and circuit breakers) as well as an individually adjustable front view for the creation of quotations. A suitable distributor is automatically recommended based on the chosen system function. Within the low-switchgear assemblies, all types of components can be placed and configured:

- Air circuit breakers
- Molded case circuit breakers
- Miniature circuit breakers
- Residual current circuit breakers
- Residual current circuit breakers with overcurrent protection
- Control and monitoring devices



Power Xpert Protection Manager











Power Xpert Protection Manager Main Menu

Eaton's Power Xpert Protection Manager (PXPM) provides a clean, intuitive user interface enabling unmatched control, testing, and troubleshooting. The software is free to download and can run on any PC. Settings and tests are communicated to trip units via USB or through connected networks, no special test equipment is required. Troubleshooting is greatly simplified through the use of historical event summaries and real-time data provided by the Power Xpert Release (PXR) trip units. This helps customers to save time and money.

- Eaton's software helps simplify testing, serviceability and customization – yielding significant time and labor savings.
- An enhanced user interface enables engineers to remotely view and adjust the trip unit settings.

- Real-time data: Provides status information and metered data directly from the trip unit.
- Event summaries: Stores up to 200 events, detailed information on most recent (10) trip and (10) alarm events, and time adjustments to the real-time clock.

Features

	Setpoint Configuration	<ul style="list-style-type: none"> - Provides full breaker configuration - Online as well as offline - Offline parameter files
	Device Settings	<ul style="list-style-type: none"> - Parameter reset - Min/max values etc. - Set date and time - Change password of trip unit - Password is required to change sensitive settings - Required for change of protection settings
	Test Mode	<ul style="list-style-type: none"> - Perform test features - "Open breaker" – test - "Current sensor" – test - "Functional" – test
	Breaker Information	<ul style="list-style-type: none"> - Provides breaker information details - Trip unit serial number - Trip unit catalog number - Trip unit manufacturing date
	Real Time Data	<ul style="list-style-type: none"> - Provides "online" real-time data - Status, currents, voltages, power - Energy, power demand, min/max values - Diagnostic data
	Event Summaries	<ul style="list-style-type: none"> - Provides event summary and detailed information - Event summary - Trip events in detail - Alarm events in detail - Time adjustments
	Reports	<ul style="list-style-type: none"> - Provides reports as PDF of - Breaker information - Real-time data - Event summary - Setpoint
	License	<ul style="list-style-type: none"> - Some features may require a license - License will be connected to specific computer (Hardware identifier) - Provides future possibility to download further trip unit language packs - Standard languages - EN, DE, CN - Other languages FR, ES, IT etc



***** At Eaton, we believe that power is a fundamental part of just about everything people do. That's why we're dedicated to helping our customers find new ways to manage electrical, hydraulic and mechanical power more efficiently, safely and sustainably. To improve people's lives, the communities where we live and work, and the planet our future generations depend upon. Because this is what really matters. And we're here to make sure it works.

To learn more go to: Eaton.com/whatmatters

We make what matters work.

Eaton is an intelligent power management company dedicated to improving the quality of life and protecting the environment for people everywhere. We are guided by our commitment to do business right, to operate sustainably and to help our customers manage power today and well into the future. By capitalizing on the global growth trends of electrification and digitalization, we're accelerating the planet's transition to renewable energy, helping to solve the world's most urgent power management challenges, and doing what's best for our stakeholders and all of society.

For more information, visit www.eaton.com.



Eaton Industries (Austria) GmbH
Scheydgasse 42
1210 Vienna
Austria

Eaton
EMEA Headquarters
Route de la Longeraie 7
1110 Morges, Switzerland
Eaton.com

© 2022 Eaton
All Rights Reserved
Publication No.: CA013003EN
December 2024

Changes to the products, to the information contained in this document, and to prices are reserved; as are errors and omissions. Only order confirmations and technical documentation by Eaton is binding. Photos and pictures also do not warrant a specific layout or functionality. Their use in whatever form is subject to prior approval by Eaton. The same applies to trademarks (especially Eaton, Moeller, and Cutler-Hammer). The Terms and Conditions of Eaton apply, as referenced on Eaton Internet pages and Eaton order confirmations.

Eaton is a registered trademark.

All other trademarks are property of their respective owners.

