


## Data Sheet | Item Number: 770-103

Socket; with strain relief housing; 3-pole; Cod. A; 4,00 mm<sup>2</sup>; black


<https://www.wago.com/770-103>



Color: ■ black

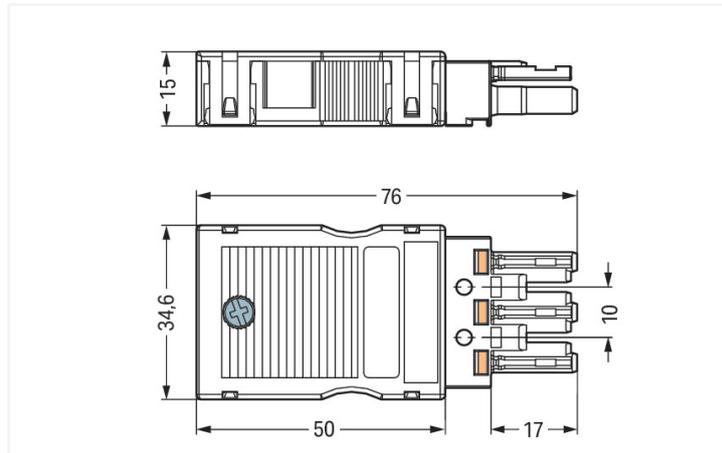

Dimensions in mm

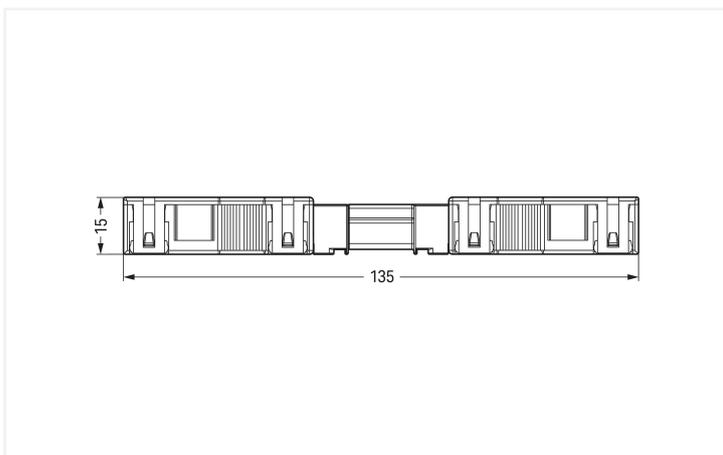

Dimensions in mm  
Overall length when mated

### Female connector/socket WINSTA® MIDI with strain relief

The WINSTA® MIDI female connector/socket A coding is the pluggable solution for your application in control cabinets, on PCBs or for lighting connections. WAGO pluggable installation connectors are useful when requirements repeat or are distributed on a specific grid, for example for installing grid lighting or flush-mount lighting. For greater security in electrical installations, the pluggable installation connector is equipped with mechanical protection against mismatching. The WINSTA® MIDI pluggable installation connector with A coding in black or white is usually used for general mains applications in power distribution. The rated current and voltage are important criteria for selecting a pluggable installation connector: They provide information about possible domains of use and applications. This product has a current rating of 25 A – as a result it is suitable for high power loads. The WINSTA® MIDI Pluggable Connection System with Push-in CAGE CLAMP® spring pressure connection technology facilitates exemplary electrification. Thanks to the integrated test slot, it is possible to check connections even when they are plugged in. This saves time, labor, and money. The strip length is 55 mm.

WINSTA® MIDI solutions for your electrical installation – protected against mismatching and maintenance-free

The WINSTA® Pluggable Connection System is perfectly tailored to the very strict requirements of building installation. It makes electrical installation pluggable, and consequently faster, even more reliable, and error-free. Using this pre-assembled system decreases assembly times and installation errors at the construction site. Enjoy the benefits of the pluggable version of our maintenance-free spring pressure connection technology too! Plan your installation with with marking from WAGO.

- pluggable installation connectors with protection against mismatching
- for automation controllers
- with A coding for use in many general mains applications

- ready to install and use immediately
- convenient installation and commissioning

**This item includes:**



Item No.: 770-503

1

Item No.: 770-203

1

Strain relief housing; 3-pole; for 2 cables; 8.0 ... 11.5 mm; 55 mm; black

Socket; 3-pole; Cod. A; black

**Notes**

General safety information

**NOTICE: Observe installation and safety instructions!**

- Nur von Elektrofachkraft oder einer für die Tätigkeit elektrisch unterwiesenen Person (EUP nach DIN VDE 0105-100) anzuwenden!
- Nicht unter Spannung/Last installieren!
- Nur für bestimmungsgemäßen Gebrauch einsetzen!
- Nationale Vorschriften/Normen/Richtlinien beachten!
- Technische Daten der Produkte beachten!
- Auf die richtige Polbelegung achten!
- Keine beschädigten/verschmutzten Komponenten verwenden!
- Leiterarten, -querschnitte, Abisolierlängen und Leitungsdurchmesser beachten!
- Leiter bis zum Anschlag einführen!
- Nur mit Verriegelungsklinke und Zugentlastung verwenden!
- Originalzubehör verwenden!

**To be sold only with installation instructions!**

**Electrical data**

Ratings per	IEC/EN 60664-1		
	III	II	I
Overvoltage category	III	II	I
Pollution degree	3	2	2
Nominal voltage	250 V	-	-
Rated impulse withstand voltage	4 kV	-	-
Rated current	25 A	-	-

Approvals per	UL 1977
Rated voltage	600 V
Rated current	23 A

**General information**

Note on contact resistance	approx. 1 mΩ of contact resistance approx. 0.25 mΩ contact transition plug/ socket
----------------------------	--

**Connection Data**

Clamping units	6
Total number of potentials	3
Number of test slots	3

**Connection 1**

Connection technology	Push-in CAGE CLAMP®
Actuation type	Operating tool Push-in
Nominal cross-section	4 mm² / 12 AWG
Solid conductor	0.5 ... 4 mm² / 20 ... 12 AWG
Solid conductor; push-in termination	1.5 ... 4 mm² / 16 ... 12 AWG
Stranded conductor	0.5 ... 2.5 mm² / 20 ... 14 AWG
Fine-stranded conductor	0.5 ... 4 mm² / 20 ... 12 AWG
Fine-stranded conductor; with insulated ferrule	0.25 ... 1.5 mm² / 20 ... 16 AWG
Fine-stranded conductor; with un-insulated ferrule	0.25 ... 2.5 mm² / 20 ... 14 AWG
Fine-stranded conductor; with ferrule; push-in termination	1.5 mm² / 16 AWG
Strip length	9 mm / 0.35 inches

### Connection 1

Pole number	3
Connectable sheathed cable diameter	8 ... 11.5 mm
Conductor entry direction to mating direction	0°
Strip length (outer insulation)	55 mm

### Physical data

Pin spacing	10 mm / 0.394 inches
Width	34.6 mm / 1.362 inches
Height	15 mm / 0.591 inches
Depth	76 mm / 2.992 inches

### Mechanical data

Use	General mains applications
Coding	A
Variable coding	Yes
Marking	L ⊕ N
Potential marking	L ⊕ N
Mating force of a plug-in connection	approx. 20 ... 70 N (depending on pole number)
Retention force of a plug-in connection	Locked: > 80 N
Unmating force of a plug-in connection	Unlocked: approx. 20 ... 70 N (depending on pole number)
Number of mating cycles	200, without resistive load
Protection type	IP2XC; When mated and secured with a strain relief housing: IP2xC (These compact connectors are not designed for use in open, easily accessible areas!)
Screw tightening torque	0.5 Nm

### Plug-in connection

Contact type (pluggable connector)	Female connector/socket
Connector (connection type)	for conductor
Mismating protection	Yes
Note on mismating protection	All <i>WINSTA</i> ® components are 100% protected against mismating when: a.) plugging different numbers of poles b.) plugging while rotated 180° c.) plugging while laterally staggered d.) plugging one pole
Locking lever	Can be retrofitted
Locking of plug-in connection	Locking lever
Note on locking system	All connectors for mounted installations (snap-in versions for lighting fixtures or devices, all types of PCB and distribution connectors) are factory-equipped with locking levers to ensure plugs and sockets are securely locked. Additional locking levers are only required for flying leads (plug/socket).
Strain relief	Strain relief housing

### Material data

Note (material data)	<a href="#">Information on material specifications can be found here</a>
Color	black
Cover color	gray
Material group	I
Insulation material (main housing)	Polyamide (PA66)
Flammability class per UL94	V0
Clamping spring material	Chrome-nickel spring steel (CrNi)
Contact material	Copper or copper alloy; surface-treated
Contact Plating	Tin
Fire load	0.425 MJ
Connector color	black

### Material data

Strain relief color	black
Weight	19.4 g

### Environmental requirements

Processing temperature	-5 ... +40 °C
Continuous operating temperature	-35 ... +85 °C
Note on continuous operating temperature	Insulating parts for temperatures ≤ 105 °C

### Commercial data

Product Group	20 (Winsta)
PU (SPU)	25 pcs
Packaging type	Box
Country of origin	PL
GTIN	4044918252096
Customs tariff number	85366990990

### Product Classification

UNSPSC	39121409
eCl@ss 10.0	27-44-06-05
eCl@ss 9.0	27-44-06-05
ETIM 9.0	EC002560
ETIM 10.0	EC002560
ECCN	NO US CLASSIFICATION

### Environmental Product Compliance

RoHS Compliance Status	Compliant, No Exemption
------------------------	-------------------------

### Approvals / Certificates

#### General approvals



Approval	Standard	Certificate Name
CCA DEKRA Certification B.V.	EN 61535	71-123228
CCA DEKRA Certification B.V.	IEC 61535	NL -84761
cURus Underwriters Laboratories Inc.	UL 1977	E45171
cURus Underwriters Laboratories Inc.	UL 1059	E 45172
VDE VDE Prüf- und Zertifizierungsinstitut	EN 61984	40002889
VDE VDE Prüf- und Zertifizierungsinstitut	EN 61535	40029808

#### Declarations of conformity and manufacturer's declarations

Approval	Standard	Certificate Name
EU-Declaration of Conformity WAGO GmbH & Co. KG	-	-

Approvals for marine applications



Approval	Standard	Certificate Name
ABS American Bureau of Ship- ping	-	24-0095977-PDA
DNV GL Det Norske Veritas, Ger- manischer Lloyd	-	TAE00001Z6
LR Lloyds Register	IEC 61984	LR22429487TA

Downloads

Environmental Product Compliance

Compliance Search
Environmental Product Compliance 770-103

Documentation

Bid Text			
770-103	19.02.2019	xml 3.01 KB	
770-103	08.06.2015	doc 23.50 KB	
ausschreiben.de 770-103			

CAD/CAE-Data

CAD data
2D/3D Models 770-103

CAE data
EPLAN Data Portal 770-103
WSCAD Universe 770-103
ZUKEN Portal 770-103

## 1 Compatible Products

### 1.1 System counterpart

#### 1.1.1 Cable assembly



**Item No.: 771-9993/206-101**  
pre-assembled connecting cable; Eca; Plug/open-ended; 3-pole; Cod. A; H05VV-F 3G 1.5 mm<sup>2</sup>; 1 m; 1,50 mm<sup>2</sup>; black



**Item No.: 771-9993/006-101**  
pre-assembled interconnecting cable; Eca; Socket/plug; 3-pole; Cod. A; H05VV-F 3G 1.5 mm<sup>2</sup>; 1 m; 1,50 mm<sup>2</sup>; black

#### 1.1.2 Distribution box



**Item No.: 899-631/181-000**  
Distribution box; 230 V + DALI; 2 inputs; 6 outputs; Cod. A, I; MINI, MIDI; black



**Item No.: 899-631/405-000**  
Distribution box; 230 V + SMI; 2 inputs; 6 outputs; Cod. A, B; MINI, MIDI; black



**Item No.: 899-631/315-000**  
Distribution box; Cable and device protection; 1 input; 4 outputs; Cod. A; MIDI; black



**Item No.: 899-631/305-000**  
Distribution box; Crossover switching; 1 input; 5 outputs; Cod. A, B, S; MIDI; black



**Item No.: 899-631/309-000**  
Distribution box; Motion/presence detector; 1 input; 3 outputs; Cod. A, S; MIDI; black



**Item No.: 899-631/180-000**  
Distribution box; Motion/presence detector; 1 input; 5 outputs; Cod. A; MIDI; black



**Item No.: 899-632/102-000**  
Distribution box; Relay switching; 2 inputs; 1 output; Cod. A, B; MINI, MIDI; black



**Item No.: 899-631/386-000**  
Distribution box; Series switching; 1 input; 7 outputs; Cod. A, S; MIDI; black



**Item No.: 899-631/477-000**  
Distribution box; Single-phase current (230 V); 1 input; 11 outputs; Cod. A; MIDI; black



**Item No.: 899-631/334-000**  
Distribution box; Single-phase current (230 V); 1 input; 13 outputs; Cod. A; MIDI; black



**Item No.: 899-631/476-000**  
Distribution box; Single-phase current (230 V); 1 input; 4 outputs; Cod. A; MIDI; black



**Item No.: 899-631/104-000**  
Distribution box; Single-phase current (230 V); 1 input; 7 outputs; Cod. A; MIDI; black



**Item No.: 899-631/311-000**  
Distribution box; Single-phase current (230 V); 2 inputs; 6 outputs; Cod. A, P; MIDI; black



**Item No.: 899-631/327-000**  
Distribution box; Single-phase current (230 V); 2 inputs; 6 outputs; Cod. A; MIDI; black



**Item No.: 899-631/363-000**  
Distribution box; Single-pole switch circuit; 1 input; 5 outputs; Cod. A, S; MIDI; black



**Item No.: 899-631/478-000**  
Distribution box; Single-pole switch circuit; 1 input; 7 outputs; Cod. A, S; MIDI; black



**Item No.: 899-632/101-000**  
Distribution box; Surge switch circuit; 1 input; 4 outputs; Cod. A, S; MIDI; black



**Item No.: 899-632/138-000**  
Distribution box; Surge switch circuit; 1 input; 4 outputs; Cod. A, S; MIDI; black



**Item No.: 899-632/103-000**  
Distribution box; Surge switch circuit; 2 inputs; 2 outputs; Cod. A; MIDI; black



**Item No.: 899-631/308-000**  
Distribution box; Two-way circuit; 1 input; 5 outputs; Cod. A, S; MIDI; black



**Item No.: 899-631/189-000**  
Distribution box; Two-way circuit; 1 input; 7 outputs; Cod. A, S; MIDI; black

#### 1.1.3 Distribution connector



**Item No.: 770-607**  
3-way distribution connector; 3-pole; Cod. A; 1 input; 3 outputs; black



**Item No.: 770-608**  
5-way distribution connector; 3-pole; Cod. A; 1 input; 5 outputs; outputs on both sides; black



**Item No.: 770-638**  
Distribution connector for switches; Single-pole and throttle two-way circuit; 3-pole; Cod. A/S; 1 input; 5 outputs; black



**Item No.: 770-637**  
Distribution connector for switches; Single-pole switch and series circuit; 3-pole; Cod. A/S; 1 input; 5 outputs; black



**Item No.: 770-633**  
h-distribution connector; 3-pole; Cod. A; 1 input; 2 outputs; 2 locking levers; black



**Item No.: 770-635**  
h-distribution connector; 3-pole; Cod. A; 1 input; 2 outputs; outputs on both sides; 3 locking levers; for flying leads; black



**Item No.: 770-634**  
h-distribution connector; 3-pole; Cod. A; 1 input; 2 outputs; outputs on one side; 2 locking levers; black



**Item No.: 770-636**  
h-distribution connector; 3-pole; Cod. A; 1 input; 2 outputs; outputs on one side; 3 locking levers; for flying leads; black

### 1.1.3 Distribution connector



**Item No.: 770-606**

T-distribution connector; 3-pole; Cod. A; 1 input; 2 outputs; 2 locking levers; black



**Item No.: 770-615**

T-distribution connector; 3-pole; Cod. A; 1 input; 2 outputs; 3 locking levers; for flying leads; black

### 1.1.4 Male connector/plug



**Item No.: 770-813/011-000**

Plug for PCBs; angled; 3-pole; Cod. A; black



**Item No.: 770-813**

Plug for PCBs; straight; 3-pole; Cod. A; black



**Item No.: 770-213**

Plug; 3-pole; Cod. A; black



**Item No.: 770-213/002-000**

Plug; with direct ground contact; 3-pole; Cod. A; 4,00 mm<sup>2</sup>; black



**Item No.: 770-113**

Plug; with strain relief housing; 3-pole; Cod. A; 4,00 mm<sup>2</sup>; black



**Item No.: 770-213/035-000**

Plug; with strain relief housing; 3-pole; Cod. A; 4,00 mm<sup>2</sup>; black



**Item No.: 770-713**

Snap-in plug; 3-pole; Cod. A; black



**Item No.: 770-713/007-000**

Snap-in plug; with direct ground contact; 3-pole; Cod. A; black

## 1.2 Required Accessories

### 1.2.1 Locking system

#### 1.2.1.1 Locking system



**Item No.: 770-101**

Locking lever; for flying leads; for manual operation; black



**Item No.: 770-121**

Locking lever; for flying leads; for manual operation; white



**Item No.: 770-111**

Locking lever; for flying leads; for tool operation; black



**Item No.: 770-131**

Locking lever; for flying leads; for tool operation; white

## 1.3 Optional Accessories

### 1.3.1 Cover

#### 1.3.1.1 Cover



**Item No.: 770-201**

Lockout cap; 12-pole, separable; for sockets; Plastic; black



**Item No.: 770-221**

Lockout cap; 12-pole, separable; for sockets; Plastic; white

### 1.3.2 Marking

#### 1.3.2.1 Marker



**Item No.: 770-450/000-006**

Marker card; Plastic; blue



**Item No.: 770-450/000-001**

Marker card; Plastic; green



**Item No.: 770-450/000-012**

Marker card; Plastic; orange



**Item No.: 770-450/000-005**

Marker card; Plastic; red



**Item No.: 770-450**

Marker card; Plastic; white



**Item No.: 770-450/000-002**

Marker card; Plastic; yellow

### 1.3.3 Tool

#### 1.3.3.1 Operating tool



**Item No.: 770-383**

Operating tool; 3-way; green




**Item No.: 210-719**


Operating tool; Blade: 2.5 x 0.4 mm; with a partially insulated shaft

### Installation Notes

#### Conductor termination



1. Strip length, outer insulation = 35 mm (2-pole), 55 mm (3- to 5-pole)
2. Strip length = 9 mm
3. Extended ground conductor = 8 mm



To terminate fine-stranded conductors, open the clamping unit via screwdriver (2.5 mm blade width) and insert a stripped conductor until it hits the backstop.




Insert the stripped solid conductor until it hits the backstop.



To terminate fine-stranded conductors, open the clamping unit via screwdriver (2.5 mm blade width) and insert a stripped conductor until it hits the backstop.

#### Conductor removal



To remove the conductor, actuate the clamp via screwdriver (2.5 mm blade width) and pull out the conductor.

### Installation



We recommend pulling the pre-latched strain relief housing over the cable prior to termination. However, the strain relief can be mounted at a later time as well.



Latch the strain relief housing onto the plug/socket. Note the "TOP" inscription.



Prepare strain relief housing by snapping together upper and bottom part.



Tighten strain relief screw with screwdriver (2.5 mm blade width).

### Coding



Simply cut off the coding pin from the socket.



Insert coding pin into plug (break first) until it engages.

Shield termination



Connector with shield termination

Apply the shield to the sheathed cable.

Strip length, outer insulation = 55 mm

Shield length = 10 mm

Push the shield connecting plate into the connector until fully inserted.

First insert the wired connector into a strain relief housing, then snap cover and tighten screw.