


Data Sheet | Item Number: 893-1002


Socket; with strain relief housing; 2-pole; Cod. E; green

<https://www.wago.com/893-1002>

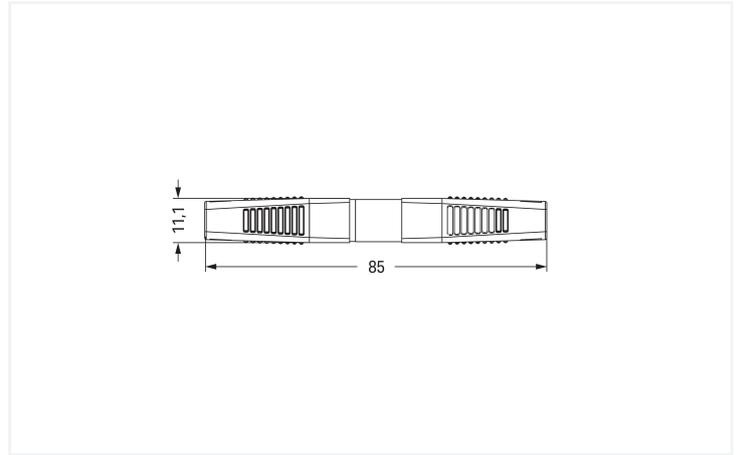

Color: ■ green

Dimensions in mm
Overall length when mated

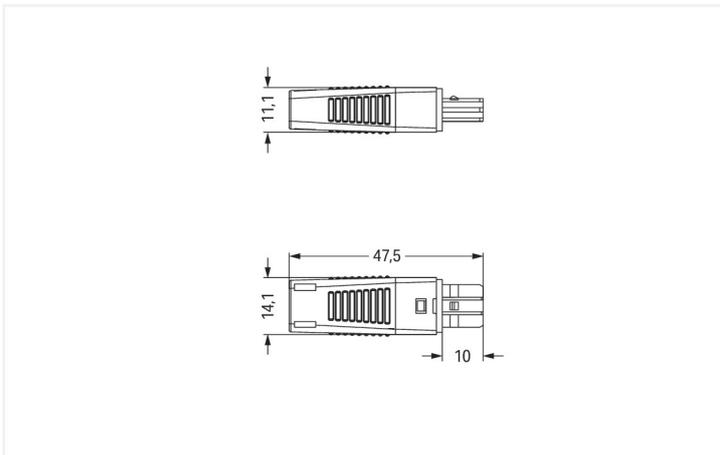

Dimensions in mm

Female connector/socket WINSTA® KNX with protection type IP20

The WINSTA® KNX female connector/socket rated current 3 A is the pluggable solution for your application in control cabinets, on PCBs or for lighting connections. Whether on PCBs, in control cabinets or for connecting lights – pluggable installation connectors from WAGO allow you to make connections according to many different requirements in no time flat. For greater protection in electrical installations, the pluggable installation connector is provided with mechanical protection against mismatching. The pluggable installation connector offers touch-proof protection with live components in accordance with protection type IP20 (Only when mated and secured with a strain relief housing (These compact connectors are not designed for use in open, easily accessible areas.)). The KNX protocol allows different equipment within one building system to communicate. WINSTA® KNX pluggable installation connectors with E coding are primarily used in KNX applications.

Push-in CAGE CLAMP® spring pressure connection technology – pluggable installation instead of laborious screw connections!

WINSTA® is the pluggable connection system that is ideally tailored to the strict requirements of electrical installation. It allows fast, secure and, above all, error-free installation of components and cables. Now you can also cut installation expenses without compromising quality and safety: with marking reduces the need for servicing and prevents unnecessary downtime.

- saves time, since no wiring is required at the construction site
- with E coding for AC and DC applications
- ready for immediate use
- rapid, structured electrical installation

Notes

General safety information

NOTICE: Observe installation and safety instructions!

- Nur von Elektrofachkraft oder einer für die Tätigkeit elektrisch unterwiesenen Person (EUP nach DIN VDE 0105-100) anzuwenden!
- Nicht unter Spannung/Last installieren!
- Nur für bestimmungsgemäßen Gebrauch einsetzen!
- Nationale Vorschriften/Normen/Richtlinien beachten!
- Technische Daten der Produkte beachten!
- Auf die richtige Polbelegung achten!
- Keine beschädigten/verschmutzten Komponenten verwenden!
- Leiterarten, -querschnitte, Abisolierlängen und Leitungsdurchmesser beachten!
- Leiter bis zum Anschlag einführen!
- Nur mit Verriegelungsklinke und Zugentlastung verwenden!
- Originalzubehör verwenden!

To be sold only with installation instructions!

Electrical data

Ratings per	IEC/EN 60664-1		
Overvoltage category	III	III	II
Pollution degree	3	2	2
Nominal voltage	50 V	-	-
Rated impulse withstand voltage	0.8 kV	-	-
Rated current	3 A	-	-

General information

Note on contact resistance Approx. 3 mΩ contact resistance

Connection Data

Clamping units	2
Total number of potentials	2

Connection 1

Connection technology	PUSH WIRE®
Actuation type	Push-in
Conductor diameter	0.8 mm
Strip length	9 mm / 0.35 inches
Pole number	2
Connectable sheathed cable diameter	5 ... 7 mm
Conductor entry direction to mating direction	0°

Physical data

Width	14.1 mm / 0.555 inches
Height	11.1 mm / 0.437 inches
Depth	47.5 mm / 1.87 inches

Mechanical data

Technology	KNX
Coding	E
Variable coding	No
Marking	1+ 2-
Potential marking	1+ 2-
Mating force of a plug-in connection	Approx. 10 ... 15 N
Retention force of a plug-in connection	Locked: > 80 N
Unmating force of a plug-in connection	Unlocked: approx. 15 ... 20 N
Number of mating cycles	200, without resistive load
Protection type	IP20; Only when mated and secured with a strain relief housing (These compact connectors are not designed for use in open, easily accessible areas.)

Plug-in connection

Contact type (pluggable connector)	Female connector/socket
Connector (connection type)	for conductor
Mismating protection	Yes
Note on mismating protection	All WINSTA® components are 100% protected against mismating when: a.) plugging different numbers of poles b.) plugging while rotated 180 c.) plugging while laterally staggered d.) plugging one pole
Locking lever	Can be retrofitted
Locking of plug-in connection	Locking lever
Strain relief	Strain relief housing

Material data

Note (material data)	Information on material specifications can be found here
Color	green
Insulation material (main housing)	Polyamide (PA66)
Flammability class per UL94	V0
Clamping spring material	Chrome-nickel spring steel (CrNi)
Contact material	Copper alloy; surface-treated
Contact Plating	Tin
Fire load	0.15 MJ
Connector color	green
Strain relief color	black
Weight	5 g

Environmental requirements

Processing temperature	-5 ... +40 °C
Continuous operating temperature	-35 ... +85 °C
Note on continuous operating temperature	Insulating parts for temperatures ≤ 105 °C

Commercial data

Product Group	20 (Winsta)
PU (SPU)	50 pcs
Packaging type	Box
Country of origin	CH
GTIN	4045454267469
Customs tariff number	85366990990

Product Classification

UNSPSC	39121402
eCl@ss 10.0	27-44-06-05
eCl@ss 9.0	27-44-06-05
ETIM 9.0	EC002560
ETIM 10.0	EC002560
ECCN	NO US CLASSIFICATION

Environmental Product Compliance

RoHS Compliance Status Compliant, No Exemption

Downloads

Environmental Product Compliance

Compliance Search	
Environmental Product Compliance 893-1002	↓

Documentation

Bid Text			
893-1002	19.02.2019	xml 2.78 KB	↓
893-1002	08.01.2015	doc 22.50 KB	↓


CAD/CAE-Data

CAE data	
WSCAD Universe 893-1002	↓

Installation Notes

- Strip length, outer insulation = 23 mm
2. Strip length = 9 mm
- Prior to termination, pull the strain relief housing over the cable.
- Insert stripped conductors directly into the conductor entries.
- Push conductors until they hit the back-stop.
- To disconnect, open clamping unit using the actuator and pull out the conductor.
- Snap wired connector into the strain relief housing.
- Press strain relief firmly on the cable.
- Pre-assembled KNX connector

Conductor removal



To disconnect, open clamping unit using the actuator and pull out the conductor.

Installation



Prior to termination, pull the strain relief housing over the cable.



Snap wired connector into the strain relief housing.



Press strain relief firmly on the cable.



Pre-assembled KNX connector