

# TRONIX

## SPECIFICATION



IP65

SMD  
LED



Optional interchangeable legends  
Efficient and reliable LED light  
source Suitable for ceiling.





# Introduction

This LED emergency bulkhead is controlled by smart IC, with self-test function. 9pcs pictograms legend are included. Using the simple line and elegant element, it has the ability to transcend ordinary design, as well as product quality. With weatherproof enclosure provides single-sided or double-sided pictograms in both wet and dusty areas.


## Application Areas

It is designed for emergency lighting applications in office, supermarket, shop, school, hotel, etc. It is also widely used for public areas, such as stairway, lobby, reception, corridors etc.


## Features

1. Optional interchangeable legends.
2. IP65 water[proof rated.
3. Visibility of 30M
4. LiFePO4 battery, long life time.
5. High power & efficiency LED.

## Product Dimension

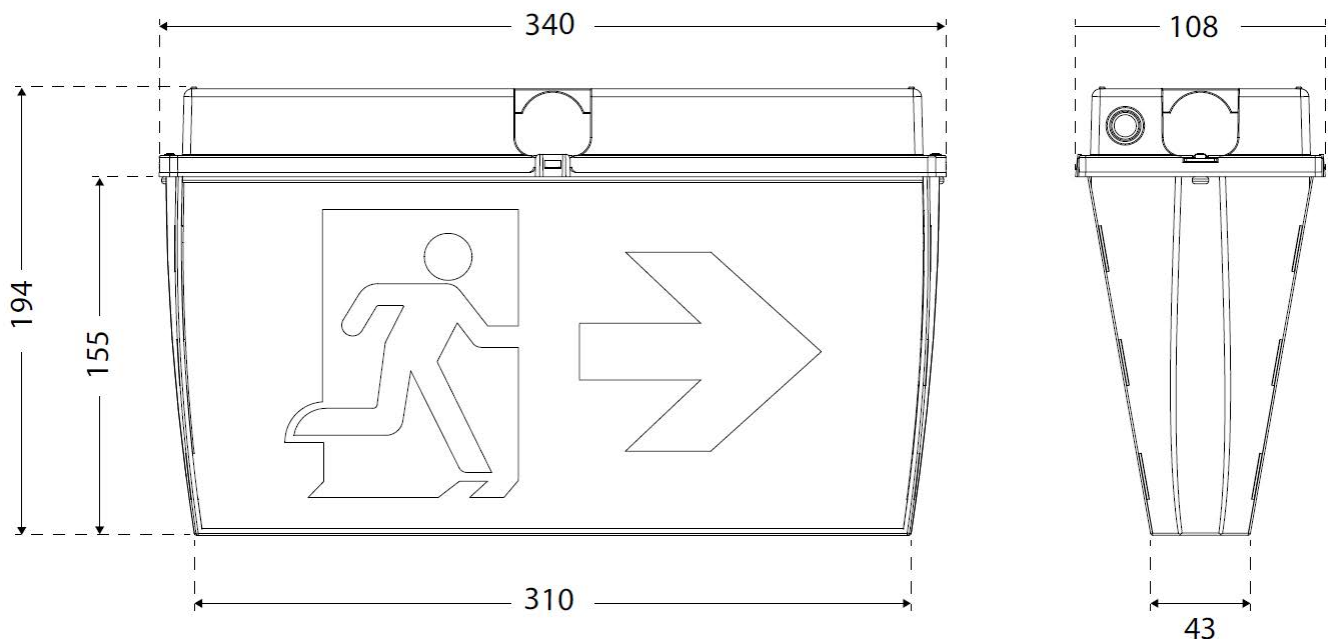

Pictograms

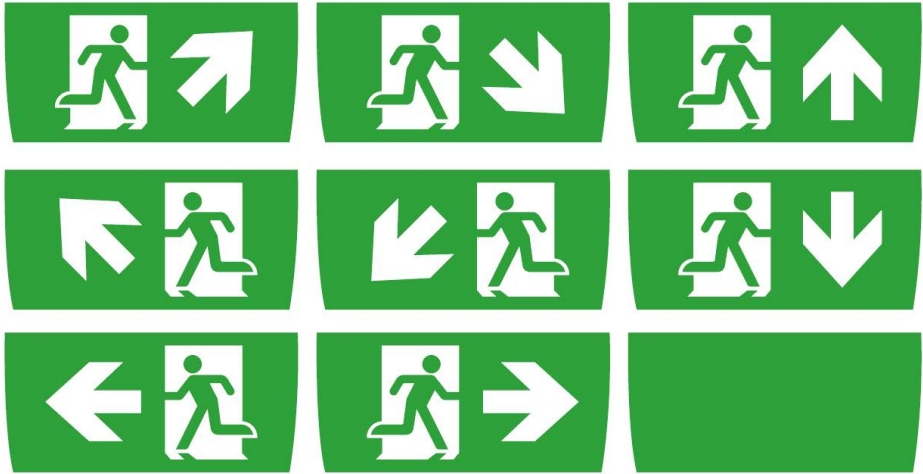

General Data Sheet

Model No.	600-043
Battery	LiFePO4 6.4 1500mAh
Charge Time	≥24H
Discharge Duration	≥3H
Visibility	30M
Test Mode	5000K
Material Base	PC
Material Diffuser	PC
Material Pictogram	PET

Technical Data Sheet

Model No.	600-043
Power Consumption Watt	5W Max
Rated Input Voltage(V)	AC230V
Input Voltage(V)	AC220-240V, 50/60Hz
LED	SMD 2835
CCT(K)	5000K
"Luminous Flux (lm) ±10%"	Non-DIM240lm
CRI	>80
LED Driver	Built-in
Protection Class	Class II
IP Rating	IP65
IK Rating	–
Finishing color	White
Material	PC
Glow wire test (°C)	COVER:850 °C
Operating Temp.(°C)	0 °C ~45 °C
Storage Temp.(°C)	0 °C ~65 °C

# Driver Datasheet

Power Consumption	3W Max
Rated Input Voltage(V)	AC230V
Frequency	50/60Hz
Input Voltage	AC220-240V
Efficiency	≥65%
Total load wattage	2W Max
Power Factor	≥0.3
Rated Input Current	≤0.08A
Full load output voltage	DC12V
Rated output curent	200mA
Output current range	200mA±10%
Power tolerance	10%
Current output tolerance	10%
Short circuit protection	PASS
Over voltage protection	PASS
Over temperature protection	PASS
THD	-
Surge	0.5KV
Withstand voltage	AC3750V

## Instructions for automatic test option

- 1.Once the unit is powered up it will automaticlly initiate a self test and diagnostics as follows:
- Every 4 seconds: Checks for battery disconnection,charger board fault,lamp fault and transfer fault.
  - Every month: Performs a 3 minute duration test.
  - Every year: Performs a 1 Hour or 3 Hours duration test.
- All test functions are factory preset and do not need field adjustment.

2.Dual Colour Indicator LED Status Meanings

- Green    Solid On    Ready/Normal Operation
- Red      Requires Service

•	One flashes, 4 second pause	Battery not connected
••	Two flashes, 4 second pause	Battery short or low battery voltage
•••	Three flashes, 4 second pause	Charger board fault
••••	Four flashes, 4 second pause	AC/DC transfer fault
•••••	Five flashes, 4 second pause	LED lamp fault

NOTE:After repairing a service fault,press and hold the test button for 2 seconds to reset the flashing indicator light to green.

3.Manual Testing

Press test button once	30 second duration test
Press test button twice within 2 seconds	3 minute duration test
Press test button 3 times within 2 seconds	30 minutes duration test
Press test button 4 times within 2 seconds	1 or 3 hours duration test