


Walraven starQuick® Push Plug

(C0575)

for use with Walraven starQuick®

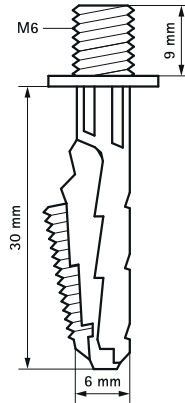

Features & benefits

- for fixing of a Walraven starQuick® clamp or other clamp with thread connection M6
- pre-drill hole Ø 6 mm and insert plug
- material: modified PA6 (polyamide), grey (according to RAL 7035)
- resistant to UV, ageing, oil and petrol
- no corrosion, recyclable, halogen free
- temperature resistance from approx. -40 °C to approx. +90 °C (constant); short to approx. +130 °C

Product Number	Plug Length	Drill Hole Diameter Plugs	Min. Drill Hole Depth	Thread Size	Length Metrical Thread	Standard Embedment Depth	Total Height	Total Width	Total Length
Reference letter	LP	d0	h0 min	TS	Lm	hnom	H	W	L
Unit description	mm	mm	mm		mm	mm	mm	mm	mm
6101063	30	6	30	M6	9	30	8	13	42