

Power supplies CP-E, CP-S and CP-C range




2CDC 275 002 F0006

ABB

The new ABB power supplies: CP-E, CP-S and CP-C range



Modern power supplies are a vital component in most areas of energy management and automation technology. ABB as your global partner in these areas pays the utmost attention to the resulting requirements. Innovation was the key to a substantial enlargement of our power supply product program: The new CP-E range offers enhanced functionality while the number of different types has been considerably reduced. Now all power supplies can be operated at an ambient temperature of up to 70 °C. Another example: The CP-C range's pluggable function modules adapt these power supplies exactly to your application's needs. Of course, all ABB power supplies feature primary switch mode – environmentally sound and cost-efficient. Innovative industry electronic at the highest stage.

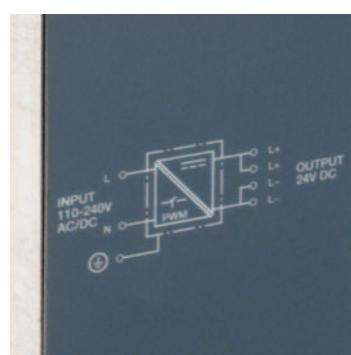

Primary switch mode for the highest efficiency

All CP-E, CP-S and CP-C types are power supplies with primary switch mode. This technology reduces heat losses and ensures maximal efficiency.




Ambient temperature range during operation of up to +70 °C

The components used in our power supplies are rated for up to +105° C. Thus, the ambient temperature range during operation has been increased to +70 °C.



2CDC 275 003 F0006

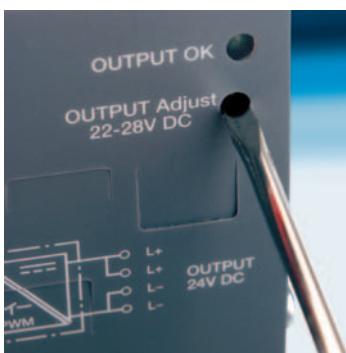

Adjustable output voltage

The CP-E and CP-C range types feature a continuously adjustable output voltage. Thus, they can be optimally adapted to the application, e.g. compensating the voltage drop caused by a long line length.

Clear labelling

High ease of use because of clearly labelled terminals, thus further facilitating wiring campaigns.

Safety

Approvals by independent testing institutes to all worldwide relevant standards guarantee highest safety in operation.



2CDC 276 006 F0006

Fast mounting

Fast, easy and failure-safe mounting on DIN-rail by means of sturdy metal snap sliders.




2CDC 271 007 F0006

The new CP-E range power supplies



The new CP-E range power supplies are an imposing addition to the ABB power supply program. This range offers types with output voltages from 5–48 V DC at output currents of 0.625–3 A. The high thermal efficiency of up to 89 %, corresponding with very low power and heat dissipation, allow the operation without forced cooling. Functionality has been enhanced while the number of different types has been considerably reduced. Of course, all power supplies of the new CP-E range are approved to all relevant world-wide standards.



“DC OK” output



Wide input range

The 24 V devices of the CP-E range offer a semiconductor output for function monitoring and remote diagnosis.

Optimised world-wide applications: The CP-E power supplies can be supplied with 85–265 V AC or 90–375 V DC.

NEW!



2CDC 275 004 F0006



2CDC 271 006 F0003

Adjustable output voltage

The CP-E range types feature a continuously adjustable output voltage. Thus, they can be optimally adapted to the application, e.g. compensating the voltage drop caused by a long line length.

Redundancy unit CP-RUD 1SVR 423 418 R9000

For decoupling of parallelized power supply units. Thus, true redundancy can be achieved.

Characteristics of the CP-E range

- Output voltage 5 V, 12 V, 24 V, 48 V DC
- Adjustable output voltages
- Output current 0.625 A, 0.75 A, 1.25 A, 2.5 A, 3 A
- Power range 15 W, 18 W, 30 W, 60 W
- Wide input range 100–240 V AC (85–265 V AC, 90–375 V DC)
- High efficiency of up to 89 %
- Low power dissipation and low heating
- Free convection cooling (no forced cooling with ventilators)
- Ambient temperature range during operation –10...+70 °C
- Open-circuit, overload and short-circuit stable, automatic recovery
- Integrated input fuse
- U/I characteristic curve for devices > 18 W (fold-forward behaviour at overload – no shutdown)
- Redundancy unit CP-A RU offering true redundancy
- LED(s) for status indication
- DC OK output (transistor) for 24 V devices (> 18 W)

Approvals/Marks of the power supplies

- Approvals:



UL 1310 Listed Class 2 Power Supply**,
UL 1604 (Class I, Div. 2)*, cULus, CCC, PG, CB*

- Marks:



* pending

** depending on device

The proven power supplies of the CP-S and CP-C range

Characteristics of the CP-S and CP-C power supplies

- Output current 5 A, 10 A and 20 A
- Integrated power reserve of up to 50 %
- Constant or adjustable output voltage (depending on type)
- High efficiency of approx. 88–89 %
- Low power dissipation and low heating
- Open-circuit, overload and short-circuit stable, automatic recovery
- Integrated input fuse
- Redundancy unit CP-A RU offering true redundancy
- Control module (voting unit) CP-A CM pluggable onto CP-A RU
- Pluggable output terminals for up to 10A
- Status LED "OUTPUT OK"

CP-S range

- Autorange input (only 5 A version)
- Input voltage adjustable via front-face selector switch (10 A, 20 A version)
- Fixed output voltage 24 V
- Possibility to be operated in parallel for redundancy purposes

CP-C range



- Autorange input 85–264 V AC, 100–350 V DC
- Output voltage adjustable 22–28 V
- Possibility to be operated in parallel to increase capacity and for redundancy purposes
- Power Factor Correction (PFC) in accordance to EN 61000-3-2
- Pluggable front-face function modules

Function modules for CP-C range

- CP-C MM, messaging module with relay outputs for INPUT OK, OUTPUT OK and REMOTE ON/OFF
- CP-C CB, current balancing module (under development)

Approvals/Marks of the power supplies

- Approvals:
     
- Marks:
 

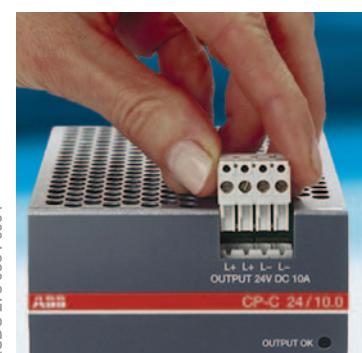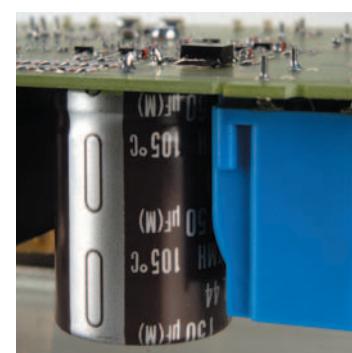

Integrated power reserve

The CP-S and CP-C range power supplies feature an integrated power reserve of up to 50 %. No oversized electricity supply is needed, especially under heavy load conditions.

Double terminal assignment + pluggable terminals

The double assignment of the output terminals considerably reduces the amount of wiring by eliminating the need for potential multiplication. Extended flexibility in operation due to pluggable output terminals (this feature is not offered on all devices).



2CDC 273 060 F0004



2CDC 273 060 F0004

Pluggable function modules for highest flexibility

The CP-C range power supplies can be equipped with pluggable modules to add specific functions. All power supplies are also fully operational in all basic functions without any module attached. The result: a superior cost/ performance ratio. A future-proof solution for highest flexibility without any sacrifices in user comfort.

Messaging module CP-C MM 1SVR 427 081 R0000

- LED display and relay outputs for "INPUT OK" and "OUTPUT OK"
- REMOTE ON/OFF function to remotely power-down and power-up the device
- Pluggable on the front of every CP-C power supply.



2CDC 273 058 F0004

NEW!

Extension devices

Redundancy unit CP-A RU

1SVR 427 071 R0000

- For decoupling of parallelized power supply units. Thus, true redundancy can be achieved.
- 2 input terminals; each up to 20 A
- Output up to 40 A
- 2 integrated diodes for decoupling
- Control module CP-A CM can be attached to the front side



2CDC 271 010 F0005

Control module CP-A CM

1SVR 427 075 R0000

- Voting unit pluggable onto the redundancy unit CP-A RU for monitoring the voltage in each channel of the CP-A RU.
- Adjustable threshold values (14–28 V) and relay output terminals per input / circuit



2CDC 271 003 F0005

Of course all power supplies are fully operational in all basic functions without any module attached. The module attaching points are factory-covered.

Product overview: Power supplies CP-E, CP-S and CP-C range

NEW!



Power supplies CP-E range

	CP-E 24/0.75	CP-E 24/1.25	CP-E 24/2.5	CP-E 5/3.0	CP-E 12/2.5	CP-E 48/0.62	CP-E 48/1.25			
Power supplies CP-E range	24 V / 0.75 A	24 V / 1.25 A	24 V / 2.5 A	5 V / 3.0 A	12 V / 2.5 A	48 V / 0.62 A	48 V / 1.25 A			
Order code										
Order code	1SVR 427 030 R0000	1SVR 427 031 R0000	1SVR 427 032 R0000	1SVR 427 033 R3000	1SVR 427 032 R1000	1SVR 427 030 R2000	1SVR 427 031 R2000			
Technical data, Input										
Rated input voltage	100–240 V AC	100–240 V AC	100–240 V AC	100–240 V AC	100–240 V AC	100–240 V AC	100–240 V AC			
Input voltage range	AC 90–265 V DC 120–370 V	85–264 V	90–265 V	90–375 V	120–370 V	85–264 V	90–375 V			
Input frequency (AC)				47–63 Hz						
Power failure buffering at nom. input	> 75 ms	> 30 ms	> 75 ms		> 30 ms					
Typ. current consumption	at 110 V AC 344 mA at 240 V AC 214 mA	565 mA	1.1 A	308 mA	577 mA	563 mA	1.1 A			
Inrush current	18 A	40 A	60 A	18 A	40 A	40 A	60 A			
Internal input fuse				2 AT / 250 V AC ¹⁾						
Technical data, Output										
Rated output voltage	24 V DC \pm 1 %	24 V DC \pm 1 %	24 V DC \pm 1 %	5 V DC \pm 1 %	12 V DC \pm 1 %	48 V DC \pm 1 %	48 V DC \pm 1 %			
Adjustable range	21.6–28.8 V DC	24–28 V DC	24–28 V DC	4.7–6 V DC	12–15 V DC	48–55 V DC	48–55 V DC			
Rated output power	18 W	30 W	60 W	15 W	30 W	30 W	60 W			
Rated output current ($T_A < 60^\circ\text{C}$)	0.75 A	1.25 A	2.5 A	3.0 A	2.5 A	0.625 A	1.25 A			
Efficiency	> 77 %	> 86 %	> 89 %	> 75 %	> 84 %	> 86 %	> 89 %			
Short-circuit / overload protection				continuous short circuit stability						
Overload characteristic	hiccup mode	U/I characteristic curve		hiccup mode	U/I characteristic curve					
Parallel operation				no						
Other data										
Protection enclosure / terminals				IP 20 / IP 20						
Ambient temperature range during operation				–10 ... + 70 °C (derating at 60 °C: 2.5% at Kelvin)						
Dimensions (WxHxD, mm)	23.9 x 88.5 x 115	43.5 x 88.5 x 115		23.9 x 88.5 x 115	43.5 x 88.5 x 115					
Weight (kg)	approx. 0.15	approx. 0.29	approx. 0.36	approx. 0.15	approx. 0.29	approx. 0.29	approx. 0.36			

All data at rated input voltage, rated load, $T_A = 25^\circ\text{C}$
1) internal device protection, not accessible




Power supplies CP-S and CP-C range

	CP-S 24/5.0	CP-S 24/10.0	CP-S 24/20.0	CP-C 24/5.0	CP-C 24/10.0	CP-C 24/20.0
Power supplies CP-S and CP-C range	24 V / 5 A	24 V / 10 A	24 V / 20 A	24 V / 5 A	24 V / 10 A	24 V / 20 A
Order code	1SVR 427 014 R0000	1SVR 427 015 R0100	1SVR 427 016 R0100	1SVR 427 024 R0000	1SVR 427 025 R0000	1SVR 427 026 R0000
Technical data, Input						
Rated input voltage	110–240 V AC	switch setting 110: 110–120 V AC switch setting 230: 220–240 V AC		110–240 V AC		
Input voltage range	85–264 V	switch setting 110: 85–132 V AC switch setting 230: 184–264 V AC		85–264 V		
AC						
DC	100–350 V	220–350 V DC		100–350 V		
Input frequency (AC)			47–63 Hz			
Power failure buffering at rated input	typ. > 100 ms	typ. > 50 ms		typ. > 100 ms	typ. > 40 ms	
Typ. current consumption						
at 110–240 V AC	2,2–1,2 A			2,2–1,2 A	3,5–1,6 A	5,5–2,5 A
at 110–120 V AC		4,2–4,0 A	9,0–8,0 A			
at 220–240 V AC		2,4–2,2 A	4,5–4,0 A			
Inrush current / i^2t (cold start)	< 23 A / approx. 0.9 A ² s	< 40 A / approx. 1.8 A ² s	< 70 A / approx. 8 A ² s	< 23 A / approx. 0.9 A ² s	< 33 A / approx. 0.2 A ² s	< 40 A / approx. 1.9 A ² s
Internal input fuse	4 AT ¹⁾	6.3 AT ¹⁾	12 AF ¹⁾	4 AT ¹⁾	6.3 AT ¹⁾	12 AF ¹⁾
Technical data, Output						
Rated output voltage			24 V DC			
Adjustable range		fix		22–28 V, factory setting 24 V \pm 0.5%		
Rated output current ($T_A < 60^\circ\text{C}$)	5 A	10 A	20 A	5 A	10 A	20 A
Peak output current I_{OUTMAX} (power reserve at $T_A < 40^\circ\text{C}$)	typ. \leq 7.25 A	typ. \leq 12.25 A	typ. \leq 22.5 A	typ. \leq 7.25 A	typ. \leq 12.25 A	typ. \leq 22.5 A
Efficiency				> 88 %		
Short-circuit / overload protection			continuous short-circuit stability, thermal protection			
Overload characteristic				U/I characteristic curve		
Short-circuit current limitation	approx. 11 A	approx. 19 A	approx. 25 A	approx. 11 A	approx. 19 A	approx. 25 A
Parallel operation				yes, up to 5 devices		
Other data						
Power factor correction (EN 61000-3-2)		no			yes	
Protection enclosure / terminals				IP 20 / IP 20		
Ambient temperature range during operation				–25 ... +70 °C (derating at 60 °C: 2.5 % at Kelvin)		
Dimensions (WxHxD, mm)	56.6 (60 ²⁾) x 130 x 137	90 (93.5 ²⁾) x 130 x 137	200 (203.5 ²⁾) x 130 x 137	56.6 (60 ²⁾) x 130 x 137	90 (93.5 ²⁾) x 130 x 137	200 (203.5 ²⁾) x 130 x 137

All data at rated input voltage, rated load, $T_A = 25^\circ\text{C}$

1) internal device protection, not accessible

2) including lateral screw

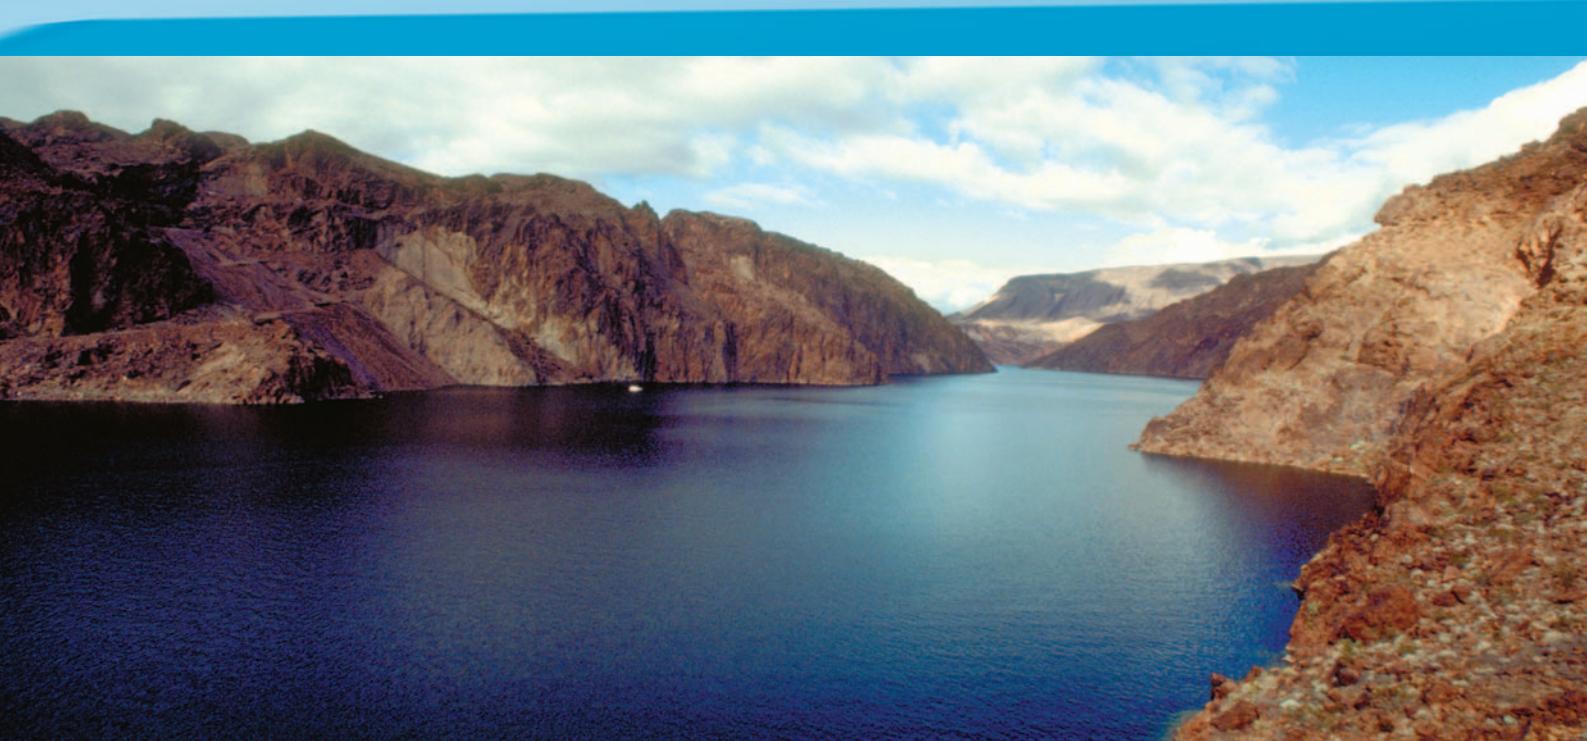


Environment protection thanks to modern technology

- The ABB power supplies of the CP-E, CP-S and CP-C range also persuade unconfined in consideration of effective and sustainable environment protection. This is because their primary switch mode design does not only stand for outstanding efficiency but also for a noteworthy relief of the environment.
- Power supplies with primary switch mode are characterised by their exceptional efficiency of up to 89 %: A remarkable difference to conventional power supplies that often only operate with 50 % efficiency.

High efficiency of up to 89 %

- The high efficiency of the ABB power supplies means that only 10–12 % of the input energy are lost in dissipated heat.
- Thanks to the low dissipated heat, other advantages result. For example it is often possible to dispense with costly external cooling systems when the power supplies are used in cabinets.
- Also, the ABB power supplies with primary switch mode feature an outstanding durability. This improves the operating efficiency and means further relief of the environment.

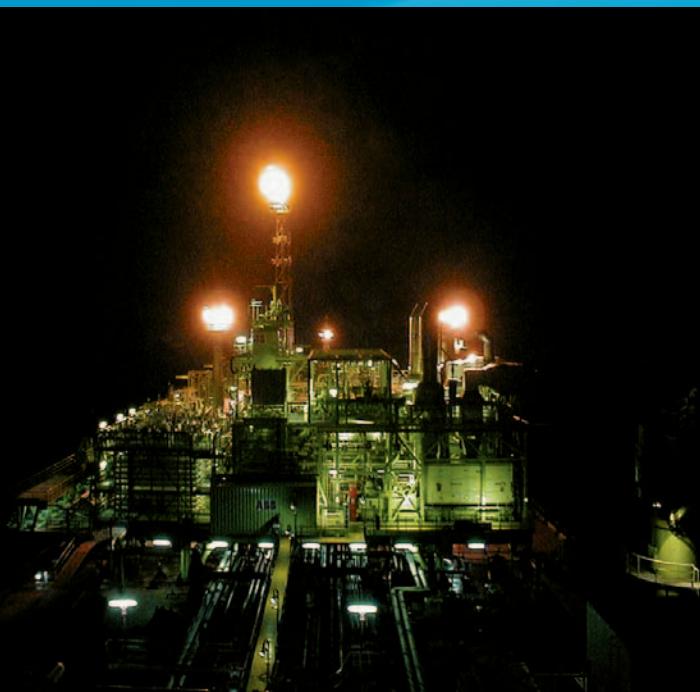

Reliability in different environments

- Due to their reliable construction, the CP-E, CP-S and CP-C range power supplies can be used in very harsh environments.
- Adherence to electrical safety standards makes these power supplies very safe and well-suited for industrial equipment while also allowing their use in domestic applications, wherever automation is important.
- The wide AC/DC range of input power makes these power supplies very flexible and offers a perfect solution for DC networks, power failure back-up systems, and much more.
- The pluggable function modules of the CP-C range power supplies allow a perfect adaptation for special application needs.
- Adjustable output voltage compensates for drops in the DC power line.

cULus and GOST approvals, CE and C-TICK marks, IEC/EN 60950 and UL 60950 certifications

- Applicability of the most important approvals and the observance of the valid EU standards provide high safety when using the power supply.
- All power supplies are approved according to UL 508, UL 60950, GOST and CCC.
- High interference immunity combined with reduced interference emission acc. to EN 61000-6-4 enable the use in rough industrial environments as well for building installations.
- Almost all power supply types are approved acc. to UL 1604 and CSA 22.2 No. 213-M1987. The units can be used in hazardous locations acc. to Class I, Division 2, Groups A, B, C, and D or non-hazardous locations.
- Some power supply types additionally are approved to UL 1310 Class 2 or CB scheme and have the C-TICK mark.



ABB STOTZ-KONTAKT GmbH

Postfach 10 16 80, 69006 Heidelberg
Eppelheimer Straße 82, 69123 Heidelberg
GERMANY

www.abb.com/lowvoltage -> Control Products -> Electronic Relays