

Power supplies CP-E, CP-S and CP-C range




2CDC 275 002 F0006

ABB

The new ABB power supplies: CP-E, CP-S and CP-C range



Modern power supplies are a vital component in most areas of energy management and automation technology. ABB as your global partner in these areas pays the utmost attention to the resulting requirements. Innovation was the key to a substantial enlargement of our power supply product program: The new CP-E range offers enhanced functionality while the number of different types has been considerably reduced. Now all power supplies can be operated at an ambient temperature of up to 70 °C. Another example: The CP-C range's pluggable function modules adapt these power supplies exactly to your application's needs. Of course, all ABB power supplies feature primary switch mode – environmentally sound and cost-efficient. Innovative industry electronic at the highest stage.

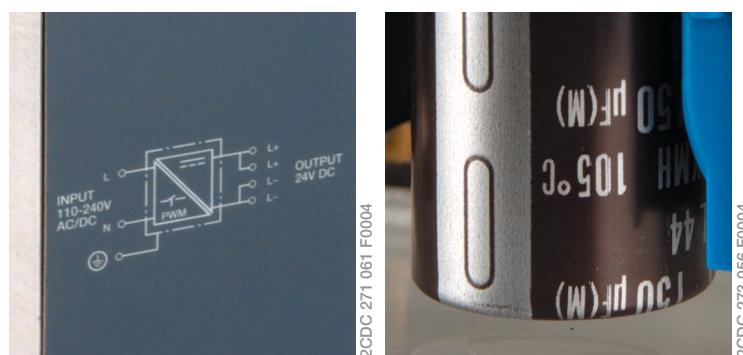

Primary switch mode for the highest efficiency


All CP-E, CP-S and CP-C types are power supplies with primary switch mode. This technology reduces heat losses and ensures maximal efficiency.

Ambient temperature range during operation of up to +70 °C

The components used in our power supplies are rated for up to +105 °C. Thus, the ambient temperature range during operation has been increased to +70 °C.



2CDC 275 003 F0006

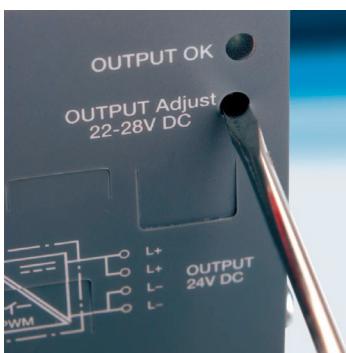

Adjustable output voltage



2CDC 273 032 F0004

Clear labelling

The CP-E and CP-C range types feature a continuously adjustable output voltage. Thus, they can be optimally adapted to the application, e.g. compensating the voltage drop caused by a long line length.

High ease of use because of clearly labelled terminals, thus further facilitating wiring campaigns.

Safety

Approvals by independent testing institutes to all worldwide relevant standards guarantee highest safety in operation.



2CDC 276 006 F0006



2CDC 271 007 F0006

Fast mounting

Fast, easy and failure-safe mounting on DIN-rail by means of sturdy metal snap sliders.

The new CP-E range power supplies



The new CP-E range power supplies are an imposing addition to the ABB power supply program. This range offers types with output voltages from 5-48 V DC at output currents of 0.625-3 A. The high thermal efficiency of up to 89 %, corresponding with very low power and heat dissipation, allows the operation without forced cooling. Functionality has been enhanced while the number of different types has been considerably reduced. Of course, all power supplies of the new CP-E range are approved to all relevant world-wide standards.



“DC OK” output



Wide input range


The 24 V devices of the CP-E range offer a semiconductor output for function monitoring and remote diagnosis.

Designed for global input voltages: The CP-E power supplies can operate with input voltages from 85-265 V AC or 90-375 V DC.

NEW!



2CDC 275 004 F0006

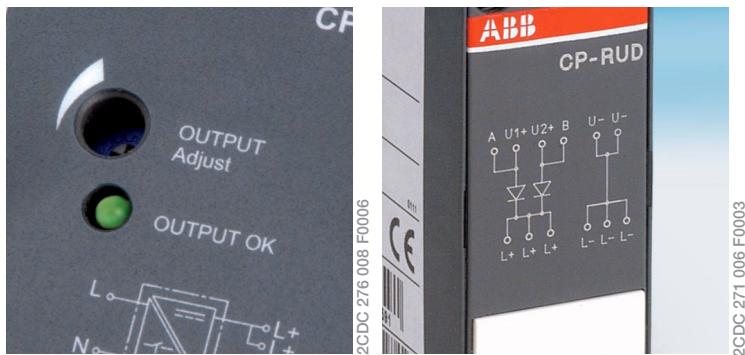

2CDC 276 008 F0006

2CDC 271 006 F0003

Adjustable output voltage

The CP-E range types feature a continuously adjustable output voltage. Thus, they can be optimally adapted to the application, e.g. compensating the voltage drop caused by a long line length.

Redundancy unit CP-RUD

- 1SVR 423 418 R9000
- For decoupling of parallelized power supply units. Thus, true redundancy can be achieved.

Characteristics of the CP-E range

- Output voltage 5 V, 12 V, 24 V, 48 V DC
- Adjustable output voltages
- Output current 0.625 A, 0.75 A, 1.25 A, 2.5 A, 3 A
- Power range 15 W, 18 W, 30 W, 60 W
- Wide input range 100-240 V AC (90-265 V AC / 120-370 V DC, 85-265 V AC / 90-375 V DC)
- High efficiency of up to 89 %
- Low power dissipation and low heating
- Free convection cooling (no forced cooling with ventilators)
- Ambient temperature range during operation -10...+70 °C
- Open-circuit, overload and short-circuit stable
- Integrated input fuse
- U/I characteristic curve for devices > 18 W (fold-forward behaviour at overload – no shutdown)
- Redundancy unit CP-RUD offering true redundancy
- LED(s) for status indication
- Signalling output (transistor) for output voltage OK on 24 V devices > 18 W

Approvals/Marks of the power supplies

■ Approvals:

- UL 508, CAN/CSA C22.2 No.14¹⁾,
- UL 1310, CAN/CSA C22.2 No.223 (Class 2 Power Supply),
- ANSI/ISA-12.12 (Class I, Div. 2 hazardous locations)²⁾,
- UL 60950, CAN/CSA C22.2 No.60950¹⁾,
- GOST,
- CCC¹⁾

■ Marks:

- CE,
- C-Tick²⁾

¹⁾ Approvals refer to rated input voltage U_{IN}

²⁾ pending

The proven power supplies of the CP-S and CP-C range

Characteristics of the CP-S and CP-C range

- Output current 5 A, 10 A and 20 A
- Integrated power reserve of up to 50 %
- High efficiency of approx. 89 %
- Low power dissipation and low heating
- Open-circuit, overload and short-circuit stable, automatic recovery
- Integrated input fuse
- Redundancy unit CP-A RU offering true redundancy
- Control module (voting unit) CP-A CM pluggable onto CP-A RU
- Pluggable output terminals for up to 10 A
- Status LED "OUTPUT OK"

CP-S range

- Wide range input 110-240 V AC (85-264 V AC, 100-350 V DC) 5 A version
- Input voltage adjustable via front-face selector switch (10 A, 20 A version)
- Output voltage fixed at 24 V DC
- Parallel operation for redundancy

CP-C range

- Wide range input 110-240 V AC (85-264 V AC, 100-350 V DC)
- Output voltage adjustable in a range of 22-28 V DC
- Parallel operation for increased capacity and redundancy
- Power factor correction (PFC) acc. to EN 61000-3-2
- Function modules pluggable onto the front side

Function modules for CP-C range

- CP-C MM, messaging module with relay outputs for INPUT OK, OUTPUT OK and REMOTE ON/OFF
- CP-C CB, current balancing module (under development)

Approvals/Marks of the power supplies

■ Approvals:

 UL 508, CAN/CSA C22.2 No.14¹⁾,

 UL 1604 (Class I, Div. 2, hazardous locations), CAN/CSA C22.2 No.213¹⁾,

 UL 60950, CAN/CSA C22.2 No.60950¹⁾,



 GOST,  CB scheme,  ^{1) 2)}

■ Marks:

  C-Tick

¹⁾ Approvals refer to rated input voltage U_{IN}

²⁾ not for CP-S 24/10.0 and CP-S 24/20.0

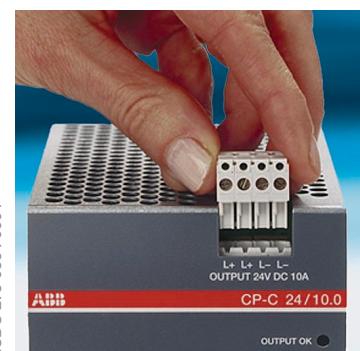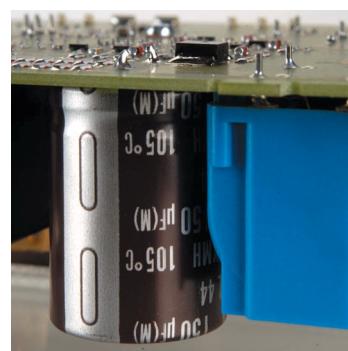

Integrated power reserve

The CP-S and CP-C range power supplies feature an integrated power reserve of up to 50 %. No oversized electricity supply is needed, especially under heavy load conditions.

Double terminal assignment + pluggable terminals

The double assignment of the output terminals considerably reduces the amount of wiring by eliminating the need for potential multiplication. Extended flexibility in operation due to pluggable output terminals (this feature is not offered on all devices).



2CDC 275 005 F0006



2CDC 273 060 F0004

Pluggable function modules for highest flexibility

The CP-C range power supplies can be equipped with pluggable modules to add specific functions.

The result: a superior cost to performance ratio. A future-proof solution for highest flexibility without any sacrifices in user comfort.

Messaging module CP-C MM

- 1SVR 427 081 R0000
- LED display and relay outputs for "INPUT OK" and "OUTPUT OK"
- REMOTE ON/OFF function to remotely power-down and power-up the device
- Pluggable on the front of every CP-C power supply



2CDC 273 058 F0004

NEW!

Extension devices

Redundancy unit CP-A RU

- 1SVR 427 071 R0000
- For decoupling of parallelized power supply units. Thus, true redundancy can be achieved.
- 2 input terminals; each up to 20 A
- Output up to 40 A
- 2 integrated diodes for decoupling
- Control module CP-A CM can be mounted on the front of the unit (accessory)



2CDC 271 010 F0005

Control module CP-A CM

- 1SVR 427 075 R0000
- Voting unit plugs onto the redundancy unit CP-A RU to allow monitoring the voltage in each channel of the CP-A RU.
- Adjustable threshold values (14-28 V) and relay output terminals per input / circuit



2CDC 271 003 F0005

Of course all devices are fully operational in all basic functions without any module attached. The module attaching points are factory-covered.

Product overview: Power supplies CP-E, CP-S and CP-C range

NEW!



Power supplies CP-E range

| | CP-E 24/0.75 | CP-E 24/1.25 | CP-E 24/25 | CP-E 5/3.0 | CP-E 12/2.5 | CP-E 48/0.62 | CP-E 48/1.25 | | |
|---|--|----------------------|--------------------------|----------------------|--------------------------|--------------------|--------------------|--|--|
| Power supplies CP-E range | 24 V / 0.75 A | 24 V / 1.25 A | 24 V / 2.5 A | 5 V / 3.0 A | 12 V / 2.5 A | 48 V / 0.62 A | 48 V / 1.25 A | | |
| Order code | 1SVR 427 030 R0000 | 1SVR 427 031 R0000 | 1SVR 427 032 R0000 | 1SVR 427 033 R3000 | 1SVR 427 032 R1000 | 1SVR 427 030 R2000 | 1SVR 427 031 R2000 | | |
| Technical data, Input | | | | | | | | | |
| Rated input voltage U_{IN} | | | | | | | | | |
| Input voltage range | AC | 90-265 V | 85-264 V | 90-265 V | 85-264 V | 90-265 V | 85-264 V | | |
| | DC | 120-370 V | 90-375 V | 120-370 V | 90-375 V | 120-370 V | 90-375 V | | |
| Input frequency (AC) | | | | | | | | | |
| Power failure buffering | | > 75 ms | > 30 ms | > 75 ms | > 30 ms | > 75 ms | > 30 ms | | |
| Typical current consumption | at 110 V AC | 336 mA | 568 mA | 1080 mA | 310 mA | 580 mA | 566 mA | | |
| | at 230 V AC | 197.4 mA | 326.6 mA | 570 mA | 183.2 mA | 328 mA | 320 mA | | |
| Inrush current | 18 A (max. 3 ms) | 40 A (max. 3 ms) | 60 A (max. 3 ms) | 18 A (max. 3 ms) | 40 A (max. 3 ms) | 40 A (max. 3 ms) | 60 A (max. 3 ms) | | |
| Internal input fuse | 2 A slow-acting / 250 V AC | | | | | | | | |
| Technical data, Output | | | | | | | | | |
| Rated output voltage | | 24 V DC $\pm 1\%$ | | 5 V DC $\pm 1\%$ | 12 V DC $\pm 1\%$ | 48 V DC $\pm 1\%$ | | | |
| Adjustable range | | 21.6-28.8 V DC | 24-28 V DC | 4.7-6 V DC | 12-15 V DC | 48-55 V DC | | | |
| Rated output power | | 18 W | 30 W | 60 W | 15 W | 30 W | 60 W | | |
| Rated output current I_f ($T_A < 60^\circ\text{C}$) | | 0.75 A | 1.25 A | 2.5 A | 3.0 A | 2.5 A | 0.625 A | | |
| Short-circuit protection | | | | | | | | | |
| Output curve | | hiccup mode | U/I characteristic curve | hiccup mode | U/I characteristic curve | | | | |
| Parallel operation | | | | | | | | | |
| yes, to enable redundancy | | | | | | | | | |
| Other data | | | | | | | | | |
| Efficiency | typ. 77 % | typ. 86 % | typ. 89 % | typ. 75 % | typ. 84 % | typ. 86 % | typ. 89 % | | |
| Protection enclosure / terminals | IP20 / IP20 | | | | | | | | |
| Ambient temperature range during operation | -10...+70 °C (derating between +60...70 °C: 2.5% per Kelvin) | | | | | | | | |
| Dimensions (W x H x D) | 23.9 x 88.5 x 115 mm | 43.5 x 88.5 x 115 mm | | 23.9 x 88.5 x 115 mm | 43.5 x 88.5 x 115 mm | | | | |
| Weight | approx. 0.15 kg | approx. 0.29 kg | approx. 0.36 kg | approx. 0.15 kg | approx. 0.29 kg | approx. 0.29 kg | approx. 0.36 kg | | |

Data at $T_A = 25^\circ\text{C}$, $U_{IN} = 230$ V AC and rated values, if nothing else indicated




Power supplies CP-S and CP-C range

| | CP-S 24/5.0 | CP-S 24/10.0 | CP-S 24/20.0 | CP-C 24/5.0 | CP-C 24/10.0 | CP-C 24/20.0 |
|---|--|--|---|--|--|--|
| Power supplies CP-S and CP-C range | 24 V / 5 A | 24 V / 10 A | 24 V / 20 A | 24 V / 5 A | 24 V / 10 A | 24 V / 20 A |
| Order code | 1SVR 427 014 R0000 | 1SVR 427 015 R0100 | 1SVR 427 016 R0100 | 1SVR 427 024 R0000 | 1SVR 427 025 R0000 | 1SVR 427 026 R0000 |
| Technical data, Input | | | | | | |
| Rated input voltage U_{IN} | 110-240 V AC | switch setting 115: 110-120 V AC switch setting 230: 220-240 V AC | | | 110-240 V AC | |
| Input voltage range | 85-264 V AC | switch setting 115: 85-132 V AC switch setting 230: 184-264 V AC | | | 85-264 V AC | |
| | DC | 100-350 V DC | 220-350 V DC | | 100-350 V DC | |
| Input frequency (AC) | | | 47-63 Hz | | | |
| Power failure buffering | typ. > 100 ms | typ. > 50 ms | | typ. > 100 ms | typ. > 40 ms | |
| Typical current consumption | | | | | | |
| at 110-240 V AC | 2.2-1.2 A | - | - | 2.2-1.2 A | 3.5-1.6 A | 5.5-2.5 A |
| at 110-120 V AC | - | 4.2-4.0 A | 9.0-8.0 A | - | - | - |
| at 220-240 V AC | - | 2.4-2.2 A | 4.5-4.0 A | - | - | - |
| Inrush current / i^2t (cold start) | < 23 A / approx. 0.9 A 2 s | < 40 A / approx. 1.8 A 2 s | < 70 A / approx. 8 A 2 s | < 23 A / approx. 0.9 A 2 s | < 33 A / approx. 0.2 A 2 s | < 40 A / approx. 1.9 A 2 s |
| Internal input fuse | 4 A slow-acting ¹⁾ | 6.3 A slow-acting ¹⁾ | 12 A fast-acting ¹⁾ | 4 A slow-acting ¹⁾ | 6.3 A slow-acting ¹⁾ | 12 A fast-acting ¹⁾ |
| Technical data, Output | | | | | | |
| Rated output voltage | | | 24 V DC \pm 1 % | | | |
| Adjustment range of the output voltage | | fixed | | | 22-28 V, default setting 24 V \pm 0.5% | |
| Rated output current ($T_A < 60^\circ\text{C}$) | 5 A | 10 A | 20 A | 5 A | 10 A | 20 A |
| Peak output current (power reserve at $T_A < 40^\circ\text{C}$) | typ. \leq 7.25 A | typ. \leq 12.25 A | typ. \leq 22.5 A | typ. \leq 7.25 A | typ. \leq 12.25 A | typ. \leq 22.5 A |
| Short-circuit / overload protection | | | continuous short-circuit stability, thermal protection | | | |
| Output curve | | | U/I characteristic curve | | | |
| Current limitation at short circuit | approx. 11 A | approx. 19 A | approx. 25 A | approx. 11 A | approx. 19 A | approx. 25 A |
| Parallel operation | | | yes, up to 5 devices | | | |
| Other data | | | | | | |
| Efficiency | | | typ. 88-89 % | | | |
| Power factor correction (EN 61000-3-2) | | no | | | yes | |
| Protection enclosure / terminals | | | IP20 / IP20 | | | |
| Ambient temperature range during operation | | | -25...+70 °C (derating between +60...70 °C: 2.5 % per Kelvin) | | | |
| Dimensions (W x H x D) | 56.6 (60 ²⁾) x 130 x 137 mm | 90 (93.5 ²⁾) x 130 x 137 mm | 200 (203.5 ²⁾ x 130 x 137 mm | 56.6 (60 ²⁾) x 130 x 137 mm | 90 (93.5 ²⁾) x 130 x 137 mm | 200 (203.5 ²⁾) x 130 x 137 mm |
| Weight | approx. 0.96 kg | approx. 1.07 kg | approx. 2.83 kg | approx. 0.96 kg | approx. 1.34 kg | approx. 3.15 kg |

Data at $T_A = 25^\circ\text{C}$, $U_{IN} = 230$ V AC and rated values, if nothing else indicated

¹⁾ internal device protection, not accessible

²⁾ including lateral screw

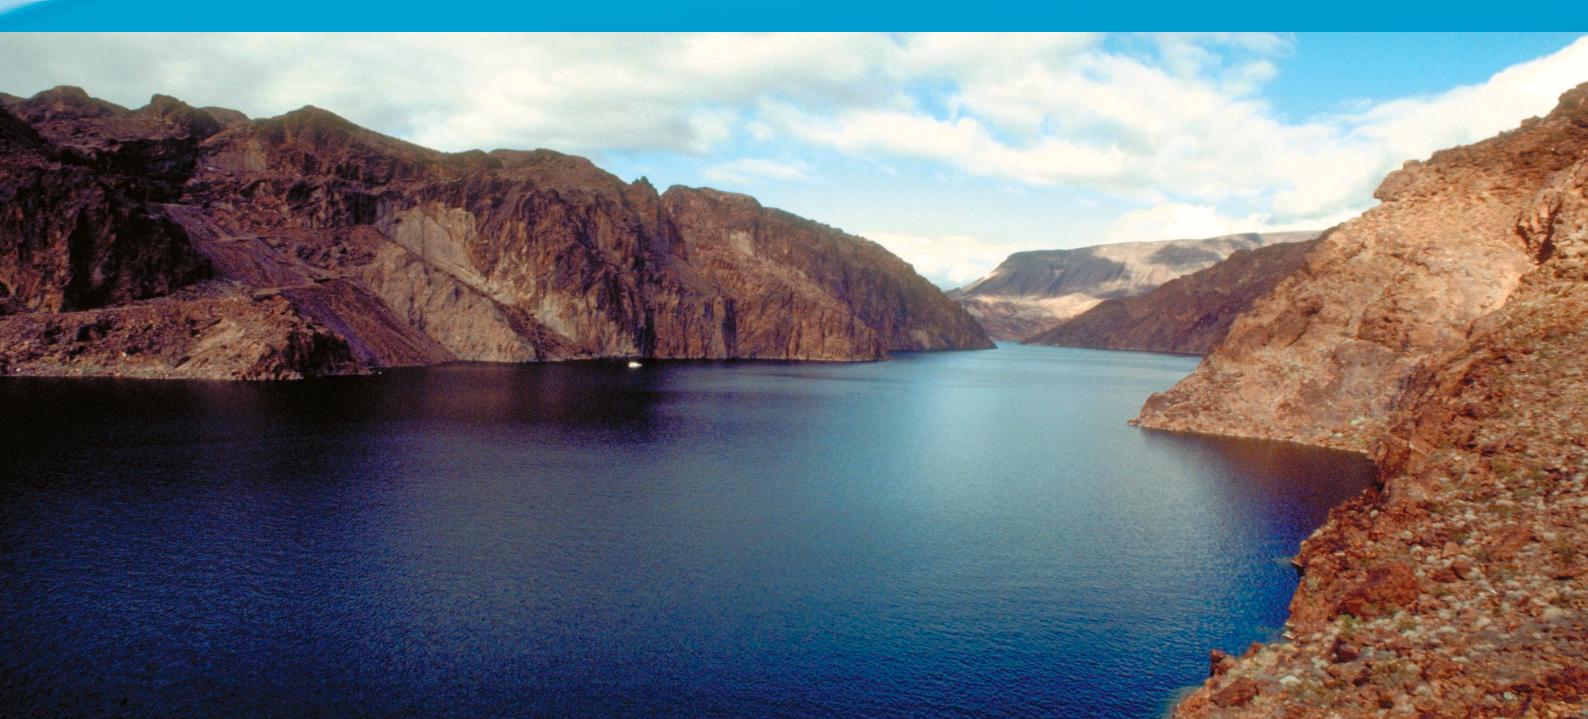


Environment protection thanks to modern technology

- The ABB power supplies of the CP-E, CP-S and CP-C range also persuade unconvinced in consideration of effective and sustainable environment protection. This is because their primary switch mode design does not only stand for outstanding efficiency but also for a noteworthy relief of the environment.
- Power supplies with primary switch mode are characterised by their exceptional efficiency of up to 89 %: A remarkable difference to conventional power supplies that often only operate with 50 % efficiency.

High efficiency of up to 89 %

- The high efficiency of the ABB power supplies means that only 10-12 % of the input energy are lost in dissipated heat.
- Thanks to the low dissipated heat, other advantages result. For example it is often possible to dispense with costly external cooling systems when the power supplies are used in cabinets.
- Also, the ABB power supplies with primary switch mode feature an outstanding durability. This improves the operating efficiency and means further relief of the environment.

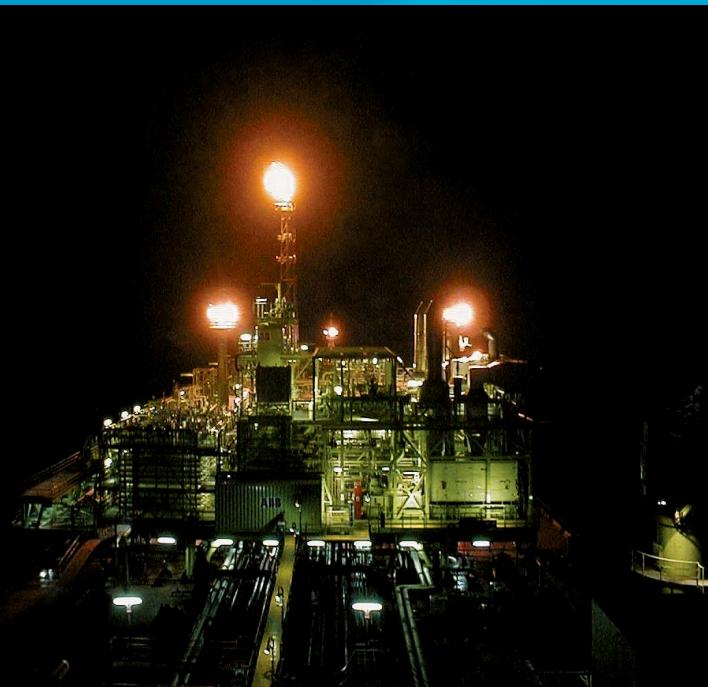

Reliability in different environments

- Due to their reliable construction, the CP-E, CP-S and CP-C range power supplies can be used in very harsh environments.
- Adherence to electrical safety standards makes these power supplies very safe and well-suited for industrial equipment while also allowing their use in domestic applications, wherever automation is important.
- The wide AC/DC range of input power makes these power supplies very flexible and offers a perfect solution for DC networks, power failure back-up systems, and much more.
- The pluggable function modules of the CP-C range power supplies allow a perfect adaptation for special application needs.
- Adjustable output voltage compensates for drops in the DC power line.

Approvals provide high safety

- Applicability of the most important approvals and the observance of the valid EU standards provide high safety when using the power supply.
- High interference immunity combined with reduced interference emission acc. to EN 61000-6-4 enable the use in rough industrial environments as well for building installations.
- All power supplies are approved acc. to UL 508, CAN/CSA C22.2 No.14 and UL 60950, CAN/CSA C22.2 No.60950.
- The power supplies CP-S and CP-C are approved acc. to UL 1604, CAN/CSA C22.2 No.213. The units can be used in hazardous locations acc. to Class I, Division 2, Groups A, B, C, and D or non-hazardous locations.
- Some power supplies additionally are approved acc. to UL 1310, CAN/CSA C22.2 No.223 (Class 2 Power Supply), GOST and/or CB scheme and have the C-Tick mark.



ABB STOTZ-KONTAKT GmbH

Postfach 10 16 80, 69006 Heidelberg
Eppelheimer Straße 82, 69123 Heidelberg
GERMANY

www.abb.com/lowvoltage -> Control Products -> Power Supplies