


# Product Environmental Profile

## SpaceLogic KNX Coupler






## General information

<b>Representative product</b>	SpaceLogic KNX Coupler - MTN6500-0101
<b>Description of the product</b>	The KNX TP TP Coupler connects two KNX segments (for example, a KNX line with a KNX area). It has a very compact design. The device has a filter table (8K bytes) and ensures a galvanic isolation between the lines. The coupler is compatible with the ETS® software. The assumed service life is 10 years.
<b>Functional unit</b>	Connects two KNX segments and ensures a galvanic isolation between the lines during 10 years.



## Constituent materials

**Reference product mass** 91 g including the product, its packaging and additional elements and accessories

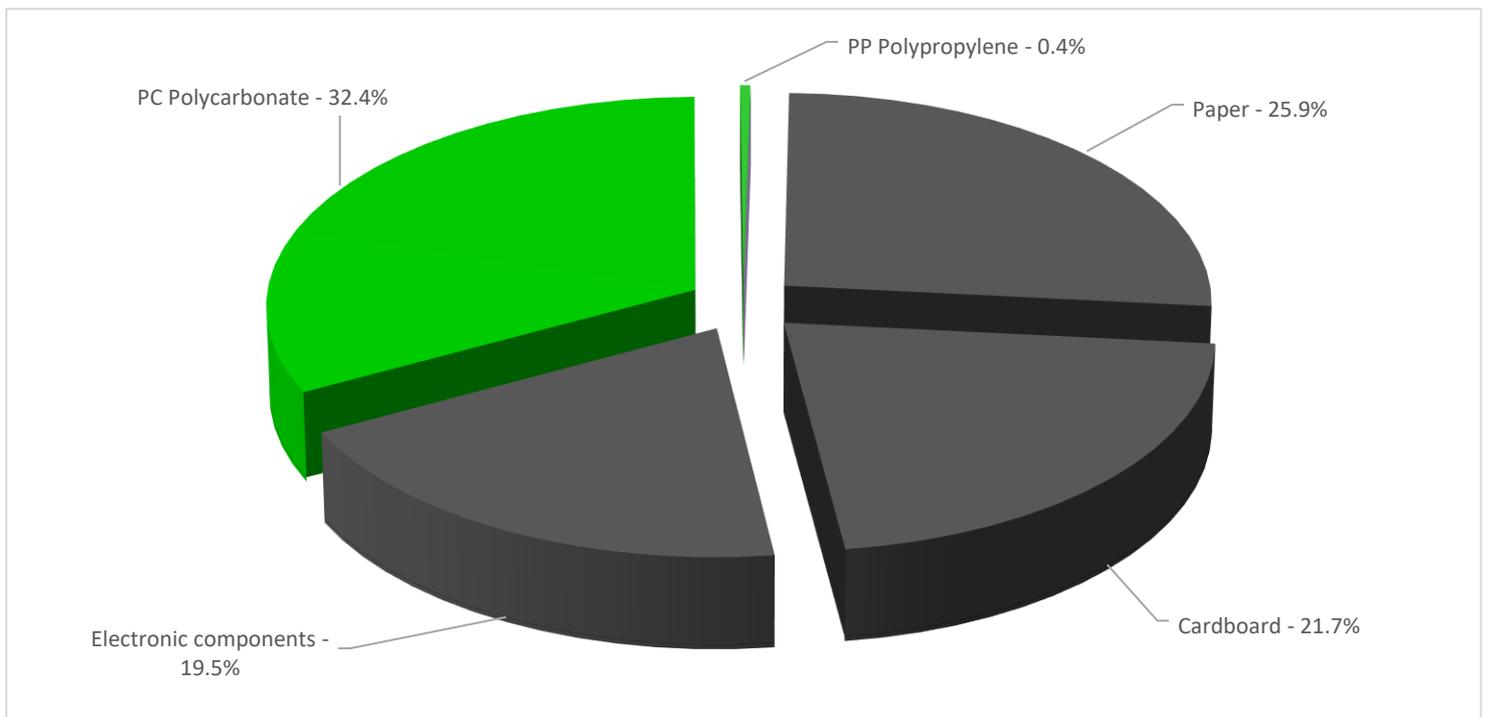

Plastics	32.8%
Metals	0.0%
Others	67.1%



## Substance assessment

Products of this range are designed in conformity with the requirements of the RoHS directive (European Directive 2011/65/EU of 2 January 2013, amended in March 2015, 2015/863/EU and in November 2017, 2017/2102/EU) and do not contain, or only contain in the authorised proportions, lead, mercury, cadmium, hexavalent chromium or flame retardants (polybrominated biphenyls - PBB, polybrominated diphenyl ethers – PBDE), Bis (2-ethylhexyl)phthalate - DEHP, Benzyl butyl phthalate– BBP, Dibutyl phthalate - DBP, Diisobutyl phthalate - DIBP) as mentioned in the Directive.

Details of ROHS and REACH substances information are available on the Schneider-Electric Green Premium website

<http://www2.schneider-electric.com/sites/corporate/en/products-services/green-premium/green-premium.page>

## Additional environmental information


The SpaceLogic KNX Coupler presents the following relevant environmental aspects

<b>Design</b>	In the KNX IP Router is only 1 PCB with lower consumption. The devices are small (1 module width is 18 mm) and device has smaller packaging.
<b>Manufacturing</b>	Manufactured at a production site complying with the regulations
<b>Distribution</b>	Weight and volume of the packaging optimized, based on the European Union's packaging directive Packaging weight is 43.1 g, consisting of PP (1%), cardboard (46%), paper (53%) Product distribution optimised by setting up local distribution centres
<b>Installation</b>	Ref MTN6500-0101 does not require any installation operations.
<b>Use</b>	The product does not require special maintenance operations.
<b>End of life</b>	<p>End of life optimized to decrease the amount of waste and allow recovery of the product components and materials</p> <p>This product contains electronic card (14.5 g) that should be separated from the stream of waste so as to optimize end-of-life treatment.</p> <p>The location of these components and other recommendations are given in the End of Life Instruction document which is available on the Schneider-Electric Green Premium website <a href="http://www2.schneider-electric.com/sites/corporate/en/products-services/green-premium/green-premium.page">http://www2.schneider-electric.com/sites/corporate/en/products-services/green-premium/green-premium.page</a></p> <p>Recyclability potential: <b>53%</b> Based on "ECO'DEEE recyclability and recoverability calculation method" (version V1, 20 Sep. 2008 presented to the French Agency for Environment and Energy Management: ADEME).</p>

## Environmental impacts

<b>Reference life time</b>	10 years			
<b>Product category</b>	Other equipments - Active product			
<b>Installation elements</b>	Packaging is being disposed during installation process.			
<b>Use scenario</b>	The product is in active mode 100% of the time with power use of 0.25W for 10 years.			
<b>Geographical representativeness</b>	France, Germany, Switzerland, Spain, Italy, Denmark, Sweden, Norway, Finland, Russia, China, UAE, Saudi Arabia, Turkey			
<b>Technological representativeness</b>	The KNX TP TP Coupler connects two KNX segments (for example, a KNX line with a KNX area). It has a very compact design. The device has a filter table (8K bytes) and ensures a galvanic isolation between the lines. The coupler is compatible with the ETS® software. The assumed service life is 10 years.			
<b>Energy model used</b>	<b>Manufacturing</b>	<b>Installation</b>	<b>Use</b>	<b>End of life</b>
	Energy model used: Germany	Electricity mix; AC; consumption mix, at consumer; 230V; DE	Electricity mix; AC; consumption mix, at consumer; 230V; DE	Electricity mix; AC; consumption mix, at consumer; 230V; DE

Compulsory indicators		SpaceLogic KNX Coupler - MTN6500-0101					
Impact indicators	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Contribution to mineral resources depletion	kg Sb eq	7.76E-04	7.76E-04	0*	0*	2.49E-07	0*
Contribution to the soil and water acidification	kg SO <sub>2</sub> eq	1.71E-02	2.26E-03	2.28E-03	9.78E-06	1.26E-02	2.02E-05
Contribution to water eutrophication	kg PO <sub>4</sub> <sup>3-</sup> eq	4.39E-03	8.30E-04	2.22E-04	2.49E-06	3.33E-03	8.90E-06
Contribution to global warming	kg CO <sub>2</sub> eq	1.63E+01	1.44E+00	7.60E-02	2.35E-03	1.47E+01	2.62E-02
Contribution to ozone layer depletion	kg CFC11 eq	7.27E-07	1.51E-07	1.29E-10	0*	5.76E-07	9.47E-10
Contribution to photochemical oxidation	kg C <sub>2</sub> H <sub>4</sub> eq	7.40E-03	2.35E-04	1.13E-04	0*	7.05E-03	1.78E-06
Resources use	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Net use of freshwater	m <sup>3</sup>	4.85E-02	1.12E-02	5.81E-06	0*	3.73E-02	1.42E-05
Total Primary Energy	MJ	2.87E+02	1.85E+01	9.64E-01	3.06E-02	2.68E+02	8.94E-02

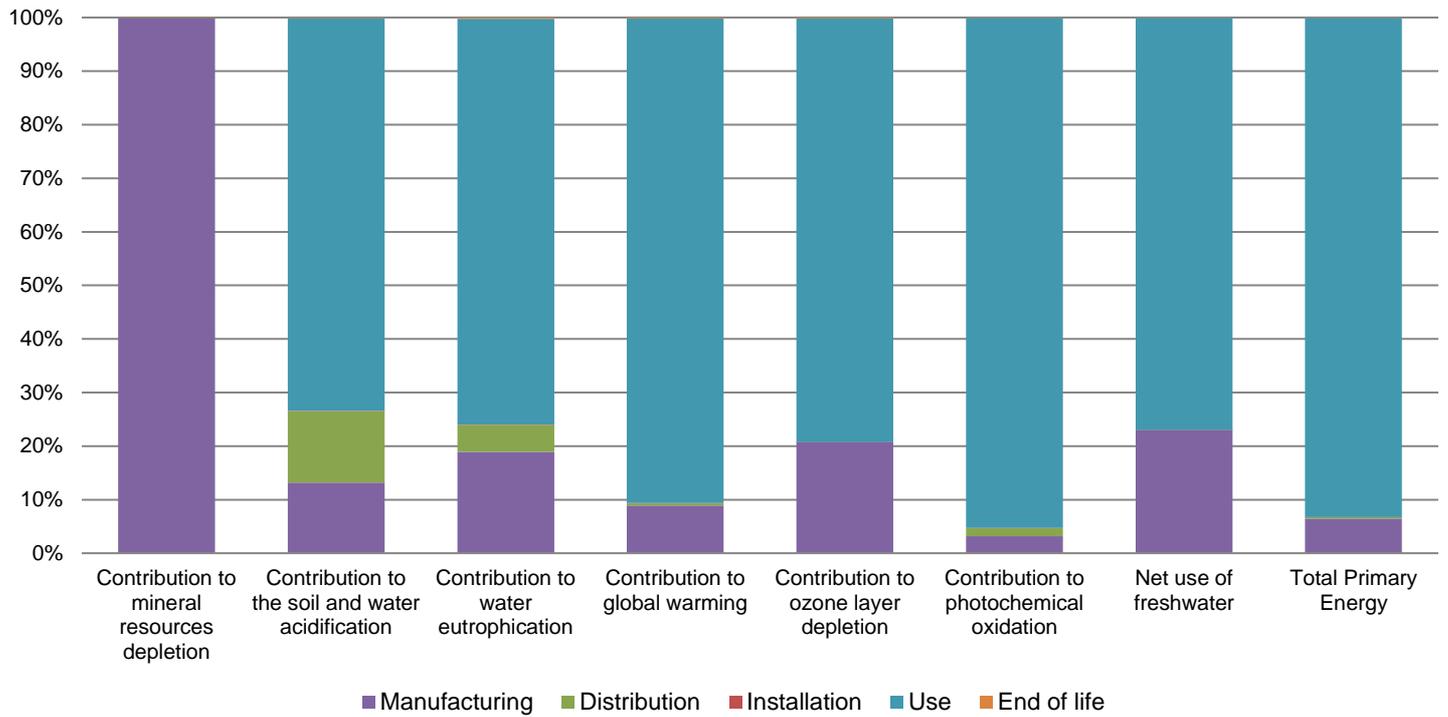

Optional indicators		SpaceLogic KNX Coupler - MTN6500-0101					
Impact indicators	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Contribution to fossil resources depletion	MJ	1.92E+02	1.33E+01	9.58E-01	3.04E-02	1.77E+02	7.29E-02
Contribution to air pollution	m³	2.96E+03	1.31E+02	1.09E+01	0*	2.81E+03	6.43E-01
Contribution to water pollution	m³	7.97E+02	2.75E+02	1.12E+01	3.55E-01	5.09E+02	1.23E+00
Resources use	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Use of secondary material	kg	4.35E-02	4.35E-02	0*	0*	0*	0*
Total use of renewable primary energy resources	MJ	5.42E+00	1.82E+00	1.23E-03	0*	3.59E+00	0*
Total use of non-renewable primary energy resources	MJ	2.82E+02	1.67E+01	9.63E-01	3.06E-02	2.64E+02	8.93E-02
Use of renewable primary energy excluding renewable primary energy used as raw material	MJ	5.42E+00	1.82E+00	1.23E-03	0*	3.59E+00	0*
Use of renewable primary energy resources used as raw material	MJ	0.00E+00	0*	0*	0*	0*	0*
Use of non renewable primary energy excluding non renewable primary energy used as raw material	MJ	2.81E+02	1.54E+01	9.63E-01	3.06E-02	2.64E+02	8.93E-02
Use of non renewable primary energy resources used as raw material	MJ	1.25E+00	1.25E+00	0*	0*	0*	0*
Use of non renewable secondary fuels	MJ	0.00E+00	0*	0*	0*	0*	0*
Use of renewable secondary fuels	MJ	0.00E+00	0*	0*	0*	0*	0*
Waste categories	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Hazardous waste disposed	kg	2.88E+00	1.37E+00	0*	0*	1.42E+00	8.33E-02
Non hazardous waste disposed	kg	1.95E+00	5.25E-01	2.31E-03	6.22E-04	1.42E+00	2.48E-04
Radioactive waste disposed	kg	1.15E-03	2.42E-04	1.60E-06	0*	9.08E-04	5.51E-07
Other environmental information	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Materials for recycling	kg	7.45E-02	7.38E-03	0*	4.25E-02	0*	2.46E-02
Components for reuse	kg	0.00E+00	0*	0*	0*	0*	0*
Materials for energy recovery	kg	6.73E-03	0*	0*	0*	0*	6.73E-03
Exported Energy	MJ	1.35E-04	1.26E-05	0*	1.22E-04	0*	0*

\* represents less than 0.01% of the total life cycle of the reference flow

Life cycle assessment performed with EIME version EIME v5.8.1, database version 2016-11 in compliance with ISO14044.

The use phase is the life cycle phase which has the greatest impact on the majority of environmental indicators (based on compulsory indicators).

Please note that the values given above are only valid within the context specified and cannot be used directly to draw up the environmental assessment of an installation.

Registration number	ENVPEP1911009_V1-EN	Drafting rules	PCR-ed3-EN-2015 04 02
Date of issue	12/2019	Supplemented by	PSR-0005-ed2-EN-2016 03 29
Validity period	5 years	Information and reference documents	<a href="http://www.pep-ecopassport.org">www.pep-ecopassport.org</a>
<i>Independent verification of the declaration and data</i>			
Internal	X	External	
<i>The elements of the present PEP cannot be compared with elements from another program.</i>			
<i>Document in compliance with ISO 14021:2016 « Environmental labels and declarations - Self-declared environmental claims (Type II environmental labelling) »</i>			

Schneider Electric Industries SAS

Country Customer Care Center  
<http://www.schneider-electric.com/contact>

35, rue Joseph Monier  
 CS 30323  
 F- 92506 Rueil Malmaison Cedex  
 RCS Nanterre 954 503 439  
 Capital social 896 313 776 €

[www.schneider-electric.com](http://www.schneider-electric.com)

ENVPEP1911009\_V1-EN

Published by Schneider Electric

© 2019 - Schneider Electric – All rights reserved

12/2019