

Features

• OPTIX RECESSED 1200x300 2L 4000K ALU DALI EM is a high efficacy low glare luminaire for office and education applications. Ceiling recessed 1200x300 mm. Aluminised plastic extra low glare optics in 2 lines configuration. White RAL9016 fixture body. DALI dimmable. 3hr maintained emergency version. 4000K Neutral White LED, CRI>80, chromaticity tolerance of 3-step MacAdam ellipse. Luminous flux 3600lm. Power consumption 26W. Luminaire efficacy 138lm/W. Lifespan: 48,500 hours L90B10. UGR<16, Luminance at 65°<200 Cd/m2, IK07, IP20. Photobiological safety risk group 0. Electrical protection Class I. Glow wire test 850°C.

Product Overview

Product name	OPTIX RECESSED 1200x300 2L 4000K ALU DALI EM
Technology	LED (3 SDCM)
Cap/Base	N/A
Housing	Steel
Mount	Ceiling recessed mounting
Fixture rating	Enclosed
Fixture luminous flux (lm)	3600
Luminaire efficacy (lm/W)	138
Colour temperature (K)	4000
Light colour	Neutral White
CRI (Ra)	80
Colour Variation Initial (SDCM)	3
Glare control	< 16
Photobiological Risk Group	RG0
Luminous flux (emergency) (lm)	80
Total power consumption (W)	26

OPTIX RECESSED 1200x300 2L 4000K ALU DALI EM 2023666

Electrical protection

Class I

Control gear type

LED driver constant current

LED Flickering Rate

Ultra low (5% or less)

Housing colour

RAL 9016 - Traffic white / Bezel

IP rating

IP20

IK rating

IK07





Product EAN number

5025768236664

Warranty

5 years

Photometry

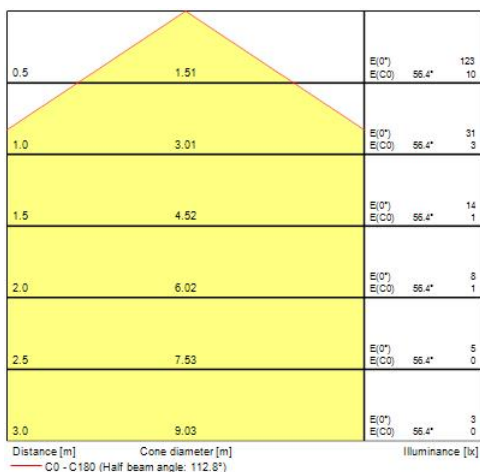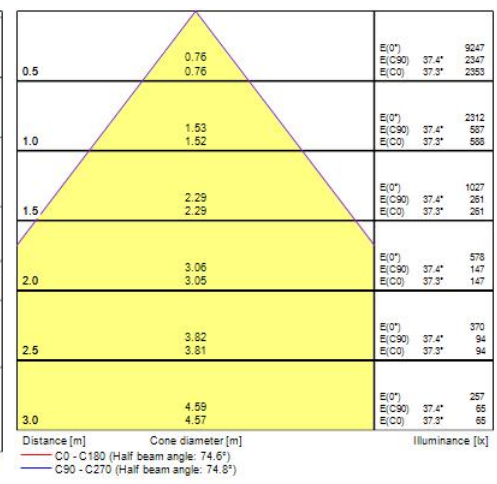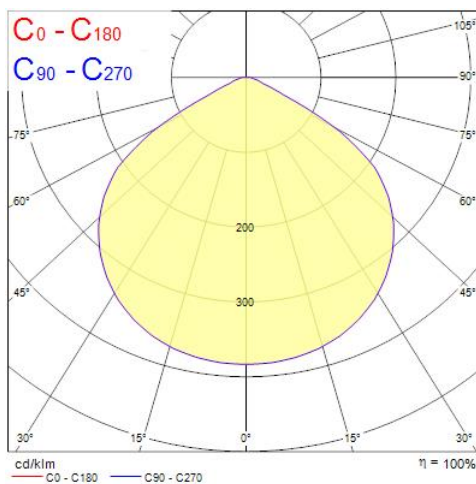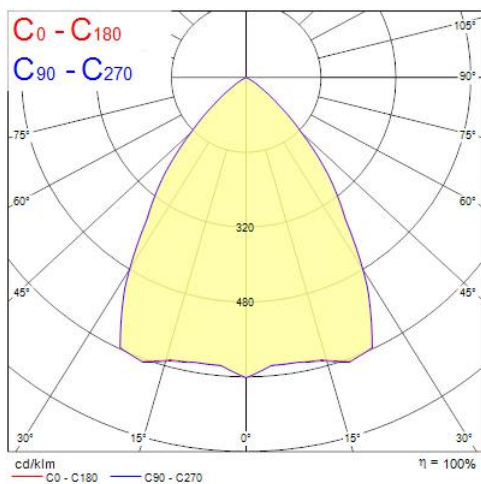


Concord

OPTIX RECESSED 1200x300 2L 4000K ALU DALI EM

2023666

Technical drawings

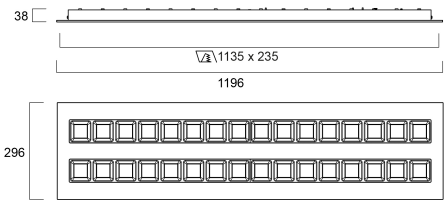

Data table

GENERAL DATA

Product name	OPTIX RECESSED 1200x300 2L 4000K ALU DALI EM
Technology	LED (3 SDCM)
Cap/Base	N/A
Housing	Steel
Mount	Ceiling recessed mounting
Fixture rating	Enclosed
Performance ambient temperature Tq (°C)	25
Warranty	5 years

OPTICAL DATA

Fixture luminous flux (lm)	3600
Luminaire efficacy (lm/W)	138
Colour temperature (K)	4000
Light colour	Neutral White
CRI (Ra)	80
Colour Variation Initial (SDCM)	3
Glare control	< 16
Photobiological Risk Group	RG0
Luminous flux (emergency) (lm)	80

OPTIX RECESSED 1200x300 2L 4000K ALU DALI EM 2023666

Emergency duration (h)	3
------------------------	---

ELECTRICAL DATA

Total power consumption (W)	26
Primary Supply/Product voltage - min (V)	198.0
Lamp power factor	0.98
Electrical protection	Class I
Control gear required	No
Control gear type	LED driver constant current
Drive current (mA)	250
Inrush Current (A)	29
Inrush Duration (µs)	180
Glow Wire Test (°C)	850
Energy Efficiency Class (A->G) of contained light source	C
Nominal Frequency (Hz)	50/60Hz
LED Flickering Rate	Ultra low (5% or less)
Max. products per 10A C Breaker	21
Max. products per 20A B Breaker	27
Connectable conductor cross section - Min (mm²)	2.5
Connectable conductor cross section - Max (mm²)	2.5

LIFETIME DATA

Lifespan L70 B50	120000
Lifespan L80 B20	107500
Lifespan L90 B10	48500

PHYSICAL DATA

Housing colour	RAL 9016 - Traffic white / Bezel
IP rating	IP20
IK rating	IK07
Diffuser finish	Matt/satinized

Concord

OPTIX RECESSED 1200x300 2L 4000K ALU DALI EM 2023666

Diffuser material	PC Polycarbonate
Nominal Product Length (mm)	1196
Nominal Product Width (mm)	296
Weight (kg)	5.0

PACKAGING

Single packaging type	Carton
Product EAN number	5025768236664
Packaging single width (cm)	6.5
Packaging single depth (cm)	32.0
DUN14 (outer)	05025768236664
Packaging outer length / height (cm)	124.5

SAFETY DATA

Special purpose lamp	No
Dry applications use only	No
Suitable for household illumination	No