

Concord

COLOSSAL 600mm 840 OPAL DIR WHITE

2071173



Features

• 600mm diameter circular architectural luminaire, can be surface mounted or suspended. Powder coated aluminium housing (RAL9016) with polycarbonate opal diffuser. Direct light distribution, 5330lm luminous flux, 40.6W system power, 131lm/W luminaire efficacy. Constant current driver. Colour rendering index Ra >80, 4000K Neutral White LED, chromaticity tolerance of 3-step MacAdam ellipse. IP40, IK03. 450mA drive current. Electrical protection Class1, 220-240V. Reported lifetime 66k hours L90B10.

Product Overview

Product name	COLOSSAL 600mm 840 OPAL DIR WHITE
Technology	LED (3 SDCM)
Cap/Base	N/A
Housing	Aluminium
Mount	Ceiling surface mounting, Suspended
Fixture luminous flux (lm)	5330
Luminaire efficacy (lm/W)	131
Colour temperature (K)	4000
Light colour	Neutral White
CRI (Ra)	80
Colour Variation Initial (SDCM)	3
Glare control	< 23
Photobiological Risk Group	RG0
Total power consumption (W)	40.6
Electrical protection	Class I
Control gear type	LED driver constant current
LED Flickering Rate	Ultra low (5% or less)
Housing colour	RAL 9016 - Traffic white / Bezel
IP rating	IP40/20
IK rating	IK07
Product EAN number	5025768711734


Concord

COLOSSAL 600mm 840 OPAL DIR WHITE


2071173

Warranty	5 years
Colour Code	840

Photometry

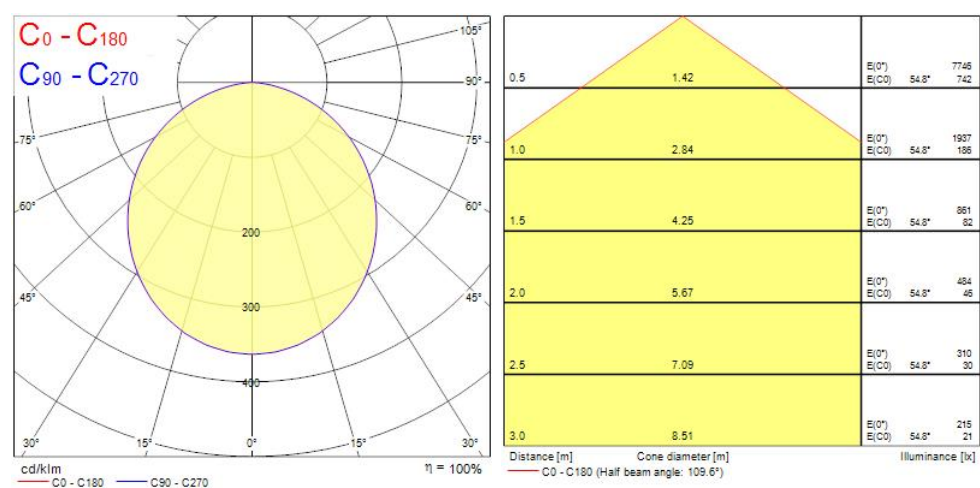

Technical drawings

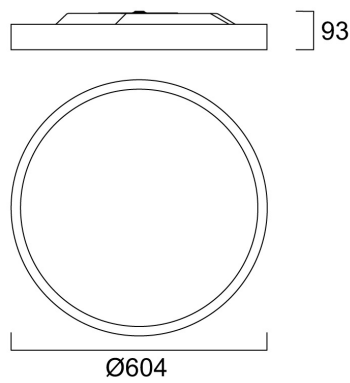

Data table

COLOSSAL 600mm 840 OPAL DIR WHITE 2071173

GENERAL DATA

Product name	COLOSSAL 600mm 840 OPAL DIR WHITE
Technology	LED (3 SDCM)
Cap/Base	N/A
Housing	Aluminium
Mount	Ceiling surface mounting, Suspended
Operating temperature range (°C)	10°C...+25°C
Warranty	5 years

OPTICAL DATA

Fixture luminous flux (lm)	5330
Luminaire efficacy (lm/W)	131
Colour temperature (K)	4000
Colour Code	840
Light colour	Neutral White
CRI (Ra)	80
Colour Variation Initial (SDCM)	3
Glare control	< 23
Photobiological Risk Group	RG0

ELECTRICAL DATA

Total power consumption (W)	40.6
Current (A)	450
Primary Supply/Product voltage - min (V)	220
Lamp power factor	0.95
Electrical protection	Class I
Control gear required	No
Control gear type	LED driver constant current
Drive current (mA)	450
Inrush Current (A)	15
Inrush Duration (µs)	250
Glow Wire Test (°C)	650

Concord

COLOSSAL 600mm 840 OPAL DIR WHITE 2071173

Energy Efficiency Class (A->G) of contained light source	B
Nominal Frequency (Hz)	50/60Hz
LED Flickering Rate	Ultra low (5% or less)
Max. products per 10A C Breaker	40
Max. products per 20A B Breaker	48
Connectable conductor cross section - Min (mm ²)	1.5
Connectable conductor cross section - Max (mm ²)	2.5

LIFETIME DATA

Lifespan L70 B50	170000
Lifespan L80 B20	145000
Lifespan L90 B10	66000

PHYSICAL DATA

Housing colour	RAL 9016 - Traffic white / Bezel
IP rating	IP40/20
IK rating	IK07
Diffuser finish	Opal
Diffuser material	PC Polycarbonate
Nominal Product Diameter (mm)	604
Weight (kg)	9.0

PACKAGING

Single packaging type	Carton
Product EAN number	5025768711734
Packaging single width (cm)	68.0
Packaging single depth (cm)	68.0
DUN14 (outer)	05025768711734
Packaging outer length / height (cm)	14.0

SAFETY DATA

Concord

COLOSSAL 600mm 840 OPAL DIR WHITE
2071173

Optimal operating condition (°C)	10-25
Special purpose lamp	No
Dry applications use only	No
Suitable for household illumination	No