



Data Sheet | Item Number: 855-301/050-103

Plug-in current transformer; Primary rated current: 50 A; Secondary rated current: 1 A; Rated power: 1.25 VA; Accuracy class: 3


<https://www.wago.com/855-301/050-103>

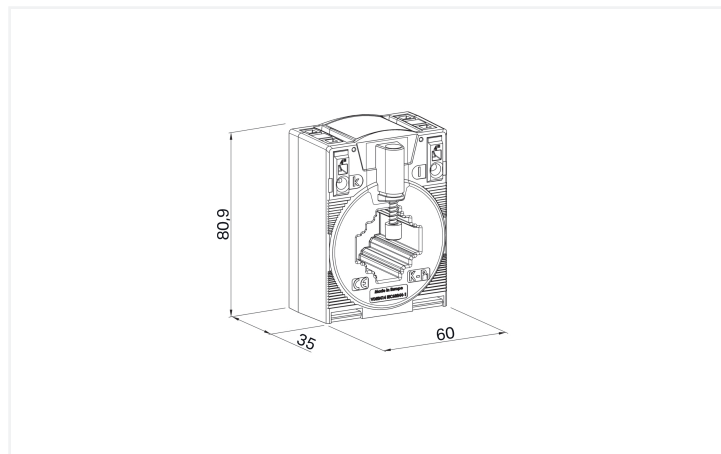

Dimensions in mm

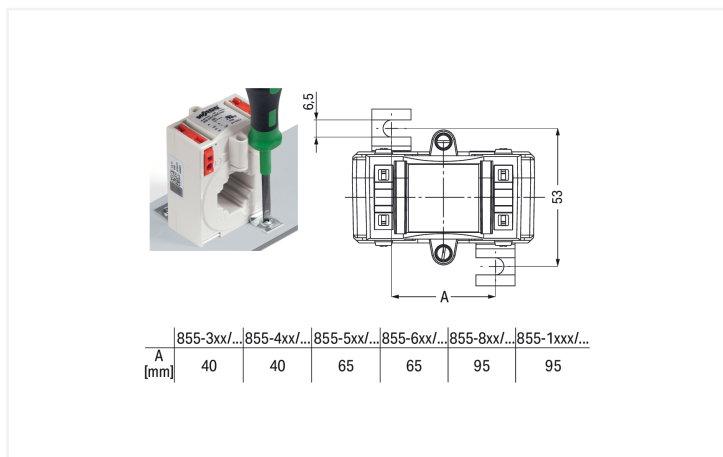

Dimensions in mm

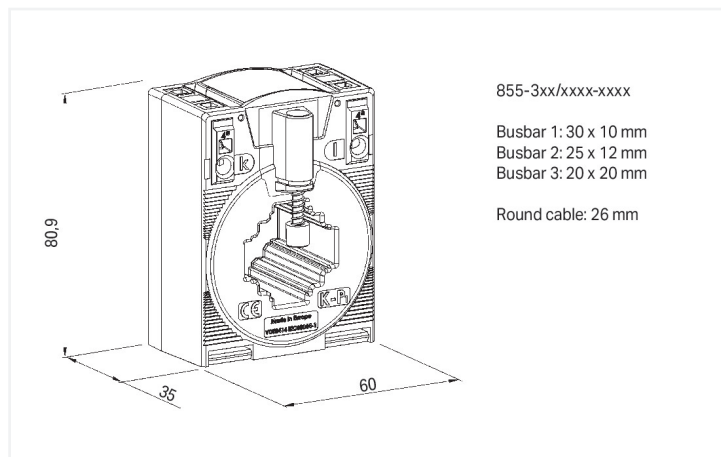

Short description:

WAGO's plug-in current transformers (855 Series) are inductive, single-conductor current transformers. Due to the measurement principle used, these current transformers are exclusively designed for AC network applications.

Features:

- Screwless CAGE CLAMP® connection technology
- Several mounting options available
- Vibration- and shock-resistant
- High mechanical retention forces
- High current-carrying capacity
- Continuous overload of 120 % the nominal primary current
- Low-voltage current transformer for operating voltages up to max. 1.2 kV
- For 690 V power networks
- UL recognized components



Technical data

Input		Input – current transformer	
Measured variable	Current	Rated continuous thermal current I_{cth}	$1.2 \times I_N$
		Rated short-time thermal current I_{th}	$60 \times I_N / 1 \text{ s (max. 100 kA / 1 s)}$
		Overcurrent limiting factor	FS5 / FS10 (type dependent; see type plate inscription)
		Rated frequency	50 ... 60 Hz
		Primary rated current	50 A

Output – current transformer		Measurement Error	
Secondary rated current	1 A	Accuracy class	3
Rated power S_r	1.25 VA		

Safety and protection	
Test voltage	6 kVAC; 50 Hz; 1 min
Highest voltage for equipment U_m	1.2 kV _{rms} AC

Connection Data		Connection 1	
Feedthrough for measurement conductor	Ø 26 mm	Connection technology	CAGE CLAMP®
		Strip length	9 ... 10 mm / 0.35 ... 0.39 inches
		Solid conductor	0.08 ... 4 mm² / 28 ... 12 AWG
		Fine-stranded conductor	0.08 ... 4 mm² / 28 ... 12 AWG

Physical data	
Width	60 mm / 2.362 inches
Height	80.9 mm / 3.185 inches
Depth	52 mm / 2.047 inches

Mechanical data	
Mounting type	Closed current transformer Installation on mounting plate Mounting on DIN-rail via DIN-rail adapter Installation on round cable

Material data	
Insulation class	E
Fire load	0 MJ
Weight	230 g



Environmental requirements	
Ambient temperature (operation)	-5 ... +50 °C
Ambient temperature (storage)	-25 ... +70 °C
Operating altitude (max.)	1000 m

Standards and Specifications	
Conformity marking	CE
Standards/specifications	EN 61869-1 EN 61869-2 UL: E356480

Commercial data	
PU (SPU)	1 pcs
Packaging type	Box
Country of origin	HU
Customs tariff number	85043129900

Product Classification	
UNSPSC	39121032
eCl@ss 10.0	27-21-09-02
eCl@ss 9.0	27-21-09-02
ETIM 9.0	EC002048
ETIM 10.0	EC002048
ECCN	NO US CLASSIFICATION

Environmental Product Compliance	
RoHS Compliance Status	Compliant, No Exemption

Approvals / Certificates											
General approvals		Declarations of conformity and manufacturer's declarations									
 											
Approval	Standard	Certificate Name									
EAC GZO Almaty Standart	TP TC 004/2011	EAC CoC 03082									
UL Underwriters Laboratories Inc.	IEEE C57.13	E356480									
		<table><tr><th>Approval</th><th>Standard</th><th>Certificate Name</th></tr><tr><td>EU-Declaration of Confor- mity WAGO GmbH & Co. KG</td><td>-</td><td>-</td></tr><tr><td>UK-Declaration of Confor- mity WAGO GmbH & Co. KG</td><td>-</td><td>-</td></tr></table>	Approval	Standard	Certificate Name	EU-Declaration of Confor- mity WAGO GmbH & Co. KG	-	-	UK-Declaration of Confor- mity WAGO GmbH & Co. KG	-	-
Approval	Standard	Certificate Name									
EU-Declaration of Confor- mity WAGO GmbH & Co. KG	-	-									
UK-Declaration of Confor- mity WAGO GmbH & Co. KG	-	-									



Downloads

Environmental Product Compliance

Compliance Search

Environmental Product Compliance
855-301/050-103

↓

Documentation

Bid Text

855-301/050-103	05.02.2015	doc 29.50 KB	↓
855-301/050-103	19.02.2019	xml 4.96 KB	↓

Instruction Leaflet

Aufsteck-Stromwandler	pdf 1438.11 KB	↓
-----------------------	-------------------	---

CAD/CAE-Data

CAD data

2D/3D Models 855-301/050-103	↓
---------------------------------	---

CAE data

EPLAN Data Portal 855-301/050-103	↓
WSCAD Universe 855-301/050-103	↓
ZUKEN Portal 855-301/050-103	↓

1 Compatible Products

1.1 Optional Accessories

1.1.1 Installation

1.1.1.1 Current transformer terminal block



Item No.: 2007-8876
Compact terminal block; for 3-phase current transformer circuit; 6,00 mm²; multicoloured



Item No.: 2007-8873
Compact terminal block; for current and voltage transformers; 6,00 mm²; multicoloured



Item No.: 2007-8874
Compact terminal block; for current and voltage transformers; 6,00 mm²; multicoloured



Item No.: 2007-8875
Compact terminal block; for current transformer circuit; 6,00 mm²; multicoloured



Item No.: 2007-8877
Compact terminal block; for current transformer circuit; 6,00 mm²; multicoloured

1.1.2 Mounting adapter

1.1.2.1 DIN-rail adapter



Item No.: 855-9900
Carrier rail adapter

1.1.2.2 Fast connection adapter



Item No.: 855-9910
Quick-mount kit

1.1.3 Signal conditioner

1.1.3.1 Current Signal Conditioner



Item No.: 857-551
Current signal conditioner; Current input signal; Current and voltage output signal; Digital output; Configuration via software; Supply voltage: 24 VDC; 6 mm module width



Item No.: 857-550
Current signal conditioner; Current input signal; Current and voltage output signal; Digital output; Configuration via software; Supply voltage: 24 VDC; 6 mm module width; 2,50 mm²

1.1.3.2 Power Measurement Module



Item No.: 2857-570/024-001
3-Phase Power Measurement Module; 3x277/480 V/1 A; Modbus RTU; Digital output; Configuration via software; Supply voltage: 24 VDC

1.1.4 Tool


1.1.4.1 Operating tool




Item No.: 210-720
Operating tool; Blade: 3.5 x 0.5 mm; with a partially insulated shaft; multicoloured

Installation Notes

Installation



Installation on copper current bar




Installation on round cable




Installation on mounting plate



Mounting on DIN-rail via 855-9900 DIN-Rail Adapter



Snapping onto DIN-rail



Snapping onto DIN-rail




Installation via 855-9910 Quick-Mount Kit

Conductor termination



Conductor termination – screwdriver ac-
tuation perpendicular to conductor entry



Conductor termination – screwdriver ac-
tuation parallel to conductor entry