

# Concord

OPTIX RECESSED 1200x300 2L 4000K C9 ALU

2023670



## Features

- OPTIX RECESSED 1200x300 2L 4000K C9 ALU is a high efficacy low glare luminaire for office and education applications with excellent colour rendering. Ceiling recessed 1200x300 mm. Aluminised plastic extra low glare optics in 2 lines configuration. White RAL9016 fixture body. Constant current driver. 4000K Neutral White LED, CRI>90, chromaticity tolerance of 3-step MacAdam ellipse. Luminous flux 3500lm. Power consumption 28W. Luminaire efficacy 125lm/W. Lifespan: 48,500 hours L90B10. UGR<16, Luminance at 65°<200 Cd/m<sup>2</sup>, IK07, IP20. Photobiological safety risk group 0. Electrical protection Class I. Glow wire test 850°C.

## Product Overview

Product name	OPTIX RECESSED 1200x300 2L 4000K C9 ALU
Technology	LED (3 SDCM)
Cap/Base	N/A
Housing	Steel
Mount	Ceiling recessed mounting
Fixture rating	Enclosed
Fixture luminous flux (lm)	3500
Luminaire efficacy (lm/W)	125
Colour temperature (K)	4000
Light colour	Neutral White
CRI (Ra)	90
Colour Variation Initial (SDCM)	3
Glare control	< 16
Photobiological Risk Group	RG0
Total power consumption (W)	28
Electrical protection	Class I
Control gear type	LED driver constant current
LED Flickering Rate	Ultra low (5% or less)

Concord  
by SYLVANIA

# Concord

OPTIX RECESSED 1200x300 2L 4000K C9 ALU

**2023670**

**Housing colour**

RAL 9016 - Traffic white / Bezel

**IP rating**

IP20

**IK rating**

IK07


**Product EAN number**

5025768236701

**Warranty**

5 years

## Photometry

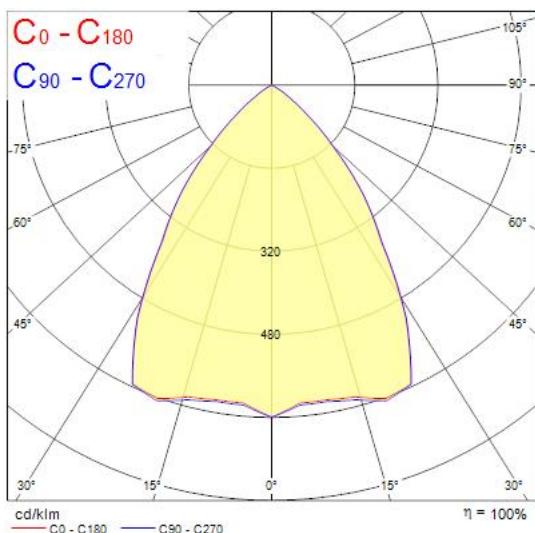

## Technical drawings

