




Data Sheet | Item Number: 770-255/062-000

Plug; 5-pole; Cod. B; 4,00 mm<sup>2</sup>; gray

<https://www.wago.com/770-255/062-000>

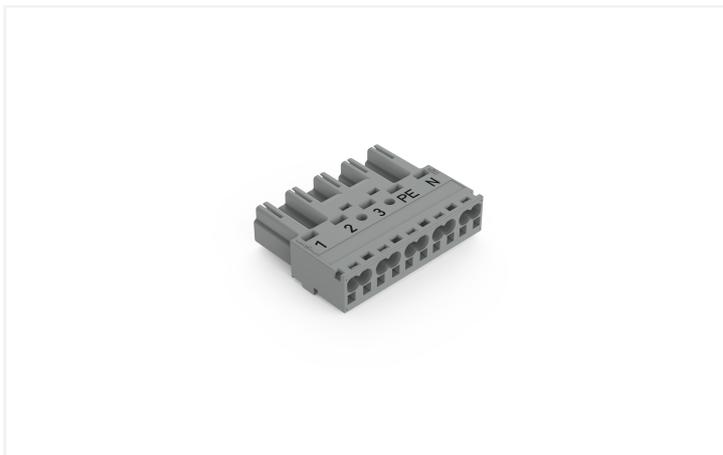

Color: ■ gray

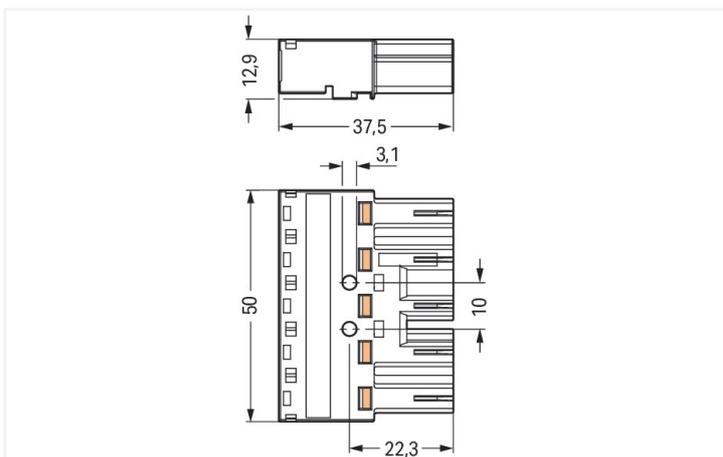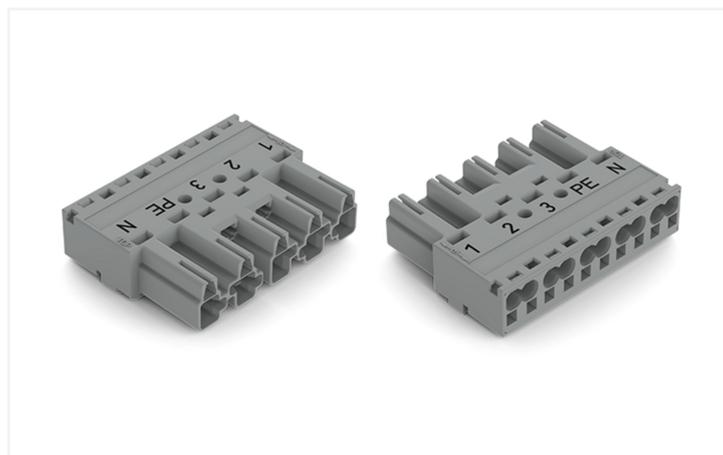

Dimensions in mm

Male connector/plug WINSTA® MIDI with protection type IP20

The WINSTA® MIDI male connector/plug 5-pole is the pluggable solution for your use in control cabinets, for lighting connections or on PCBs. Whether on PCBs, in control cabinets or for connecting lights – pluggable installation connectors from WAGO allow you to establish connections according to an enormous variety of requirements in seconds. The mechanical coding and color coding of the pluggable installation connector ensure error-free installation of the individual components – including protection against mismatching. The pluggable installation connector is protected in accordance with protection type IP20 (When mated and secured with a strain relief housing: IP2xC (These compact connectors are not designed for use in open, easily ac-



cessible areas!)). That results in the fact that users' fingers will never come into contact with energised contact elements. Pluggable installation connectors with B coding from the WINSTA® MIDI line are available in gray, light green, or pink, allowing you to distinguish different circuits, for example for light, pumps or, sun blinds. Customer-specific pole marking is possible as well. This pluggable installation connector is designed for a current load of up to 25 A. Thus, it can also be used for high power loads. The WINSTA® MIDI Pluggable Connection System with Push-in CAGE CLAMP® spring pressure connection technology facilitates precise electrification. Thanks to the built-in test slot, it is possible to check connections even when they are plugged in. This saves time, labor, and money.

Push-in CAGE CLAMP® spring pressure connection technology – pluggable installation instead of laborious screw connections!

WINSTA® is the pluggable connection system that is perfectly tailored to the strict requirements of electrical installation. It ensures error-free installation of cables and components, quickly and reliably. Choose quality and durability – with marking from WAGO makes the installation of electrical components substantially easier.

- protection against mismatching eliminates errors
- simple circuits
- with B coding for controllers such as sun blinds and lighting fixtures
- exact dimensions
- fast, secure installation

Notes	
General safety information	<p><b>NOTICE: Observe installation and safety instructions!</b></p> <ul style="list-style-type: none"> <li>• Nur von Elektrofachkraft oder einer für die Tätigkeit elektrisch unterwiesenen Person (EUP nach DIN VDE 0105-100) anzuwenden!</li> <li>• Nicht unter Spannung/Last installieren!</li> <li>• Nur für bestimmungsgemäßen Gebrauch einsetzen!</li> <li>• Nationale Vorschriften/Normen/Richtlinien beachten!</li> <li>• Technische Daten der Produkte beachten!</li> <li>• Auf die richtige Polbelegung achten!</li> <li>• Keine beschädigten/verschmutzten Komponenten verwenden!</li> <li>• Leiterarten, -querschnitte, Abisolierlängen und Leitungsdurchmesser beachten!</li> <li>• Leiter bis zum Anschlag einführen!</li> <li>• Nur mit Verriegelungsklinke und Zugentlastung verwenden!</li> <li>• Originalzubehör verwenden!</li> </ul> <p><b>To be sold only with installation instructions!</b></p>

Variants: Other pole markings  
 Other versions (or variants) can be requested from WAGO Sales or configured at <https://configurator.wago.com/>.

Electrical data				
Ratings per	IEC/EN 60664-1			Ratings per IEC/EN – Notes
Overvoltage category	III	III	II	Rated current (note)
Pollution degree	3	2	2	25 A for 3-pole load
Nominal voltage	400 V	-	-	20 A for 4- and 5-pole load
Rated impulse withstand voltage	6 kV	-	-	
Rated current	25 A	-	-	

Approvals per	UL 1977	General information
Rated voltage	600 V	Note on contact resistance
Rated current	23 A	approx. 1 mΩ of contact resistance
		approx. 0.25 mΩ contact transition plug/ socket

## Connection Data

Clamping units	10	<b>Connection 1</b>	
Total number of potentials	5	Connection technology	Push-in CAGE CLAMP®
		Actuation type	Operating tool Push-in
		Nominal cross-section	4 mm <sup>2</sup> / 12 AWG
		Solid conductor	0.5 ... 4 mm <sup>2</sup> / 20 ... 12 AWG
		Solid conductor; push-in termination	1.5 ... 4 mm <sup>2</sup> / 16 ... 12 AWG
		Stranded conductor	0.5 ... 2.5 mm <sup>2</sup> / 20 ... 14 AWG
		Fine-stranded conductor	0.5 ... 4 mm <sup>2</sup> / 20 ... 12 AWG
		Fine-stranded conductor; with insulated ferrule	0.25 ... 1.5 mm <sup>2</sup> / 20 ... 16 AWG
		Fine-stranded conductor; with uninsulated ferrule	0.25 ... 2.5 mm <sup>2</sup> / 20 ... 14 AWG
		Fine-stranded conductor; with ferrule; push-in termination	1.5 mm <sup>2</sup> / 16 AWG
		Strip length	9 mm / 0.35 inches
		Pole number	5
		Conductor entry direction to mating direction	0°

## Physical data

Pin spacing	10 mm / 0.394 inches
Width	50 mm / 1.969 inches
Height	12.9 mm / 0.508 inches
Depth	37.5 mm / 1.476 inches

## Mechanical data

Use	Control technology
Coding	B
Variable coding	Yes
Marking	1 2 3 PE N
Potential marking	1 2 3 PE N
Mating force of a plug-in connection	approx. 20 ... 70 N (depending on pole number)
Retention force of a plug-in connection	Locked: > 80 N
Unmating force of a plug-in connection	Unlocked: approx. 20 ... 70 N (depending on pole number)
Number of mating cycles	200, without resistive load
Protection type	IP20; When mated and secured with a strain relief housing: IP2xC (These compact connectors are not designed for use in open, easily accessible areas!)

## Plug-in connection

Contact type (pluggable connector)	Male connector/plug
Connector (connection type)	for conductor
Mismating protection	Yes
Note on mismating protection	All WINSTA® components are 100% protected against mismating when: a.) plugging different numbers of poles b.) plugging while rotated 180 c.) plugging while laterally staggered d.) plugging one pole
Locking lever	Can be retrofitted
Locking of plug-in connection	Locking lever
Note on locking system	All connectors for mounted installations (snap-in versions for lighting fixtures or devices, all types of PCB and distribution connectors) are factory-equipped with locking levers to ensure plugs and sockets are securely locked. Additional locking levers are only required for flying leads (plug/socket).

### Material data

Note (material data)	<a href="#">Information on material specifications can be found here</a>
Color	gray
Cover color	gray
Material group	I
Insulation material (main housing)	Polyamide (PA66)
Flammability class per UL94	V0
Clamping spring material	Chrome-nickel spring steel (CrNi)
Contact material	Copper or copper alloy; surface-treated
Contact Plating	Tin
Fire load	0.328 MJ
Weight	16.4 g

### Environmental requirements

Processing temperature	-5 ... +40 °C
Continuous operating temperature	-35 ... +85 °C
Note on continuous operating temperature	Insulating parts for temperatures ≤ 105 °C

### Commercial data

PU (SPU)	50 pcs
Packaging type	Box
Country of origin	PL
GTIN	4050821454991
Customs tariff number	85366990990

### Product Classification

UNSPSC	39121402
eCl@ss 10.0	27-44-06-05
eCl@ss 9.0	27-44-06-05
ETIM 9.0	EC002560
ETIM 10.0	EC002560
ECCN	NO US CLASSIFICATION

### Environmental Product Compliance

RoHS Compliance Status	Compliant, No Exemption
------------------------	-------------------------

### Approvals / Certificates

#### General approvals



Approval	Standard	Certificate Name
cURus Underwriters Laboratories Inc.	UL 1977	E45171
cURus Underwriters Laboratories Inc.	UL 1059	E 45172

## Downloads

### Environmental Product Compliance

#### Compliance Search

Environmental Product Compliance  
770-255/062-000



## Documentation

### Bid Text

770-255/062-000	19.02.2019	xml 2.97 KB	
770-255/062-000	08.06.2015	doc 24.50 KB	

## CAD/CAE-Data

### CAD data

2D/3D Models  
770-255/062-000



### CAE data

WSCAD Universe  
770-255/062-000



ZUKEN Portal  
770-255/062-000



## 1 Compatible Products

### 1.1 System counterpart

#### 1.1.1 Female connector/socket



**Item No.: [770-745/062-000](#)**

Snap-in socket; 5-pole; Cod. B; 4,00 mm<sup>2</sup>; gray

**Item No.: [770-845/011-000/062-000](#)**

Socket for PCBs; angled; 5-pole; Cod. B; gray

**Item No.: [770-845/062-000](#)**

Socket for PCBs; straight; 5-pole; Cod. B; gray

**Item No.: [770-245/062-000](#)**

Socket; 5-pole; Cod. B; 4,00 mm<sup>2</sup>; gray

### 1.2 Required Accessories

#### 1.2.1 Locking system

##### 1.2.1.1 Locking system



**Item No.: [770-101](#)**

Locking lever; for flying leads; for manual operation; black

**Item No.: [770-121](#)**

Locking lever; for flying leads; for manual operation; white

**Item No.: [770-111](#)**

Locking lever; for flying leads; for tool operation; black

**Item No.: [770-131](#)**

Locking lever; for flying leads; for tool operation; white

## 1.2.2 Strain relief

### 1.2.2.1 Strain relief housing



**Item No.: 770-505/021-000**

Strain relief housing; 5-pole; for 1 cable; 11.5 ... 16.5 mm; 71 mm; black



**Item No.: 770-515/021-000**

Strain relief housing; 5-pole; for 1 cable; 11.5 ... 16.5 mm; 71 mm; white



**Item No.: 770-505/023-000**

Strain relief housing; 5-pole; for 2 cables; 5.0 ... 9.0 mm; 55 mm; black



**Item No.: 770-515/023-000**

Strain relief housing; 5-pole; for 2 cables; 5.0 ... 9.0 mm; 55 mm; white



**Item No.: 770-505**

Strain relief housing; 5-pole; for 2 cables; 9.0 ... 13.0 mm; 55 mm; black



**Item No.: 770-515**

Strain relief housing; 5-pole; for 2 cables; 9.0 ... 13.0 mm; 55 mm; white

## 1.3 Optional Accessories

### 1.3.1 Coding

#### 1.3.1.1 Coding



**Item No.: 770-401**

Coding pin; for plugs; Plastic; gray

### 1.3.2 Cover

#### 1.3.2.1 Cover



**Item No.: 770-360**

Lockout cap; for plugs; 5-pole; separable; yellow



**Item No.: 897-2005**

Protective cap; Type4; for sockets and plugs; PVC; red

### 1.3.3 Installation

#### 1.3.3.1 Mounting accessories



**Item No.: 770-321**

Snap-in frame; 5-pole; 0.5 ... 2.0 mm; black



**Item No.: 770-341**

Snap-in frame; 5-pole; 0.5 ... 2.0 mm; white



**Item No.: 770-320**

Snap-in frame; 5-pole; 1.0 ... 3.0 mm; black



**Item No.: 770-340**

Snap-in frame; 5-pole; 1.0 ... 3.0 mm; white

### 1.3.4 Marking

#### 1.3.4.1 Marker



**Item No.: 770-450/000-006**

Marker card; Plastic; blue



**Item No.: 770-450/000-001**

Marker card; Plastic; green



**Item No.: 770-450/000-012**

Marker card; Plastic; orange



**Item No.: 770-450/000-005**

Marker card; Plastic; red



**Item No.: 770-450**

Marker card; Plastic; white



**Item No.: 770-450/000-002**

Marker card; Plastic; yellow

### 1.3.5 Tool

#### 1.3.5.1 Operating tool




**Item No.: 210-719**

Operating tool; Blade: 2.5 x 0.4 mm; with a partially insulated shaft

### Installation Notes

#### Conductor termination



1. Strip length, outer insulation = 35 mm (2-pole), 55 mm (3- to 5-pole)
2. Strip length = 9 mm
3. Extended ground conductor = 8 mm



To terminate fine-stranded conductors, open the clamping unit via screwdriver (2.5 mm blade width) and insert a stripped conductor until it hits the backstop.




Insert the stripped solid conductor until it hits the backstop.



To terminate fine-stranded conductors, open the clamping unit via screwdriver (2.5 mm blade width) and insert a stripped conductor until it hits the backstop.

#### Conductor removal



To remove the conductor, actuate the clamp via screwdriver (2.5 mm blade width) and pull out the conductor.

### Installation



We recommend pulling the pre-latched strain relief housing over the cable prior to termination. However, the strain relief can be mounted at a later time as well.



Latch the strain relief housing onto the plug/socket. Note the "TOP" inscription.



Prepare strain relief housing by snapping together upper and bottom part.



Tighten strain relief screw with screwdriver (2.5 mm blade width).

### Coding



Simply cut off the coding pin from the socket.



Insert coding pin into plug (break first) until it engages.

## Mismatching protection



B-coded connectors with different colors can be plugged together.

Important note:  
Different colors and/or pole markings are used for circuit identification.  
Only connectors of the same color and same pole marking must be plugged together.

B-coded connectors (shown in gray) not only differ in color, but also in their design, making them incompatible with other coded connectors.

Easy circuit identification via different marking and colors