
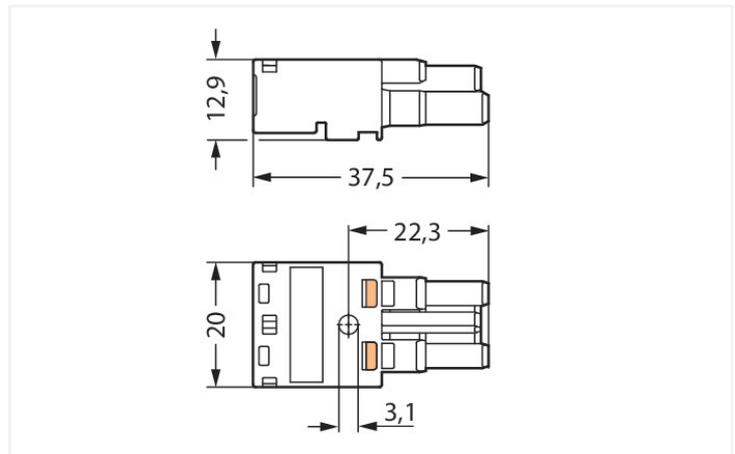


Color: ■ pink

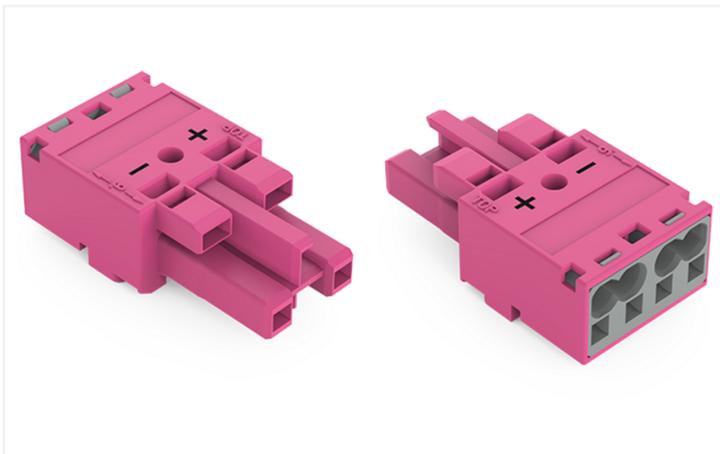

Dimensions in mm

#### Female connector/socket WINSTA® MIDI with protection against mismatching

For power and signal transmission: The WINSTA® MIDI female connector/socket with protection type IP20. WAGO pluggable installation connectors are useful when requirements repeat or are planned on a defined grid, for example for installing grid lighting or flush-mount lighting. The coding options reduce installation errors, allowing fast, secure wiring of all components. The pluggable installation connector is protected in accordance with protection type IP20 (When mated and secured with a strain relief housing: IP2xC (These compact connectors are not designed for use in open, easily accessible areas!)). This means that users' fingers will never come into contact with live contact elements. Pluggable installation connectors with B coding from the WINSTA® MIDI line are available in pink, light green, or gray, allowing you to distinguish different circuits, for example for light, pumps or sun blinds. Usage-specific pole marking is possible in addition. This pluggable installation connector is designed for a load of up to 25 A. As a result, it can also be used for high power loads. The WINSTA® MIDI product line achieves flexibility for the electrical installation. With its Push-in CAGE CLAMP® spring pressure connection technology, it guarantees time-saving, error-free installation and offers flexibility for meeting an enormous variety of installation requirements.

WINSTA® MIDI solutions for your electrical installation – protected against mismatching and maintenance-free

WINSTA® is the pluggable connection system that is optimally tailored to the strict requirements of electrical installation. It ensures error-free installation of cables and components, quickly and reliably. Enjoy the benefits of the pluggable version of our maintenance-free spring pressure connection technology too! Plan your installation with with marking from WAGO.

- protection against mismatching eliminates errors
- for automation controllers
- with B coding for use in automation of processes, such as lighting technology, among other examples

- flexible installation to save space
- rapid, structured electrical installation

## Notes

General safety information

**NOTICE: Observe installation and safety instructions!**

- Nur von Elektrofachkraft oder einer für die Tätigkeit elektrisch unterwiesenen Person (EUP nach DIN VDE 0105-100) anzuwenden!
- Nicht unter Spannung/Last installieren!
- Nur für bestimmungsgemäßen Gebrauch einsetzen!
- Nationale Vorschriften/Normen/Richtlinien beachten!
- Technische Daten der Produkte beachten!
- Auf die richtige Polbelegung achten!
- Keine beschädigten/verschmutzten Komponenten verwenden!
- Leiterarten, -querschnitte, Abisolierlängen und Leitungsdurchmesser beachten!
- Leiter bis zum Anschlag einführen!
- Nur mit Verriegelungsklinke und Zugentlastung verwenden!
- Originalzubehör verwenden!

**To be sold only with installation instructions!**

Variants:

Other pole markings

Other versions (or variants) can be requested from WAGO Sales or configured at <https://configurator.wago.com/>.

## Electrical data

| Ratings per                     | IEC/EN 60664-1 |     |    |
|---------------------------------|----------------|-----|----|
|                                 | III            | III | II |
| Overvoltage category            | III            | III | II |
| Pollution degree                | 3              | 2   | 2  |
| Nominal voltage                 | 250 V          | -   | -  |
| Rated impulse withstand voltage | 4 kV           | -   | -  |
| Rated current                   | 25 A           | -   | -  |

| Approvals per | UL 1977 |
|---------------|---------|
| Rated voltage | 600 V   |
| Rated current | 23 A    |

## General information

|                            |  |
|----------------------------|--|
| Note on contact resistance | approx. 1 mΩ of contact resistance<br>approx. 0.25 mΩ contact transition plug/<br>socket |
|----------------------------|--|

## Connection Data

|                            |   |
|----------------------------|---|
| Clamping units             | 4 |
| Total number of potentials | 2 |

### Connection 1

|  |  |
|--|--|
| Connection technology                                      | Push-in CAGE CLAMP®                          |
| Actuation type   | Operating tool<br>Push-in                    |
| Nominal cross-section                                      | 4 mm <sup>2</sup> / 12 AWG                   |
| Solid conductor  | 0.5 ... 4 mm <sup>2</sup> / 20 ... 12 AWG    |
| Solid conductor; push-in termination                       | 1.5 ... 4 mm <sup>2</sup> / 16 ... 12 AWG    |
| Stranded conductor   | 0.5 ... 2.5 mm <sup>2</sup> / 20 ... 14 AWG  |
| Fine-stranded conductor                                    | 0.5 ... 4 mm <sup>2</sup> / 20 ... 12 AWG    |
| Fine-stranded conductor; with insulated ferrule            | 0.25 ... 1.5 mm <sup>2</sup> / 20 ... 16 AWG |
| Fine-stranded conductor; with uninsulated ferrule          | 0.25 ... 2.5 mm <sup>2</sup> / 20 ... 14 AWG |
| Fine-stranded conductor; with ferrule; push-in termination | 1.5 mm <sup>2</sup> / 16 AWG                 |
| Strip length   | 9 mm / 0.35 inches                           |
| Pole number  | 2  |
| Conductor entry direction to mating direction              | 0°   |

### Physical data

|             |                        |
|-------------|------------------------|
| Pin spacing | 10 mm / 0.394 inches   |
| Width       | 20 mm / 0.787 inches   |
| Height      | 12.9 mm / 0.508 inches |
| Depth       | 37.5 mm / 1.476 inches |

### Mechanical data

|   |  |
|---|--|
| Use                                     | Control technology   |
| Coding                                  | B  |
| Variable coding                         | No   |
| Marking                                 | + -  |
| Potential marking                       | + -  |
| Mating force of a plug-in connection    | approx. 20 ... 70 N (depending on pole number)   |
| Retention force of a plug-in connection | Locked: > 80 N   |
| Unmating force of a plug-in connection  | Unlocked: approx. 20 ... 70 N (depending on pole number)   |
| Number of mating cycles                 | 200, without resistive load  |
| Protection type                         | IP20; When mated and secured with a strain relief housing: IP2xC (These compact connectors are not designed for use in open, easily accessible areas!) |

### Plug-in connection

|                                    |  |
|------------------------------------|--|
| Contact type (pluggable connector) | Female connector/socket  |
| Connector (connection type)        | for conductor  |
| Mismating protection               | Yes  |
| Note on mismating protection       | All <i>WINSTA</i> ® components are 100% protected against mismating when:<br>a.) plugging different numbers of poles<br>b.) plugging while rotated 180<br>c.) plugging while laterally staggered<br>d.) plugging one pole  |
| Locking lever                      | Can be retrofitted   |
| Locking of plug-in connection      | Locking lever  |
| Note on locking system             | All connectors for mounted installations (snap-in versions for lighting fixtures or devices, all types of PCB and distribution connectors) are factory-equipped with locking levers to ensure plugs and sockets are securely locked. Additional locking levers are only required for flying leads (plug/socket). |

### Material data

|                                    |  |
|------------------------------------|--|
| Note (material data)               | <a href="#">Information on material specifications can be found here</a> |
| Color                              | pink   |
| Cover color                        | gray   |
| Material group                     | I  |
| Insulation material (main housing) | Polyamide (PA66)   |
| Flammability class per UL94        | V0   |
| Clamping spring material           | Chrome-nickel spring steel (CrNi)  |
| Contact material                   | Copper or copper alloy; surface-treated                                  |
| Contact Plating                    | Tin  |
| Fire load                          | 0.114 MJ   |
| Weight                             | 6.6 g  |

**Environmental requirements**

|  |  |
|--|--|
| Processing temperature                   | -5 ... +40 °C                              |
| Continuous operating temperature         | -35 ... +85 °C                             |
| Note on continuous operating temperature | Insulating parts for temperatures ≤ 105 °C |

**Commercial data**

|                       |               |
|-----------------------|---------------|
| PU (SPU)              | 100 pcs       |
| Packaging type        | Box           |
| Country of origin     | PL            |
| GTIN                  | 4050821553144 |
| Customs tariff number | 85366990990   |

**Product Classification**

|             |                      |
|-------------|----------------------|
| UNSPSC      | 39121409             |
| eCl@ss 10.0 | 27-44-06-05          |
| eCl@ss 9.0  | 27-44-06-05          |
| ETIM 9.0    | EC002560             |
| ETIM 10.0   | EC002560             |
| ECCN        | NO US CLASSIFICATION |

**Environmental Product Compliance**

|                        |                         |
|------------------------|-------------------------|
| RoHS Compliance Status | Compliant, No Exemption |
|------------------------|-------------------------|

**Approvals / Certificates**

**General approvals**



| Approval                                   | Standard | Certificate Name |
|--|----------|------------------|
| cURus<br>Underwriters Laboratories<br>Inc. | UL 1977  | E45171           |
| cURus<br>Underwriters Laboratories<br>Inc. | UL 1059  | E 45172          |

**Downloads**

**Environmental Product Compliance**

|   |                   |
|---|-------------------|
| <b>Compliance Search</b>                            |                   |
| Environmental Product Compliance<br>770-282/082-000 | <a href="#">↓</a> |

## Documentation

### Bid Text

|                 |            |                 |  |
|-----------------|------------|-----------------|--|
| 770-282/082-000 | 19.02.2019 | xml<br>2.96 KB  |  |
| 770-282/082-000 | 08.06.2015 | doc<br>24.00 KB |  |

## CAD/CAE-Data

### CAD data

2D/3D Models  
770-282/082-000



### CAE data

EPLAN Data Portal  
770-282/082-000



WSCAD Universe  
770-282/082-000



ZUKEN Portal  
770-282/082-000



## 1 Compatible Products

### 1.1 System counterpart

#### 1.1.1 Male connector/plug



[Item No.: 770-292/082-000](#)

Plug; 2-pole; Cod. B; 4,00 mm<sup>2</sup>; pink

### 1.2 Required Accessories

#### 1.2.1 Locking system

##### 1.2.1.1 Locking system



[Item No.: 770-101](#)

Locking lever; for flying leads; for manual operation; black



[Item No.: 770-121](#)

Locking lever; for flying leads; for manual operation; white



[Item No.: 770-111](#)

Locking lever; for flying leads; for tool operation; black



[Item No.: 770-131](#)

Locking lever; for flying leads; for tool operation; white

#### 1.2.2 Strain relief

##### 1.2.2.1 Strain relief housing



[Item No.: 770-502/042-000](#)

Strain relief housing; 2-pole; with locking clip; for 1 cable; 5.0 ... 9.0 mm; 35 mm; black



[Item No.: 770-512/042-000](#)

Strain relief housing; 2-pole; with locking clip; for 1 cable; 5.0 ... 9.0 mm; 35 mm; white



[Item No.: 770-502/041-000](#)

Strain relief housing; 2-pole; with locking clip; for 1 cable; 7.0 ... 10.5 mm; 35 mm; black



[Item No.: 770-512/041-000](#)

Strain relief housing; 2-pole; with locking clip; for 1 cable; 7.0 ... 10.5 mm; 35 mm; white

### 1.3 Optional Accessories

#### 1.3.1 Cover

##### 1.3.1.1 Cover



**Item No.: 770-201**

Lockout cap; 12-pole, separable; for sockets; Plastic; black



**Item No.: 770-221**

Lockout cap; 12-pole, separable; for sockets; Plastic; white



**Item No.: 897-2003**

Protective cap; Type2; for sockets and plugs; PVC; red

#### 1.3.2 Installation

##### 1.3.2.1 Mounting accessories



**Item No.: 897-2100**

Mounting plate; for Snap-in; Plastic; for detectors and sensors ; Ø 200 mm; red



**Item No.: 770-317**

Snap-in frame; 2-pole; 1.0 ... 3.0 mm; black



**Item No.: 770-337**

Snap-in frame; 2-pole; 1.0 ... 3.0 mm; white

#### 1.3.3 Tool

##### 1.3.3.1 Operating tool



**Item No.: 770-382**

Operating tool; 2-way; green




**Item No.: 210-719**


Operating tool; Blade: 2.5 x 0.4 mm; with a partially insulated shaft

### Installation Notes

#### Conductor termination



1. Strip length, outer insulation = 35 mm (2-pole), 55 mm (3- to 5-pole)
2. Strip length = 9 mm
3. Extended ground conductor = 8 mm



To terminate fine-stranded conductors, open the clamping unit via screwdriver (2.5 mm blade width) and insert a stripped conductor until it hits the backstop.




Insert the stripped solid conductor until it hits the backstop.




To terminate fine-stranded conductors, open the clamping unit via screwdriver (2.5 mm blade width) and insert a stripped conductor until it hits the backstop.

#### Conductor removal



To remove the conductor, actuate the clamp via screwdriver (2.5 mm blade width) and pull out the conductor.

### Installation



We recommend pulling the pre-latched strain relief housing over the cable prior to termination. However, the strain relief can be mounted at a later time as well.

Latch the strain relief housing onto the plug/socket. Note the "TOP" inscription.

Prepare strain relief housing by snapping together upper and bottom part.

Tighten strain relief screw with screwdriver (2.5 mm blade width).


### Coding



Simply cut off the coding pin from the socket.

Insert coding pin into plug (break first) until it engages.

### Mismatching protection



B-coded connectors with different colors can be plugged together.

Important note:  
Different colors and/or pole markings are used for circuit identification.  
Only connectors of the same color and same pole marking must be plugged together.

B-coded connectors (shown in gray) not only differ in color, but also in their design, making them incompatible with other coded connectors.

Easy circuit identification via different marking and colors