


## Data Sheet | Item Number: 770-213/035-000

Plug; with strain relief housing; 3-pole; Cod. A; 4,00 mm<sup>2</sup>; black


<https://www.wago.com/770-213/035-000>



Color: ■ black

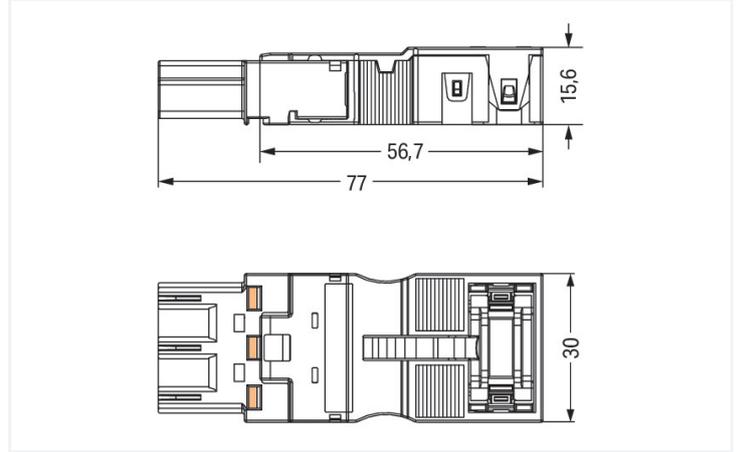

Dimensions in mm

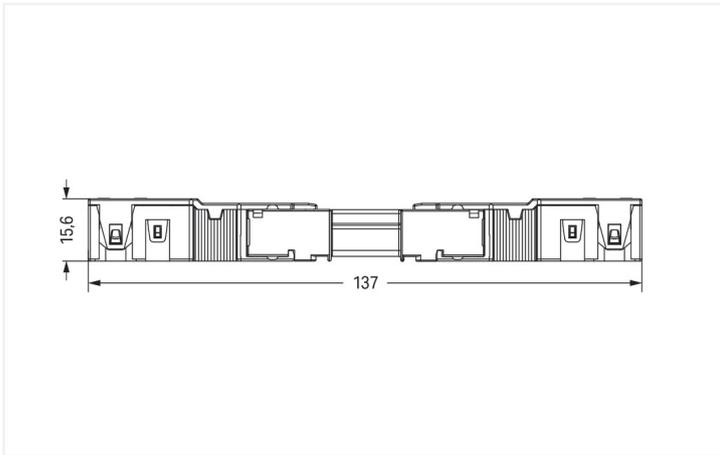

Dimensions in mm  
Overall length when mated

### Male connector/plug WINSTA® MIDI A coding

The WINSTA® MIDI male connector/plug with protection type IP2XD supports rapid, correct installation. WAGO pluggable installation connectors are useful when specifications repeat or are distributed on a specified pattern, for example for installing grid lighting or flush-mount lighting. The coding options reduce installation errors, allowing fast, secure wiring of all components. Thanks to the color coding and mechanical A coding of WINSTA® MIDI pluggable installation connectors, you can clearly distinguish different circuits. This pluggable installation connector can be used for a current load of up to 25 A. Therefore, it can also be used for high power loads. WINSTA® MIDI with Push-in CAGE CLAMP® spring pressure connection technology is used in can be found in a variety of projects you can use for quick, easy, secure, tailored installation. The strip length is 48 mm.

WINSTA® MIDI solutions for your electrical installation – protected against mismatching and maintenance-free

The WINSTA® Pluggable Connection System is perfectly tailored to the very strict requirements of building installation. It makes electrical installation pluggable, and thus faster, even more reliable, and error-free. Use of this pre-assembled system reduces assembly times and installation errors at the construction site. Take advantage of the pluggable version of our maintenance-free spring pressure connection technology too! Plan your installation with with protection type IP2XD from WAGO.

- pluggable installation connectors with protection against mismatching
- for automation controllers
- with A coding for a large number of uses
- exact dimensions
- fast, secure installation

## This item includes:



Item No.: 770-213

1

Item No.: 770-503/035-000

1

Plug; 3-pole; Cod. A; black

Strain relief housing; 3-pole; with locking clip; for 1 cable; 7.0 ... 11.5 mm; 48 mm; black

## Notes

General safety information

**NOTICE: Observe installation and safety instructions!**

- Nur von Elektrofachkraft oder einer für die Tätigkeit elektrisch unterwiesenen Person (EUP nach DIN VDE 0105-100) anzuwenden!
- Nicht unter Spannung/Last installieren!
- Nur für bestimmungsgemäßen Gebrauch einsetzen!
- Nationale Vorschriften/Normen/Richtlinien beachten!
- Technische Daten der Produkte beachten!
- Auf die richtige Polbelegung achten!
- Keine beschädigten/verschmutzten Komponenten verwenden!
- Leiterarten, -querschnitte, Abisolierlängen und Leitungsdurchmesser beachten!
- Leiter bis zum Anschlag einführen!
- Nur mit Verriegelungsklinke und Zugentlastung verwenden!
- Originalzubehör verwenden!

**To be sold only with installation instructions!**

## Electrical data

Ratings per	IEC/EN 60664-1		
	III	III	II
Overtoltage category	III	III	II
Pollution degree	3	2	2
Nominal voltage	250 V	-	-
Rated impulse withstand voltage	4 kV	-	-
Rated current	25 A	-	-

## Approvals per

## UL 1977

Rated voltage	600 V
Rated current	23 A

## General information

Note on contact resistance	approx. 1 mΩ of contact resistance approx. 0.25 mΩ contact transition plug/ socket
----------------------------	--

## Connection Data

Clamping units	6
Total number of potentials	3
PE function	Preceding PE contact

## Connection 1

Connection technology	Push-in CAGE CLAMP®
Actuation type	Operating tool Push-in
Nominal cross-section	4 mm <sup>2</sup> / 12 AWG
Solid conductor	0.5 ... 4 mm <sup>2</sup> / 20 ... 12 AWG
Solid conductor; push-in termination	1.5 ... 4 mm <sup>2</sup> / 16 ... 12 AWG
Stranded conductor	0.5 ... 2.5 mm <sup>2</sup> / 20 ... 14 AWG
Fine-stranded conductor	0.5 ... 4 mm <sup>2</sup> / 20 ... 12 AWG
Fine-stranded conductor; with insulated ferrule	0.25 ... 1.5 mm <sup>2</sup> / 20 ... 16 AWG
Fine-stranded conductor; with uninsulated ferrule	0.25 ... 2.5 mm <sup>2</sup> / 20 ... 14 AWG
Fine-stranded conductor; with ferrule; push-in termination	1.5 mm <sup>2</sup> / 16 AWG
Strip length	9 mm / 0.35 inches
Pole number	3
Connectable sheathed cable diameter	7 ... 11.5 mm

### Connection 1

Conductor entry direction to mating direction 0°

Strip length (outer insulation) 48 mm

### Physical data

Pin spacing	10 mm / 0.394 inches
Width	30 mm / 1.181 inches
Height	15.6 mm / 0.614 inches
Depth	77 mm / 3.031 inches

### Mechanical data

Use	General mains applications
Coding	A
Variable coding	Yes
Marking	N ⊕ L
Potential marking	N ⊕ L
Mating force of a plug-in connection	approx. 20 ... 70 N (depending on pole number)
Retention force of a plug-in connection	Locked: > 80 N
Unmating force of a plug-in connection	Unlocked: approx. 20 ... 70 N (depending on pole number)
Number of mating cycles	200, without resistive load
Protection type	IP2XD; When mated and secured with a strain relief housing: IP2xC (These compact connectors are not designed for use in open, easily accessible areas!)
Suitable	for quick assembly

### Plug-in connection

Contact type (pluggable connector)	Male connector/plug
Connector (connection type)	for conductor
Mismating protection	Yes
Note on mismating protection	All WINSTA® components are 100% protected against mismating when: a.) plugging different numbers of poles b.) plugging while rotated 180° c.) plugging while laterally staggered d.) plugging one pole
Locking lever	Can be retrofitted
Locking of plug-in connection	Locking lever
Note on locking system	All connectors for mounted installations (snap-in versions for lighting fixtures or devices, all types of PCB and distribution connectors) are factory-equipped with locking levers to ensure plugs and sockets are securely locked. Additional locking levers are only required for flying leads (plug/socket).
Strain relief	Strain relief house, for quick assembly

### Material data

Note (material data)	<a href="#">Information on material specifications can be found here</a>
Color	black
Cover color	gray
Material group	I
Insulation material (main housing)	Polyamide (PA66)
Flammability class per UL94	V0
Clamping spring material	Chrome-nickel spring steel (CrNi)
Contact material	Copper or copper alloy; surface-treated
Contact Plating	Tin
Fire load	0.446 MJ
Connector color	black
Strain relief color	black
Weight	18.1 g

**Environmental requirements**

Processing temperature	-5 ... +40 °C
Continuous operating temperature	-35 ... +85 °C
Note on continuous operating temperature	Insulating parts for temperatures ≤ 105 °C

**Commercial data**

PU (SPU)	25 pcs
Packaging type	Box
Country of origin	DE
GTIN	4055143209151
Customs tariff number	85366990990

**Product Classification**

UNSPSC	39121402
eCl@ss 10.0	27-44-06-05
eCl@ss 9.0	27-44-06-05
ETIM 9.0	EC002560
ETIM 10.0	EC002560
ECCN	NO US CLASSIFICATION

**Environmental Product Compliance**

RoHS Compliance Status	Compliant, No Exemption
------------------------	-------------------------

**Approvals / Certificates**

<b>General approvals</b>	<b>Approvals for marine applications</b>
--------------------------	--



Approval	Standard	Certificate Name	Approval	Standard	Certificate Name
cURus Underwriters Laboratories Inc.	UL 1059	E 45172	LR Lloyds Register	IEC 61984	LR22429487TA

**Downloads**

**Environmental Product Compliance**

<b>Compliance Search</b>
Environmental Product Compliance 770-213/035-000



Documentation

Bid Text			
770-213/035-000	19.02.2019	xml 3.06 KB	<a href="#">↓</a>
770-213/035-000	08.06.2015	doc 23.50 KB	<a href="#">↓</a>
ausschreiben.de 770-213/035-000			<a href="#">↓</a>

CAD/CAE-Data

CAD data	
2D/3D Models 770-213/035-000	<a href="#">↓</a>

1 Compatible Products

1.1 System counterpart

1.1.1 Cable assembly



**Item No.: 771-9993/106-101**  
pre-assembled connecting cable; Eca; Socket/open-ended; 3-pole; Cod. A; H05VV-F 3G 1.5 mm<sup>2</sup>; 1 m; 1,50 mm<sup>2</sup>; black

**Item No.: 771-9993/006-101**  
pre-assembled interconnecting cable; Eca; Socket/plug; 3-pole; Cod. A; H05VV-F 3G 1.5 mm<sup>2</sup>; 1 m; 1,50 mm<sup>2</sup>; black

1.1.2 Distribution box



**Item No.: 899-631/181-000**  
Distribution box; 230 V + DALI; 2 inputs; 6 outputs; Cod. A, I; MINI, MIDI; black



**Item No.: 899-631/405-000**  
Distribution box; 230 V + SMI; 2 inputs; 6 outputs; Cod. A, B; MINI, MIDI; black



**Item No.: 899-631/315-000**  
Distribution box; Cable and device protection; 1 input; 4 outputs; Cod. A; MIDI; black



**Item No.: 899-631/305-000**  
Distribution box; Crossover switching; 1 input; 5 outputs; Cod. A, B, S; MIDI; black



**Item No.: 899-631/309-000**  
Distribution box; Motion/presence detector; 1 input; 3 outputs; Cod. A, S; MIDI; black



**Item No.: 899-631/180-000**  
Distribution box; Motion/presence detector; 1 input; 5 outputs; Cod. A; MIDI; black



**Item No.: 899-631/386-000**  
Distribution box; Series switching; 1 input; 7 outputs; Cod. A, S; MIDI; black



**Item No.: 899-631/334-000**  
Distribution box; Single-phase current (230 V); 1 input; 13 outputs; Cod. A; MIDI; black



**Item No.: 899-631/476-000**  
Distribution box; Single-phase current (230 V); 1 input; 4 outputs; Cod. A; MIDI; black



**Item No.: 899-631/104-000**  
Distribution box; Single-phase current (230 V); 1 input; 7 outputs; Cod. A; MIDI; black



**Item No.: 899-631/311-000**  
Distribution box; Single-phase current (230 V); 2 inputs; 6 outputs; Cod. A, P; MIDI; black



**Item No.: 899-631/327-000**  
Distribution box; Single-phase current (230 V); 2 inputs; 6 outputs; Cod. A; MIDI; black



**Item No.: 899-631/363-000**  
Distribution box; Single-pole switch circuit; 1 input; 5 outputs; Cod. A, S; MIDI; black



**Item No.: 899-631/450-000**  
Distribution box; supply cable entry; 6 outputs; Cod. A; MIDI; black



**Item No.: 899-632/101-000**  
Distribution box; Surge switch circuit; 1 input; 4 outputs; Cod. A, S; MIDI; black



**Item No.: 899-632/138-000**  
Distribution box; Surge switch circuit; 1 input; 4 outputs; Cod. A, S; MIDI; black



**Item No.: 899-631/346-000**  
Distribution box; Three-phase to single-phase current (400 V/230 V); 1 input; 4 outputs; Cod. A; MIDI; black



**Item No.: 899-631/149-000**  
Distribution box; Three-phase to single-phase current (400 V/230 V); 1 input; 6 outputs; Cod. A; MIDI, MAXI; black



**Item No.: 899-631/105-000**  
Distribution box; Three-phase to single-phase current (400 V/230 V); 1 input; 6 outputs; Cod. A; MIDI; black



**Item No.: 899-631/100-000**  
Distribution box; Three-phase to single-phase current (400 V/230 V); 1 input; 7 outputs; Cod. A; MIDI; black

1.1.2 Distribution box



**Item No.: 899-631/302-000**  
Distribution box; Three-phase to single-phase current (400 V/230 V); 2 inputs; 6 outputs; Cod. A, P; MIDI; black

**Item No.: 899-631/338-000**  
Distribution box; Three-phase to single-phase current (400 V/230 V); supply cable entry; 1 input; 6 outputs; Cod. A; MIDI; black

**Item No.: 899-631/308-000**  
Distribution box; Two-way circuit; 1 input; 5 outputs; Cod. A, S; MIDI; black

**Item No.: 899-631/189-000**  
Distribution box; Two-way circuit; 1 input; 7 outputs; Cod. A, S; MIDI; black

1.1.3 Distribution connector



**Item No.: 770-607**  
3-way distribution connector; 3-pole; Cod. A; 1 input; 3 outputs; black

**Item No.: 770-608**  
5-way distribution connector; 3-pole; Cod. A; 1 input; 5 outputs; outputs on both sides; black

**Item No.: 770-638**  
Distribution connector for switches; Single-pole and throttle two-way circuit; 3-pole; Cod. A/S; 1 input; 5 outputs; black

**Item No.: 770-637**  
Distribution connector for switches; Single-pole switch and series circuit; 3-pole; Cod. A/S; 1 input; 5 outputs; black



**Item No.: 770-633**  
h-distribution connector; 3-pole; Cod. A; 1 input; 2 outputs; 2 locking levers; black

**Item No.: 770-635**  
h-distribution connector; 3-pole; Cod. A; 1 input; 2 outputs; outputs on both sides; 3 locking levers; for flying leads; black

**Item No.: 770-634**  
h-distribution connector; 3-pole; Cod. A; 1 input; 2 outputs; outputs on one side; 2 locking levers; black

**Item No.: 770-636**  
h-distribution connector; 3-pole; Cod. A; 1 input; 2 outputs; outputs on one side; 3 locking levers; for flying leads; black



**Item No.: 770-611**



**Item No.: 770-606**  
T-distribution connector; 3-pole; Cod. A; 1 input; 2 outputs; 2 locking levers; black

**Item No.: 770-615**  
T-distribution connector; 3-pole; Cod. A; 1 input; 2 outputs; 3 locking levers; for flying leads; black

**Item No.: 770-611**  
Three-phase to single-phase distribution connector; with phase selection; 5-pole/3-pole; Cod. A; 1 input; 2 outputs; with cable connection on the input side; black

**Item No.: 770-612**  
Three-phase to single-phase distribution connector; with phase selection; 5-pole/3-pole; Cod. A; 1 input; 2 outputs; with cable connection on the input side; black



**Item No.: 770-640**  
Three-phase to single-phase distribution connector; with phase selection; 5-pole/3-pole; Cod. A; 1 input; 5 outputs; black

1.1.4 Female connector/socket



**Item No.: 770-703**  
Snap-in socket; 3-pole; Cod. A; black

**Item No.: 770-703/009-000**  
Snap-in socket; with protruding mating face; 3-pole; Cod. A; black

**Item No.: 770-803/011-000**  
Socket for PCBs; angled; 3-pole; Cod. A; black

**Item No.: 770-803**  
Socket for PCBs; straight; 3-pole; Cod. A; black



**Item No.: 770-203**  
Socket; 3-pole; Cod. A; black

**Item No.: 770-103**  
Socket; with strain relief housing; 3-pole; Cod. A; 4,00 mm<sup>2</sup>; black

**Item No.: 770-203/035-000**  
Socket; with strain relief housing; 3-pole; Cod. A; 4,00 mm<sup>2</sup>; black

1.1.5 Tap-off module



**Item No.: 772-263**  
Tap-off module; for flat cable; 5 x 2.5 mm<sup>2</sup> + 2 x 1.5 mm<sup>2</sup>; 3-pole; Cod. A; with cable connection on the output side; black

## 1.2 Required Accessories

### 1.2.1 Locking system

#### 1.2.1.1 Locking system



[Item No.: 770-101](#)

Locking lever; for flying leads; for manual operation; black

[Item No.: 770-121](#)

Locking lever; for flying leads; for manual operation; white

[Item No.: 770-111](#)

Locking lever; for flying leads; for tool operation; black

[Item No.: 770-131](#)

Locking lever; for flying leads; for tool operation; white

## 1.3 Optional Accessories

### 1.3.1 Coding

#### 1.3.1.1 Coding



[Item No.: 770-401](#)

Coding pin; for plugs; Plastic; gray

### 1.3.2 Cover

#### 1.3.2.1 Cover



[Item No.: 770-360](#)

Lockout cap; for plugs; 5-pole; separable; yellow

### 1.3.3 Marking

#### 1.3.3.1 Marker



[Item No.: 770-450/000-006](#)

Marker card; Plastic; blue

[Item No.: 770-450/000-001](#)

Marker card; Plastic; green

[Item No.: 770-450/000-012](#)

Marker card; Plastic; orange

[Item No.: 770-450/000-005](#)

Marker card; Plastic; red



[Item No.: 770-450](#)

Marker card; Plastic; white

[Item No.: 770-450/000-002](#)

Marker card; Plastic; yellow

### 1.3.4 Shield termination

#### 1.3.4.1 Shield termination



[Item No.: 770-523](#)

Shield connecting plate; 3-pole; for sockets and plugs; silver-colored

### 1.3.5 Tool

#### 1.3.5.1 Operating tool



Item No.: 770-383

Operating tool; 3-way; green

Item No.: 210-719

Operating tool; Blade: 2.5 x 0.4 mm; with a partially insulated shaft

### Installation Notes

#### Conductor termination



1. Strip length, outer insulation = 35 mm (2-pole), 55 mm (3- to 5-pole)
2. Strip length = 9 mm
3. Extended ground conductor = 8 mm



To terminate fine-stranded conductors, open the clamping unit via screwdriver (2.5 mm blade width) and insert a stripped conductor until it hits the backstop.




Insert the stripped solid conductor until it hits the backstop.



To terminate fine-stranded conductors, open the clamping unit via screwdriver (2.5 mm blade width) and insert a stripped conductor until it hits the backstop.

#### Conductor removal



To remove the conductor, actuate the clamp via screwdriver (2.5 mm blade width) and pull out the conductor.

#### Coding



Simply cut off the coding pin from the socket.



Insert coding pin into plug (break first) until it engages.

#### Shield termination



Connector with shield termination



Apply the shield to the sheathed cable.  
Strip length, outer insulation = 55 mm  
Shield length = 10 mm



Push the shield connecting plate into the connector until fully inserted.



First insert the wired connector into a strain relief housing, then snap cover and tighten screw.

Subject to changes. Please also observe the further product documentation!

---

Current addresses can be found at: [www.wago.com](http://www.wago.com)