



Features

• OPTIX RECESSED 1200x300 2L 4000K C9 ALU EM is a high efficacy low glare luminaire for office and education applications with excellent colour rendering. Ceiling recessed 1200x300 mm. Aluminised plastic extra low glare optics in 2 lines configuration. White RAL9016 fixture body. Constant current driver. 3hr combined maintained emergency version. 4000K Neutral White LED, CRI>90, chromaticity tolerance of 3-step MacAdam ellipse. Luminous flux 3500lm. Power consumption 28W. Luminaire efficacy 125lm/W. Lifespan: 48,500 hours L90B10. UGR<16, Luminance at 65°<200 Cd/m2, IK07, IP20. Photobiological safety risk group 0. Electrical protection Class I. Glow wire test 850°C.


Product Overview

Product name	OPTIX RECESSED 1200x300 2L 4000K C9 ALU EM
Technology	LED (3 SDCM)
Cap/Base	N/A
Housing	Steel
Mount	Ceiling recessed mounting
Fixture rating	Enclosed
Fixture luminous flux (lm)	3500
Luminaire efficacy (lm/W)	125
Colour temperature (K)	4000
Light colour	Neutral White
CRI (Ra)	90
Colour Variation Initial (SDCM)	3
Glare control	< 16
Photobiological Risk Group	RG0
Luminous flux (emergency) (lm)	80
Total power consumption (W)	28


OPTIX RECESSED 1200x300 2L 4000K C9 ALU EM
2023672

Electrical protection	Class I
Control gear type	LED driver constant current
LED Flickering Rate	Ultra low (5% or less)
Housing colour	RAL 9016 - Traffic white / Bezel
IP rating	IP20
IK rating	IK07
Product EAN number	5025768236725
Warranty	5 years

Photometry

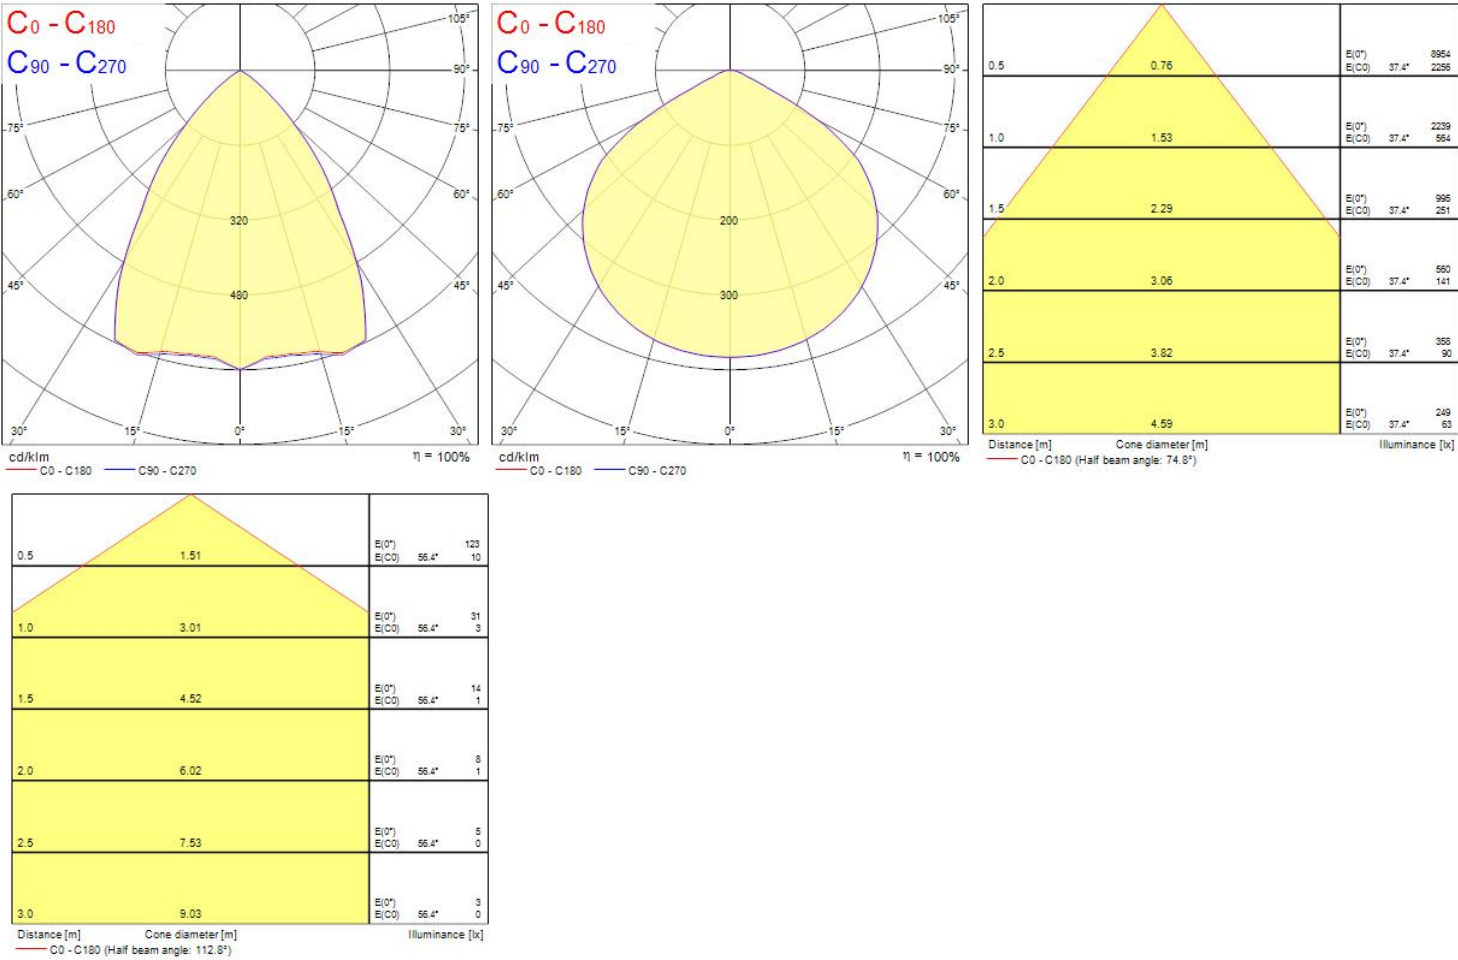

Technical drawings

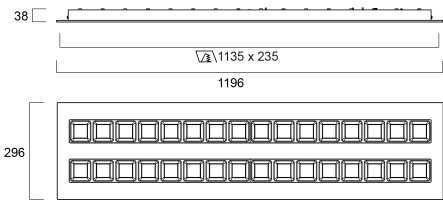

Data table

GENERAL DATA

Product name	OPTIX RECESSED 1200x300 2L 4000K C9 ALU EM
Technology	LED (3 SDCM)
Cap/Base	N/A
Housing	Steel
Mount	Ceiling recessed mounting
Fixture rating	Enclosed
Operating temperature range (°C)	10°C...+25°C
Performance ambient temperature Tq (°C)	25
Warranty	5 years

OPTICAL DATA

Fixture luminous flux (lm)	3500
Luminaire efficacy (lm/W)	125
Colour temperature (K)	4000
Light colour	Neutral White
CRI (Ra)	90
Colour Variation Initial (SDCM)	3
Glare control	< 16
Photobiological Risk Group	RG0

OPTIX RECESSED 1200x300 2L 4000K C9 ALU EM 2023672

Luminous flux (emergency) (lm)	80
Emergency duration (h)	3

ELECTRICAL DATA

Total power consumption (W)	28
Primary Supply/Product voltage - min (V)	198.0
Lamp power factor	0.95
Electrical protection	Class I
Control gear required	No
Control gear type	LED driver constant current
Drive current (mA)	550
Inrush Current (A)	25
Inrush Duration (µs)	250
Glow Wire Test (°C)	850
Energy Efficiency Class (A->G) of contained light source	D
Nominal Frequency (Hz)	50/60Hz
LED Flickering Rate	Ultra low (5% or less)
Max. products per 10A C Breaker	20
Max. products per 20A B Breaker	24
Connectable conductor cross section - Min (mm²)	2.5
Connectable conductor cross section - Max (mm²)	2.5

LIFETIME DATA

Lifespan L70 B50	120000
Lifespan L80 B20	107500
Lifespan L90 B10	48500

PHYSICAL DATA

Housing colour	RAL 9016 - Traffic white / Bezel
IP rating	IP20
IK rating	IK07

Concord

OPTIX RECESSED 1200x300 2L 4000K C9 ALU EM 2023672

Diffuser finish	Matt/satinized
Diffuser material	PC Polycarbonate
Nominal Product Length (mm)	1196
Nominal Product Width (mm)	296
Weight (kg)	5.25

PACKAGING

Single packaging type	Carton
Product EAN number	5025768236725
Packaging single width (cm)	6.5
Packaging single depth (cm)	32.0
DUN14 (outer)	05025768236725
Packaging outer length / height (cm)	124.5

SAFETY DATA

Optimal operating condition (°C)	10-25
Special purpose lamp	No
Dry applications use only	No
Suitable for household illumination	No