



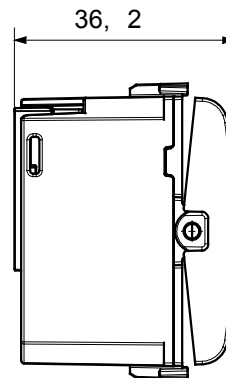

The 4-channel KNX pushbutton panel is a flush-mounted device designed to control functions on KNX systems. Each channel can be configured individually or in combination for functions such as on/off, dimming, shutter control, scene management, priority and timed commands. It is compatible with 1- or 2-module pushbuttons, tilt or fixed. One rocker button allows control of two channels, which can be configured independently or combined. Each channel has a built-in RGB LED for nighttime localization and status indication of the controlled load. The module can be installed in standard flush-mounting boxes and mounts in Chorus series holders, occupying the space of two modules.

Communicatie	KNX	Aant. DIN- modules	2
Voeding	Via KNX BUS, 29 V DC SELV	Interfaces	KNX TP1
Door KNX bus geabsorbeerde stroom (mA)	Max 7 mA	Aant. uitgangs kanalen	4
Verbinding met de KNX bus	KNX busklem	Bedrijfs temperatuur	-5 ÷ +45 °C
Opslagtemperatuur	-25 ÷ +55 °C	IP waarde	IP20
Standaard	Richtlijn laagspanning 2014/35/EU Richtlijn elektromagnetische compatibiliteit 2014/30/EU, EN 50491, EN 60669-2-5	Kleur	Glanzend wit

DIMENSIONAL

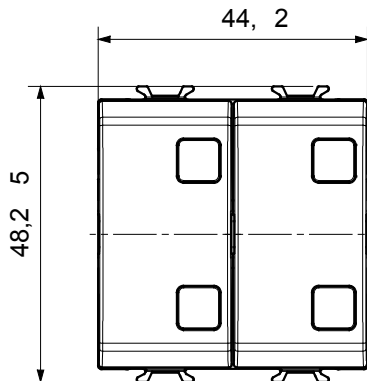

TECHNICAL SYMBOLOGY

IP

IP20

STANDARDS/APPROVALS

