





The 4 channel KNX contact interface allows you to connect up to 4 input contacts, which are without voltage and independent (buttons, switches, sensors etc.), and send the relative commands to actuator devices using the KNX bus. The interface is powered by the bus line. The voltage (SELV) required to scan the contacts is supplied by the same interface. The device is fitted with 4 outputs to connect any low-consumption indicator LEDs (e.g. GW 10 886, GW 10 887, GW 10 888, GW 10 889, GW 10 890) which are used to indicate the status of the commanded charge.

Categorie	AAN / UIT	Communicatie	KNX
Aant. DIN- modules	4	Voeding	Via KNX BUS, 29 V DC SELV
Voeding voltage	230 V ac - 50/60 Hz	Interfaces	KNX TP1
Door KNX bus geabsorbeerde stroom (mA)	Max. 9 mA	Max. kabellengte	10 m
Aant. invoer kanalen	4	Inputs	Per contatti privi di potenziale ed indipendenti
Aant. uitgangs kanalen	4	Outputs for LED	Tensione: 3,3 V dc - Corrente max: 1 mA
Verbinding met de KNX bus	KNX busklem	Bedrijfs temperatuur	-5 ÷ +45 °C
Opslagtemperatuur	-25 +70 °C	IP waarde	IP20
Relatieve vochtigheid (niet-condenserend)	Max. 93%	Standaard	Low Voltage Directive 2014/35/EU - Electromagnetic Compatibility Directive 2014/30/ EU - EN50428, EN50090-2-2

DIMENSIONAL

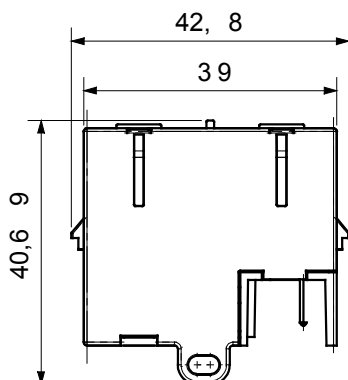

TECHNICAL SYMBOLOGY

IP

IP20

STANDARDS/APPROVALS

