


## Walraven BISMAT® 2000 (M8/10) 2-screw

(A0524)

for steel, copper, cast iron and plastic (multilayer) pipe

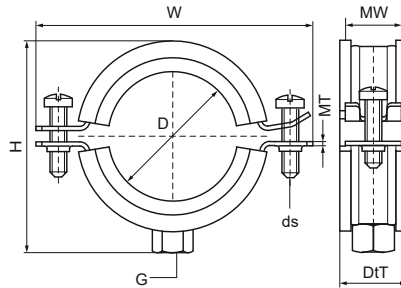

### Features & benefits

- two-screw clamp
- with Walraven BISMAT® quick locking system
- material: steel
- zinc plated
- sound insulating lining according DIN 4109
- noise reduction according to ISO 3822-1 up to 23 dB(A)
- tested for fire safety



EPD

| Product Number   | Outside Pipe Diameter | DN     | Pipe Diameter Imperial | Connection Thread | Total Height | Total Width | Total Depth | Material Width | Material Thickness | Screw Size | Maximum Allowed Load Faz | Approvals                                                     |
|------------------|-----------------------|--------|------------------------|-------------------|--------------|-------------|-------------|----------------|--------------------|------------|--------------------------|---------------------------------------------------------------|
| Reference Letter | D                     | D      | D                      | G                 | H            | W           | DtT         | MW             | MT                 | ds         | F <sub>0,z</sub>         |                                                               |
| Unit description | mm                    |        | "                      |                   | mm           | mm          | mm          | mm             | mm                 |            | N                        |                                                               |
| 3403064          | 57 - 64               | DN 50  | 2                      | M8/M10            | 92           | 107         | 29          | 23             | 2.00               | M6         | 520                      | RAL-GZ 656, ITB (KOT), CE, ETA, ISO 3822-1, RAL-GZ 655/B, EPD |
| 3403070          | 64 - 70               | -      | -                      | M8/M10            | 100          | 115         | 29          | 23             | 2.00               | M6         | 520                      | RAL-GZ 656, ITB (KOT), CE, ETA, ISO 3822-1, RAL-GZ 655/B, EPD |
| 3403080          | 73 - 80               | DN 65  | 2½                     | M8/M10            | 110          | 125         | 29          | 23             | 2.00               | M6         | 520                      | RAL-GZ 656, ITB (KOT), CE, ETA, ISO 3822-1, RAL-GZ 655/B, EPD |
| 3403091          | 83 - 91               | DN 80  | 3                      | M8/M10            | 122          | 136         | 31          | 25             | 2.50               | M6         | 935                      | RAL-GZ 656, ITB (KOT), CE, ETA, ISO 3822-1, RAL-GZ 655/B, EPD |
| 3403105          | 100 - 105             | -      | -                      | M8/M10            | 137          | 151         | 31          | 25             | 2.50               | M6         | 935                      | RAL-GZ 656, ITB (KOT), CE, ETA, ISO 3822-1, RAL-GZ 655/B, EPD |
| 3403114          | 114                   | DN 100 | 4                      | M8/M10            | 145          | 159         | 31          | 25             | 2.50               | M6         | 935                      | RAL-GZ 656, ITB (KOT), CE, ETA, ISO 3822-1, RAL-GZ 655/B, EPD |
| 3403119          | 116 - 119             | -      | -                      | M8/M10            | 150          | 164         | 31          | 25             | 2.50               | M6         | 935                      | ITB (KOT), CE, ETA, ISO 3822-1, RAL-GZ 655/B, EPD             |
| 3403125          | 122 - 125             | -      | -                      | M8/M10            | 158          | 172         | 31          | 25             | 2.50               | M6         | 935                      | ITB (KOT), CE, ETA, ISO 3822-1, RAL-GZ 655/B, EPD             |
| 3403141          | 133 - 141             | DN 125 | 5                      | M8/M10            | 172          | 187         | 31          | 25             | 2.50               | M6         | 935                      | ITB (KOT), CE, ETA, ISO 3822-1, RAL-GZ 655/B, EPD             |