

Concord

COLOSSAL 600mm 840 PRISM DIR WHITE 2071179



Features

• 600mm diameter circular architectural luminaire, can be surface mounted or suspended. Powder coated aluminium housing (RAL9016) with PMMA prismatic diffuser. Direct light distribution, 3995lm luminous flux, 31.3W system power, 128lm/W luminaire efficacy. Constant current driver. Colour rendering index Ra >80, 4000K Neutral White LED, chromaticity tolerance of 3-step MacAdam ellipse. IP40, IK03. 350mA drive current. UGR≤19. Electrical protection Class1, 220-240V. Reported lifetime 66k hours L90B10.

Product Overview

Product name	COLOSSAL 600mm 840 PRISM DIR WHITE
Technology	LED (3 SDCM)
Cap/Base	N/A
Housing	Aluminium
Mount	Ceiling surface mounting, Suspended
Fixture luminous flux (lm)	3995
Luminaire efficacy (lm/W)	128
Colour temperature (K)	4000
Light colour	Neutral White
CRI (Ra)	80
Colour Variation Initial (SDCM)	3
Glare control	< 19
Photobiological Risk Group	RG0
Total power consumption (W)	31.3
Electrical protection	Class I
Control gear type	LED driver constant current
LED Flickering Rate	Ultra low (5% or less)
Housing colour	RAL 9016 - Traffic white / Bezel
IP rating	IP40/20
IK rating	IK07
Product EAN number	5025768711796


Concord

COLOSSAL 600mm 840 PRISM DIR WHITE


2071179

Warranty	5 years
Colour Code	840

Photometry

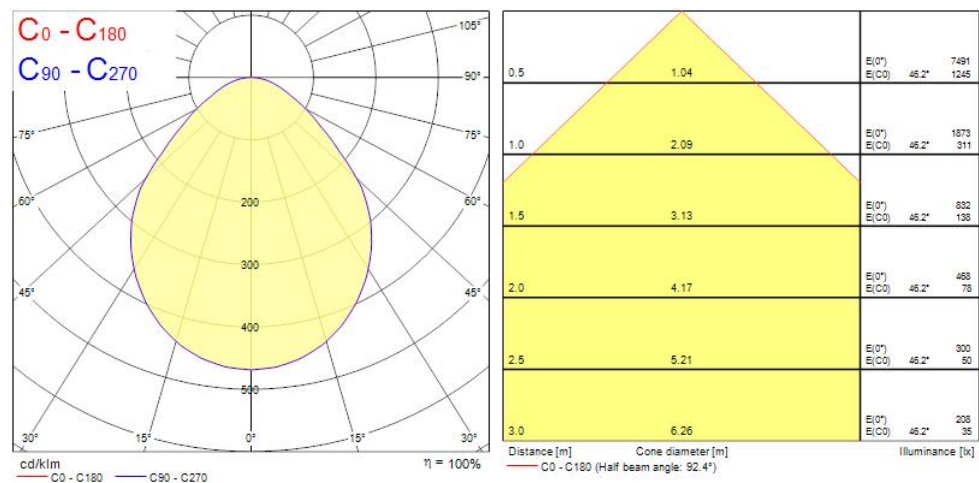

Technical drawings

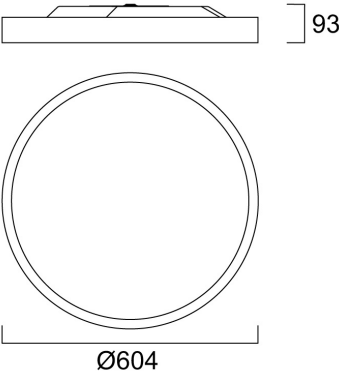

Data table

COLOSSAL 600mm 840 PRISM DIR WHITE 2071179

GENERAL DATA

Product name	COLOSSAL 600mm 840 PRISM DIR WHITE
Technology	LED (3 SDCM)
Cap/Base	N/A
Housing	Aluminium
Mount	Ceiling surface mounting, Suspended
Operating temperature range (°C)	10°C...+25°C
Warranty	5 years

OPTICAL DATA

Fixture luminous flux (lm)	3995
Luminaire efficacy (lm/W)	128
Colour temperature (K)	4000
Colour Code	840
Light colour	Neutral White
CRI (Ra)	80
Colour Variation Initial (SDCM)	3
Glare control	< 19
Photobiological Risk Group	RG0

ELECTRICAL DATA

Total power consumption (W)	31.3
Primary Supply/Product voltage - min (V)	220
Lamp power factor	0.95
Electrical protection	Class I
Control gear required	No
Control gear type	LED driver constant current
Drive current (mA)	350
Inrush Current (A)	22
Inrush Duration (µs)	250
Glow Wire Test (°C)	650
Energy Efficiency Class (A->G) of contained light source	B

COLOSSAL 600mm 840 PRISM DIR WHITE 2071179

Nominal Frequency (Hz)	50/60Hz
LED Flickering Rate	Ultra low (5% or less)
Max. products per 10A C Breaker	28
Max. products per 20A B Breaker	34
Connectable conductor cross section - Max (mm ²)	2.5

LIFETIME DATA

Lifespan L70 B50	170000
Lifespan L80 B20	145000
Lifespan L90 B10	66000

PHYSICAL DATA

Housing colour	RAL 9016 - Traffic white / Bezel
IP rating	IP40/20
IK rating	IK07
Diffuser finish	Prismatic
Diffuser material	PMMA Acrylic
Nominal Product Diameter (mm)	604
Weight (kg)	9.0

PACKAGING

Single packaging type	Carton
Product EAN number	5025768711796
Packaging single width (cm)	68.0
Packaging single depth (cm)	68.0
DUN14 (outer)	05025768711796
Packaging outer length / height (cm)	14.0

SAFETY DATA

Optimal operating condition (°C)	10-25
Special purpose lamp	No
Dry applications use only	No

Concord

COLOSSAL 600mm 840 PRISM DIR WHITE
2071179

Suitable for household illumination

No