

# Concord

## OPTIX SURFACE 1200x200 2 LINE 3000K ALU 2023700



### Features

- OPTIX SURFACE 1200x200 2 LINE 3000K ALU is a high efficacy low glare luminaire for office and education applications. Suitable for surface and suspended mounting. Size: 1129x200x45mm. Aluminised plastic extra low glare optics in 2 lines configuration. White RAL9016 fixture body. Constant current driver. 3000K Warm White LED, CRI>80, chromaticity tolerance of 3-step MacAdam ellipse. Luminous flux 3400lm. Power consumption 26W. Luminaire efficacy 131lm/W. Lifespan: 60,000 hours L90B10. UGR<16, Luminance at 65°<200 Cd/m<sup>2</sup>, IK07, IP20. Photobiological safety risk group 0. Electrical protection Class I. Glow wire test 850°C.

### Product Overview


<b>Product name</b>	OPTIX SURFACE 1200x200 2 LINE 3000K ALU
<b>Technology</b>	LED (3 SDCM)
<b>Cap/Base</b>	N/A
<b>Housing</b>	Steel
<b>Mount</b>	Ceiling surface mounting
<b>Fixture rating</b>	Enclosed
<b>Fixture luminous flux (lm)</b>	3400
<b>Luminaire efficacy (lm/W)</b>	131
<b>Colour temperature (K)</b>	3000
<b>Light colour</b>	Warm White
<b>CRI (Ra)</b>	80
<b>Colour Variation Initial (SDCM)</b>	3
<b>Glare control</b>	< 16
<b>Photobiological Risk Group</b>	RG0
<b>Total power consumption (W)</b>	26
<b>Electrical protection</b>	Class I
<b>Control gear type</b>	LED driver constant current
<b>LED Flickering Rate</b>	Ultra low (5% or less)

# Concord

## OPTIX SURFACE 1200x200 2 LINE 3000K ALU 2023700

Housing colour	RAL 9016 - Traffic white / Bezel
IP rating	IP20
IK rating	IK07
Product EAN number	5025768237005
Warranty	5 years

### Photometry

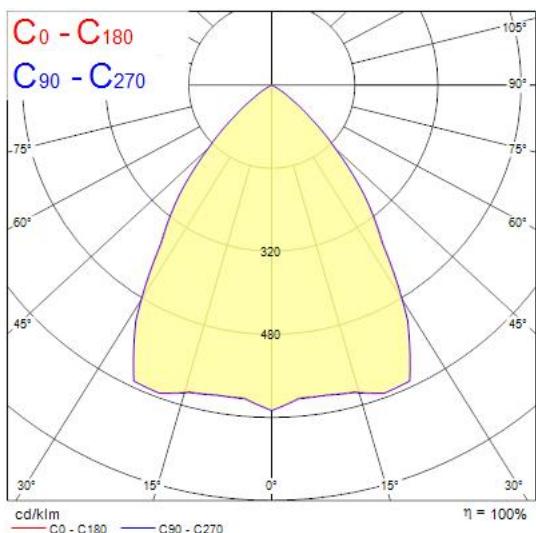

### Technical drawings

