


Optix Surface 1200 Direct Medium Output
OPTIX SURFACE 1200x200 2 LINE 3000K ALU DALI
2023701

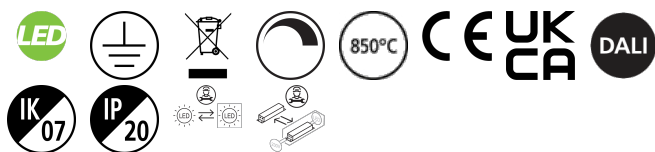

PRODUCT OVERVIEW

Product name	OPTIX SURFACE 1200x200 2 LINE 3000K ALU DALI
Technology	LED (3 SDCM)
Cap/Base	N/A
Housing	Steel
Mount	Ceiling surface mounting
Fixture rating	Enclosed
Warranty	5 years
Fixture luminous flux (lm)	3400
Luminaire efficacy (lm/W)	131
Colour temperature (K)	3000
Light colour	Warm White
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM3
Glare control	< 16
Photobiological Risk Group	RG0
Total power consumption (W)	26
Electrical protection	Class I
Control gear type	LED driver constant current
LED Flickering Rate	Ultra low (5% or less)
Housing colour	RAL 9016 - Traffic white / Bezel
IP rating	IP20
IK rating	IK07
Product EAN number	5025768237012

DATA TABLE

General data	
Product name	OPTIX SURFACE 1200x200 2 LINE 3000K ALU DALI
Technology	LED (3 SDCM)
Cap/Base	N/A
Housing	Steel
Mount	Ceiling surface mounting

Optix Surface 1200 Direct Medium Output

OPTIX SURFACE 1200x200 2 LINE 3000K ALU DALI

2023701

Fixture rating	Enclosed
Performance ambient temperature Tq (°C)	25
Warranty	5 years

Optical data

Fixture luminous flux (lm)	3400
Luminaire efficacy (lm/W)	131
Colour temperature (K)	3000
Light colour	Warm White
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM3
Glare control	< 16
Photobiological Risk Group	RG0

Electrical data

Total power consumption (W)	26
Primary Supply/Product voltage - min (V)	198.0
Lamp power factor	0.98
Electrical protection	Class I
Control gear type	LED driver constant current
Drive current (mA)	250
Inrush Current (A)	29
Inrush Duration (µs)	180
Glow Wire Test (°C)	850
Energy Efficiency Class (A->G) of contained light source	C
Nominal Frequency (Hz)	50/60Hz
LED Flickering Rate	Ultra low (5% or less)
Max. products per 10A C Breaker	21
Max. products per 20A B Breaker	27
Connectable conductor cross section - Min (mm²)	2.5
Connectable conductor cross section - Max (mm²)	2.5

Lifetime data

Lifespan L70 B50	120000
Lifespan L80 B20	120000
Lifespan L90 B10	60000

Physical data

Housing colour	RAL 9016 - Traffic white / Bezel
IP rating	IP20
IK rating	IK07
Diffuser finish	Matt/satinized
Diffuser material	PC Polycarbonate
Nominal Product Length (mm)	1129
Nominal Product Width (mm)	200
Weight (kg)	4.5


Optix Surface 1200 Direct Medium Output

OPTIX SURFACE 1200x200 2 LINE 3000K ALU DALI
2023701

Packaging

Single packaging type	Carton
Product EAN number	5025768237012
Packaging single width (cm)	22.5
Packaging single depth (cm)	6.8
DUN14 (outer)	05025768237012
Packaging outer length / height (cm)	117.0

PHOTOMETRY

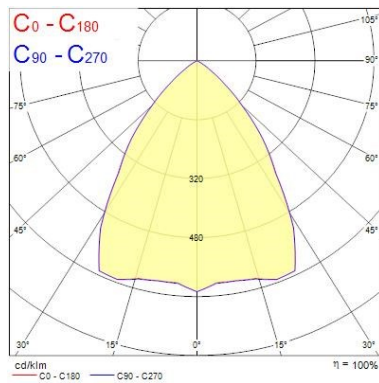

Distance [m]	Cone diameter [m]	Beam angle [°]	Beam angle [°]	Illuminance [lx]
0.5	0.78	0.78	35.0°	8524
1.0	1.56	1.56	35.0°	2131
1.5	2.34	2.34	35.0°	947
2.0	3.13	3.13	35.0°	593
2.5	3.91	3.91	35.0°	464
3.0	4.69	4.69	35.0°	387

TECHNICAL DRAWINGS

