

## START Downlight IP20 220 Surface Mounted


*START Downlight 220 2150lm 840 Surface*

0030447



### Product features

- Surface mounted LED downlight with diameter size of 220mm. Ideal replacement for 1x42W CFL downlights. The polycarbonate diffuser allows for a wider light distribution and increased spacings between luminaires. Loop in loop out connector allows for quick installation. Die-cast aluminium body, 4000K, Driver Current: 600mA, CRI80, Non-dimmable LED driver, IP20, IK07, (HxW) 94x220mm, Class 2, 220-240V. Meets TP(a) requirements.

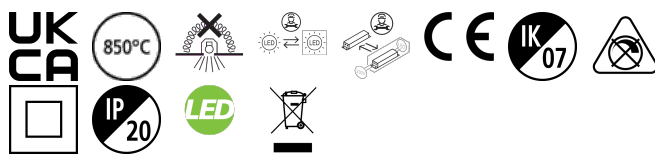

### PRODUCT OVERVIEW



Product name	START Downlight 220 2150lm 840 Surface
Technology	LED
Cap/Base	N/A
Housing	Aluminium
Mount	Ceiling surface mounting
General application	Hospitality, Logistics & Industry, Office
ETIM Class	EC001744
E-number FI	4279539
Warranty	5 years
Useful luminous flux (Fuse)	2025
Fixture luminous flux (lm)	2150
Luminous flux (lm)	2150
Luminaire efficacy (lm/W)	102
Correlated colour temperature (k)	4000
Light colour	Neutral White
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM5
Beam Angle (°)	74
Glare control	< 25
Photobiological Risk Group	RG0
Total power consumption (W)	21
Electrical protection	Class II
Control gear type	LED driver constant current
Dimmable	No
Dimming method	N/A
LED Flickering Rate	Ultra low (5% or less)
Housing colour	RAL 9003 - Signal white
IP rating	IP20
IK rating	IK07
Product EAN number	5410288304472

## START Downlight IP20 220 Surface Mounted

*START Downlight 220 2150lm 840 Surface*

0030447

### PHOTOMETRY

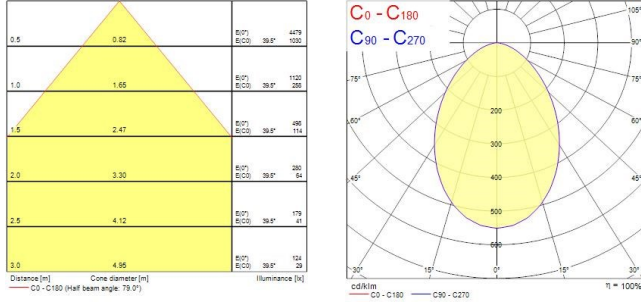

### TECHNICAL DRAWINGS

