


Industrial switch-disconnectors
Dumeco switch-disconnector ranges
QSA, Pasco and CCP2 fused switch-disconnectors



EATON

Powering Business Worldwide

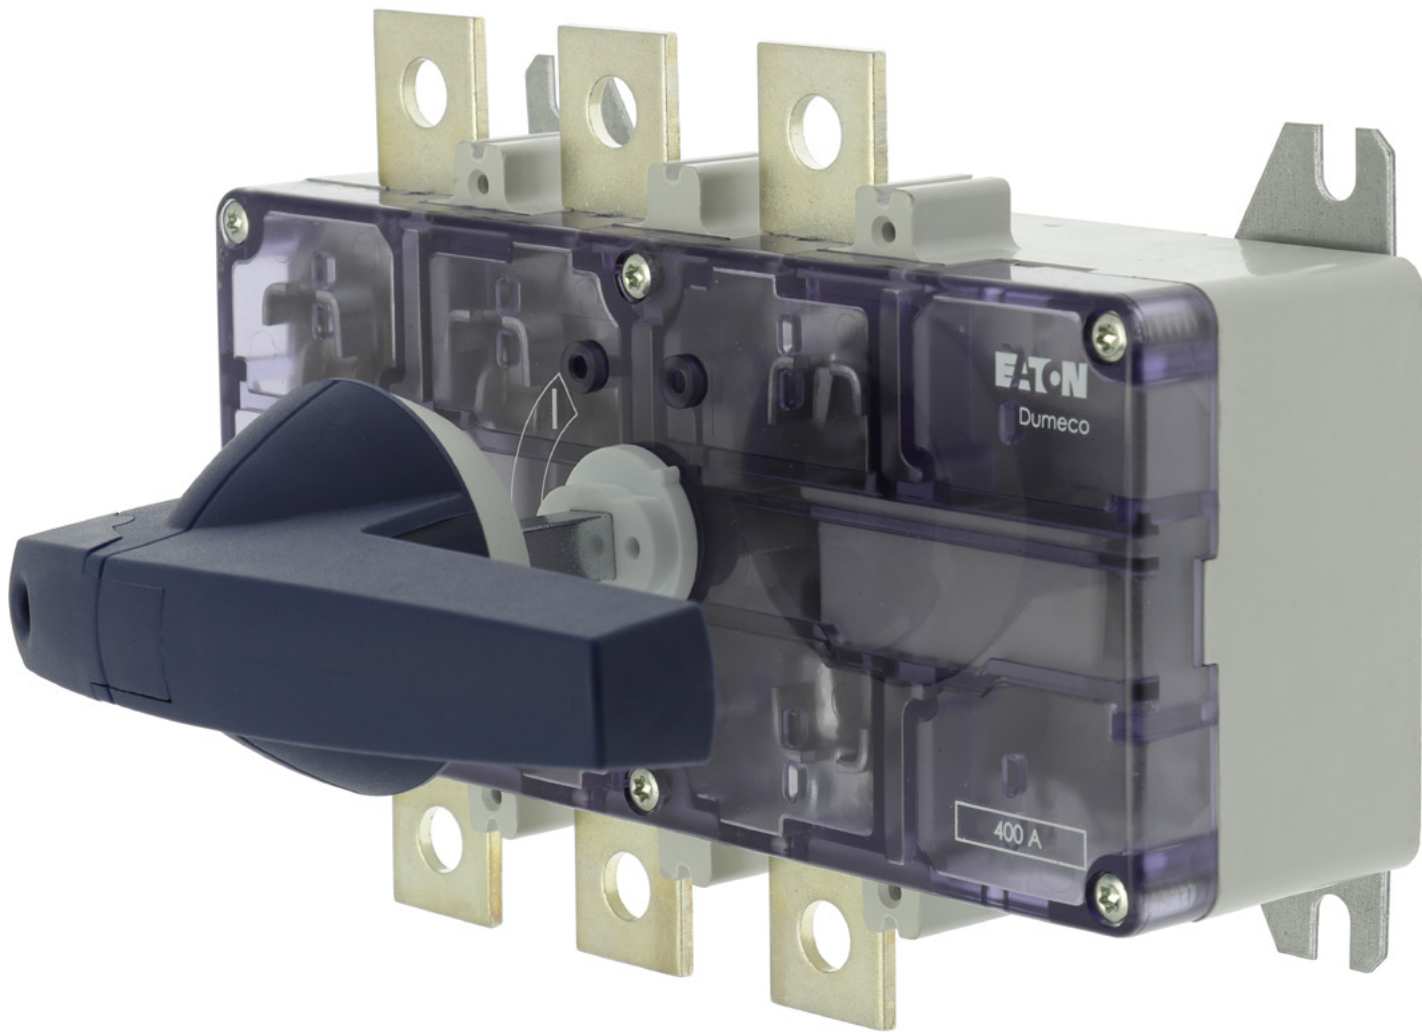

We make what matters work.*



At Eaton, we believe that power is a fundamental part of just about everything people do. That's why we're dedicated to helping our customers find new ways to manage electrical, hydraulic and mechanical power more efficiently, safely and sustainably. To improve people's lives, the communities where we live and work, and the planet our future generations depend upon. Because this is what really matters. And we're here to make sure it works.

To learn more go to: Eaton.com/whatmatters

EATON
Powering Business Worldwide

We make what matters work.

Safe switching, isolating and control

Eaton's high performance, high quality, robust Switch-disconnectors are the perfect solution for industrial switchboards and panels.

Starting from 25 A Fused switch-disconnectors right through to 3150 A Isolators, we have a wide range of products to suit a variety of industrial segment needs. In-built quality and reliability ensures the safety of both equipment and those who operate it. Eaton's switch range comes with a multitude of approvals making our products suitable for use worldwide.

Visit www.eaton.eu/switchdisconnectors for detailed product information on Eaton's switch-disconnectors (online catalogue, CAD models, data sheets and documentation).

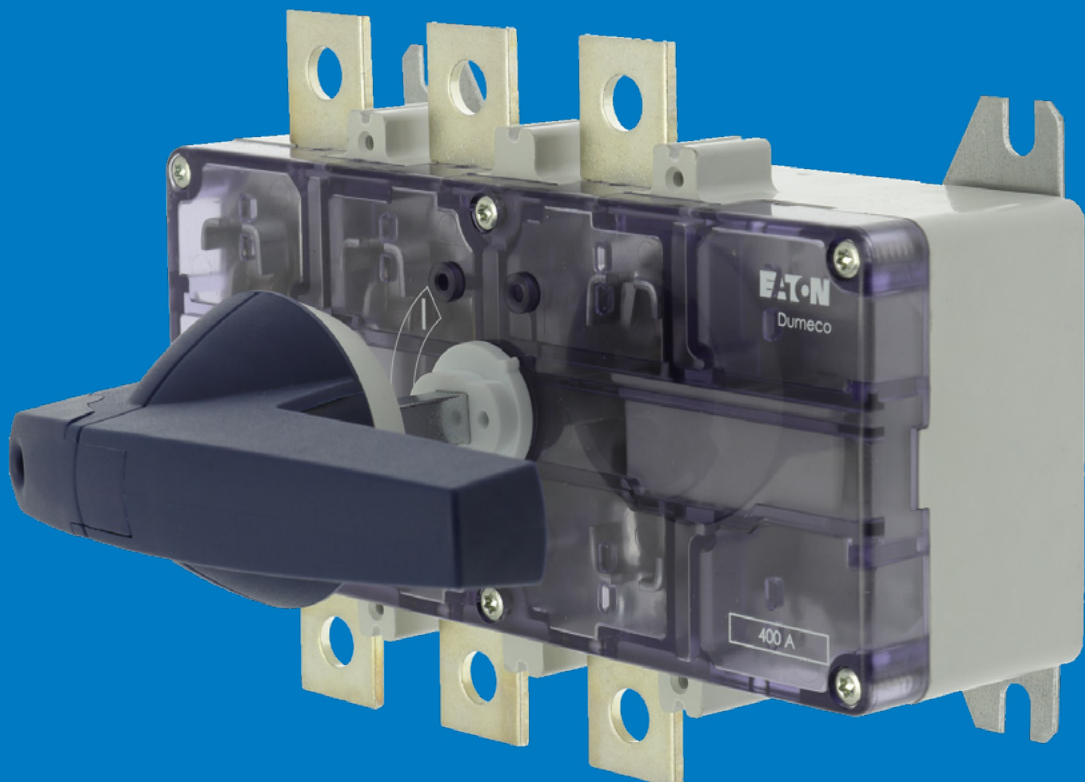



Table of contents

Switch-disconnectors, 160 A to 3150 A, 690 V a.c.	6
DMV Dumeco switch-disconnectors	6
Handles and shafts	9
Accessories	12
Technical data	13
Outline drawings	16
Switch-disconnectors, 40 A to 160 A, AC-23 A	20
DMM Dumeco switch-disconnectors	20
Handles and shafts	24
Accessories	26
Technical data	27
Outline drawings	28
Switch-disconnectors, 40 A and 63 A, AC-21 A and AC-22 A	30
DCM Duco switch-disconnectors, 40 A and 63 A, 415 V a.c.	30
Handles and shafts	32
Accessories	33
Technical data	34
Outline drawing	34
DMV Change-over mechanisms, 160 A to 2000 A, 690 V a.c.	36
DMV Change-over mechanisms, 160 A to 2000 A, 690 V a.c. for DMV switch-disconnectors	36
Handles and shafts	38
Outline drawings	40
DMV Multipole mechanisms , 160 A to 1000 A, 690 V a.c.	44
DMV Multipole mechanisms, 160 A to 1000 A, 690 V a.c.	44
Handles and shafts	45
Outline drawings	48
Change-over and multipole switches, 40 A to 100 A, 690 V a.c.	50
QM Change-over and multipole switches, 40 A to 100 A, 690 V a.c.	50
Accessories	52
Technical data	54
Outline drawings	55
Fused switch-disconnectors, 40 A to 800 A, 690 V a.c.	56
QSA Fused switch-disconnector, 40 A to 800 A, 690 V a.c.	56
QSA Fused switch-disconnector, suitable for NH DIN Fuse links, 40 A to 800 A, 690 V a.c.	57
QSA Fused switch-disconnector, suitable for British Standard industrial fuse links, 40 A to 800 A, 690 V a.c.	58
Handles and shafts	59
Accessories	62
Technical data	66
Outline drawings	70
Compatible Eaton's Bussmann series Fuse links	76

Fused switch-disconnector 25 A, 35 A and 50 A, 400 V a.c.	82
Pasco Fused switch-disconnector, 25 A, 35 A and 50 A, 400 V a.c.	82
Pasco and Paco range overview	83
Accessories	83
Compatible Eaton's Bussmann series Fuse links	84
Outline drawings	84
Technical data	85
Switch-disconnectors for DC applications, 125 A to 1250 A, 800/1000 V d.c.	86
DDC Dumeco, 125 A to 1250 A, 800/1000 V d.c.	86
Handles and shafts	88
Accessories	90
Technical data	91
Outline drawings	93
K Type handles dimensions	95
A Type handles	95
C Type handles	96
D/P handles	97
D/C Type handles	98
CCP2 Compact circuit protector Class CF disconnect switches 30 A and 60 A	100
CCP2 class CF 30 A and 60 A, up to 600 V a.c./125 V d.c.	100
Handles and shafts	103
Accessories	104
Outline drawings	106

Switch-disconnectors, 160 A to 3150 A, 690 V a.c.

DMV Dumeco switch-disconnectors

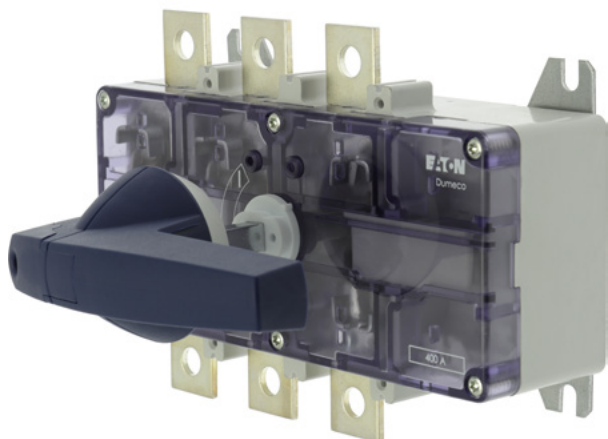

Description

The DMV Dumeco switch-disconnectors have excellent short-circuit making capacities thanks to their parallel knife contacts with double break per phase. They provide unbeatable safety protection for equipment and personnel involved in their operation and maintenance.

Standards/Approvals

- IEC 60947-3
- EAC
- KEMA-KEUR
- Lloyd's Register
- CCC up to 1250 A

Technical data

- Voltage: 690 V ac.
- Current: 160 A to 3150 A
- 3-pole, 3-pole + solid neutral and 4-pole
- Direct handle operation or with door mounted handle


Features

- Parallel knife-contacts with double-break per phase
- Visible contact separation
- Forced contact breaking within 90 degrees
- Totally enclosed compact housing, made of non-tracking, heat resistant insulations material


DMV range overview

	160 A	250 A	400 A	630 A	1000 A	1250 A	1600 A	2000 A	2500 A	3150 A
Switch-disconnectors without operating shaft and handle	✓	✓	✓	✓	✓	✓	✓	✓		
Switch-disconnectors with operating shaft and C-Type handles		✓	✓	✓	✓					
Switch-disconnectors with 400 mm shaft and red/yellow or grey handle		✓	✓							
Switch-disconnectors with 300 mm shaft and K-Line handle									✓	✓


DMV without operating shaft and handle



1814186



1814446




1814597

Current rating	Number of poles	Part number	Article number	Pack qty	Connection
160 A	3P	DMV-160N/3	1814178	1	
160 A	3P	DMV-160N/3+TC	1814175	1	With box terminal clamps
160 A	3P	DMVS-160N/3	1814186	1	With larger bolt connection terminals
160 A	3P + solid neutral	DMV-160N/1	1814177	1	
160 A	3P + solid neutral	DMV-160N/1+TC	1814174	1	With box terminal clamps
160 A	3P + solid neutral	DMVS-160N/1	1814187	1	With larger bolt connection terminals
160 A	4P	DMV-160N/4	1814179	1	
160 A	4P	DMV-160N/4+TC	1814176	1	With box terminal clamps
160 A	4P	DMVS-160N/4	1814188	1	With larger bolt connection terminals
250 A	3P	DMV-250N/3	1814408	1	
250 A	3P + solid neutral	DMV-250N/1	1814409	1	
250 A	4P	DMV-250N/4	1814410	1	
400 A	3P	DMV-400N/3	1814411	1	
400 A	3P + solid neutral	DMV-400N/1	1814412	1	
400 A	4P	DMV-400N/4	1814413	1	
630 A	3P	DMV-630N/3	1814442	1	
630 A	3P + solid neutral	DMV-630N/1	1814443	1	
630 A	4P	DMV-630N/4	1814444	1	
1000 A	3P	DMV-1000N/3	1814445	1	
1000 A	3P + solid neutral	DMV-1000N/1	1814446	1	
1000 A	4P	DMV-1000N/4	1814447	1	
1250 A	3P	DMV-1250N/3	1814590	1	
1250 A	3P + solid neutral	DMV-1250N/1	1814591	1	
1250 A	4P	DMV-1250N/4	1814592	1	
1600 A	3P	DMV-1600N/3	1814595	1	
1600 A	3P + solid neutral	DMV-1600N/1	1814596	1	
1600 A	4P	DMV-1600N/4	1814597	1	
2000 A	3P	DMV-2000N/3	1814065	1	

Switch-disconnectors, 160 A to 3150 A, 690 V a.c.

DMV Dumeco switch-disconnectors


DMV with operating shaft and knob for cover mounting, without interlock function, for example when mounted on the cover of Eaton's Halyester enclosure range



1814422

Current rating	Number of poles	Part number	Article number	Pack qty
250 A	3P	DMV-250N/3+SH	1814420	1
250 A	3P + solid neutral	DMV-250N/1+SH	1814421	1
250 A	4P	DMV-250N/4+SH	1814422	1
400 A	3P	DMV-400N/3+SH	1814423	1
400 A	3P + solid neutral	DMV-400N/1+SH	1814424	1
400 A	4P	DMV-400N/4+SH	1814425	1
630 A	3P	DMV-630N/3+SH	1814448	1
630 A	3P + solid neutral	DMV-630N/1+SH	1814449	1
630 A	4P	DMV-630N/4+SH	1814450	1
1000 A	3P	DMV-1000N/3+SH	1814451	1
1000 A	3P + solid neutral	DMV-1000N/1+SH	1814452	1
1000 A	4P	DMV-1000N/4+SH	1814453	1


DMV with padlockable rotary handle, with door interlock function and 400 mm metal shaft



6094966

Current rating	Number of poles	Handle with padlock	Shaft length	Part number	Article number	Pack qty
250 A	3P	Red/Yellow	400 mm	DMV-250/3/M4/P-R	6094966	1
250 A	3P	Grey	400 mm	DMV-250/3/M4/P-G	6099271	1
250 A	4P	Red/Yellow	400 mm	DMV-250/4/M4/P-R	6094970	1
250 A	4P	Grey	400 mm	DMV-250/4/M4/P-G	6099273	1
400 A	3P	Red/Yellow	400 mm	DMV-400/3/M4/P-R	6094967	1
400 A	3P	Grey	400 mm	DMV-400/3/M4/P-G	6099272	1
400 A	4P	Red/Yellow	400 mm	DMV-400/4/M4/P-R	6094971	1
400 A	4P	Grey	400 mm	DMV-400/4/M4/P-G	6099274	1

DMV with padlockable rotary handle, with door interlock function and 300 mm metal shaft, supplied with two 1NO + 1NC auxiliaries



6084846

Current rating	Number of poles	Handle with padlock	Shaft length	Part number	Article number	Pack qty
2500 A	3P	Grey	300 mm	DMV-2500/3/M6/2HI11/K6-PG	6093244	1
2500 A	3P + neutral	Grey	300 mm	DMV-2500/3N/M6/2HI11/K6-PG	6093243	1
2500 A	4P	Grey	300 mm	DMV-2500/4/M6/2HI11/K6-PG	6093242	1
3150 A	3P	Grey	300 mm	DMV-3150/3/M6/2HI11/K6-PG	6084848	1
3150 A	3P + neutral	Grey	300 mm	DMV-3150/3N/M6/2HI11/K6-PG	6084847	1
3150 A	4P	Grey	300 mm	DMV-3150/4/M6/2HI11/K6-PG	6084846	1

Handles and shafts

Handles mounting types overview

DMV	K Types handles	Shaft square mm	A Type handles			C Type handles		D/P Type handles			D/C Type handles		
			Blue	Red	Grey	Blue	Red	Blue	Red/Yellow	Grey	Blue	Red/Yellow	Grey
DMV 160N	K2S	6 x 6	✓	✓		✓	✓	✓	✓	✓	✓	✓	✓
DMVS 160N	K3	10 x 10	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
DMV 250N	K3	10 x 10	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
DMV 400N	K3	10 x 10	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
DMV 630N	K5	14 x 14	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
DMV 1000N	K5	14 x 14	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
DMV 1250N	K6	14 x 14	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
DMV 1600N	K6	14 x 14	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
DMV 2000N	K6	14 x 14	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
DMV 2500	K6	14 x 14								✓			
DMV 3150	K6	14 x 14								✓			

A Type: Handle mounted directly on switch

C Type: Handle without interlock function, for example when mounted on the cover of Eaton's Halyester enclosure range

D/P Type: Handle padlockable for mounting on hinged door, with interlock function

D/C Type: Handle with cylinder lock for mounting on hinged door, supplied with two keys, with interlock function

See handles dimensions pages 95 to 98

A Type handles

Mounted directly on switch, suitable for DMV 160N







K2S A handle

1818003

K3 A handle

1818202

K5 A handle

1818012

K6 A handle

1818013

Shafts

A Type handles

Metal shafts

DMV	Handle colours		Shaft mm	Shaft length						Pack qty
	Blue	Red		116 mm	132 mm	148 mm	172 mm	270 mm	400 mm	
DMV 160N	K2SAB 1818003	K2SAR 1818004	6 x 6	4K6116MMK1/2S 1314996	4K6132MMK1/2S 1314751	4K6148MMK1/2S 1314752	4K6172MMK1/2S 1314691	4K6270MMK1/2S 1314692	4K6400MMK1/2S 1314693	1

Mounted directly on switch, suitable for DMVS 160N up to DMV 2000N

A Type handles				Metal shafts						Pack qty
DMV	Handle colours			Shaft mm□	Shaft length					
	Blue	Red	Grey		135 mm	200 mm	245 mm	400 mm	600 mm	
DMVS 160N				10 x 10	4K10K3H135 1050240		4K10K3H245 1050242	4K10K3H400 1050243		1
DMV 250N	K3AB 1818110	K3AR 1818111	K3AG 1818202							
DMV 400N										
DMV 630N	K5AB 1818011	K5AR 1818012		14 x 14		4K14K5H200 1050244		4K14K5H400 1050247	4K14K5H600 6090659	1
DMV 1000N										
DMV 1250N				14 x 14		4K14K6H200 1050248		4K14K6H400 1050250		1
DMV 1600N	K6AB 1818013	K6AR 1818014								
DMV 2000N										

Switch-disconnectors, 160 A to 3150 A, 690 V a.c.

DMV Dumeco switch-disconnectors

Handles and shafts

C Type handles

Without interlock function, for example when mounted on the cover of Eaton's Halyester enclosure rangesuitable for DMV 160N




DMV	C Type handles		Metal shafts							Pack qty
	Handle colours		Shaft mm□	Shaft length						
	Blue	Red		116 mm	132 mm	148 mm	172 mm	270 mm	400 mm	
DMV 160N	K2SCB 1818017	K2SCR 1818018	6 x 6	4K6116MMK1/2S 1314996	4K6132MMK1/2S 1314751	4K6148MMK1/2S 1314752	4K6172MMK1/2S 1314691	4K6270MMK1/2S 1314692	4K6400MMK1/2S 1314693	1

Without interlock function, for example when mounted on the cover of Eaton's Halyester enclosure range, suitable for DMVS 160N up to DMV 2000N

DMV	C Type handles		Metal shafts					Pack qty	
	Handle colours		Shaft mm□	Shaft length					
	Blue	Red/ yellow		135 mm	200 mm	245 mm	400 mm		600 mm
DMVS 160N	K3CB 1818068	K3CR 1818112	10 x 10	4K10K3H135 1050240		4K10K3H245 1050242	4K10K3H400 1050243		1
DMV 250N									
DMV 400N									
DMV 630N	K5CB 1818025	K5CR 1818026	14 x 14		4K14K5H200 1050244		4K14K5H400 1050247	4K14K5H600 6090659	1
DMV 1000N									
DMV 1250N	K6CB 1818027	K6CR 1818028	14 x 14		4K14K6H200 1050248		4K14K6H400 1050250		1
DMV 1600N									
DMV 2000N									

D/P Type handles

Padlockable for mounting on hinged door, with interlock function, suitable for DMV 160N

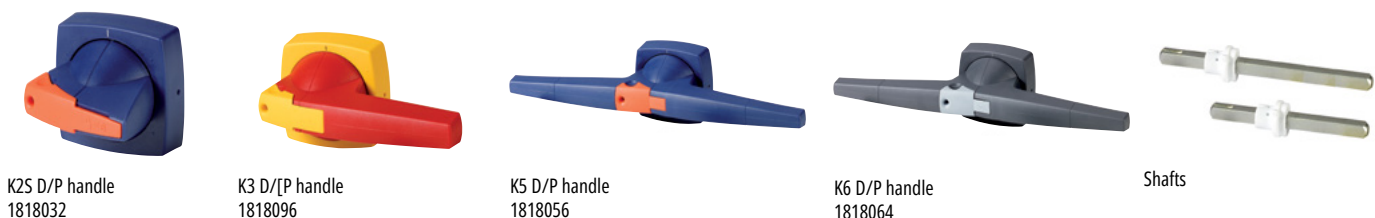

DMV	D/P Type handles			Metal shafts							Pack qty
	Handle Type			Shaft mm□	Shaft length						
	Blue	Red	Grey		116 mm	132 mm	148 mm	172 mm	270 mm	400 mm	
DMV 160N	K2SDB/P 1818032	K2SDR/P 1818033	K2SDG/P 1818034	6 x 6	4K6116MMK1/2S 1314996	4K6132MMK1/2S 1314751	4K6148MMK1/2S 1314752	4K6172MMK1/2S 1314691	4K6270MMK1/2S 1314692	4K6400MMK1/2S 1314693	1

Handles and shafts

D/P Type handles

Padlockable for mounting on hinged door, with interlock function, suitable for DMVS 160N up to DMV 2000N

DMV	D/P Type handles			Metal shafts						Pack qty
	Handle colours			Shaft mm□	Length of shaft					
	Blue	Red	Grey		135 mm	200 mm	245 mm	400 mm	600 mm	
DMVS 160N				10 x 10	4K10K3H135 1050240		4K10K3H245 1050242	4K10K3H400 1050243		1
DMV 250N	K3DB/P 1818113	K3DR/P 1818096	K3DG/P 1818069							
DMV 400N										
DMV 630N				14 x 14		4K14K5H200 1050244		4K14K5H400 1050247	4K14K5H600 6090659	1
DMV 1000N	K5DB/P 1818056	K5DR/P 1818057	K5DG/P 1818058							
DMV 1250N				14 x 14	4K14K6H200 1050248			4K14K6H400 1050250		1
DMV 1600N	K6DB/P 1818062	K6DR/P 1818063	K6DG/P 1818064							
DMV 2000N										

D/C Type handles

With cylinder lock for mounting on hinged door, supplied with two keys, with interlock function, suitable for DMV 160N



DMV	D/C Type handles			Shaft mm□	Metal shafts						Pack qty
	Handle colours				Length of shafts						
	Blue	Red	Grey		116 mm	132 mm	148 mm	172 mm	270 mm	400 mm	
DMV 160N	K2SDB/C 1818038	K2SDR/C 1818039	K2SDR/C 1818040	6 x 6	4K6116MMK1/2S 1314996	4K6132MMK1/2S 1314751	4K6148MMK1/2S 1314752	4K6172MMK1/2S 1314691	4K6270MMK1/2S 1314692	4K6400MMK1/2S 1314693	1

With cylinder lock for mounting on hinged door, supplied with two keys, with interlock function, suitable for DMVS 160N up to DMV 2000N

D/C Type handles				Metal shafts					Pack qty	
DMV	Handle Type			Shaft mm□	Shaft length					
	Blue	Red	Grey		135 mm	200 mm	245 mm	400 mm		600 mm
DMVS 160N				10 x 10	4K10K3H135 1050240		4K10K3H245 1050242	4K10K3H400 1050243		1
DMV 250N	K3DB/C 1818114	K3DR/C 1818097	K3DG/C 1818070							
DMV 400N										
DMV 630N				14 x 14		4K14K5H200 1050244		4K14K5H400 1050247	4K14K5H600 6090659	1
DMV 1000N	K5DB/C 1818059	K5DR/C 1818060	K5DG/C 1818061							
DMV 1250N				14 x 14	4K14K6H200 1050248			4K14K6H400 1050250		1
DMV 1600N	K6DB/C 1818065	K6DR/C 1818066	K6DG/C 1818067							
DMV 2000N										

Switch-disconnectors, 160 A to 3150 A, 690 V a.c.

DMV Dumeco switch-disconnectors

Accessories

Transparent terminal cover



400894

DMV Type	Part number	Article number	Pack qty
DMV 160N	COVERDMV160	1314230	1
DMVS 160N, DMV 250N, DMV 400N	EXTENDED-COVERDMVS160N/400N	EP-400894	1
DMV 630N and DMV 1000N	COVERDMV630N/1000N	1314830	1

Auxiliary switch, including fixing adaptor



1314398

DMV Type	Part number	Article number	Pack qty
DMV 160N	AUX1NO+1NC DMV160N	1314398	1
DMVS 160N, DMV 250N up to DMV 2000N	AUX1NO+1NC DMVS160-2000	1314736	1

Spare connection kits (Connection kits are supplied with switch-disconnector as standard)



1314031

DMV Type	Bolt connection	Part number	Article number	Pack qty
DMV 160N	M6 x 20	KITM6X20	1314031	1
DMVS 160N, DMV 250N	M8 x 20	KITM8X20	1314927	1
DMV 400N	M10 x 20	KITM10X20	1314915	1
DMV 630N	M10 x 30	KITM10X30	1314648	1
DMV 1000N	M12 x 35	KITM12X35	1314857	1

Shaft extension kit for extending shaft length



1050256

DMV Type	Part number 100 mm	Article number 100 mm	Part number 200 mm	Article number 200 mm	Pack qty
DMV 1250 N	K6100VERL	1050256	K6200VERL	1050257	1
DMV 1600N					1

Technical data

			DMV 160N	DMVS 160N	DMV 250N	DMV 400N	DMV 630N	
Conventional free air thermal current			I _{th}	160 A	160 A	250 A	400 A	630 A
Conventional enclosed thermal current			I _{the}	160 A	160 A	250 A	400 A	630 A
Rated uninterrupted current			I _u	160 A	160 A	250 A	400 A	630 A
Rated operational voltage			U _e	690 V a.c.	690 V a.c.	690 V a.c.	690 V a.c.	690 V a.c.
Rated insulation voltage			U _i	1000 V	1000 V	1000 V	1000 V	1000 V
Rated impulse withstand voltage			U _{imp}	8 kV	8 kV	8 kV	8 kV	12 kV
Rated frequency				50 - 60 Hz	50 - 60 Hz	50 - 60 Hz	50 - 60 Hz	50 - 60 Hz
Ambient temperature	Operation temperature			-25°C...55°C	-25°C...55°C	-25°C...55°C	-25°C...55°C	-25°C...55°C
	Storage temperature			-30°C...80°C	-30°C...80°C	-30°C...80°C	-30°C...80°C	-30°C...80°C
Rated operational current								
AC-21A	At U _e = 415 V AC-21A	I _e	160 A	160 A	250 A	400 A	630 A	
	At U _e = 500 V AC-21A	I _e	160 A	160 A	250 A	400 A	630 A	
	At U _e = 690 V AC-21A	I _e	125 A	160 A	250 A	400 A	630 A	
AC-22A	At U _e = 415 V AC-22A	I _e	160 A	160 A	250 A	400 A	630 A	
	At U _e = 500 V AC-22A	I _e	160 A	160 A	250 A	400 A	630 A	
	At U _e = 690 V AC-22A	I _e	125 A	160 A	250 A	315 A	630 A	
AC-23A	At U _e = 415 V AC-23A	I _e	154 A	160 A	250 A	333 A	630 A	
	At U _e = 500 V AC-23A	I _e	106 A	156 A	220 A	254 A	575 A	
	At U _e = 690 V AC-23A	I _e	-	140 A	140 A	140 A	437 A	
Rated operational power	At U _e = 415 V AC-23A	P	90 kW	90 kW	147 kW	180 kW	375 kW	
	At U _e = 500 V AC-23A	P	75 kW	110 kW	160 kW	180 kW	425 kW	
	At U _e = 690 V AC-23A	P	-	132 kW	132 kW	132 kW	425 kW	
Rated breaking capacity	At U _e = 415 V		1232 A	1280 A	2000 A	2664 A	5040 A	
	At U _e = 500 V		848 A	1248 A	1760 A	2032 A	4600 A	
	At U _n = 690 V			1120 A	1120 A	1120 A	3496 A	
Rated short-time withstand current			I _{cw}	8 kA - 0.2 s	12 kA - 0.3 s	12 kA - 0.3 s	12 kA - 0.3 s	36 kA - 0.3 s
Short-circuit rating	Fuse link max			160 /100	500/250	500/250	500/250	1000/630
	Rated conditional short-circuit current		I _q	I _n = 160 50 kA	I _n = 500 50 kA	I _n = 500 50 kA	I _n = 500 50 kA	I _n = 1000 50 kA
		I _q	I _n = 100 100 kA	I _n = 250 100 kA	I _n = 250 100 kA	I _n = 250 100 kA	I _n = 630 100 kA	
	Breaking current			I _n = 160 50 kA	I _n = 500 40 kA	I _n = 500 40 kA	I _n = 500 40 kA	I _n = 1000 70 kA
				I _n = 100 14.5 kA	I _n = 250 33 kA	I _n = 250 33 kA	I _n = 250 33 kA	I _n = 630 65 kA
	Max let-through energy			I _n = 160 600 kA²s	I _n = 500 1700 kA²s	I _n = 500 1700 kA²s	I _n = 500 1700 kA²s	I _n = 1000 4200 kA²s
				In = 100 67 kA²s	I _n = 250 380 kA²s	I _n = 250 380 kA²s	I _n = 250 380 kA²s	I _n = 630 3200 kA²s
Power dissipation per pole			P	2.3 W	1.8 W	3.75 W	11.5 W	14 W
Durability - maximum cycles (on+off)				10000	10000	10000	10000	5000
Pollution degree				III/3	III/3	III/3	III/3	III/3
Protection class				IP20 with or without terminal cover				
Terminal capacities								
	Flat connection with busbars			75 mm²	120 mm²	120 mm²	240 mm²	400 mm²
	Terminal screw			M6 x 16	M8 x 20	M8 x 20	M10 x 20	M10 x 30
	Tightening torque for terminal screw			-	14 Nm	14 Nm	28 Nm	28 Nm
Standards				IEC 60947-1 and -3				
Certification				CCC, KEMA-KEUR, Lloyd's Register				

Switch-disconnectors, 160 A to 3150 A, 690 V a.c.

DMV Dumeco switch-disconnectors

Technical data

		DMV 1000N	DMV 1250N	DMV 1600N	DMV 2000N
Conventional free air thermal current	I_{th}	1000 A	1250 A	1600 A	2000 A
Conventional enclosed thermal current	I_{the}	1000 A	1250 A	1600 A	2000 A
Rated uninterrupted current	I_u	1000 A	1250 A	1600 A	2000 A
Rated operational voltage	U_e	690 V a.c.	690 V a.c.	690 V a.c.	690 V a.c.
Rated insulation voltage	U_i	1000 V	1000 V	1000 V	1000 V
Rated impulse withstand voltage	U_{imp}	12 kV	12 kV	12 kV	12 kV
Rated frequency		50 - 60 Hz	50 - 60 Hz	50 - 60 Hz	50 - 60 Hz
Ambient temperature					
Operation temperature		-25°C...55°C	-25°C...55°C	-25°C...55°C	-25°C...55°C
Storage temperature		-30°C...80°C	-30°C...80°C	-30°C...80°C	-30°C...80°C
Rated operational current					
AC-21A					
At $U_e = 415$ V AC-21A	I_e	1000 A	1250 A	1600 A	2000 A
At $U_e = 500$ V AC-21A	I_e	1000 A	1250 A	1600 A	2000 A
At $U_e = 690$ V AC-21A	I_e	1000 A	1250 A	1600 A	2000 A
AC-22A					
At $U_e = 415$ V AC-22A	I_e	1000 A	1250 A	1600 A	2000 A
At $U_e = 500$ V AC-22A	I_e	1000 A	1250 A	1600 A	2000 A
At $U_e = 690$ V AC-22A	I_e	1000 A	1250 A	1600 A	2000 A
AC-23A					
At $U_e = 415$ V AC-23A	I_e	759 A	1250 A	1250 A	1250 A
At $U_e = 500$ V AC-23A	I_e	575 A	909 A	909 A	909 A
At $U_e = 690$ V AC-23A	I_e	437 A	630 A	630 A	630 A
Rated operational power					
At $U_e = 415$ V AC-23A	P	425 kW	750 kW	750 kW	750 kW
At $U_e = 500$ V AC-23A	P	425 kW	630 kW	630 kW	630 kW
At $U_e = 690$ V AC-23A	P	425 kW	630 kW	630 kW	630 kW
Rated breaking capacity					
At $U_e = 415$ V		6072 A	10000 A	10000 A	10000 A
At $U_e = 500$ V		4600 A	7272 A	7272 A	7272 A
At $U_n = 690$ V		3496 A	5040 A	4050 A	5040 A
Rated short-time withstand current	I_{cw}	36 kA - 0.3 s	50 kA - 1 s	50 kA - 1 s	50 kA - 1 s
Short-circuit rating					
Fuse link max		1000/630	-	-	-
Rated conditional short-circuit current	I_q	$I_n = 1000$ 50 kA	-	-	-
	I_q	$I_n = 630$ 100 kA	-	-	-
Breaking current		$I_n = 1000$ 70 kA	-	-	-
		$I_n = 630$ 65 kA	-	-	-
Max let-through energy		$I_n = 1000$ 4200 kA²s	-	-	-
		$I_n = 630$ 3200 kA²s	-	-	-
Power dissipation per pole	P	35.3 W	27.5 W	45 W	60 W
Durability - maximum cycles (on+off)		5000	5000	5000	5000
Pollution degree		III/3	III/3	III/3	III/3

Technical data

	DMV 1000N	DMV 1250N	DMV 1600N	DMV 2000N
Protection class	IP20 with or without terminal cover			
Terminal capacities				
Flat conductor connection with busbars	600 mm ²	800 mm ²	1000 mm ²	1500 mm ²
Terminal screw	M12 x 35	M16 x 50	M12 x 50 (2 x)	M12 x 50 (2 x)
Tightening torque for terminal screw	28 Nm	60 Nm	40 Nm	40 Nm
Standards	IEC 60947-1 and -3			
Certification	CCC, KEMA-KEUR, Lloyd's Register			

		DMV 2500	DMV 3150
Conventional free air thermal current	I_{th}	2500 A	3150 A
Conventional enclosed thermal current	I_{the}	2500 A	3150 A
Rated uninterrupted current	I_u	2500 A	3150 A
Rated operational voltage	U_e	690 V a.c.	690 V a.c.
Rated insulation voltage	U_i	1000 V	1000 V
Rated impulse withstand voltage	U_{imp}	12 kV	12 kV
Rated frequency		50 - 60 Hz	50 - 60 Hz

Ambient temperature

Operation temperature	-25°C...55°C	-25°C...55°C
Storage temperature	-30°C...80°C	-30°C...80°C

Rated operational current

AC-21A

At $U_e = 415$ V AC-21A	I_e	2500 A	3150 A
At $U_e = 500$ V AC-21A	I_e	2500 A	3150 A
At $U_e = 690$ V AC-21A	I_e	2500 A	3150 A

Rated operational power

At $U_e = 415$ V AC-23A	P	1400 kW	1400 kW
At $U_e = 500$ V AC-23A	P	-	-
At $U_e = 690$ V AC-23A	P	-	-

Rated breaking capacity

At $U_e = 415$ V		10000 A	10000 A
At $U_e = 500$ V		7272 A	7272 A
At $U_n = 690$ V		5040 A	5040 A
Rated short-time withstand current	I_{cw}	65 kA - 1 s	65 kA - 1 s
Power dissipation per pole	P	68.7 W	108.8 W
Durability - maximum cycles (on+off)		5000	5000
Pollution degree		III/3	III/3
Protection class		IP20 with or without terminal cover	

Terminal capacities


Flat conductor connection with busbars		3000 mm ²	3000 mm ²
Terminal screw		M12 x 50 (2x)	M12 x 50 (2x)
Tightening torque for terminal screw		40 Nm	40 Nm
Standards		IEC 60947-1 and -3	
Certification		CCC, KEMA-KEUR, Lloyd's Register	

Switch-disconnectors, 160 A to 3150 A, 690 V a.c.


DMV Dumeco switch-disconnectors

Outline drawings


DMV 160N 3-pole and 4-pole connecting contacts with box terminal clamps - mm

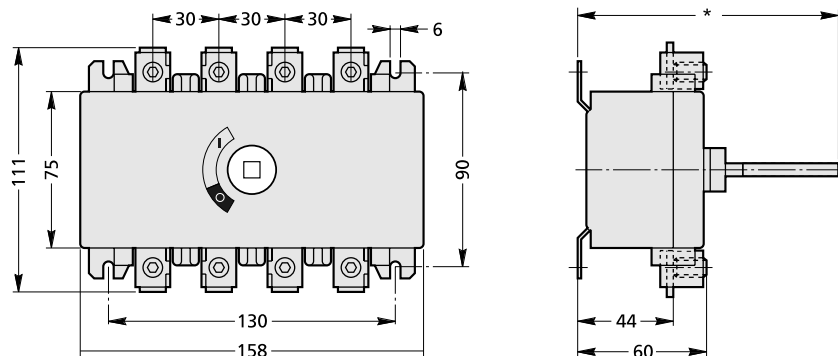


DMV 160N 3-pole and 4-pole - mm

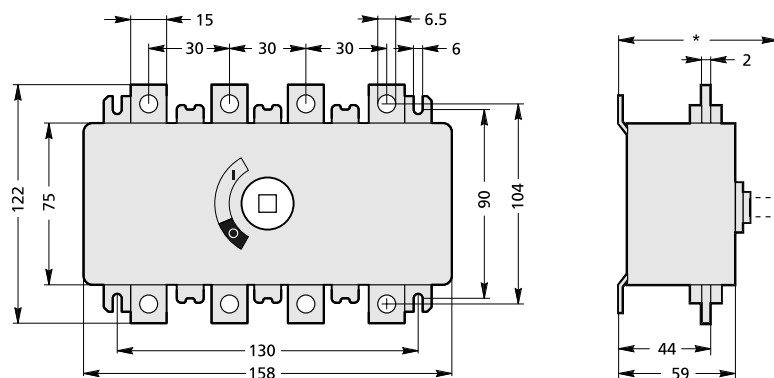

DMVS 160N 3-pole and 4-pole - mm

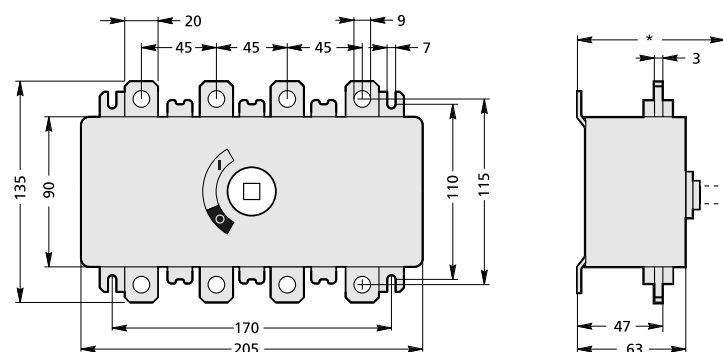


DMV 250N 3-pole and 4-pole - mm

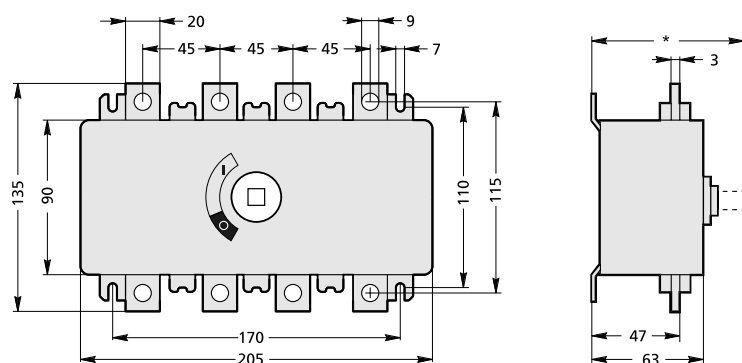


* Depending on the applied operating shaft

Outline drawings


DMV 400N 3-pole and 4-pole - mm

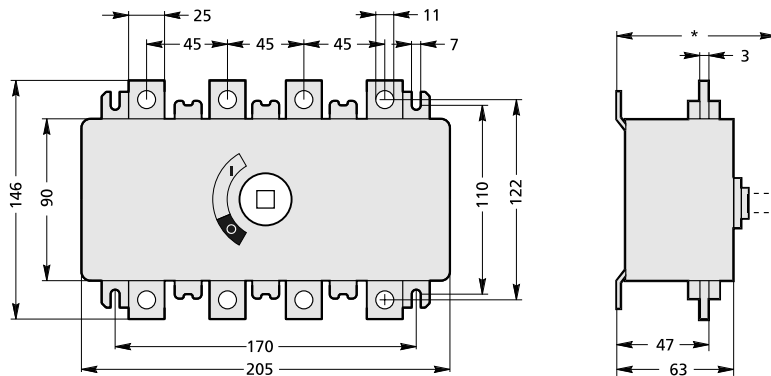


DMV 630N 3-pole and 4-pole - mm

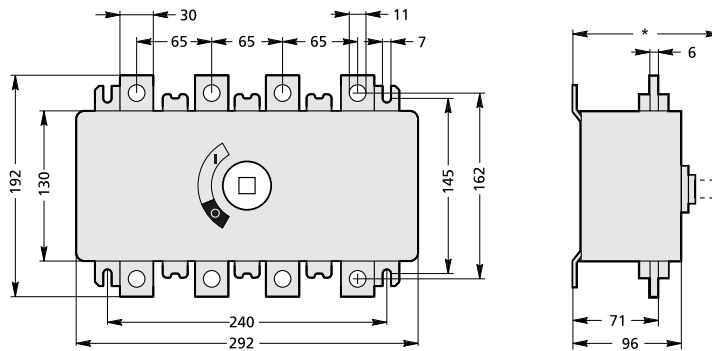

DMV 1000N 3-pole and 4-pole - mm

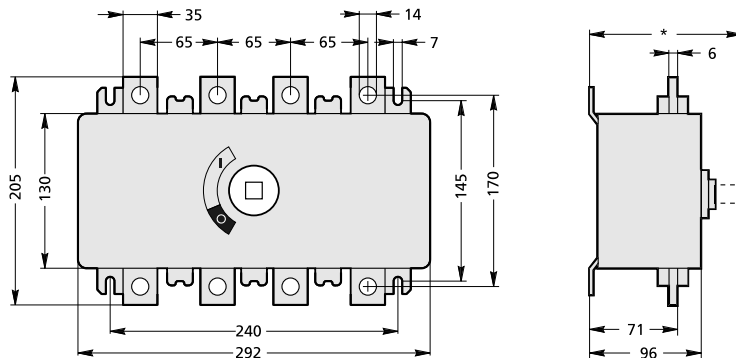

DMV 1250N 3-pole and 4-pole - mm

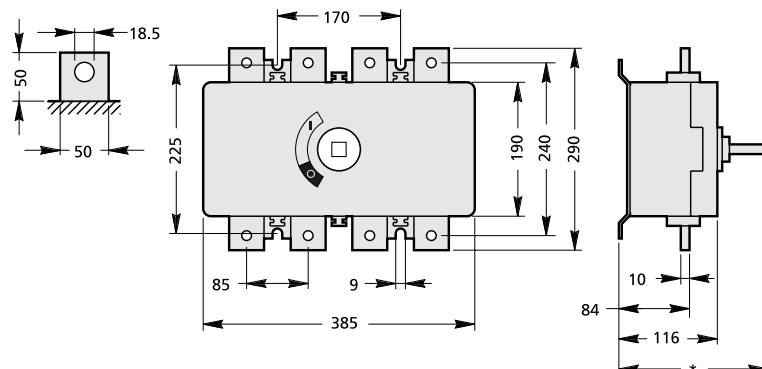


* Depending on the applied operating shaft

Switch-disconnectors, 160 A to 3150 A, 690 V a.c.


DMV Dumeco switch-disconnectors

Outline drawings


DMV 1600N 3-pole and 4-pole - mm

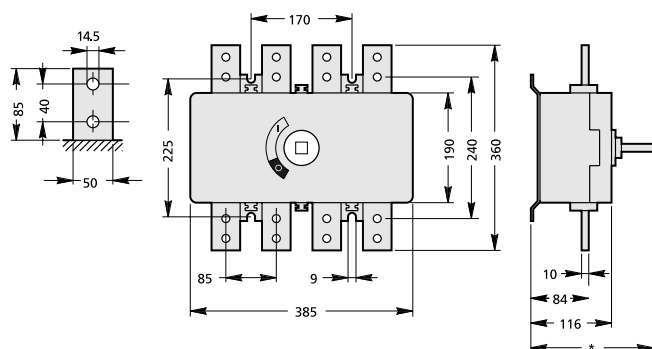


DMV 2000N 3-pole and 4-pole - mm

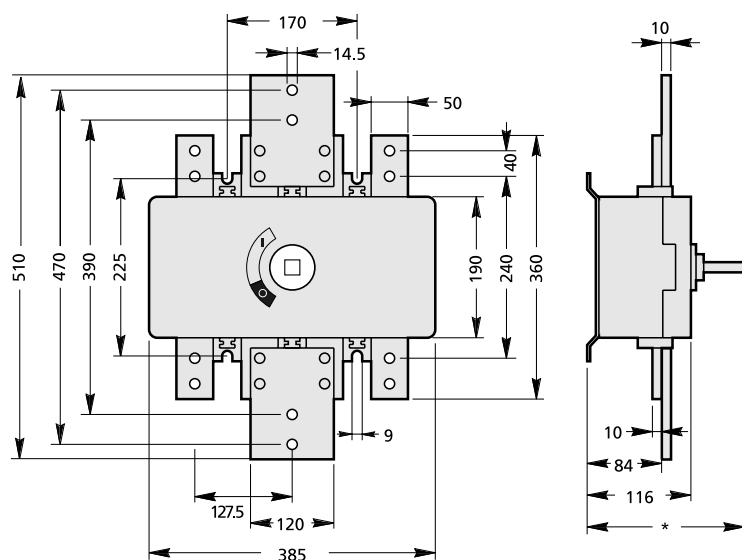

DMV 2500 A and 3150 A 3-pole and 4-pole - mm

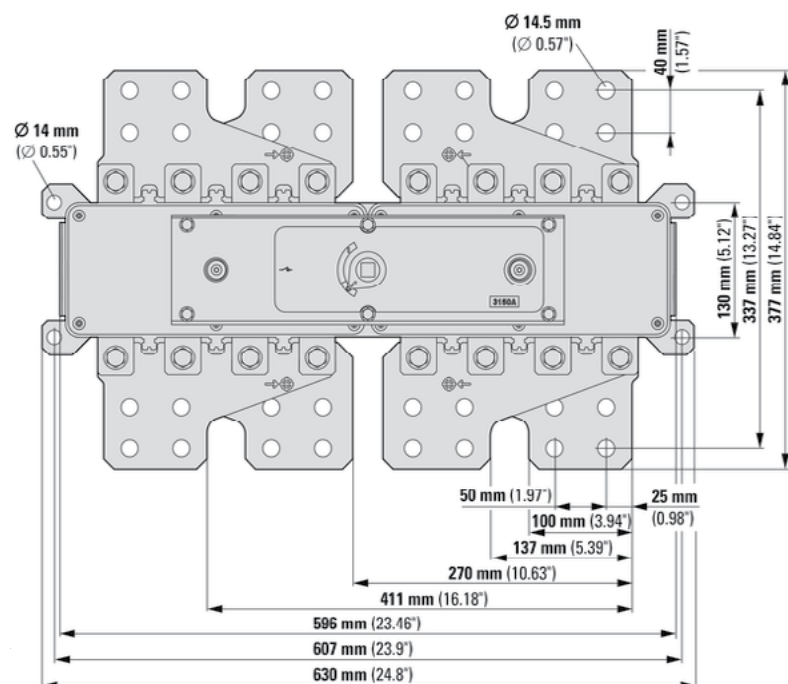

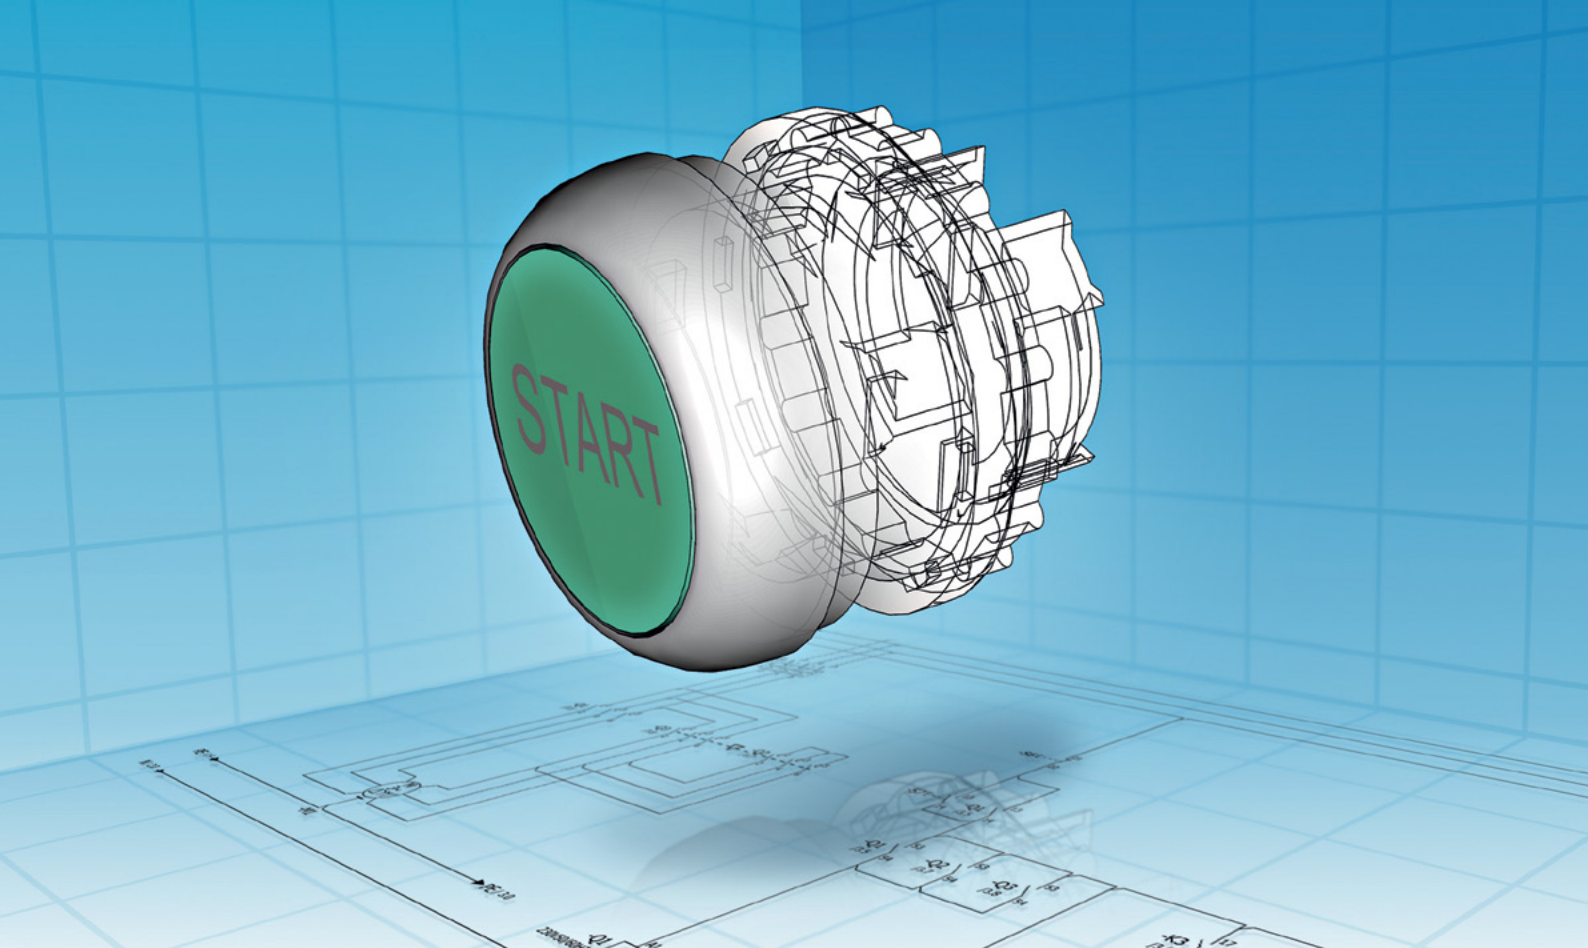

Planning safety and process optimization: CAD data at the click of a mouse!



- 13,200 article data items and macros
- Convenient selection tool
- Version P8

Eaton is providing its customers with CAD data to offer optimum support during planning. Both electrical and mechanical design data can be called up quickly and conveniently from the Internet at any time. This reduces processing times, minimizes errors and thus reduces costs already in the engineering phase of control panels, systems and machinery.



- Models for approx. 11,000 products
- 80 different neutral & native formats

eCAD: Eaton has product data and macros available for EPLAN Electric P8. After downloading the small EPLANSelection program, you will not only be able to select the items you need from a database containing more than 10,800 products, but will also be able to export them and import them into your own EPLAN item database.

mCAD: Eaton makes 2D and 3D data available for more than 11,000 products. Over 80 different neutral and native formats guarantee compatibility with the project engineering systems of the customer. The models can either be integrated directly into the planning software from the Partcommunity Portal on the Internet or via the CADENAS Partsolution software.

Switch-disconnectors, 40 A to 160 A, AC-23 A

DMM Dumeco switch-disconnectors



Description

The DMM Dumeco switch-disconnectors provide safe isolation in a wide range of low voltage applications. Thanks to their excellent making and breaking capacity under load conditions they are particularly suited for use in distribution panels and for machine controls.

Standards/Approvals

- IEC 60947-3
- EAC
- KEMA-KEUR
- Lloyd's Register

Technical data

- Voltage: 690 V ac.
- Current: 40 A to 160 A
- 3-pole + solid neutral and 4--poles
- Direct operation or with door mount knob
- Utilisation category: AC-23A

Mounting options

- DIN-Rail mounting
- 45 mm front for standard distribution board
- IP65 Enclosed for 125 A and 160 A only

Features

- 125 and 160 A DMM switch-disconnectors available as a complete package: with a 400 mm shaft and a red or grey padlockable handle
- 125 and 160 A DMM switch-disconnectors are also available in a CI-K5 enclosure



DMM range overview

	40 A	63 A	80 A	100 A	125 A	160 A
Switch-disconnectors with integrated black rotary handle	✓	✓	✓	✓	✓	✓
Switch-disconnectors without shaft and knob	✓	✓			✓	✓
Switch-disconnectors with operating shaft and knob for cover mounting	✓	✓			✓	
Switch-disconnectors with 400 mm shaft and red/yellow or grey paclockable handle					✓	✓
Switch-disconnectors in CI-K5 enclosure with cylinder lock handle					✓	✓
Switch-disconnectors in CI-K5 enclosure with padlock					✓	✓

DMM with integrated black rotary handle



1314161



6093346

Thermal current I_{the}	Number of poles	Part number	Article number	Pack qty
40 A	3P + solid neutral	DMM-40/1	1314056	1
40 A	4P	DMM-40/4	1314057	1
63 A	3P + solid neutral	DMM-63/1	1314161	1
63 A	4P	DMM-63/4	1314162	1
80 A	3P + solid neutral	DMM-80/1	199969	1
80 A	3P	DMM-80/3	199531	1
80 A	4P	DMM-80/4	199533	1
100 A	3P + solid neutral	DMM-100/1	199970	1
100 A	3P	DMM-100/3	199532	1
100 A	4P	DMM-100/4	199534	1
125 A	3P	DMM-125/3	6093344	1
125 A	3P + solid neutral	DMM-125/1	1314210	1
125 A	4P	DMM-125/4	1314211	1
160 A	3P	DMM-160/3	6093347	1
160 A	3P + solid neutral	DMM-160/1	6093345	1
160 A	4P	DMM-160/4	6093346	1

DMM without shaft and knob



1314158



6085418

Thermal current I_{the}	Number of poles	Part number	Article number	Pack qty
40 A	3P + solid neutral	DMM-40/1-SK	1314052	1
40 A	4P	DMM-40/4-SK	1314053	1
63 A	3P + solid neutral	DMM-63/1-SK	1314157	1
63 A	4P	DMM-63/4-SK	1314158	1
125 A	3P	DMM-125/3-SK	6083336	1
125 A	3P + solid neutral	DMM-125/1-SK	1314203	1
125 A	4P	DMM-125/4-SK	1314204	1
160 A	3P	DMM-160/3-SK	6085416	1
160 A	3P + solid neutral	DMM-160/1-SK	6085417	1
160 A	4P	DMM-160/4-SK	6085418	1

Switch-disconnectors, 40 A to 160 A, AC-23 A

DMM Dumeco switch-disconnectors

DMM with operating shaft and knob, without interlock function, for example when mounted on the cover of Eaton's Halyester enclosure range



1314207

Thermal current I_{the}	Number of poles	Height*	Part number	Article number	Pack qty
40 A	3P + solid neutral	172 mm	DMM-40/1+SK	1314054	1
40 A	4P	172 mm	DMM-40/4+SK	1314055	1
63 A	3P + solid neutral	172 mm	DMM-63/1+SK	1314159	1
63 A	4P	172 mm	DMM-63/4+SK	1314160	1
125 A	3P + solid neutral	172 mm	DMM-125/1+CM	1314206	1
125 A	4P	172 mm	DMM-125/4+CM	1314207	1

* Height from back of switch up to the handle

DMM with padlockable rotary handle, with door interlock function and 400 mm metal shaft



6096807

Thermal current I_{the}	Handle colour	Number of poles	Part number	Article number	Pack qty
125 A	Red/Yellow	3P	DMM-125/3/M4/P-R	6094964	1
125 A	Red/Yellow	4P	DMM-125/4/M4/P-R	6094968	1
125 A	Grey	3P	DMM-125/3/M4/P-G	6096804	1
125 A	Grey	4P	DMM-125/4/M4/P-G	6096805	1
160 A	Red/Yellow	3P	DMM-160/3/M4/P-R	6094965	1
160 A	Red/Yellow	4P	DMM-160/4/M4/P-R	6094969	1
160 A	Grey	3P	DMM-160/3/M4/P-G	6096806	1
160 A	Grey	4P	DMM-160/4/M4/P-G	6096807	1

DMM Enclosed 125 A and 160 A, IP65, padlockable



172849



172848

Thermal current I_{the}	Handle colour	Number of poles	Part number	Article number	Pack qty
125 A	Blue	3P	DMM-125/3/I5/P-B	172849	1
125 A	Grey	3P	DMM-125/3/I5/P-G	172850	1
125 A	Red/Yellow	3P	DMM125/3/I5/P-R	172851	1
125 A	Blue	3P + Solid neutral	DMM-125/3N/I5/P-B	172846	1
125 A	Grey	3P + Solid neutral	DMM-125/3N/I5/P-G	172847	1
125 A	Red/Yellow	3P + Solid neutral	DMM125/3N/I5/P-R	172848	1
125 A	Blue	4P	DMM-125/4/I5/P-B	172852	1
125 A	Grey	4P	DMM-125/4/I5/P-G	172853	1
125 A	Red/Yellow	4P	DMM125/4/I5/P-R	172854	1
160 A	Blue	3P	DMM-160/3/I5/P-B	172792	1
160 A	Grey	3P	DMM-160/3/I5/P-G	172793	1
160 A	Red/Yellow	3P	DMM-160/3/I5/P-R	172794	1
160 A	Blue	3P + Solid neutral	DMM-160/3N/I5/P-B	172789	1
160 A	Grey	3P + Solid neutral	DMM-160/3N/I5/P-G	172790	1
160 A	Red/Yellow	3P + Solid neutral	DMM160/3N/I5/P-R	172791	1
160 A	Blue	4P	DMM-160/4/I5/P-B	172795	1
160 A	Grey	4P	DMM-160/4/I5/P-G	172796	1
160 A	Red/Yellow	4P	DMM160/4/I5/P-R	172797	1

DMM Enclosed 125 A and 160 A, IP65, with cylinder lock handle






172858



172805

Thermal current I_{the}	Handle colour	Number of poles	Part number	Article number	Pack qty
125 A	Blue	3P	DMM-125/3/I5/C-B	172858	1
125 A	Grey	3P	DMM-125/3/I5/C-G	172859	1
125 A	Red/Yellow	3P	DMM-125/3/I5/C-R	172860	1
125 A	Blue	3P + Solid neutral	DMM-125/3N/I5/C-B	172855	1
125 A	Grey	3P + Solid neutral	DMM-125/3N/I5/C-G	172856	1
125 A	Red/Yellow	3P + Solid neutral	DMM-125/3N/I5/C-R	172857	1
125 A	Blue	4P	DMM-125/4/I5/C-B	172861	1
125 A	Grey	4P	DMM-125/4/I5/C-G	172862	1
125 A	Red/Yellow	4P	DMM-125/4/I5/C-R	172863	1
160 A	Blue	3P	DMM-160/3/I5/C-B	172801	1
160 A	Grey	3P	DMM-160/3/I5/C-G	172802	1
160 A	Red/Yellow	3P	DMM-160/3/I5/C-R	172803	1
160 A	Blue	3P + Solid neutral	DMM-160/3N/I5/C-B	172798	1
160 A	Grey	3P + Solid neutral	DMM-160/3N/I5/C-G	172799	1
160 A	Red/Yellow	3P + Solid neutral	DMM-160/3N/I5/C-R	172800	1
160 A	Blue	4P	DMM-160/4/I5/C-B	172804	1
160 A	Grey	4P	DMM-160/4/I5/C-G	172805	1
160 A	Red/Yellow	4P	DMM-160/4/I5/C-R	172806	1

Enclosure dimensions - mm

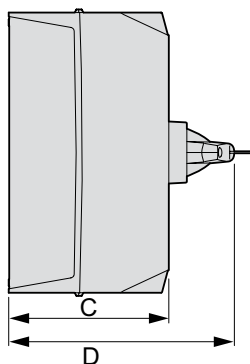

	mm	inches
A	200	7.87
B	280	11.02
C	160	6.3
D	226	8.9

Switch-disconnectors, 40 A to 160 A, AC-23 A

DMM Dumeco switch-disconnectors

Handles and shafts

Handles mounting types overview

Duco	K Type handles	A Type handles			C Type handles		D/P Type handles			D/C Type handles		
		Blue	Red	Grey	Blue	Red	Blue	Red/Yellow	Grey	Blue	Red/Yellow	Grey
40 A	K1	✓	✓	✓	✓	✓	✓	✓	✓			
63 A	K1	✓	✓	✓	✓	✓	✓	✓	✓			
125 A	K2S	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
160 A	K2S	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓

A Type: Handle mounted directly on switch

C Type: Handle without interlock function, for example when mounted on the cover of Eaton's Halyester enclosure range

D/P Type: Handle padlockable for mounting on hinged door, with interlock function

D/C Type: Handle with cylinder lock for mounting on hinged door, supplied with two keys, with interlock function

See handles dimensions pages 95 to 98

A Type handles

Mounted directly on switch



K1 A handle
1818001

K2S A handle
1818004

Shafts

	A Type handles			Metal shafts							Pack qty
	Handle colours			Shaft mm □	Length of shaft						
	Blue	Red	Grey		116 mm	132 mm	148 mm	172 mm	270 mm	400 mm	
DMM 40	K1AB	K1AR	K1AG	6 x 6	4K6116MMDCM/ DMM	4K6132MMDMM	4K6148MMDMM	4K6172MMDCM/ DMM	4K6270MMDMM	4K6400MMDCM/ DMM	1
DMM 63	1818001	1818002	1818200								
DMM 125	K2SAB	K2SAR		6 x 6	1314335*	1314341*	1314342*	1314334*	1314374*	1314370	
DMM 160	1818003	1818004									

C Type handles

Without interlock function, for example when mounted on the cover of Eaton's Halyester enclosure range



K1 C handle
1818015

K2S handle
1818018

Shafts

	C Type handles		Metal shafts							Pack qty
	Handle colours		Shaft mm□	Total height of switch + shaft						
	Blue	Red		116 mm	132 mm	148 mm	172 mm	270 mm	400 mm	
DMM 40	K1CB	K1CR	6 x 6	4K6116MMDCM/DMM	4K6132MMDMM	4K6148MMDMM	4K6172MMDCM/ DMM	4K6270MMDMM	4K6400MMDCM/ DMM	1
DMM 63	1818015	1818016								
DMM 125	K2SCB	K2SCR	6 x 6	1314335*	1314341*	1314342*	1314334*	1314374*	1314370	
DMM 160	1818017	1818018								

* Height of switch from bottom of switch to top of operating shaft

Handles and shafts

D/P Type handles

Padlockable for mounting on hinged door, with interlock function



K1 D/P handle
1818029



K2S D/P handle
1818034



Shafts

	D/P Type handles			Metal shafts						Pack qty	
	Handle colours			Shaft mm □	Length of shaft						
	Blue	Red	Grey		116 mm	132 mm	148 mm	172 mm	270 mm		400 mm
DMM 40	K1DB/P 1818029	K1DR/P 1818030	K1DG/P 1818031	6 x 6	4K6116MMDCM/ DMM	4K6132MMDMM	4K6148MMDMM	4K6172MMDCM/ DMM	4K6270MMDMM	4K6400MMDCM/ DMM	1
DMM 63											
DMM 125	K2SDB/P 1818032	K2SDR/P 1818033	K2SDG/P 1818034	6 x 6	1314335*	1314341*	1314342*	1314334*	1314374*	1314370	
DMM 160											

D/C Type handles

With cylinder lock for mounting on hinged door, supplied with two keys, with interlock function



K2SDB/C
1818038



K2SDR/C
1818039



K2SDG/C
1818040



Shafts

D/C Type handles				Metal shafts							
Handle colours			Shaft mm □	Length of shaft						Pack qty	
Blue	Red	Grey		116 mm	132 mm	148 mm	172 mm	270 mm	400 mm		
DMM 125	K2SDB/C 1818038	K2SDR/C 1818039	K2SDG/C 1818040	6 x 6	4K6116MMDCM/ DMM	4K6132MMDMM	4K6148MMDMM	4K6172MMDCM/ DMM	4K6270MMDMM	4K6400MMDCM/ DMM	1
DMM 160					1314335*	1314341*	1314342*	1314334*	1314374*	1314370	

* Height of switch from bottom of switch to top of operating shaft

Switch-disconnectors, 40 A to 160 A, AC-23 A

DMM Dumeco switch-disconnectors

Accessories

Auxiliary switch sets suitable for DMM 40 to 160 A


Not suitable for DMM with integrated black rotary handle



1314301

Part number	Article number	Rated current	Rated voltage	Contact	Pack qty
AUX1NO+1NCDCM/DMM	1314300	16 A	380 V a.c.	1 NO + 1 NC	1
AUX2NO+2NCDCM/DMM	1314301	16 A	380 V a.c.	2 NO + 2 NC	1

Shaft supporting set for DMM 40 to 160 A



1314369

Part number	Article number	Pack qty
SHAFTSETDCM/DMM	1314369	1

Connection set for DMM 80 A, 100 A, 125 A and 160 A



1314232

Part number	Article number	Connecting capacity	Pack qty
SETDMM125*	1314232*	2 x 2.5 mm ² up to 50 mm ²	1

*Cannot be used with part number 1314330

Transparent terminal cover



1314331

DMM	Part number	Article number	Pack qty
DMM 40	COVERDCM/DMM40/63	1314331	1
DMM 63			
DMM 80	COVERDCM/DMM125*	1314330*	1
DMM 100			
DMM 125			
DMM 160			

*Cannot be used with part number 1314332

Technical data


			DMM 40	DMM 63	DMM 80	DMM 100	DMM 125	DMM 160
Conventional free air thermal current	I_{th}		40 A	63 A	80 A	100 A	125 A	160 A
Conventional enclosed thermal current	I_{the}	35°C / 50°C	40 A	63 A	80 A	100 A	125 A	160 A
Rated uninterrupted current	I_u		40 A	63 A	80 A	100 A	125 A	160 A
Rated operational voltage	U_e		690 V	690 V	690 V	690 V	690 V	690 V
Rated insulation voltage	U_i		690 V	690 V	690 V	690 V	690 V	690 V
Rated impulse withstand voltage	U_{imp}		6 kV	6 kV	6 kV	6 kV	6 kV	6 kV
Rated frequency			50/60 Hz	50/60 Hz	50/60 Hz	50/60 Hz	50/60 Hz	50/60 Hz
Storage temperature			-25°C..+80°C	-25°C..+80°C	-25°C..+80°C	-25°C..+80°C	-25°C..+80°C	-25°C..+80°C
Max altitude (without derating)			2000 m	2000 m	2000 m	2000 m	2000 m	2000 m
Rated operational current								
AC-21A	At $U_e = 415$ V AC-21A	I_e	40 A	63 A	80 A	100 A	125 A	160 A
	At $U_e = 500$ V AC-21A	I_e	40 A	63 A	80 A	100 A	125 A	160 A
	At $U_e = 690$ V AC-21A		40 A	63 A	80 A	100 A	125 A	160 A
AC-22A	At $U_e = 415$ V AC-22A	I_e	40 A	63 A	80 A	100 A	125 A	160 A
	At $U_e = 500$ V AC-22A		40 A	63 A	80 A	100 A	125 A	160 A
	At $U_e = 690$ V AC-22A		40 A	63 A	80 A	100 A	125 A	160 A
AC-23A	At $U_e = 415$ V AC-23A	I_e	40 A	63 A	80 A	100 A	66 A	140 A
	At $U_e = 500$ V AC-23A		25 A	25 A	66 A	66 A	66 A	66 A
	At $U_e = 690$ V AC-23A		25 A	25 A	42 A	42 A	42 A	42 A
Rated operational power								
	At $U_e = 415$ V AC-23A	P	22 kW	30 kW	45 kW	55 kW	37 kW	30 kW
	At $U_e = 500$ V AC-23A	P	15 kW	15 kW	45 kW	45 kW	45 kW	45 kW
	At $U_e = 690$ V AC-23A	P	22 kW	22 kW	37 kW	37 kW	37 kW	40 kW
Rated breaking capacity								
	At $U_e = 415$ V	I	320 A	504 A	833 A	1029 A	528 A	1120 A
	At $U_e = 500$ V	I	200 A	200 A	528 A	528 A	528 A	528 A
	At $U_n = 690$ V	I	200 A	200 A	336 A	336 A	336 A	336 A
Rated short-time withstand current	I_{cw}		1.5 kA - 1 s	1.5 kA - 1 s	2.5 kA - 1s	2.5 kA - 1s	2.5 kA - 1 s	2.5 kA - 1 s
Rated short-circuit making capacity	I_{cm}		2.2 kA - 1 s	2.2 kA - 1 s	3.6 kA	3.6 kA	3.6 kA - 1 s	3.6 kA - 1 s
Rated conditional short-circuit current	$I_p(I_g)$	415 V	100 kA	100 kA	30 kA	30 kA	30 kA	30 kA
		690 V	50 kA	50 kA	50 kA	50 kA	50 kA	50 kA
Cut-off current	max.	415 V	7.93 kA	7.93 kA	13.7 kA	13.7 kA	13.7 kA	13.7 kA
		690 V	8.49 kA	8.49 kA	13.5 kA	13.5 kA	13.5 kA	13.5 kA
Joule integral	max.	415 V	10.5 kA²s	10.5 kA²s	134 kA2s	134 kA2s	134 kA²s	134 kA²s
		690 V	25.5 kA²s	25.5 kA²s	86.9 kA2s	86.9 kA2s	86.9 kA²s	86.9 kA²s
Fuse-link gG max	I_n	415 V	P5gG63-000, 63 A		P5gG160-1, 160 A		P5gG160-1, 160 A	
		690 V	80NHG00B-69, 80 A		P6gG125-1, 125 A		P6gG125-1, 125 A	
Power dissipation per pole	P		0.6 W	1.5 W	2.9 W	3.6 W	5.5 W	9.1 W
Durability - maximum cycles (on+off)			10.000	10.000	10.000	10.000	10.000	10.000
Pollution degree			III/3	III/3	III/3	III/3	III/3	III/3
Protection class			IP20	IP20	IP20	IP20	IP20	IP20
Tightening torque			2 Nm	2 Nm	7 Nm	7 Nm	7 Nm	7 Nm
Copper conductor.Stranded/Flexible			6 - 70 mm²	6 - 70 mm²	6 - 70 mm²	6 - 70 mm²	6 - 70 mm²	6 - 70 mm²
Standards and certifications			IEC 60947-3, EAC, KEMA-KEUR, Lloyd's Register					

Switch-disconnectors, 40 A to 160 A, AC-23 A


DMM Dumeco switch-disconnectors

Outline drawings

DMM 40 A and DMM 63 A - mm

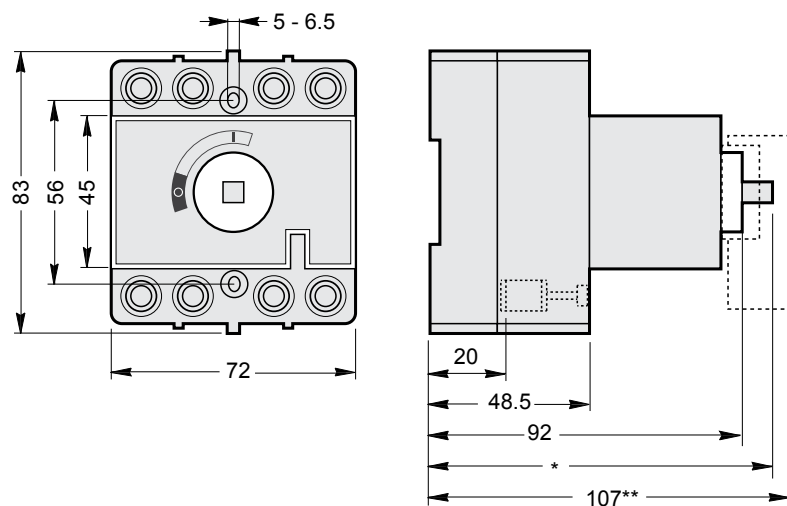

DMM 80A, 100 A, 125 A and DMM 160 A - mm

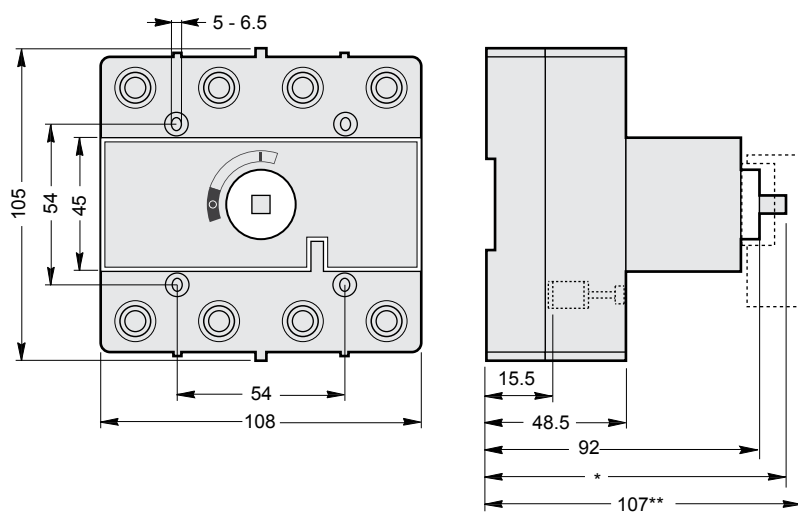


* Dependent on the applied operating shaft

** With integrated black rotary handle

At Eaton, we serve the needs of machine builders and their customers across the globe.

As one of the world's leading power management companies, we provide energy efficient solutions designed to help our customers use electrical, fluid and mechanical power more efficiently, safely, economically and sustainably. Our future-proof solutions will help you meet both current and future challenges, even in a world driven by Industry 4.0. To this end, we are bringing together electrical engineering with hydraulics and IT, respectively. Whether in-house or jointly with our partners, we create integrated industry technologies for the machine-building industry.

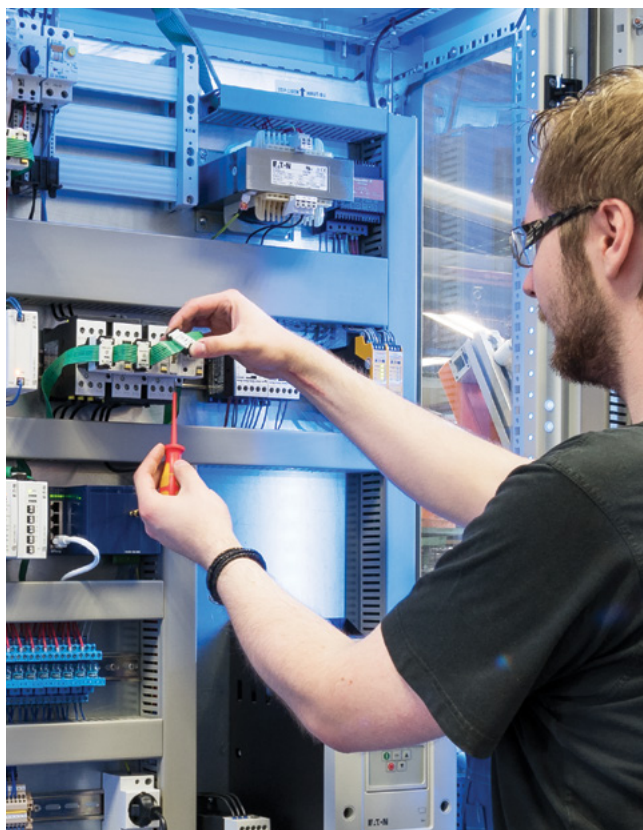

Eaton brings you a new dimension of expertise.

With ever shorter product lifecycles, customers now expect you to design and build highly customized machines, or to retrofit existing ones, at a faster pace and at lower cost than ever before. Your customers demand machines that operate reliably, error-free, and with maximum energy efficiency.

By equipping your machines with our best-in-class electrical and hydraulic solutions, you are guaranteed to achieve higher levels of accuracy, speed, energy efficiency, reliability, and flexibility. Eaton is one of the only suppliers globally that to offer integrated solutions for both hydraulic and electrical systems in machinery and equipment.

Integrated Industry Technologies: Innovations that are the product of a great legacy.

As we have grown, our solutions portfolio has also diversified; by integrating the unique capabilities and product families of market leaders such as Aeroquip, Moeller, Vickers, Bussmann, F&G and Heinemann, we are able to deliver innovation across a broad range of sophisticated products and solutions that is continuously being expanded. One of our main priorities is to combine these technologies into one innovative solution. This includes both the Electrical and the Hydraulics sector, as well as IT and machine controls for our Industry 4.0 solutions. In this way, our customers benefit from Eaton's Integrated Industry Technologies and the future-proof solutions that they offer.

Switch-disconnectors, 40 A and 63 A, AC-21 A and AC-22 A

DCM Duco switch-disconnectors, 40 A and 63 A, 415 V a.c.



Description

The DCM Duco switch-disconnectors provide safe isolation in a wide range of low voltage applications. Thanks to their excellent making and breaking capacity under load conditions they are particularly suited for use in distribution panels and for machine controls.

Standards/Approvals

- IEC 60947-3
- EAC
- KEMA-KEUR,
- Lloyd's Register

Technical data

- Voltage: 415 V ac.
- Current: 40 A and 63 A
- 3-pole + solid neutral and 4-poles
- Semi-independent manual operation mechanism
- AC-21 A and AC-22 A

Mounting options

Suitable for DIN-Rail mounting and 45 mm standard panel cut-out
Direct operation or with door mount knob

Features

- Compact
- Enclosure made of non-tracking synthetic material
- Semi-independent manual operation mechanism
- Various shaft lengths
- Suitable for padlocking in OFF position (1 padlock, diameter up to 5 mm)
- Available as basic switch body with a selection of shafts and handles or with integrated black rotary handle
- Available with horizontal cable connection
- Available for front mounting

DCM range overview

	40 A	63 A
Switch-disconnectors with integrated black rotary handle	✓	✓
Switch-disconnectors without shaft and knob	✓	✓
Switch-disconnectors with shaft C Type handles for mounting on Halyester cover only	✓	✓

DCM with integrated black rotary handle



1314106

Thermal current I_{the}	Number of poles	Part number	Article number	Pack qty
40 A	3P + solid neutral	DCM-40/1	1314106	1
40 A	4P	DCM-40/4	1314110	1
63 A	3P + solid neutral	DCM-63/1	1314004	1
63 A	4P	DCM-63/4	1314006	1

DCM without shaft and handle



1314109 Vertical cable connection



1314104 Horizontal cable connection



1314113 Front mounting

Thermal current I_{the}	Number of poles	Part number	Article number	Pack qty
Vertical cable connection				
40 A	3P + solid neutral	DCM-40/1-SK+VC	1314105	1
40 A	4P	DCM-40/4-SK+VC	1314109	1
63 A	3P + solid neutral	DCM-63/1-SK+VC	1314003	1
63 A	4P	DCM-63/4-SK+VC	1314016	1
Horizontal cable connection				
40 A	3P + solid neutral	DCM-40/1-SK+HC	1314104	1
40 A	4P	DCM-40/4-SK+HC	1314108	1
63 A	3P + solid neutral	DCM-63/1-SK+HC	1314002	1
63 A	4P	DCM-63/4-SK+HC	1314015	1
Front mounting				
40 A	3P + solid neutral	DCM-40/1-SK+FM	1314112	1
40 A	4P	DCM-40/4-SK+FM	1314113	1
63 A	4P	DCM-63/4-SK+FM	1314009	1

DCM with shaft and cover mounted handle, without interlock function, for example when mounted on Eaton's Halyester enclosure range



1314007

Thermal current I_{the}	Number of poles	Height*	Part number	Article number	Pack qty
40 A	3P + solid neutral	116 mm	DCM-40/1+CM	1314107	1
40 A	4P	116 mm	DCM-40/4+CM	1314111	1
63 A	3 + solid neutral	116 mm	DCM-63/1+CM	1314005	1
63 A	4P	116 mm	DCM-63/4+CM	1314007	1

* Height of switch from bottom of switch to top of operating shaft

Switch-disconnectors, 40 A and 63 A, AC-21 A and AC-22 A

DCM Duco switch-disconnectors

Handles and shafts

Handles mounting types overview

Duco	K Type handles	A Type handles			C Type handles		D/P Type handles		
		Blue	Red	Grey	Blue	Red	Blue	Red/Yellow	Grey
40 A	K1	✓	✓	✓	✓	✓	✓	✓	✓
63 A	K1	✓	✓	✓	✓	✓	✓	✓	✓

A Type: Handle mounted directly on switch

C Type: Without interlock function, for example when mounted on the cover of Eaton's Halyester enclosure range

D/P Type: Handle padlockable for mounting on hinged door, with interlock function

See handles dimensions pages 95 to 98

A Type handles

Mounted directly on switch



K1AB 1818001



K1AR 1818002



K1AG 1818200



Shafts

A Type handles			Metal shafts						Pack qty	
Handles colours			Shaft mm□	Length of shafts (length from base of switch to top of shaft)						
Blue	Red	Grey			100 mm	116 mm	132 mm	156 mm	254 mm	384 mm
K1AB 1818001	K1AR 1818002	K1AG 1818200	6 x 6	4K6116MMDCM/ DMM 1314335	4K6132MMDMM 1314341	4K6148MMDMM 1314342	4K6172MMDCM/ DMM 1314334	4K6270MMDMM 1314374	4K6400MMDCM/ DMM 1314370	1

C Type handles

Without interlock function, for example when mounted on the cover of Eaton's Halyester enclosure range



K1CB 1818015



K1CR 1818016



Shafts

C Type handles			Metal shafts						Pack qty
Handle colours		Shaft mm□	Length of shafts (length from base of switch to top of shaft)						
Blue	Red/yel- low		100 mm	116 mm	132 mm	156 mm	254 mm	384 mm	
K1CB 1818015	K1CR 1818016		6 x 6	4K6116MMDCM/DMM 1314335	4K6132MMDMM 1314341	4K6148MMDMM 1314342	4K6172MMDCM/DMM 1314334	4K6270MMDMM 1314374	

D/P Type handles

Padlockable for mounting on hinged door, with interlock function



K1DB/P 1818029



K1DR/P 1818030



K1DG/P 1818031



Shafts

D/P Type handles			Metal shafts							Pack qty
Handle colours			Shaft mm□	Length of shafts (length from base of switch to top of shaft)						
Blue	Red/yel- low	Grey		100 mm	116 mm	132 mm	156 mm	254 mm	384 mm	
K1DB/P 1818029	K1DR/P 1818030	K1DG/P 1818031	6 x 6	4K6116MMDCM/ DMM 1314335	4K6132MMDMM 1314341	4K6148MMDMM 1314342	4K6172MMDCM/ DMM 1314334	4K6270MMDMM 1314374	4K6400MMDCM/ DMM 1314370	1

Accessories

Front mounting kit



1314344

DCM	Part number	Article number	Pack qty
DCM 40 A	FRONTKITDCM/DMM	1314344	1
DCM 63 A			1


Auxiliary switch set



1314301

Part number	Article number	Current	Voltage	Contact	Pack qty
AUX1NO+1NCDCM/DMM	1314300	16 A	380 V a.c.	1 NO + 1 NC	1
AUX2NO+2NCDCM/DMM	1314301	16 A	380 V a.c.	2 NO + 2 NC	1

Shaft supporting set for use with 384 mm shaft (article number 1314370)



1314369

DCM	Part number	Article number	Pack qty
DCM 40 A	SHAFTSETDCM/DMM	1314369	1
DCM 63 A			1

Transparent terminal cover



1314331

DCM	Part number	Article number	Pack qty
DCM 40 A	COVERDCM/DMM40/63	1314331	1
DCM 63 A			1

Conversion kits for locking the D Type handles in both On and Off position



1818103

QSA	Part number	Article number	Pack qty
DCM 40 A	ADAPTORPADLOCK-K1	1818103	1
DCM 63 A			1

Coupling links for extension of universal shafts



1319833

QSA	Shaft mm	Part number	Article number	Pack qty
DCM 40 A	6 x 6	COUP6X6MM	1319833	1
DCM 63 A	6 x 6			1

Switch-disconnectors, 40 A and 63 A, AC-21 A and AC-22 A


DCM Duco switch-disconnectors

Technical data

		DCM 40	DCM 63
Conventional free air thermal current	I_{th}	40 A	63 A
Conventional enclosed thermal current	I_{the}	40 A	63 A
Rated uninterrupted current	I_u	40 A	63 A
Rated operational voltage	U_e	415 V	415 V
Rated insulation voltage	U_i	690 V	800 V
Rated impulse withstand voltage	U_{imp}	6 kV	6 kV
Rated frequency		50 Hz	50 Hz
Max altitude (without derating)		2000 m	2000 m
Rated operational current			
At $U_e = 415$ V AC-21A	I_e	40 A	63 A
At $U_e = 415$ V AC-22A	I_e	40 A	63 A
At $U_e = 415$ V AC-23A	I_e	40 A	63 A
Rated operational power			
At $U_e = 415$ V AC-23A		16.6 kW	26 kW
Rated short-time withstand current	I_{cw}	1.5 kA	1.5 kA
Rated short-circuit making capacity	I_{cm}	2.2 kA	2.2 kA
Rated conditional short-circuit current	$I_p(I_q)$	415 V: 50 kA	415 V: 50 kA
Cut-off current	max.	690 V: 7 kA	690 V: 7 kA
Joule integral	max.	690 V: 12 kA ² s	690 V: 12 kA ² s
Fuse-link max	I_n	690 V: 50 A	690 V: 800 A
Power dissipation per pole	P	0.6 W	1.5 W
Terminal capacities			
Copper connector:			
Solid		2.5 - 6 mm ²	2.5 - 6 mm ²
Stranded		2.5 - 25 mm ²	2.5 - 25 mm ²
Flexible		1.5 - 25 mm ²	1.5 - 25 mm ²
Tightening torque		2 Nm	2 Nm
Pollution degree		III/3	III/3
Protection class		IP20	IP20
Standards		EN-IEC 60947-3, EAC	
Certification		KEMA-KEUR, Lloyd's Register	

Outline drawing

DCM Duco 40 A and 63 A - mm

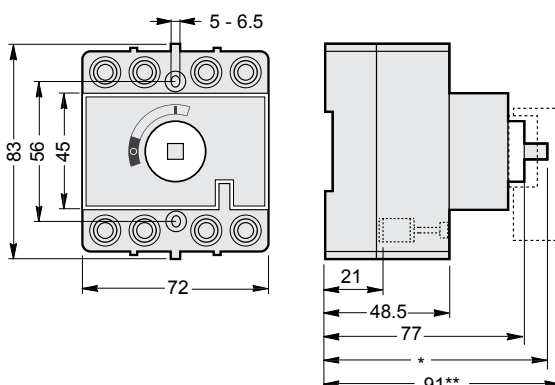



Worldwide export of machines and plants

European machine and system building and worldwide exports are closely related. Even if you don't export your machines at present, you should be prepared for it in the future. Eaton provides switchgear and protective devices with all the essential approvals and certificates for machine and system building. In most countries around the world, conformity with international standards is the sole requirement for successful exports. This is because components in these locations are governed by compliance with well known and established IEC standards. In this respect, the European CE mark is not only the passport for exports within Europe but also far beyond its borders.



World market equipment for machine building

Nearly all the switchgear and protective devices of Eaton's Moeller series are world market devices. Each product line thus carries all the approvals and certification marks required for worldwide use.

These product lines include those for

- Pilot devices, limit switches
- Contactors and various timing and special relays
- Motor-protective circuit breakers and relays
- Electronic components and systems.

With circuit breakers and switch-disconnectors, Eaton offers IEC devices for use in most countries in the world and NA devices with virtually the same dimensions and the same accessories for the North American market. This considerably simplifies device selection since the North American standards often involve the need for considerably different technical specifications.

DMV Change-over mechanisms, 160 A to 2000 A, 690 V a.c.

DMV Change-over mechanisms, 160 A to 2000 A, 690 V a.c. for DMV switch-disconnectors



Description

The Dumeco DMV change-over mechanisms convert DMV switch-disconnectors into 3 to 4-pole change-over switches.

Standards/Approvals

- IEC 60947-3
- EAC
- KEMA-KEUR
- Lloyd's Register
- CCC up to 1250 A

Technical data


- Voltage: 690 V ac.
- Current: 160 A to 2000 A

Features

- Compact
- Made of non-tracking material
- Independent manual operation
- Easy installation of 3-pole + solid neutral or 4-pole

Parts required for the change-over mechanisms

- 2 switch-disconnectors
- 1 Change-over mechanism
- 1 through-connector set (4-pole)
- 1 operating shaft (6 mm, 10 mm or 14 mm shaft)
- 1 change-over handle. **Note: Use 2 standard handles for 1250 A, 1600 A and 2000 A DMV switch-disconnectors**

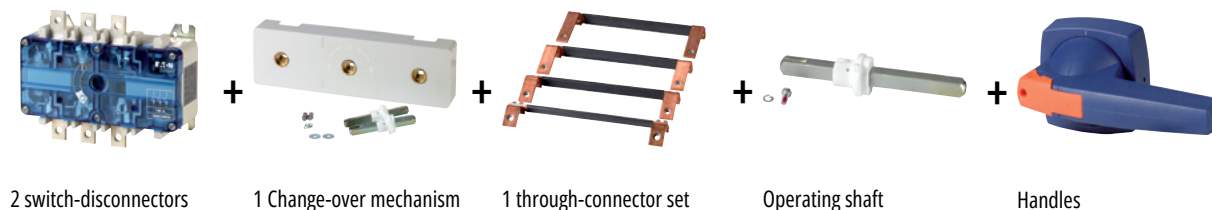

Change-over mechanisms for Dumeco DMV switch-disconnectors



1314314



1314884

Suitable for DMV	Part number	Article number	Pack qty
DMV 160N	CODMV160N*	1314314*	1
DMVS 160N, DMV 250N and DMV 400N	CODMVS160N/400N	1314884	1
DMV 630N and DMV 1000N	CODMV630N/1000N	1314682	1
DMV 1250N, DMV 1600N and DMV 2000N	CODMV1250/1600/2000A3P**	1314336**	1

*1314314: Operating shaft included (shaft length = 70 mm from top of change-over mechanism)

**1314336: When door mounted padlockable handle (D/P Type) is required 2 additional standard shafts (Article number 1050250) and 2 additional handles (Article number 1818076) are necessary

Bridge connector set



1314320



1314881

Suitable for DMV	Part number	Article number	Pack qty
DMV 160N	SETDMV160N	1314320	1 (4 pieces)
DMVS 160N, DMV 250N	SETDMVS160N/250N	1314878	1 (4 pieces)
DMV 400N	SETDMV400N	1314879	1 (4 pieces)
DMV 630N	SETDMV630N	1314881	1 (4 pieces)
DMV 1000N	SETDMV1000N	1314883	1 (4 pieces)

DMV Change-over mechanisms, 160 A to 2000 A, 690 V a.c.

DMV Change-over mechanisms

Handles and shafts

Handles mounting types overview

DMV	K Type handles	Shaft square mm	A Type handles			D/P Type handles*
			Blue	Red	Grey	Blue
DMV 160N	K2S	6 x 6	✓	✓		✓*
DMVS 160N	K3	6 x 6	✓	✓	✓	✓*
DMV 250N	K3	10 x 10	✓	✓	✓	✓*
DMV 400N	K3	10 x 10	✓	✓	✓	✓*
DMV 630N	K5	14 x 14	✓	✓	✓	✓*
DMV 1000N	K5	14 x 14	✓	✓	✓	✓*
DMV 1250N	K6 (2x)	14 x 14	✓	✓	✓	
	K5	14 x 14				✓*
DMV 1600N	K6 (2x)	14 x 14	✓	✓	✓	
	K5	14 x 14				✓*
DMV 2000N	K6 (2x)	14 x 14	✓	✓	✓	
	K5	14 x 14				✓*


A Type: Handle mounted directly on switch

***D/P Type:** Handle padlockable for mounting on hinged door with interlock function. These handles are pre-printed with 1, 0, 2 position

See handles dimensions pages 95 to 98

A Type handles

Mounted directly on switch

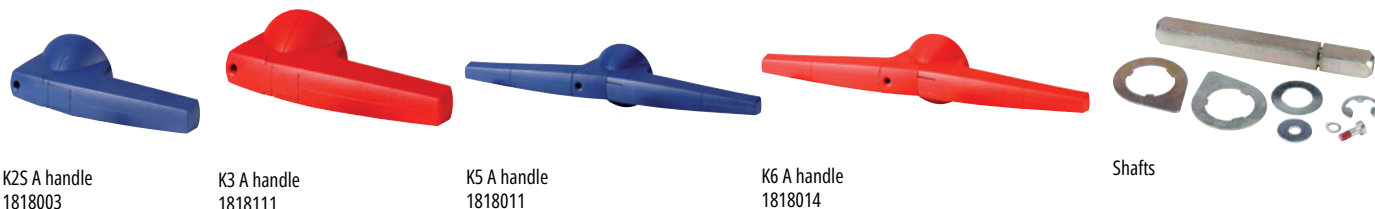

Change-over mechanism	Suitable for DMV	A Type handles			Metal shafts				Pack qty	
		Handle colours			Shaft mm□	Lenght of shafts				
		Blue	Red	Grey		185 mm	200 mm	230 mm		400 mm
CODMV160N 1314314	DMV 160N	K2SAB 1818003	K2SAR 1818004		Shaft already included with the mechanism				1	
CODMVS160N/400N 1314884	DMVS 160N	K3AB 1818110	K3AR 1818111	K3AG 1818202	10 x 10	4K10H185COK3 1050251		4K10H400COK3 1050252	1	
	DMV 250N									
	DMV 400N									
CODMV630N/1000N 1314682	DMV 630N	K5AB 1818011	K5AR 1818012		14 x 14		4K14H230COK5 1050253	4K14H400COK5 1050254	1	
	DMV 1000N									
CODMV1250/1600/2000A3P 1314336	DMV 1250N	K6AB 1818013	K6AR 1818014		14 x 14		4K14K6H200 1050248		4K14K6H400 1050250	1
	DMV 1600N									
	DMV 2000N									

Handles and shafts

D/P Type handles

Padlockable for mounting on hinged door, with interlock function



K02SDB/P handle
1818072



K03D/P handle
1818116



K05DB/P handle
1818076



Shafts


Change-over mechanism	Suitable for DMV	D/P Type handles		Metal shafts				Pack qty
		Handle colours	Shaft mm□	Length of shafts				
		Blue		185 mm	200 mm	230 mm	400 mm	
CODMV160N 1314314	DMV 160N	K02SDB/P 1818072	Shaft already included with the mechanism					1
CODMVS160N/400N 1314884	DMVS 160N	K03DB/P 1818116	10 x 10	4K10H185COK3 1050251			4K10H400COK3 1050252	1
	DMV 250N							
	DMV 400N							
CODMV630N/1000N 1314682	DMV 630N	K05DB/P 1818076	14 x 14			4K14H230COK5 1050253	4K14H400COK5 1050254	1
	DMV 1000N							
CODMV1250/1600/2000A3P 1314336	DMV 1250N	K06DB/P 1818078	14 x 14	4K14K6H200 1050248			4K14K6H400 1050250	1
	DMV 1600N							
	DMV 2000N							

DMV Change-over mechanisms, 160 A to 2000 A, 690 V a.c.


DMV Change-over mechanisms

Outline drawings


Change-over mechanisms suitable for DMV 160N - horizontal - mm

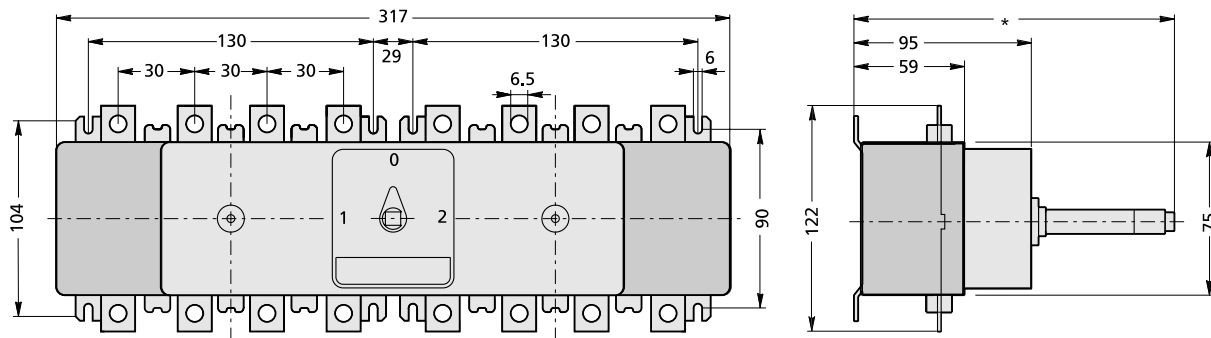


Change-over mechanisms suitable for DMVS 160N, DMV 250N and DMV 400N - horizontal - mm

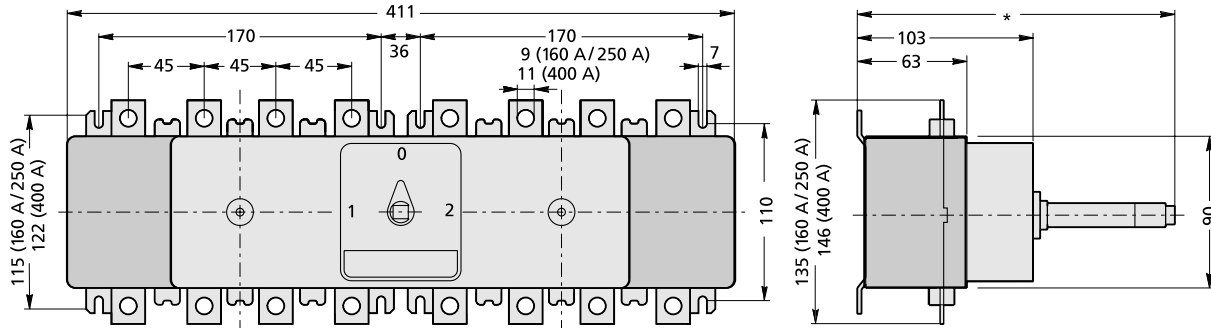

Change-over mechanisms suitable for DMV 630N and DMV 1000N - horizontal - mm

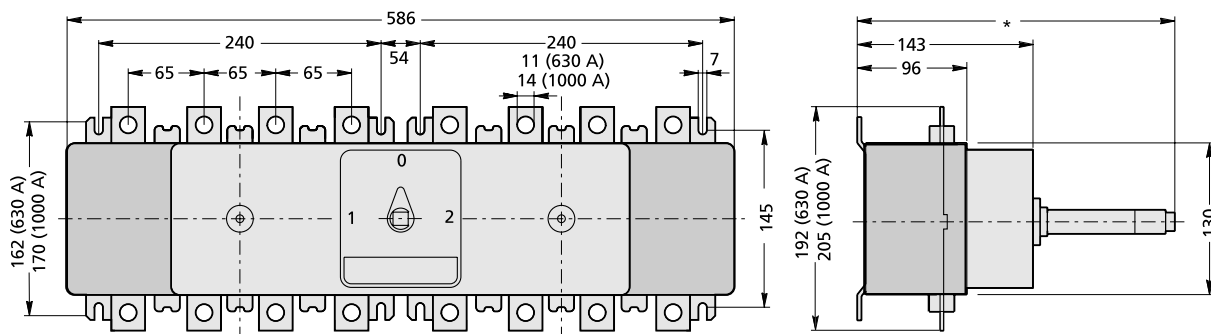


Change-over mechanisms suitable for DMV 1250N and DMV 1600N - horizontal

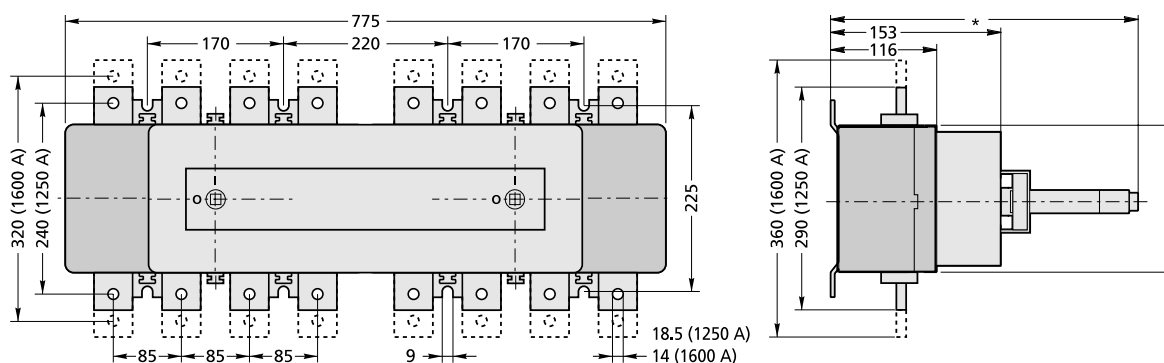


Outline drawings

Change-over mechanisms suitable for DMV 160N - vertical - mm

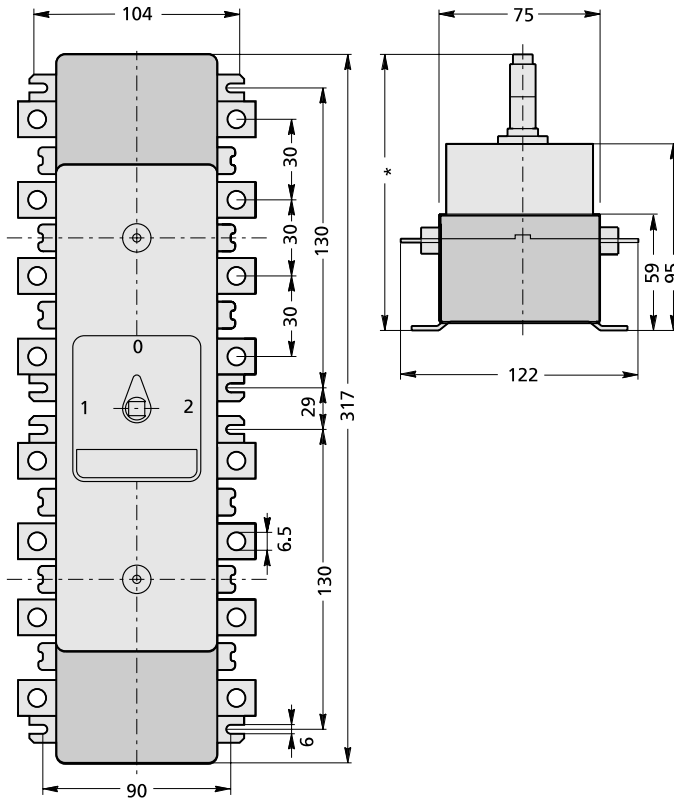

Change-over mechanisms suitable for DMVS 160N, DMV 250N and DMV 400N - vertical - mm

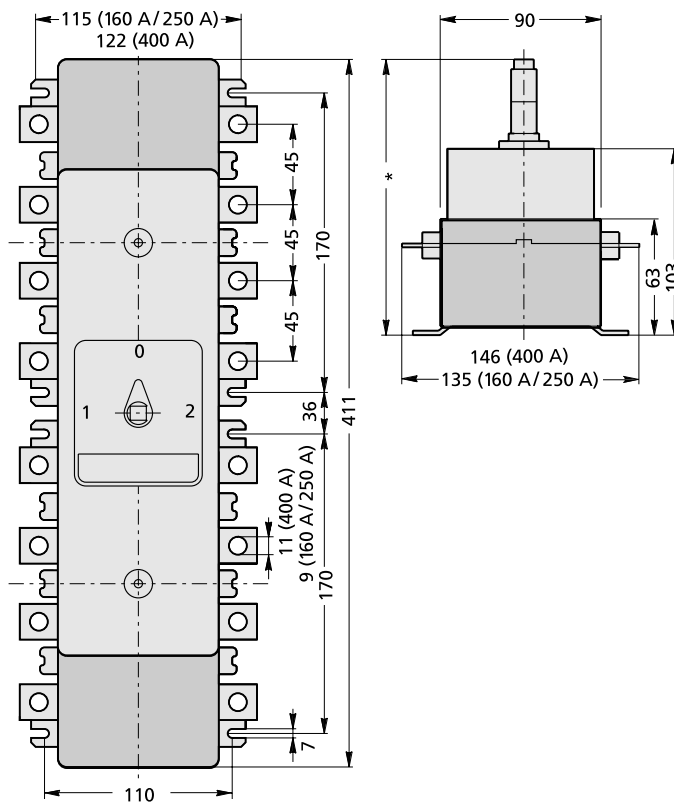


* Dependant on the applied operating shaft

DMV Change-over mechanisms, 160 A to 2000 A, 690 V a.c.


DMV Change-over mechanisms

Outline drawings

Change-over mechanisms suitable for DMV 630N and DMV 1000N - vertical - mm

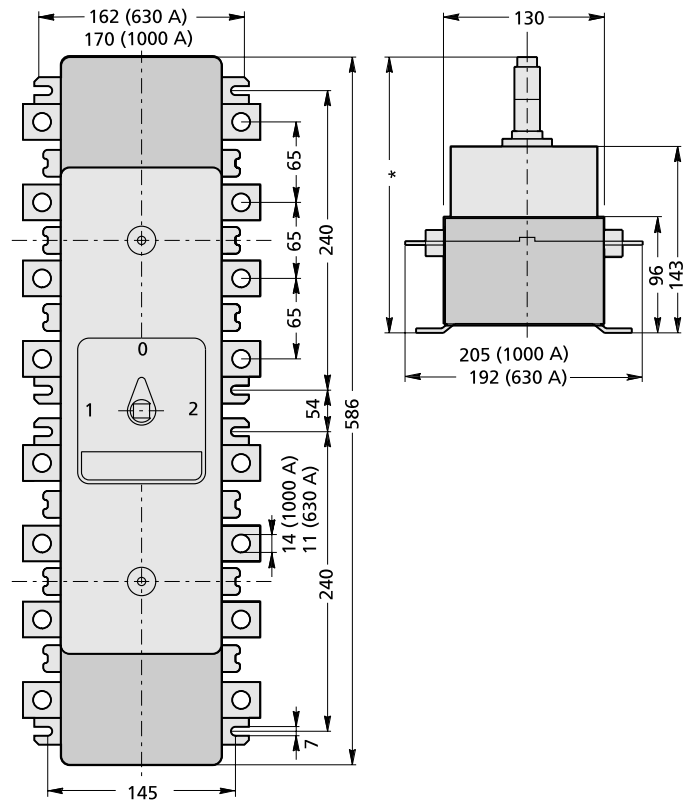

Change-over mechanisms suitable for DMV 1250N and DMV 1600N - vertical - mm

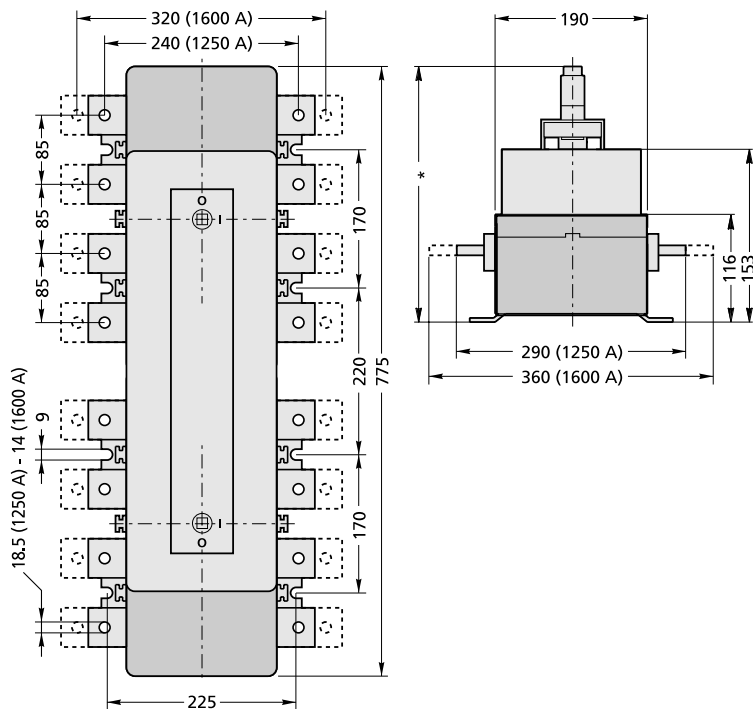

* Dependant on the applied operating shaft

Optimise space and budget

Eaton are dedicated to offering innovative solutions that are safe, compact, reliable and financially efficient. With budgets across the sector increasingly squeezed, the importance of reducing costs across engineering, wiring, testing and commissioning is paramount to future profitability. Eaton can help you achieve this cost reduction and improve downtime in the process.

Standardize Operations

Our portfolio of standardised solutions can revolutionise your operational efficiency. Designed to meet global standards, manage costs and reduce energy consumption, Eaton can help you build state-of-the-art systems that are both easy to maintain and service.

Improve integrated performance

Offering compatibility with a wide variety of technology our solutions can be integrated into ready built systems to enhance flexibility, improve diagnostic output and increase communication between machines within a network.


Prioritize Safety

Safety is one of Eaton's greatest priorities throughout the machine building process, we are dedicated to developing safer working environments and reducing operational risks. Our solutions have been efficiently designed to meet all regulatory requirements without duplicating wiring or generating resource waste. The safeguards we implement at every stage of the process ensure risk of overload, damage or fire is minimized.



DMV Multipole mechanisms , 160 A to 1000 A, 690 V a.c.

DMV Multipole mechanisms, 160 A to 1000 A, 690 V a.c.

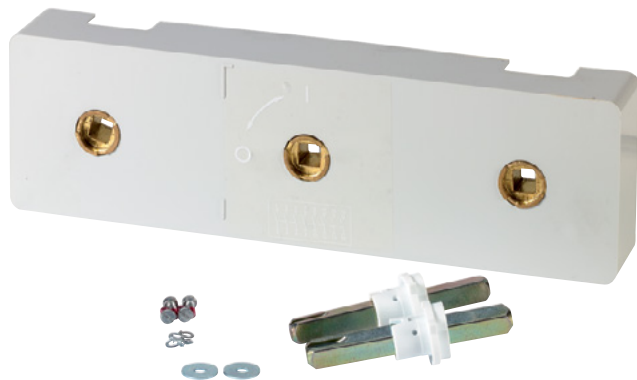

Description

The Dumeco DMV multipole mechanisms convert DMV switch-disconnectors into 6 to 8-pole disconnectors.

Standards/Approvals

- IEC 60947-3
- EAC
- KEMA-KEUR
- Lloyd's Register
- CCC

Technical data


- Voltage: 690 V a.c.
- Current: 160 A to 1000 A

Features

- Compact
- Made of non-tracking materials
- Independent manual operation
- Easy installation of switched or solid neutral for 4-pole version

Required parts for the multipole mechanisms

- 2 switch-disconnectors
- 1 multipole mechanism
- 1 operating shaft (10 mm or 14 mm)
- 1 change-over handle.

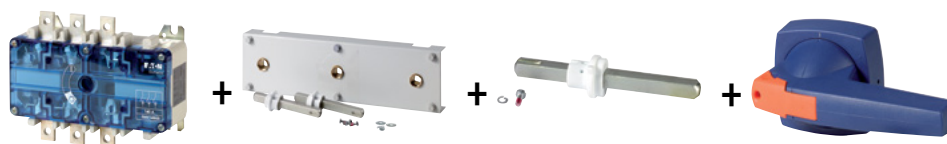

2 switch-disconnectors

1 multipole mechanism

Operating shaft

Handles

Multipole mechanisms for Dumeco DMV switch-disconnectors



1314039

Suitable for DMV	Part number	Article number	Pack qty
DMV 160N	MPDMV160N	1314337	1
DMVS 160N, DMV 250N and DMV 400N	MPDMV250N/400N	1314039	1
DMV 630N and DMV 1000N	MPDMV630N/1000N	1314040	1

Handles and shafts

Handles mounting types overview

DMV	K Types handle	Shaft mm	A Type handles			D/P Type handles			D/C Type handles		
			Blue	Red	Grey	Blue	Red/Yellow	Grey	Blue	Red/Yellow	Grey
DMV 160N	K3	10 x 10	✓	✓	✓	✓	✓	✓	✓	✓	✓
DMVS 160N	K3	10 x 10	✓	✓	✓	✓	✓	✓	✓	✓	✓
DMV 250N	K3	10 x 10	✓	✓	✓	✓	✓	✓	✓	✓	✓
DMV 400N	K3	10 x 10	✓	✓	✓	✓	✓	✓	✓	✓	✓
DMV 630N	K5	14 x 14	✓	✓	✓	✓	✓	✓	✓	✓	✓
DMV 1000N	K5	14 x 14	✓	✓	✓	✓	✓	✓	✓	✓	✓

A Type: Handle mounted directly on switch

D/P Type: Handle padlockable for mounting on hinged door, with interlock function

D/C Type: Handle with cylinder lock for mounting on hinged door, supplied with two keys, with interlock function

See handles dimensions pages 95 to 98

DMV Multipole mechanisms , 160 A to 1000 A, 690 V a.c.

DMV Multipole mechanisms

Handles and shafts

A Type handles

Mounted directly on switch suitable for DMV 160N, DMVS 160N, DMV 250N up to DMV 1000N



K3 A handle
1818111



K5 A handle
1818011



Shafts

		A Type handles			Metal shafts					
Multipole mechanism	Suitable for DMV	Handle colours			Shaft mm□	Length of shafts				Pack qty
		Blue	Red	Grey		135 mm	200 mm	245 mm	400 mm	
MPDMV160N 1314337	DMV 160N	K3AB 1818110	K3AR 1818111	K3AG 1818202	10 x 10	4K10K3H135 1050240		4K10K3H245 1050242	4K10K3H400 1050243	1
MPDMV250N/400N 1314039	DMVS 160N									
	DMV 250N									
	DMV 400N									
MPDMV630N/1000N 1314040	DMV 630N	K5AB 1818011	K5AR 1818012		14 x 14		4K14K5H200 1050244		4K14K5H400 1050247	1
	DMV 1000N									

D/P Type handles

Padlockable for mounting on hinged door, with interlock function, suitable for DMV 160N, DMVS 160N up to and DMV 1000N



K3 D/P handle
1818096



K5 D/P handle
1818056



Shafts

Multipole mechanism	Suitable for DMV	D/P Type handles			Metal shafts				Pack qty	
		Handle colours			Shaft mm□	Shaft length				
		Blue	Red	Grey		135 mm	200 mm	245 mm		400 mm
MPDMV160N 1314337	DMV 160N	K3DB/P 1818113	K3DR/P 1818096	K3DG/P 1818069	10 x 10	4K10K3H135 1050240		4K10K3H245 1050242	4K10K3H400 1050243	1
MPDMV250N/400N 1314039	DMVS 160N									
	DMV 250N									
	DMV 400N									
MPDMV630N/1000N 1314040	DMV 630N	K5DB/P 1818056	K5DR/P 1818057	K5DG/P 1818058	14 x 14		4K14K5H200 1050244		4K14K5H400 1050247	1
	DMV 1000N									

Handles and shafts

D/C Type handles

With cylinder lock for mounting on hinged door, with interlock function, suitable for DMV 160N, DMVS 160N up to DMV 1000N



K3 D/C handle
1818097



K5 D/C handle
1818061



Shafts


Multipole mechanism	Suitable for DMV	D/C Type handles			Metal shafts				Pack qty	
		Handle colours			Shaft mm□	Length of shafts				
		Blue	Red	Grey		135 mm	200 mm	245 mm		400 mm
MPDMV160N 1314337	DMV 160N	K3DB/C 1818114	K3DR/C 1818097	K3DG/C 1818070	10 x 10	4K10K3H135 1050240		4K10K3H245 1050242	4K10K3H400 1050243	1
MPDMV250N/400N 1314039	DMVS 160N									
	DMV 250N									
	DMV 400N									
MPDMV630N/1000N 1314040	DMV 630N	K5DB/C 1818059	K5DR/C 1818060	K5DG/C 1818061	14 x 14		4K14K5H200 1050244		4K14K5H400 1050247	1
	DMV 1000N									

DMV Multipole mechanisms , 160 A to 1000 A, 690 V a.c.


DMV Multipole mechanisms

Outline drawings


Multipole mechanisms suitable for DMV 160N - horizontal - mm

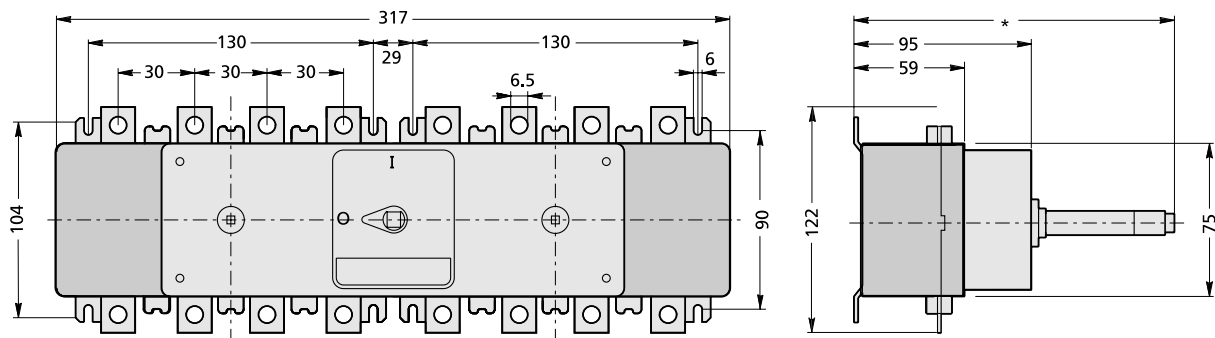

Multipole mechanisms suitable for DMVS 160N, DMV 250N and DMV 400N - horizontal - mm

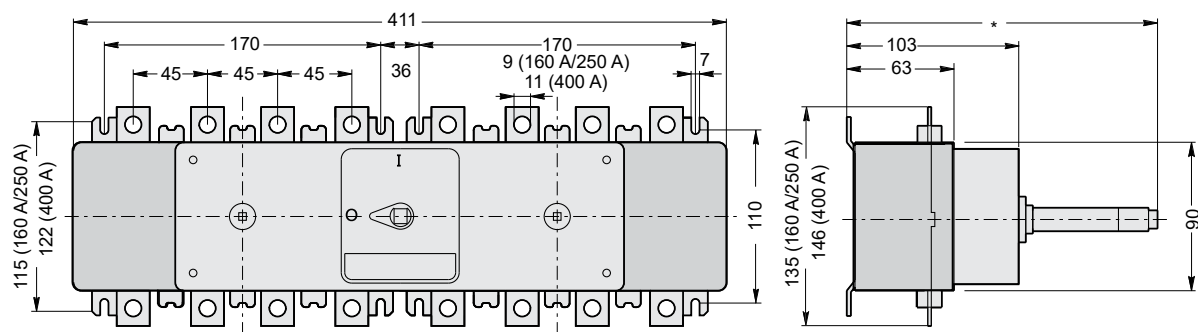


Multipole mechanisms suitable for DMV 630N and DMV 1000N - horizontal - mm

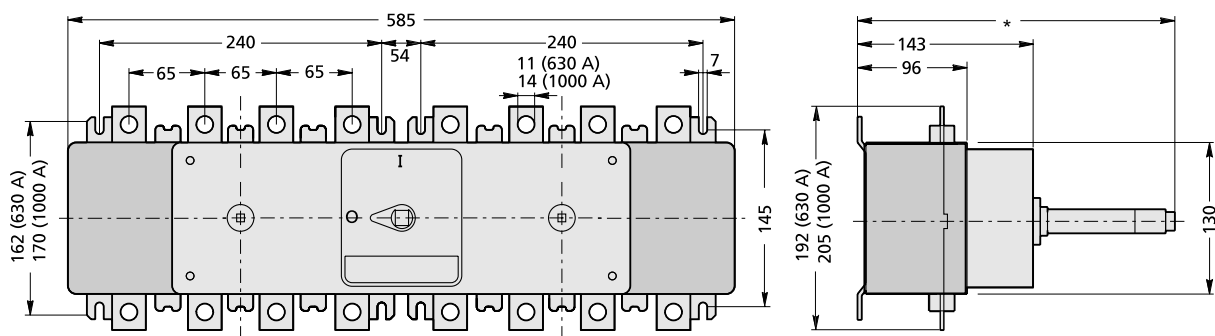


* Dependant on the applied operating shaft

Outline drawings

Multipole mechanisms suitable for DMVS 160N, DMV 250N and DMV 400N - vertical - mm

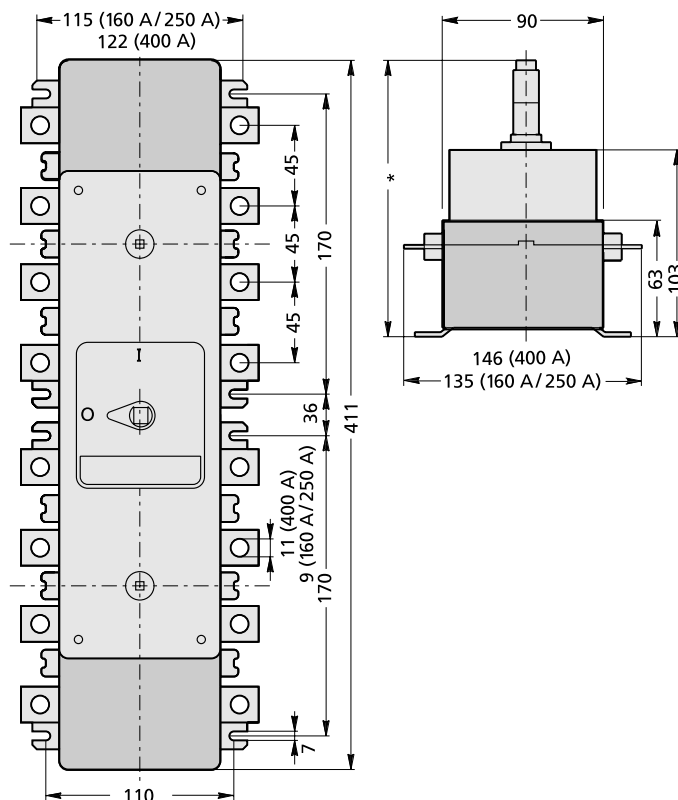

Multipole mechanisms suitable for DMVS 160N, DMV 250N and DMV 400N - vertical - mm

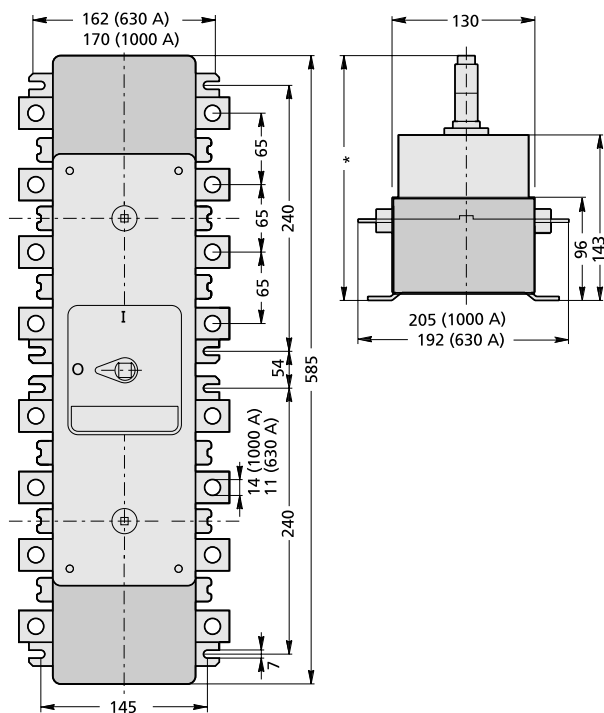

* Dependant on the applied operating shaft

Change-over and multipole switches, 40 A to 100 A, 690 V a.c.

QM Change-over and multipole switches, 40 A to 100 A, 690 V a.c.



Description

The change-over and multipole switches Type QM provide safe isolation in a wide range of low voltage applications where 6 to 8-poles are required, also the perfect solution for 3 to 4-pole change-over applications.

Thanks to their excellent making and breaking capacity under load conditions they are particularly suited for use in distribution panels and for machine controls.

Standards/Approvals

- IEC 60947-3
- EAC

Technical data

- Voltage: 690 V ac.
- Current: 40 A to 100 A
- 6 to 8-pole OFF-ON
- 3 or 4-pole change-over applications
- Direct operation or with door mount knob
- Utilisation category: AC-23A

Mounting options

- DIN-Rail mounting and base plate

Features

- Compact
- Made of non-tracking material
- Independent manual operation for ON and OFF switching
- Easy installation of switched or solid neutral for 4-pole version

QM Change-over and multipole switches - range overview

	40 A	50 A	63 A	80 A	100 A
Change-over switches, 3 -pole and 3-pole + switched neutral	✓		✓		✓
Multipole switches, 6-pole and 6-pole + 2 switched neutral		✓		✓	

QM Change-over switches



1319970

Number of poles	Thermal current I_{the}	Suitable shaft	Part number	Article number	Pack qty
2 x 3P + switched neutral	40 A	6 x 6 mm	QM40/3N	1319970	1
2 x 3P	63 A	6 x 6 mm	QM63/3	1319807	1
2 x 3P + switched neutral	63 A	6 x 6 mm	QM63/3N	1319915	1
2 x 3P	100 A	6 x 6 mm	QM100/3	1319815	1
2 x 3P + switched neutral	100 A	6 x 6 mm	QM100/3N	1319916*	1

QM Multipole switches



1319904

Number of poles	Thermal current I_{the}	Suitable shaft	Part number	Article number	Pack qty
6P	50 A	6 x 6 mm	QM63/6	1319806	1
6P + 2 switched neutral	50 A	6 x 6 mm	QM63/6N2	1319904	1
6P	80 A	6 x 6 mm	QM100/6	1319814	1
6P + 2 switched neutral	80 A	6 x 6 mm	QM100/6N2	1319905	1

Parts required for interlock door mounted handle

- 1 QM change-over or multipole switch
- 1 coupling for use with extension shaft
- 1 extension shaft for door mounting the operating knob
- 1 door coupling
- 1 operating knob



1 change-over or multipole switch

+



1 coupling for use with extension shaft

+



1 extension shaft for door mounting the operating knob

+



1 door coupling

+



1 operating knob

Change-over and multipole switches, 40 A to 100 A, 690 V a.c.

QM Change-over and multipole switches

Accessories

Coupling for use with extension shafts



1319833

Shaft mm □	Part number	Article number	Pack qty
6 x 6	COUP6X6MM	1319833	1

Extension shaft for door mounting the operating knob



1319830

Shaft mm □	Length	Suitable for knob	Part number	Article number	Pack qty
6 x 6	180mm	K1/K2S	4K6180MMK1/2S	1319830	1
6 x 6	300 mm	K1/K2S	4K6300MMK1/2S	1319831	1
6 x 6	600 mm	K1/K2S	4K6600MMK1/2S	1319832	1

Door coupling



1319857

Description	Part number	Article number	Pack qty
Door coupling base-plate for change-over and multipole switches	QMDOORCOUP	1319857	1

Operating knob



1319855

Description	Part number	Article number	Pack qty
Operating knob black (0-1) for multipole switch	QMHANDLEMP	1319855	1
Operating knob, black (1-0-2) for change-over switch	QMHANDLECO	1319856	1

Connection sets (4-pole) for change-over switch only



1319969

QM	Part number	Article number	Pack qty
QM40 and QM63	QMCOSET40/63	1319969	1
QM 100	QMCOSET100	1319967	1

Solid neutrals



1319858

QM	Number of poles	Part number	Article number	Pack qty
QM40/3 and QM60/3	3P + Solid neutral	QMNEUTRAL40/634P	1319858	1
QM80/3 and QM100/3	3P + Solid neutral	QMNEUTRAL80/1004P	1319859	1

Accessories

Earth terminals



1319868

QM	Part number	Article number	Pack qty
QM40 and QM63	QMEARTH40/63	1319868	1
QM80 and QM100	QMEARTH80/100	1319869	1

Auxiliary switches



1319853

QM	Contact configuration	Part number	Article number	Pack qty
QM40 and QM63	1 NO + 1 NC	QMAUX1NO+1NC40/63	1319851	1
QM80 and QM100	1 NO + 1 NC	QMAUX1NO+1NC80/100	1319853	1

Protective covers set for connection terminals



1319870

QM	Number of poles	Part number	Article number	Pack qty
QM 40/3, QM 63/3	3P	QMCOVER40/633P	1319870	1
QM 80/30, QM 100/3	3P	QMCOVER80/1003P	1319872	1
QM 40/3N, QM 63/3N	3P + Neutral	QMCOVER40/633P+N	1319871	1
QM 80/3, QM 100/3N	3P + Neutral	QMCOVER80/1003P+N	1319873	1

Change-over and multipole switches, 40 A to 100 A, 690 V a.c.


QM Change-over and multipole switches

Technical data


			QM 40	QM 63	QM 100
Conventional free air thermal current			40 A	63 A	100 A
Conventional enclosed thermal current			40 A	55 A	100 A
Conventional thermal current in enclosure (multipole)			40 A	50 A	80 A
Rated uninterrupted current			40 A	63 A	100 A
Rated operational current			690 V	690 V	690 V
Rated insulation voltage			690 V	690 V	690 V
Rated impulse withstand voltage			8 kV	8 kV	8 kV
Rated operational current					
AC-21A	At $U_e = 240$ V AC-21A	I_e	40 A	63 A	100 A
	At $U_e = 440$ V AC-21A	I_e	40 A	63 A	100 A
	At $U_e = 500$ V AC-21A	I_e	40 A	63 A	100 A
	At $U_e = 690$ V AC-21A	I_e	40 A	63 A	100 A
AC-22A	At $U_e = 240$ V AC-22A	I_e	40 A	63 A	100 A
	At $U_e = 440$ V AC-22A	I_e	40 A	63 A	100 A
	At $U_e = 500$ V AC-22A	I_e	40 A	63 A	100 A
	At $U_e = 690$ V AC-22A	I_e	40 A	55 A	85 A
Rated operational current/power					
AC-23A	At $U_e = 240$ V AC-23A	I_e	7.5 kW	11 kW	22 kW
	At $U_e = 440$ V AC-23A	I_e	15 kW	22 kW	37 kW
	At $U_e = 500$ V AC-23A	I_e	18.5 kW	30 kW	45 kW
	At $U_e = 690$ V AC-23A	I_e	15 kW	18.5 kW	30 kW
AC-3	At $U_e = 240$ V AC-3	I_e	7.5 kW	11 kW	18.5 kW
	At $U_e = 440$ V AC-3	I_e	11 kW	18.5 kW	30 kW
	At $U_e = 500$ V AC-3	I_e	15 kW	22 kW	37 kW
	At $U_e = 690$ V AC-3	I_e	11 kW	15 kW	22 kW
Rated short-time withstand current			0.5 kA -1 s	0.78 kA - 1 s	1.85 kA -1 s
Rated short-circuit making capacity			3 kA	3 kA	3 kA
Rated conditional fuse-protected short-circuit current withstand/ making			15 kA	15 kA	15 kA
Fuse link			50 A	63 A	100 A
Switched neutral conventional free air thermal current			40 A	63 A	100 A
Rated operational current					
At $U_e = 500$ V AC-22A			40 A	63 A	100 A
Auxiliary switch					
Rated operational current					
At $U_e = 380$ V AC-11			3 A	3 A	3 A
At $U_e = 660$ V AC-11			10 A	10 A	10 A
Terminal capacities					
Copper conductor Solid/Stranded/Flexible			2.5 - 16 mm ²	2.5 - 16 mm ²	10 - 35 mm ²
Tightening torque			1.2 Nm	1.2 Nm	2.5 Nm
Pollution degree			III/3		
Protection class			IP20		
Standards			EN IEC 60947-3, EAC		

Outline drawings


6-pole, QM63/3 and QM63/6 - mm

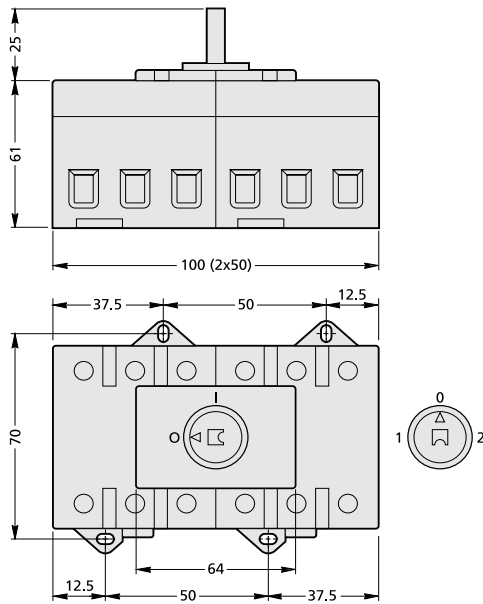


6-pole, QM100/3 and QM100/6 - mm

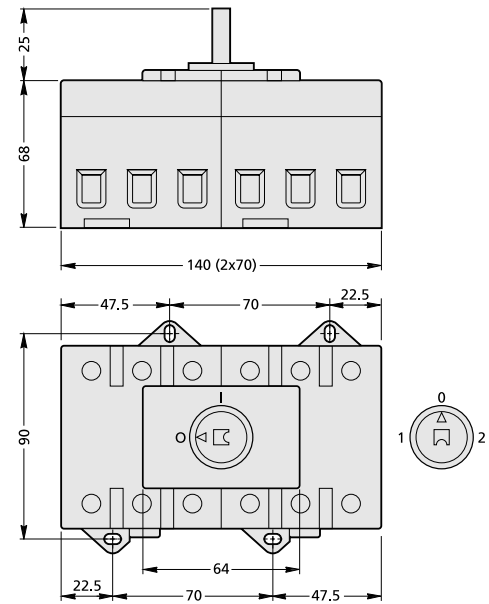

8-pole, QM40/3N, QM63/3N and QM63/6N2 - mm

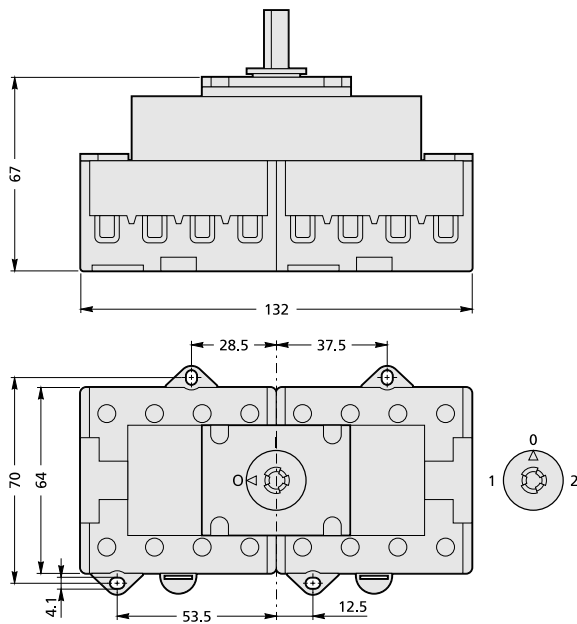


8-pole, QM100/3N and QM100/6N2 - mm

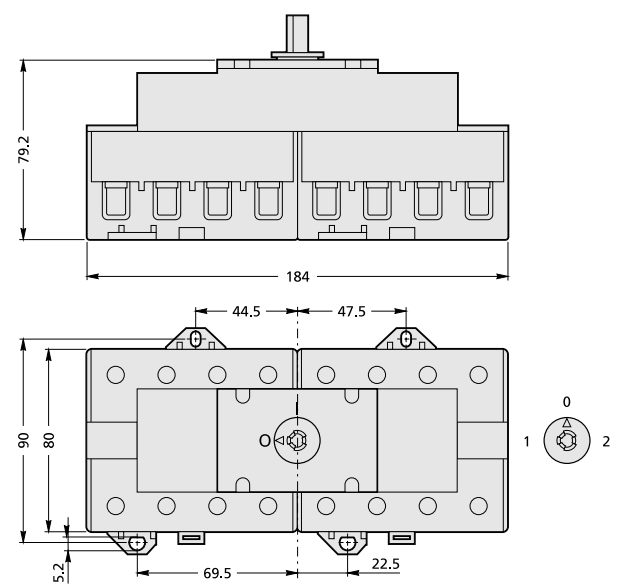


Fused switch-disconnectors, 40 A to 800 A, 690 V a.c.

QSA Fused switch-disconnector, 40 A to 800 A, 690 V a.c.

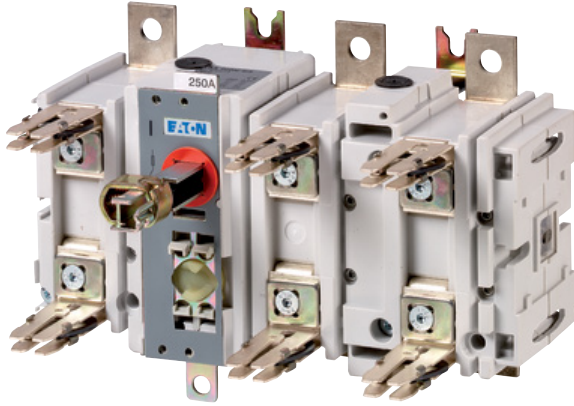

QSA DIN

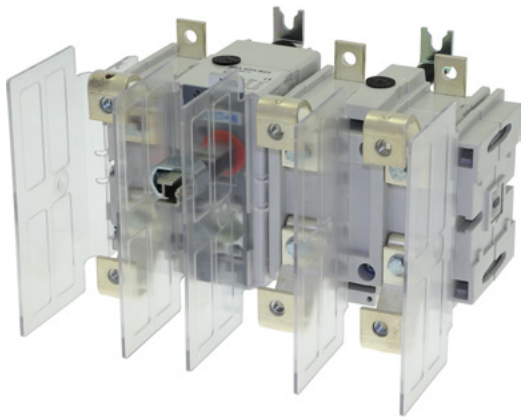

QSA BS

Description

The QSA fused switch-disconnector provide the ultimate safety in electrical protection for equipment and personnel. The NH DIN fuse links and low voltage British Standard industrial fuse links, fitted in the QSA unit protect the equipment against overcurrents and the switch enables safe disconnection for a high number of switching operations.

Frame sizes

0, 1, 2 and 3

Standards/Approvals

- IEC 60947-3
- EAC,
- KEMA-KEUR
- Lloyd's Register

Technical data

- Voltage: 690 V ac.
- Current: 40 A to 800 A
- 3-pole and solid/switched neutral options

Recommended fuse links

- For QSA DIN: Eaton's Bussmann series low voltage NH Fuse links body size 00 to 3
- For QSA BS: Eaton's Bussmann series low voltage British Standard industrial fuse links

Features


- All standard switches have a 3-pole frame
- Separate switched or bolted neutrals can be mounted to the switch on location or ordered pre-mounted
- Totally enclosed compact housing made of creepage-proof, heat resistant, insulation material
- Spring-loaded silver-plated roller contacts
- Independent manual operation
- Double break interruption
- Easy to install

QSA Fused switch-disconnector, suitable for NH DIN Fuse links, 40 A to 800 A, 690 V a.c.

QSA DIN range overview

QSA DIN	Frame size	40 A	63 A	100 A	125 A	160 A	200 A	250 A	315 A	400 A	630 A	800 A
Fused switch-disconnector	0	✓	✓									
	1		✓	✓	✓	✓						
	2						✓	✓	✓	✓		
	3									✓	✓	✓

QSA DIN Fused switch-disconnector



1320205



1318546



1318526



1318542

Thermal current I_{the}	Number of poles	Frame size	Part number	Article number	Pack qty	Compatible Eaton's Bussmann series NH Fuse body size
40 A	3P	0	QSA40N0-00/3	1320201	1	NH 000 and NH 00
40 A	3P	0	QSA40N0-00/3+P*	1320205*	1	NH 000 and NH 00
63 A	3P	0	QSA63N0-00/3	1320203	1	NH 000 and NH 00
63 A	3P	0	QSA63N0-00/3+P*	1320207*	1	NH 000 and NH 00
63 A	3P + solid neutral	0	QSA63N0-00/1	1320297	1	NH 000 and NH 00
63 A	3P + switched neutral	0	QSA63N0-00/3N	1320298	1	NH 000 and NH 00
63 A	3P	1	QSA63N1-00/3	1318027	1	NH 000 and NH 00
100 A	3P	1	QSA100N1-00/3	1318546	1	NH 000 and NH 00
100 A	3P + solid neutral	1	QSA100N1-00/1	1318550	1	NH 000 and NH 00
100 A	3P + switched neutral	1	QSA100N1-00/3N	1318551	1	NH 000 and NH 00
125 A	3P	1	QSA125N1-00/3	1318030	1	NH 000 and NH 00
160 A	3P	1	QSA160N1-00/3	1318033	1	NH 000 and NH 00
160 A	3P + solid neutral	1	QSA160N1-00/1	1318552	1	NH 000 and NH 00
160 A	3P + switched neutral	1	QSA160N1-00/3N	1318553	1	NH 000 and NH 00
200 A	3P	2	QSA200N-2/3	1318547	1	NH 1 and 2
250 A	3P	2	QSA250N-2/3	1318526	1	NH 1 and 2
250 A	3P + solid neutral	2	QSA250N-2/1	1318554	1	NH 1 and 2
250 A	3P + switched neutral	2	QSA250N-2/3N	1318555	1	NH 1 and 2
315 A	3P	2	QSA315N-2/3	1318548	1	NH 1 and 2
400 A	3P	2	QSA400N-2/3**	1318533**	1	NH 1 and 2
400 A	3P + solid neutral	2	QSA400N-2/1**	1318612**	1	NH 1 and 2
400 A	3P + switched neutral	2	QSA400N-2/3N**	1318614**	1	NH 1 and 2
400 A	3P	3	QSA400-3/3	1318549	1	NH 3
630 A	3P	3	QSA630-3/3	1318542	1	NH 3
630 A	3P + solid neutral	3	QSA630-3/1	1318694	1	NH 3
630 A	3P + switched neutral	3	QSA630-3/3N	1318699	1	NH 3
800 A	3P	3	QSA800-3/3**	1318543**	1	NH 3

* Fused switch-disconnector with box terminal clamps

** Thermal current rating only applicable when utilised in a ventilated enclosure

See compatible Eaton's Bussmann series NH fuse links

Fused switch-disconnectors, 40 A to 800 A, 690 V a.c.


QSA Fused switch-disconnector

QSA Fused switch-disconnector, suitable for British Standard industrial fuse links, 40 A to 800 A, 690 V a.c.

QSA BS range overview

QSA DIN	Frame size	40 A	63 A	100 A	125 A	160 A	200 A	250 A	315 A	400 A	630 A	800 A
Fused switch-disconnector	0	✓	✓									
	1		✓	✓	✓	✓						
	2						✓	✓	✓	✓		
	3									✓	✓	✓

QSA BS Fused switch-disconnectors



1319065

Thermal current I _{the}	Number of poles	Frame size	Part number	Article number	Pack qty	Compatible fuse links BS reference	Compatible Eaton's Bussmann series fuse links
40 A	3P	0	QSA40N0-A3/3	1320200	1	A3	BAO, TIS
63 A	3P	0	QSA63N0-A3/3	1320202	1	A3	
40 A	3P	0	QSA40N0-A3/3+P*	1320204*	1	A3	
63 A	3P	0	QSA63N0-A3/3+P*	1320206*	1	A3	
63 A	3P	1	QSA63N1-A3/3	1318011	1	A3	BAO, TIS
100 A	3P	1	QSA100N1-A4/3	1318016	1	A4	CEO, TCP
125 A	3P	1	QSA125N1-B2/3	1318020	1	B1 and B2	CD, DD, TC, TF
160 A	3P	1	QSA160N1-B2/3	1318023	1	B1 and B2	
200 A	3P	2	QSA200N-B2/3	1319065	1	B1 to B4	
250 A	3P	2	QSA250N-B4/3	1319074	1	B1 to B4	CD, DD, ED, TC, TF, TKF, TMF
315 A	3P	2	QSA315N-B4/3	1319095	1	B1 to B4	
400 A	3P	2	QSA400N-B4/3**	1319103**	1	B1 to B4	
400 A	3P	3	QSA400-C3/3	1318537	1	C1 to C3	EF, FF, GF, TTM
630 A	3P	3	QSA630-C3/3	1318544	1	C1 to C3	
800 A	3P	3	QSA800-C3/3**	1319175**	1	C1 to C3	

* Fused switch-disconnector with box terminal clamps

** Thermal current rating only applicable when utilised in a ventilated enclosure

See details on compatible Eaton's Bussmann series British Standard fuse links

Handles and shafts

Handles mounting types overview

Frame size	K Type handles	A Type handles			C Type handles		D/P Type handles			D/C Type handles		
		Blue	Red	Grey	Blue	Red	Blue	Red/Yellow	Grey	Blue	Red/Yellow	Grey
0	K1	✓	✓	✓	✓	✓	✓	✓	✓			
1	K2	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
2	K3	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
3	K4	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓

A Type: Handle mounted directly on switch

C Type: Without interlock function, for example when mounted on the cover of Eaton's Halyester enclosure range

D/P Type: Handle padlockable for mounting on hinged door, with interlock function

D/C Type: Handle with cylinder lock for mounting on hinged door, supplied with two keys, with interlock function

See handles dimensions pages 95 to 98

A Type handles

Mounted directly on switch



K1 A handle
1818001

K2 A handle
1818005

K3 A handle
1818202

K4 A handle
1818010

Shafts

		A Type handles			Metal shafts								
QSA Type	Frame size	Handle colours			Shaft mm□	Length of shaft						Pack qty	
		Blue	Red	Grey		115 mm	135 mm	140 mm	180 mm	300 mm	600 mm		
QSA40N0	0	K1AB 1818001	K1AR 1818002	K1AG 1818200	6 x 6				4K6180MMK1/2S 1319830	4K6300MMK1/2S 1319831	4K6600MMK1/2S 1319832	1	
QSA63N0	0												
QSA63N1	1	K2AB 1818005	K2AR 1818006	K2AG 1818201	8 x 8	4K8115MMK2 1319303		4K8140MMK2 1319306	4K8180MMK2 1319307	4K8300MMK2 1319311	4K8600MMK2 1319301	1	
QSA100N1	1												
QSA125N1	1												
QSA160N1	1												
QSA200N	2	K3AB 1818110	K3AR 1818111	K3AG 1818202	10 x 10		4K10135MMK3 1319314		4K10180MMK3 1319315	4K10300MMK2 1319319	4K10600MMK2 1319322	1	
QSA250N	2												
QSA315N	2												
QSA400N	2												
QSA400	3	K4AB 1818009	K4AR 1818010	K4AG 1818203	12 x 12					4K12300MMK4 1319326	4K12600MMK4 1319329	1	
QSA630	3												
QSA800	3												

Fused switch-disconnectors, 40 A to 800 A, 690 V a.c.

QSA Fused switch-disconnector

Handles and shafts

C Type handles

Without interlock function, for example when mounted on the cover of Eaton's Halyester enclosure range



K1 C handle 1818016



K2 C handle 1818019



K3 C handle 1818112



K4 C handle 1818023



Shafts

C Type handles

Metal shafts

QSA	Frame size	Handle colour		Shaft mm□	Length of shaft						Pack qty							
		Blue	Red/ yellow		115 mm	135 mm	140 mm	180 mm	300 mm	600 mm								
QSA40N0	0	K1CB	K1CR	6 x 6				4K6180MMK1/2S	4K6300MMK1/2S	4K6600MMK1/2S	1							
QSA63N0	0	1818015	1818016					1319830	1319831	1319832								
QSA63N1	1	K2CB	K2CR	8 x 8	4K8115MMK2		4K8140MMK2	4K8180MMK2	4K8300MMK2	4K8600MMK2	1							
QSA100N1	1											1818019	1818020	1319303	1319306	1319307	1319311	1319301
QSA125N1	1																	
QSA160N1	1																	
QSA200N	2	K3CB	K3CR	10 x 10		4K10135MMK3		4K10180MMK3	4K10300MMK2	4K10600MMK2	1							
QSA250N	2											1818068	1818112	1319314	1319315	1319319	1319322	
QSA315N	2																	
QSA400N	2																	
QSA400	3	K4CB	K4CR	12 x 12					4K12300MMK4	4K12600MMK4	1							
QSA630	3											1818023	1818024	1319326	1319329			
QSA800	3																	

D/P Type handles

Padlockable for mounting on hinged door, with interlock function



K1 D/P handle 818029



K2 D/P handle 1818036



K3 D/P handle 1818113



K4 D/P handle 1818052



Shafts

D/P Type handles

Metal shafts

QSA	Frame size	Handle colour			Shaft mm□	Length of shaft						Pack qty
		Blue	Red/yel-low	Grey		115 mm	135 mm	140 mm	180 mm	300 mm	600 mm	
QSA40N0	0	K1DB/P 1818029	K1DR/P 1818030	K1DG/P 1818031	6 x 6				4K6180MMK1/2S 1319830	4K6300MMK1/2S 1319831	4K6600MMK1/2S 1319832	1
QSA63N0	0											
QSA63N1	1	K2DB/P 1818035	K2DR/P 1818036	K2DG/P 1818037	8 x 8	4K8115MMK2 1319303		4K8140MMK2 1319306	4K8180MMK2 1319307	4K8300MMK2 1319311	4K8600MMK2 1319301	1
QSA100N1	1											
QSA125N1	1											
QSA160N1	1											
QSA200N	2	K3DB/P 1818113	K3DR/P 1818096	K3DG/P 1818069	10 x 10		4K10135MMK3 1319314		4K10180MMK3 1319315	4K10300MMK2 1319319	4K10600MMK2 1319322	1
QSA250N	2											
QSA315N	2											
QSA400N	2											
QSA400	3	K4DB/P 1818050	K4DR/P 1818051	K4DG/P 1818052	12 x 12					4K12300MMK4 1319326	4K12600MMK4 1319329	1
QSA630	3											
QSA800	3											

Handles and shafts

D/C Type handles

With cylinder lock for mounting on hinged door, supplied with two keys, with interlock function



K2 D/C handle
1818041



K3 D/C handle
1818097



K4 D/C handle
1818055



Shafts

		D/C Type handles			Metal shafts							
QSA	Frame size	Handle Type			Shaft mm□	Length of shaft						Pack qty
		Blue	Red/ yellow	Grey		115 mm	135 mm	140 mm	180 mm	300 mm	600 mm	
QSA63N1	1	K2DB/C 1818041	K2DR/C 1818042	K2DG/C 1818043	8 x 8	4K8115MMK2 1319303		4K8140MMK2 1319306	4K8180MMK2 1319307	4K8300MMK2 1319311	4K8600MMK2 1319301	1
QSA100N1	1											
QSA125N1	1											
QSA160N1	1											
QSA200N	2	K3DB/C 1818114	K3DR/C 1818097	K3DG/C 1818070	10 x 10		4K10135MMK3 1319314		4K10180MMK3 1319315	4K10300MMK2 1319319	4K10600MMK2 1319322	1
QSA250N	2											
QSA315N	2											
QSA400N	2											
QSA400	3	K4DB/C 1818053	K4DR/C 1818054	K4DG/C 1818055	12 x 12					4K12300MMK4 1319326	4K12600MMK4 1319329	1
QSA630	3											
QSA800	3											

Accessories for QSA

Conversion kit for locking the D Type handles in both On and Off position



1818103


QSA	Frame size	DIN/BS	Part number	Article number	Pack qty
QSA40N0	0	✓	ADAPTORPADLOCK-K1	1818103	1
QSA63N0	0	✓			1
QSA63N1	1	✓			1
QSA100N1	1	✓	ADAPTORPADLOCK-K2	1818104	1
QSA125N1	1	✓			1
QSA160N1	1	✓			1
QSA200N	2	✓	ADAPTORPADLOCK-K3	1818105	1
QSA250N	2	✓			1
QSA315N	2	✓			1
QSA400N	2	✓			1
QSA400	3	✓	ADAPTORPADLOCK-K4	1818106	1
QSA630	3	✓			1
QSA800	3	✓			1

Fused switch-disconnectors, 40 A to 800 A, 690 V a.c.

QSA Fused switch-disconnector

Accessories

Solid neutrals, side mounted



1319472

QSA Type	Frame size	DIN/BS	Part number	Article number	Pack qty
QSA40N0	0	✓	QSAN40/63A	1319460	1
QSA63N0	0	✓			1
QSA63N1	1	✓			1
QSA100N1	1	✓	QSAN100/125A	1319466	1
QSA125N1	1	✓			1
QSA160N1	1	✓	QSAN160A	1319472	1
QSA200N	2	✓	QSAN160/200A	1319473	1
QSA250N	2	✓			1
QSA315N	2	✓	QSAN250/315/400A	1319480	1
QSA400N	2	✓			1
QSA400	3	✓	QSAN400/630/800A	1319486	1
QSA630	3	✓			1
QSA800	3	✓			1

Switched neutrals, side mounted



1319482

QSA Type	Frame size	DIN/BS	Part number	Article number	Pack qty
QSA40N0	0	✓	QSANS40/63A	1319462	1
QSA63N0	0	✓			1
QSA63N1	1	✓			1
QSA100N1	1	✓	QSANS100/125A	1319467	1
QSA125N1	1	✓			1
QSA160N1	1	✓	QSANS160A	1319474	1
QSA200N	2	✓	QSANS160/200A	1319476	1
QSA250N	2	✓			1
QSA315N	2	✓	QSANS250/315/400A	1319482	1
QSA400N	2	✓			1
QSA400	3	✓	QSANS400/630/800A	1319662	1
QSA630	3	✓			1
QSA800	3	✓			1

Accessories

Auxiliary contact set

Auxiliary contact 1 NO + 1 NC



6028293

QSA Type	Frame size	DIN/BS	Part number	Article number	Pack qty
QSA40N0	0	✓	AUX1NO+1NC-BOX012	6028293	1
QSA63N0	0	✓			1
QSA63N1	1	✓			1
QSA100N1	1	✓			1
QSA125N1	1	✓			1
QSA160N1	1	✓			1
QSA200N	2	✓			1
QSA250N	2	✓			1
QSA315N	2	✓			1
QSA400N	2	✓			1
QSA400	3	✓	AUX1NO+1NC-BOX3 Replacement adaptors available Part number AUXADAPTERDMV/QSA /	6101137 6098593	1
QSA630	3	✓			1
QSA800	3	✓			1

1-pole transparent terminal covers

Terminal cover for cable lugs on connection terminals




1319411

QSA Type	Frame size	DIN	BS	Number of poles	Bolt Type	Part number	Article number	Pack qty
QSA40N0	0	✓	✓	1P	M6	QSACOVER1PM6	1319409	1
QSA63N0	0	✓	✓	1P	M6			1
QSA100N1	1	✓	✓	1P	M6			1
QSA125N1	1	✓	✓	1P	M6			1
QSA160N1	1	✓	✓	1P	M8	QSACOVER1PM8	1319411	1
QSA200N (BS)	2		✓	1P	M8			1
QSA200N (DIN)	2	✓		1P	M10	QSACOVER1PM10	1319413	1
QSA250N	2	✓	✓	1P	M10			1
QSA315N	2	✓	✓	1P	M10			1
QSA400N	2	✓	✓	1P	M10			1
QSA400	3	✓	✓	1P	M12	QSACOVER1PM12	1319415	1
QSA630	3	✓	✓	1P	M12			1
QSA800	3	✓	✓	1P	M12			1

3-pole transparent terminal covers

For cable lugs on connection terminals, suitable for QSA fused switch-disconnector frame sizes 0, 1 and 2.



1319432

QSA Type	Frame size	DIN/BS	Number of poles	Part number	Article number	Pack qty
QSA40N0	0	✓	3P	QSATCOVERBOX0	1320239	1
QSA63N0	0	✓	3P			1
QSA63N1	1	✓	3P	QSATCOVERBOX1	1319432	1
QSA100N1	1	✓	3P			1
QSA125N1	1	✓	3P			1
QSA160N1	1	✓	3P			1
QSA200N	2	✓	3P	QSATCOVERBOX2	1319418	1
QSA250N	2	✓	3P			1
QSA315N	2	✓	3P			1
QSA400N	2	✓	3P			1

Fused switch-disconnectors, 40 A to 800 A, 690 V a.c.

QSA Fused switch-disconnector

Accessories

Transparent front cover

Used to shield live parts at the front of the QSA fused switch-disconnector



1319426

QSA Type	Frame size	DIN	BS	Part number	Article number	Pack qty
QSA40N0	0	✓	✓	QSAFCOVER40N0-63N0	1320237	1
QSA63N0	0	✓	✓			1
QSA63N1	1	✓	✓	QSAFCOVER63N1-125N1	1319435	1
QSA100N1 (DIN)	1	✓				1
QSA125N1 (DIN)	1	✓				1
QSA160N1 (DIN)	1	✓				1
QSA100N1 (BS)	1		✓	QSAFCOVER160N1-A4/3	1319423	1
QSA125N1 (BS)	1		✓	QSAFCOVER125N1-160N1-B2/3	1319438	1
QSA160N1 (BS)	1		✓			1
QSA200N	2	✓	✓	QSAFCOVER160N-400N	1319429	1
QSA250N	2	✓	✓			1
QSA315N	2	✓	✓			1
QSA400N	2	✓	✓			1
QSA400	3	✓	✓	QSAFCOVER400-800	1319426	1
QSA630	3	✓	✓			1
QSA800	3	✓	✓			1

1-pole rear cover

Used to shield live parts at the back of the QSA fused switch-disconnector



1319439

QSA Type	Frame size	DIN	BS	Number of poles	Part number	Article number	Pack qty
QSA63N1	1	✓	✓	1P	QSARCOVER1P63-160	1319439	1
QSA100N1 (BS)	1		✓	1P			1
QSA125N1	1	✓	✓	1P			1
QSA160N1	1	✓	✓	1P			1
QSA200N	2	✓	✓	1P	QSARCOVER1P160-400	1319441	1
QSA250N	2	✓	✓	1P			1
QSA315N	2	✓	✓	1P			1
QSA400N	2	✓	✓	1P			1

Rear cover for QSA frame size 3 only

Used to shield live parts at the back of the QSA fused switch-disconnector frame size 3



1319417

QSA Type	Frame size	DIN	BS	Number of poles	Part number	Article number	Pack qty
QSA400	3	✓	✓	1P	QSARCOVER400-800-C3/3	1319417	1
QSA630	3	✓	✓	1P			1
QSA800	3 (BS)		✓	1P			1

Accessories

Coupling links for extension of universal shafts



1319833



1319336

QSA Type	Frame size	DIN/BS	Shaft mm□	Part number	Article number	Pack qty
QSA40N0	0	✓	6 x 6	COUP6X6MM	1319833	1
QSA63N0	0	✓	6 x 6			1
QSA63N1	1	✓	8 x 8	COUP8X8MM	1319332	1
QSA100N1	1	✓	8 x 8			1
QSA125N1	1	✓	8 x 8			1
QSA160N1	1	✓	8 x 8			1
QSA200N	2	✓	10 x 10	COUP10X10MM	1319334	1
QSA250N	2	✓	10 x 10			1
QSA315N	2	✓	10 x 10			1
QSA400N	2	✓	10 x 10			1
QSA400	3	✓	12 x 12	COUP12X12MM	1319336	1
QSA630	3	✓	12 x 12			1
QSA800	3	✓	12 x 12			1

Coupling links for converting shafts sizes



1319398

Shaft mm□	Part number	Article number	Pack qty
From 10 x 10 mm to 12 x 12 mm	4K10/4K12	1319398	1
From 12 x 12 mm to 14 x 14 mm	4K12/4K14	1318685	1

Fused switch-disconnectors, 40 A to 800 A, 690 V a.c.

QSA Fused switch-disconnector

Technical data

QSA 40 - 63 A, DIN or BS fuse links, frame size 0

		QSA 40N0	QSA 63N0
Conventional free air thermal current	I_{th}	40 A	63 A
Conventional enclosed thermal current	I_{the}	40 A	63 A
Rated uninterrupted current	I_u	40 A	63 A
Rated operational voltage	U_e	690 V	690 V
Rated insulation voltage	U_i	800 V	800 V
Rated impulse withstand voltage	U_{imp}	8 kV 6 kV with switched neutral	8 kV 6 kV with switched neutral
Rated frequency		50 Hz	50 Hz
Storage temperature		-30°C...+80°C	-30°C...+80°C
Rated operational current			
AC-21A			
At $U_e = 415$ V AC-21A	I_e	40 A	63 A
At $U_e = 500$ V AC-21A	I_e	40 A	63 A
At $U_e = 690$ V AC-21A	I_e	40 A	63 A
AC-22A			
At $U_e = 415$ V AC-22A	I_e	40 A	63 A
At $U_e = 500$ V AC-22A	I_e	40 A	63 A
At $U_e = 690$ V AC-22A	I_e	40 A	63 A
AC-23A			
At $U_e = 415$ V AC-23A	I_e	40 A	63 A
At $U_e = 500$ V AC-23A	I_e	40 A	63 A
At $U_e = 690$ V AC-23A	I_e	40 A	63 A
Rated operational power			
At $U_e = 415$ V AC-23A		22 kW	30 kW
At $U_e = 500$ V AC-23A		25 kW	45 kW
At $U_e = 690$ V AC-23A		37 kW	59 kW
Rated conditional short-circuit current	$I_p (I_q)$	690 V: 50 kA	415 V: 100 kA
Cut-off current	max.	690 V: 14.5 kA	440 V: 11 kA
Joule integral	max.	690 V: 140 kA²s	440 V: 18.4 kA²s
Fuse-link max	I_n	690 V: 125 A	440 V: 63 A
Compatible fuse links		NH 000, NH 00 and BS Ref A3	NH 000, NH 00 and BS Ref A3
Power dissipation per pole	P	1.5 W	2.3 W
Pollution degree		III/3	III/3
Protection class		IP00 without terminal cover IP20 with terminal cover	
Standards		EN-IEC 60947-3, EAC	
Certification		KEMA-KEUR, Lloyd's Register	

Technical data

QSA 63 - 160 A, DIN or BS fuse links, frame size 1

		QSA 63N1	QSA 100N1	QSA 125N1	QSA 160N1
Conventional free air thermal current	I_{th}	63 A	100 A	125 A	160 A
Conventional enclosed thermal current	I_{the}	63 A	100 A	125 A	160 A
Rated uninterrupted current	I_u	63 A	100 A	125 A	160 A
Rated operational voltage	U_e	690 V	690 V	690 V	690 V
Rated insulation voltage	U_i	1000 V	1000 V	1000 V	1000 V
Rated impulse withstand voltage	U_{imp}	8 kV 6 kV with switched neutral	8 kV 6 kV with switched neutral	8 kV 6 kV with switched neutral	8 kV 6 kV with switched neutral
Rated frequency		50 Hz	50 Hz	50 Hz	50 Hz
Storage temperature		-30°C...+80°C	-30°C...+80°C	-30°C...+80°C	-30°C...+80°C
Mechanical lifespan	Operations	20,000	20,000	20,000	20,000
Rated operational current					
AC-21A					
At $U_e = 415$ V AC-21A	I_e	63 A	100 A	125 A	160 A
At $U_e = 500$ V AC-21A	I_e	63 A	100 A	125 A	160 A
At $U_e = 690$ V AC-21A	I_e	63 A	100 A	125 A	160 A
AC-22A					
At $U_e = 415$ V AC-22A	I_e	63 A	100 A	125 A	160 A
At $U_e = 500$ V AC-22A	I_e	63 A	100 A	125 A	160 A
At $U_e = 690$ V AC-22A	I_e	63 A	100 A	125 A	160 A
AC-23A					
At $U_e = 415$ V AC-23A	I_e	63 A	100 A	125 A	160 A
At $U_e = 500$ V AC-23A	I_e	63 A	100 A	125 A	160 A
At $U_e = 690$ V AC-23A	I_e	63 A	100 A	125 A	160 A
Rated operational power					
At $U_e = 415$ V AC-23A		30 kW	55 kW	59 kW	90 kW
At $U_e = 500$ V AC-23A		45 kW	59 kW	80 kW	110 kW
At $U_e = 690$ V AC-23A		59 kW	90 kW	110 kW	147 kW
Rated conditional short-circuit current	$I_p (I_q)$	690 V: 50 kA 415 V: 100 kA	690 V: 50 kA 415 V: 100 kA	690 V: 50 kA 415 V: 100 kA	690 V: 50 kA 415 V: 100 kA
Cut-off current	max.	690 V: 27 kA 440 V: 23 kA	690 V: 27 kA 440 V: 23 kA	690 V: 27 kA 440 V: 23 kA	690 V: 27 kA 440 V: 23 kA
Joule integral	max.	690 V: 820 kA ² s 440 V: 143 kA ² s	690 V: 140 kA ² s 440 V: 18.4 kA ² s	690 V: 820 kA ² s 440 V: 143 kA ² s	690 V: 140 kA ² s 440 V: 18.4 kA ² s
Fuse-link max	I_n	690 V: 315 A 440 V: 160 A	690 V: 315 A 440 V: 160 A	690 V: 315 A 440 V: 160 A	690 V: 315 A 440 V: 160 A
Compatible fuse links		NH00 BS Ref A3	NH 00 BS Ref A4 max. ø 30mm	NH 00 BS Ref B1 and B2	NH 00 BS ref B1
Power dissipation per pole	P	2 W	6 W	9 W	10 W
Pollution degree		III/3	III/3	III/3	III/3
Protection class		IP00 without terminal cover IP20 with terminal cover			
Standards		EN-IEC 60947-3, EAC			
Certification		KEMA-KEUR, Lloyd's Register			

Fused switch-disconnectors, 40 A to 800 A, 690 V a.c.

QSA Fused switch-disconnector

Technical data

QSA 200 - 400 A, DIN or BS fuse links, frame size 2

		QSA 200N	QSA 250N	QSA 315N	QSA 400N
Conventional free air thermal current	I_{th}	200 A	250 A	315 A	400 A
Conventional enclosed thermal current	I_{the}	200 A	250 A	315 A	355 A*
Rated uninterrupted current	I_u	200 A	250 A	315 A	355 A / 400 A
Rated operational voltage	U_e	690 V	690 V	690 V	690 V
Rated insulation voltage	U_i	1000 V	1000 V	1000 V	1000 V
Rated impulse withstand voltage	U_{imp}	12 kV 8 kV with neutral	12 kV 8 kV with neutral	12 kV 8 kV with neutral	12 kV 8 kV with neutral
Rated frequency		50 Hz	50 Hz	50 Hz	50 Hz
Storage temperature		-30°C...+80°C	-30°C...+80°C	-30°C...+80°C	-30°C...+80°C
Mechanical lifespan	Operations	16,000	16,000	16,000	16,000
Rated operational current					
AC-21A					
At $U_e = 415$ V AC-21A	I_e	200 A	250 A	315 A	400 A
At $U_e = 500$ V AC-21A	I_e	200 A	250 A	315 A	400 A
At $U_e = 690$ V AC-21A	I_e	200 A	250 A	315 A	400 A
AC-22A					
At $U_e = 415$ V AC-22A	I_e	200 A	250 A	315 A	400 A
At $U_e = 500$ V AC-22A	I_e	200 A	250 A	315 A	400 A
At $U_e = 690$ V AC-22A	I_e	200 A	250 A	315 A	400 A
AC-23A					
At $U_e = 415$ V AC-23A	I_e	200 A	250 A	315 A	400 A
At $U_e = 500$ V AC-23A	I_e	200 A	250 A	315 A	400 A
At $U_e = 690$ V AC-23A	I_e	200 A	250 A	315 A	400 A
Rated operational power					
At $U_e = 415$ V AC-23A		110 kW	147 kW	184 kW	220 kW
At $U_e = 500$ V AC-23A		140 kW	160 kW	220 kW	257 kW
At $U_e = 690$ V AC-23A		184 kW	220 kW	295 kW	375 kW
Rated conditional short-circuit current	$I_p (I_q)$	690 V: 50 kA 415 V: 100 kA	690 V: 50 kA 415 V: 100 kA	690 V: 50 kA 415 V: 100 kA	690 V: 50 kA 415 V: 100 kA
Cut-off current	max.	690 V: 57 kA 440 V: 43 kA	690 V: 57 kA 440 V: 43 kA	690 V: 57 kA 440 V: 43 kA	690 V: 57 kA 440 V: 43 kA
Joule integral	max.	690 V: 13000 kA ² s 440 V: 986 kA ² s	690 V: 13000 kA ² s 440 V: 986 kA ² s	690 V: 13000 kA ² s 440 V: 986 kA ² s	690 V: 13000 kA ² s 440 V: 986 kA ² s
Fuse-link max	I_n	690 V: 630 A 440 V: 400 A	690 V: 630 A 440 V: 400 A	690 V: 630 A 440 V: 400 A	690 V: 630 A 440 V: 400 A
Compatible fuse links		NH 1 and NH 2 BS Ref B1 and B2	NH 1 and NH 2 BS Ref B1 to B4	NH 1 and 2 BS Ref B1 to B4	NH 1 and 2 BS Ref B1 to B4
Power dissipation per pole	P	10 W	12 W	18 W	28 W
Pollution degree		III/3	III/3	III/3	III/3
Protection class		IP00 without terminal cover IP20 with terminal cover			
Standards		EN-IEC 60947-3, EAC			
Certification		KEMA-KEUR, Lloyd's Register			

* 400 A thermal current rating only applicable when utilised in a ventilated enclosure


Technical data

QSA 400 - 800 A, DIN or BS fuse links, frame size 3

		QSA 400	QSA 630	QSA 800
Conventional free air thermal current	I_{th}	400 A	630 A	800 A
Conventional enclosed thermal current	I_{the}	400 A	630 A	800 A
Rated uninterrupted current	I_u	400 A	630 A	800 A
Rated operational voltage	U_e	690 V	690 V	690 V
Rated insulation voltage	U_i	1000 V	1000 V	1000 V
Rated impulse withstand voltage	U_{imp}	12 kV	12 kV	12 kV
Rated impulse withstand voltage	U_{imp}	12 kV 8 kV with neutral	12 kV 8 kV with neutral	12 kV 8 kV with neutral
Rated frequency		50 Hz	50 Hz	50 Hz
Storage temperature		-30°C ... +80°C	-30°C ... +80°C	-30°C ... +80°C
Mechanical lifespan	Operations	10,000	10,000	10,000
Rated operational current				
AC-21A				
At $U_e = 415$ V AC-21A	I_e	400 A	630 A	800 A
At $U_e = 500$ V AC-21A	I_e	400 A	630 A	800 A
At $U_e = 690$ V AC-21A	I_e	400 A	630 A	800 A
AC-22A				
At $U_e = 415$ V AC-22A	I_e	400 A	630 A	800 A
At $U_e = 500$ V AC-22A	I_e	400 A	630 A	800 A
At $U_e = 690$ V AC-22A	I_e	400 A	630 A	800 A
AC-23A				
At $U_e = 415$ V AC-23A	I_e	400 A	630 A	800 A
At $U_e = 500$ V AC-23A	I_e	400 A	630 A	800 A
At $U_e = 690$ V AC-23A	I_e	400 A	630 A	800 A
Rated operational power				
At $U_e = 415$ V AC-23A		220 kW	375 kW	500 kW
At $U_e = 500$ V AC-23A		220 kW	375 kW	500 kW
At $U_e = 690$ V AC-23A		220 kW	375 kW	500 kW
Rated conditional short-circuit current	$I_p (I_q)$	690 V: 50 kA 415 V: 100 kA	690 V: 50 kA 415 V: 100 kA	690 V: 50 kA 415 V: 100 kA
Cut-off current	max.	690 V: 64 kA 440 V: 62.5 kA	690 V: 64 kA 440 V: 62.5 kA	690 V: 64 kA 440 V: 62.5 kA
Joule integral	max.	690 V: 13000 kA ² s 440 V: 3700 kA ² s	690 V: 13000 kA ² s 440 V: 3700 kA ² s	690 V: 13000 kA ² s 440 V: 3700 kA ² s
Fuse-link max	I_n	690 V: 800 A 440 V: 630 A	690 V: 800 A 440 V: 630 A	690 V: 800 A 440 V: 630 A
Compatible fuse links		NH 3 BS Ref C1 and C3	NH 3 BS Ref C1 and C3	NH 3 BS Ref C1 and C3
Power dissipation per pole	P	28 W	28 W	58 W
Pollution degree		III/3	III/3	III/3
Protection class		IP00 without terminal cover IP20 with terminal cover		
Standards		EN-IEC 60947-3, EAC		
Certification		KEMA-KEUR, Lloyd's Register		


Outline drawings

DIN QSA 200 A to 400 A - Frame size 2 - mm

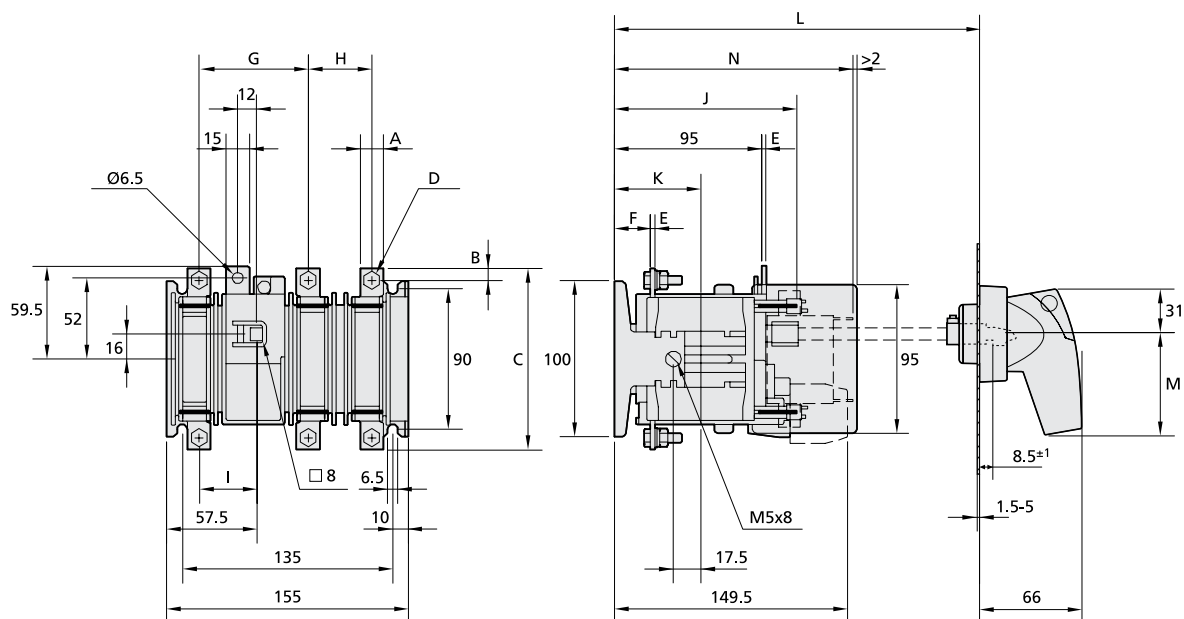

Type	A	B	C	D	E	F	G	H	I	J	K	L	M	N	R
QSA 200N-2	25	12.5	160	M10	4	29	107	65	59.5	198	160	205 ⁺¹⁰ - 625 ⁺¹⁰	140	188	246.5
QSA 250N-2	25	12.5	160	M10	4	29	107	65	59.5	198	160	205 ⁺¹⁰ - 625 ⁺¹⁰	140	188	246.5
QSA 315N-2	25	12.5	160	M10	6	27	107	65	59.5	198	160	205 ⁺¹⁰ - 625 ⁺¹⁰	140	188	246.5
QSA 400N-2	25	12.5	160	M10	6	27	107	65	59.5	198	160	205 ⁺¹⁰ - 625 ⁺¹⁰	140	188	246.5

DIN QSA 400 A and 630 A - Frame size 3 - mm

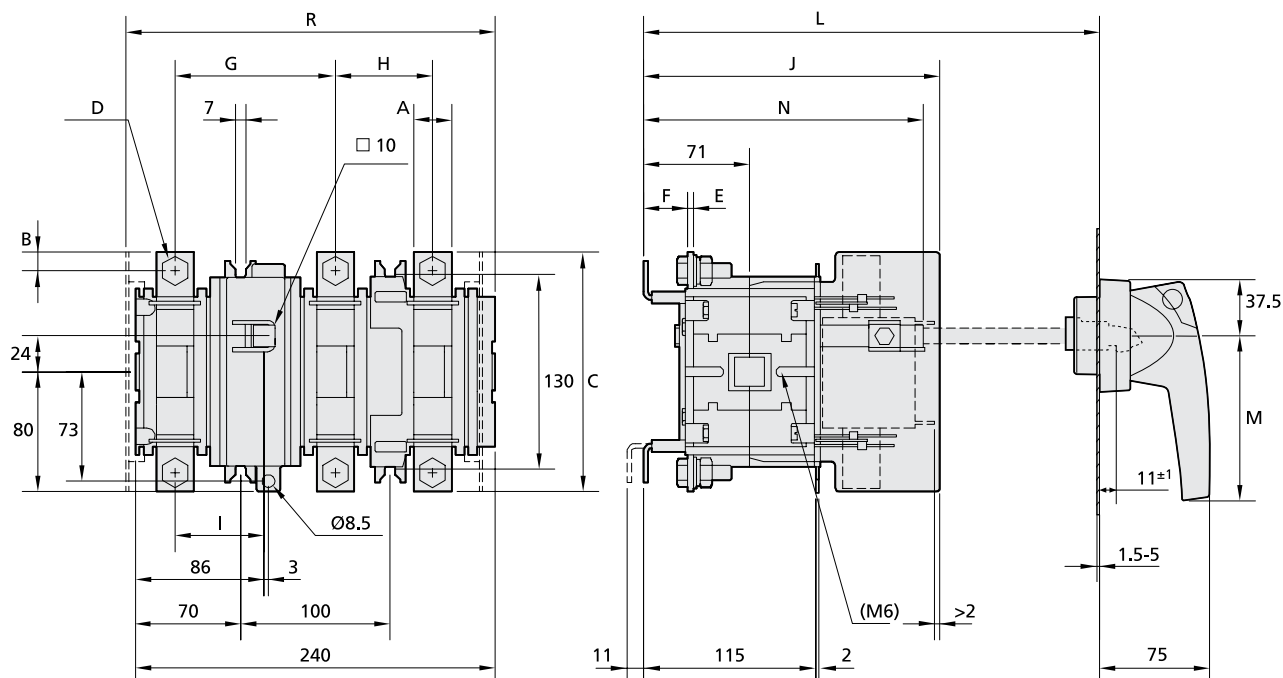


Type	A	B	C	D	E	F	G	H	I	J	K	L	M	N
QSA 400-3	40	20	270	M12	6	23	87	87	60	173	205	320 ⁺¹⁰ - 620 ⁺¹⁰	200	240
QSA 630-3	40	20	270	M12	6	23	87	87	60	173	205	320 ⁺¹⁰ - 620 ⁺¹⁰	200	240

Fused switch-disconnectors, 40 A to 800 A, 690 V a.c.


QSA Fused switch-disconnector

Outline drawings

BS QSA 40 A and 63 A - Frame size 0 - mm

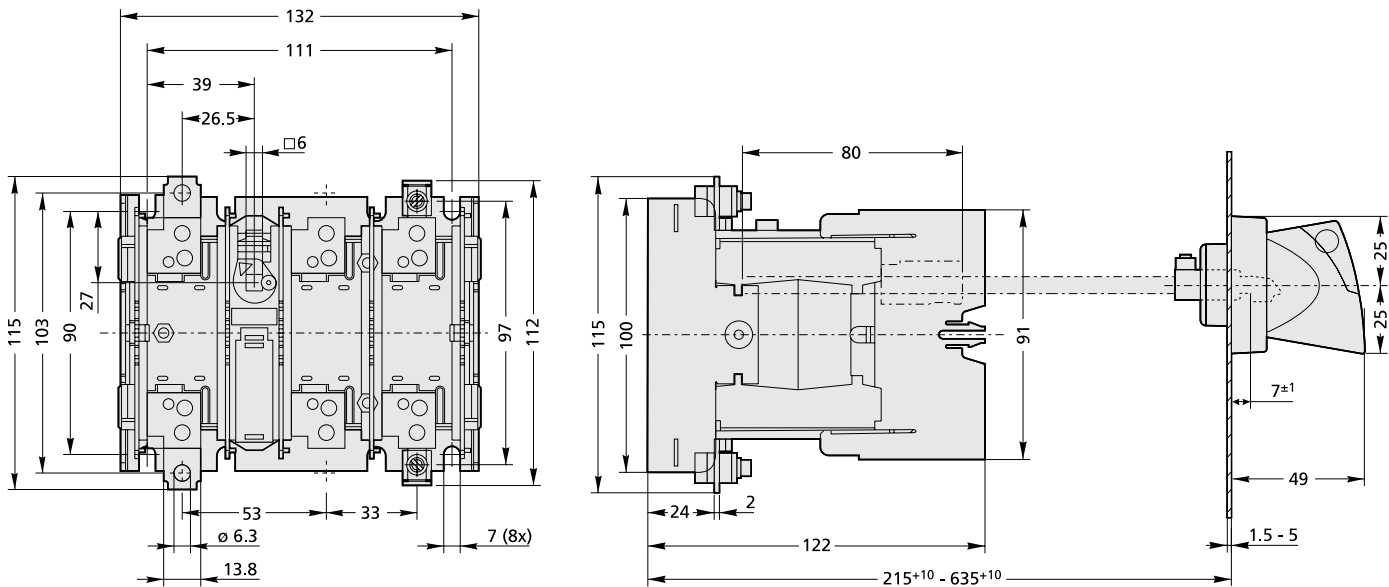


BS QSA 63 A to 160 A - Frame size 1 - mm

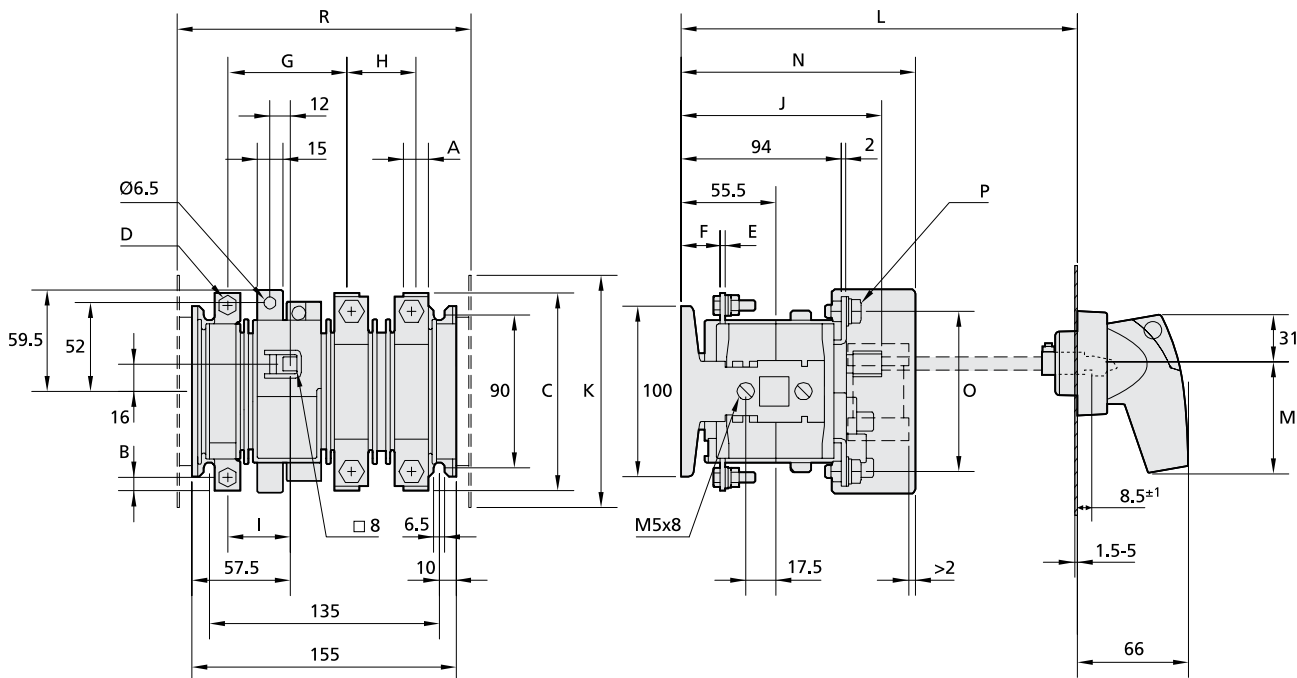

Type	A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	R
QSA 63N1-A3	12	6	100	M5	2	24	72	38.5	38	118	95	200 ⁺¹⁰ - 620 ⁺¹⁰	62	155.5	73	M5	-
QSA 100N1-A4	15	7.5	116	M6	3	23	70	40.5	37	118	120	200 ⁺¹⁰ - 620 ⁺¹⁰	62	137.5	94	M8	-
QSA 125N1-B2	15	7.5	116	M6	3	23	70	40.5	37	118	150	200 ⁺¹⁰ - 620 ⁺¹⁰	62	137.5	112	M8	184
QSA 160N1-B2	20	10	127	M8	3	23	65	45.5	35	118	150	200 ⁺¹⁰ - 620 ⁺¹⁰	62	137.5	112	M8	184


Outline drawings

BS QSA 200 A to 400 A - Frame size 2 - mm

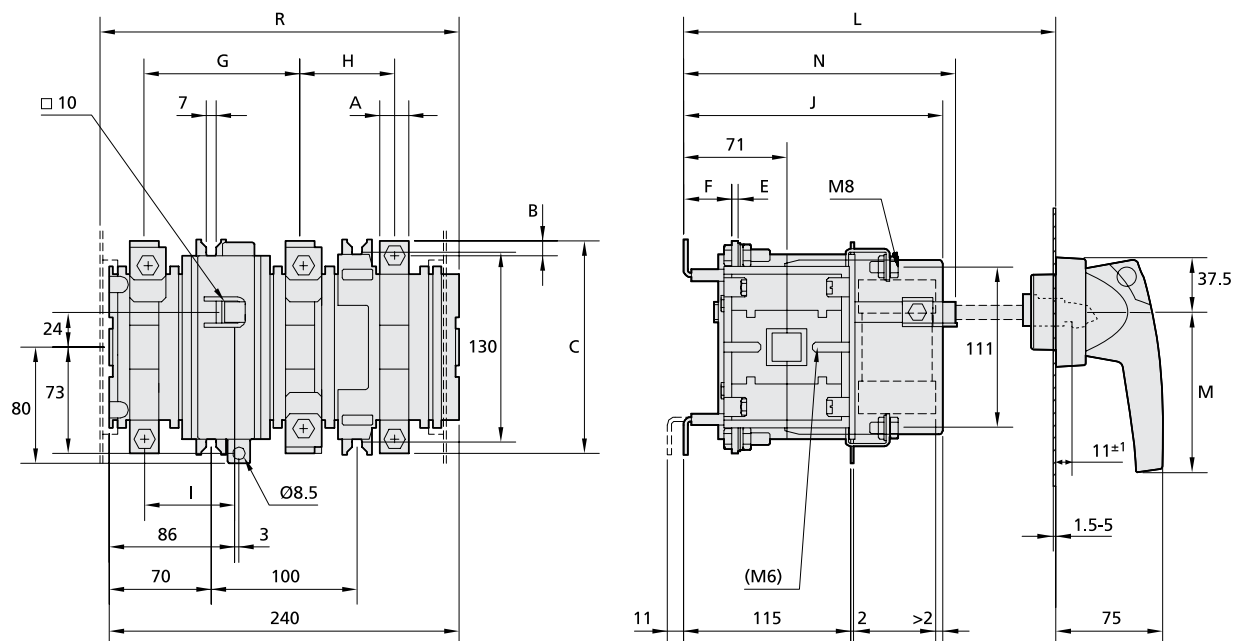

Type	A	B	C	D	E	F	G	H	I	J	K	L	M	N	R
QSA 200N-B2	20	10	146	M8	4	33	107	65	62	188	120	205 ⁺¹⁵ - 625 ⁺¹⁵	140	178	-
QSA 250N-B4	25	12.5	160	M10	4	29	107	65	59.5	188	160	205 ⁺¹⁵ - 625 ⁺¹⁵	140	198	246.5
QSA 315N-B4	25	12.5	160	M10	6	27	107	65	59.5	188	160	205 ⁺¹⁵ - 625 ⁺¹⁵	140	198	246.5
QSA 400N-B4	25	12.5	160	M10	6	27	107	65	59.5	188	160	205 ⁺¹⁵ - 625 ⁺¹⁵	140	198	246.5

BS QSA 400 A to 800 A - Frame size 3 - mm

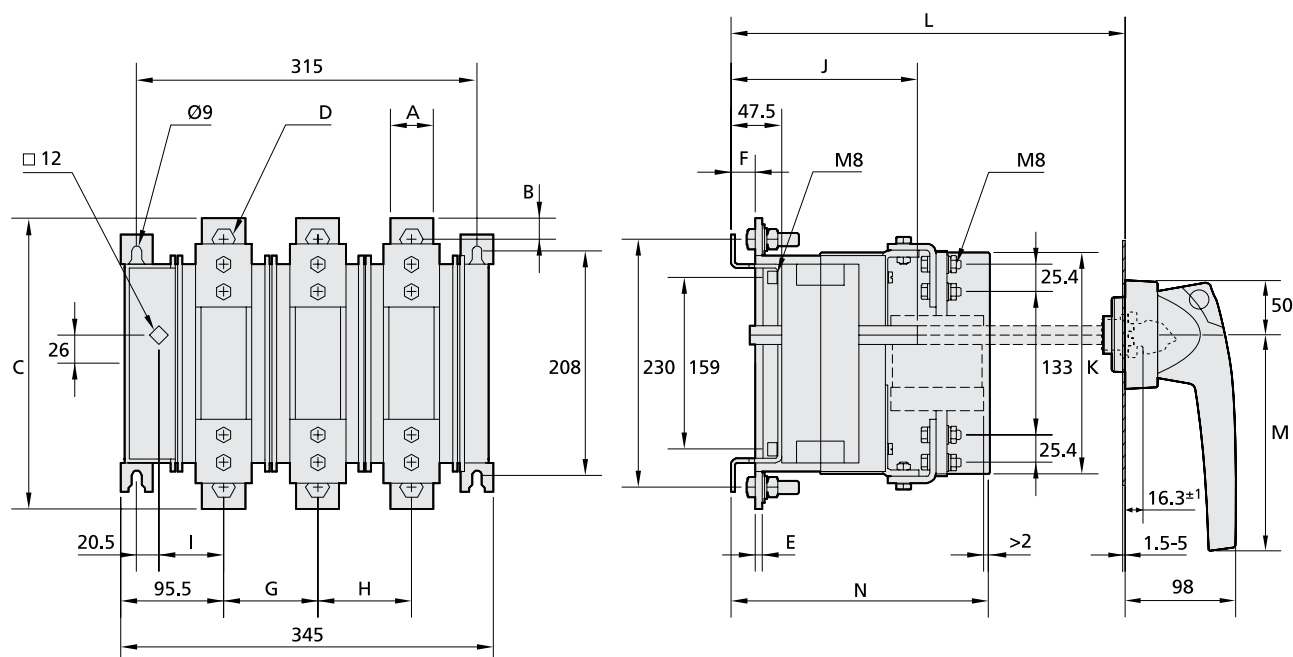


Type	A	B	C	D	E	F	G	H	I	J	K	L	M	N
QSA 400-C3/3	40	20	270	M12	6	23	87	87	60	173	205	320 ⁺¹⁰ - 620 ⁺¹⁰	200	240
QSA 630-C3/3	40	20	270	M12	6	23	87	87	60	173	205	320 ⁺¹⁰ - 620 ⁺¹⁰	200	240
QSA 800-C3/3	40	20	270	M12	6	23	87	87	60	173	205	320 ⁺¹⁰ - 620 ⁺¹⁰	200	240

Fused switch-disconnectors, 40 A to 800 A, 690 V a.c.

QSA Fused switch-disconnector


Outline drawings

BS or DIN QSA 40 A to 400 A with switched neutral - Frames sizes 0 to 2 - mm

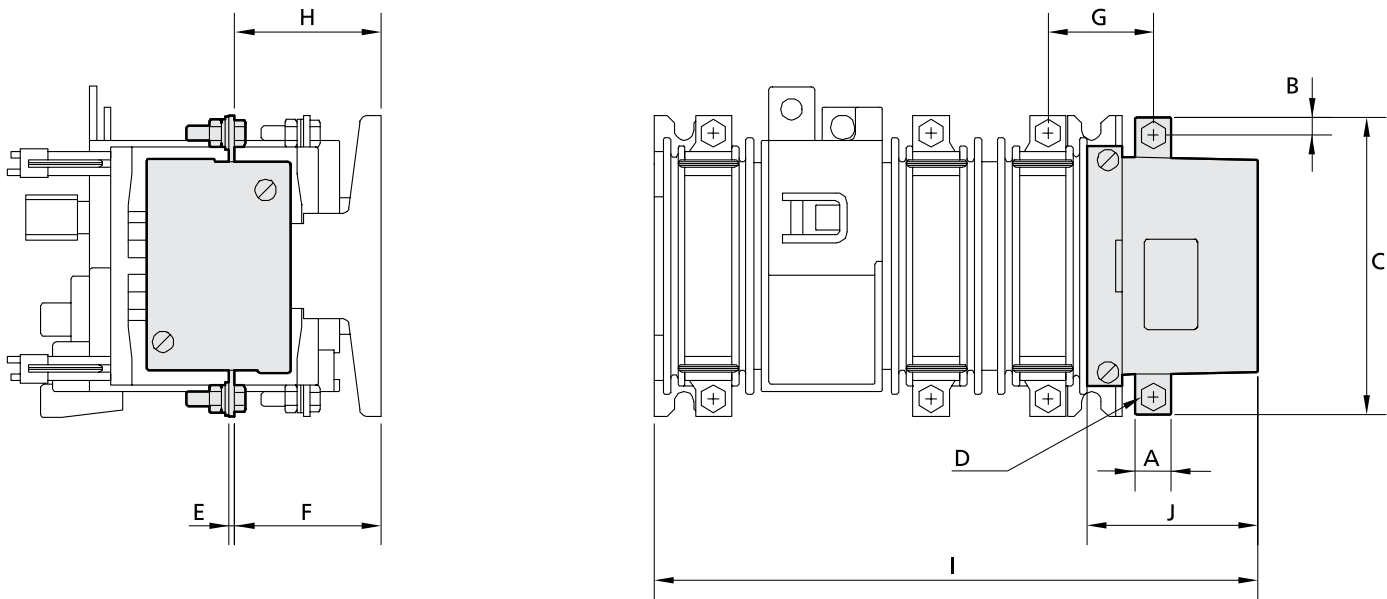


Type	Frame size	A	B	C	D	E	F	G	H	I	J
QSA 40N0/QSA63N0	0	12	6	99	M5	4.5	48	35	45.5	177	45
QSA 63N1	1	12	6	99	M5	2	48.5	36	48.5	200	45
QSA 100N1	1	15	7.5	105	M6	4.5	48.5	33.5	46	200	45
QSA 125N1	1	15	7.5	105	M6	4.5	48.5	33.5	46	200	45
QSA 160N1	1	20	10	115	M8	4.5	48.5	32	46	200	45
QSA 200N	2	20	10	146	M8	4	69	53	69	299	53
QSA 250N	2	25	12.5	160	M10	4	69	55.5	69	299	53
QSA 315N	2	25	12.5	160	M10	4	69	55.5	69	299	53
QSA 400N	2	25	12.5	160	M10	4	69	55.5	69	299	53


BS or DIN QSA 400 A to 800 A with switched neutral - Frames size 3 - mm

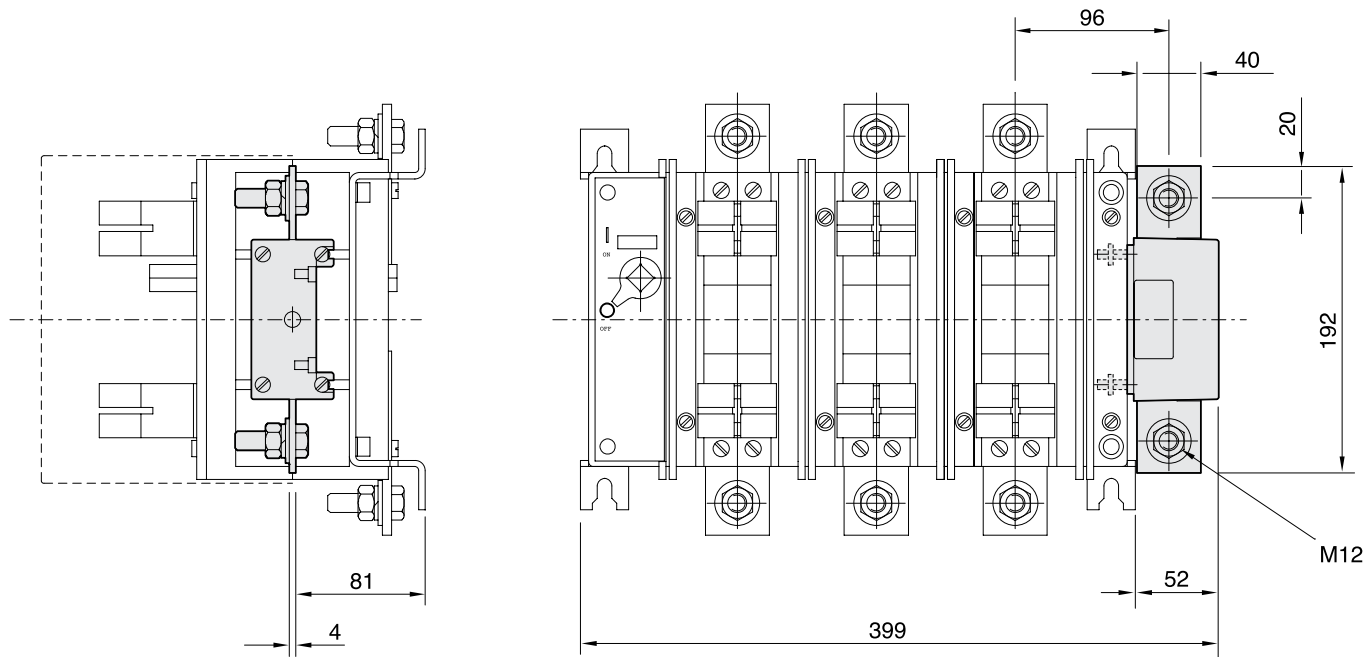

Outline drawings

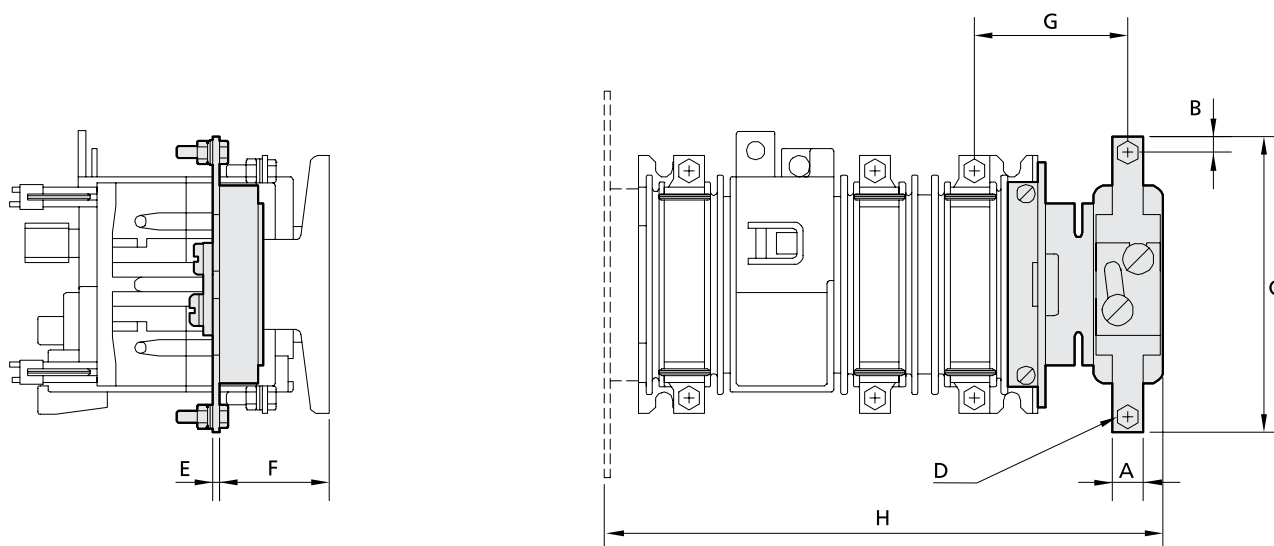BS or DIN QSA 40 A to 400 A with solid neutral - Frames sizes 0 to 2 - mm

Type	Frame size	A	B	C	D	E	F	G	H
QSA 40N0/QSA63N0	0	12	6	114	M5	2.5	44	55	177
QSA 63N1	1	12	6	114	M5	2.5	41.5	57	203
QSA 100N1	1	15	7.5	116.5	M6	3	41.5	56	203
QSA 125N1	1	15	7.5	116.5	M6	3	41.5	56	216
QSA 160N1	1	20	10	127	M8	3	41.5	54	216
QSA 200N	2	20	10	146	M8	4	70	79	296.5
QSA 250N	2	25	12.5	160	M10	4	70	76.5	296.5
QSA 315N	2	25	12.5	160	M10	4	70	76.5	296.5
QSA 400N	2	25	12.5	160	M10	4	70	76.5	296.5

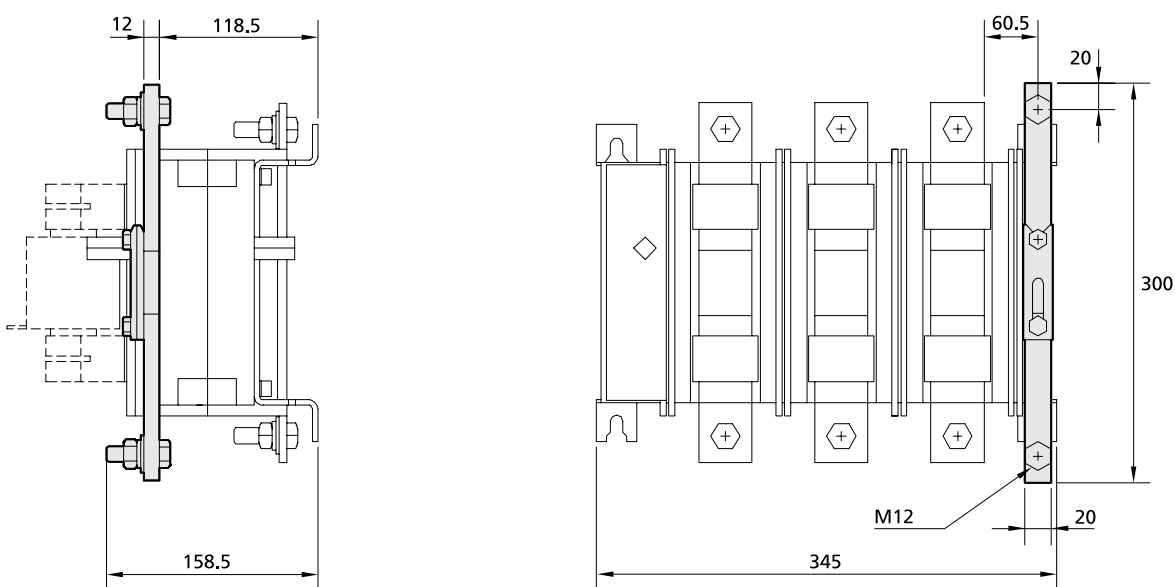BS or DIN QSA 400 A to 800 A with solid neutral - Frames size 3 - mm

Type	A	B	C	D	E	F	G	H	I
QSA 40N0/QSA63N0	20	20	300	M12	12	118.5	60.5	158.5	345
QSA 63N1	20	20	300	M12	12	118.5	60.5	158.5	345
QSA 100N1	20	20	300	M12	12	118.5	60.5	158.5	345

Fused switch-disconnectors, 40 A to 800 A, 690 V a.c.

QSA Fused switch-disconnector

Compatible Eaton's Bussmann series Fuse links

NH Fuse links suitable for QSA DIN switch-disconnector

500 V a.c. NH with metal gripping lugs, 2 to 1250 A, sizes 000 to 4, IEC 60269 and DIN 43620



QSA DIN	Compatible NH Fuse links					
Article number	Part number	Size	Rated current (Amps)	Rated voltage	Pack qty	MOQ
1318027, 1318030, 1318033, 1320201, 1320203, 1320205, 1320207, and 13138546	2NHG000B	000	2	500 V a.c.	3	3
	4NHG000B	000	4	500 V a.c.	3	3
	6NHG000B	000	6	500 V a.c.	3	3
	10NHG000B	000	10	500 V a.c.	3	3
	16NHG000B	000	16	500 V a.c.	3	3
	20NHG000B	000	20	500 V a.c.	3	3
	25NHG000B	000	25	500 V a.c.	3	3
	32NHG000B	000	32	500 V a.c.	3	3
	35NHG000B	000	35	500 V a.c.	3	3
	40NHG000B	000	40	500 V a.c.	3	3
1318027, 1318030, 1318033, 1320203, 1320207, and 13138546	50NHG000B	000	50	500 V a.c.	3	3
	63NHG000B	000	63	500 V a.c.	3	3
1318030, 1318033 and 1318546	80NHG000B	000	80	500 V a.c.	3	3
	100NHG000B	000	100	500 V a.c.	3	3
1318027, 1318030, 1318033, 1320203, 1320207, and 13138546	50NHG00B	00	50	500 V a.c.	3	3
	63NHG00B	00	63	500 V a.c.	3	3
1318546	80NHG00B	00	80	500 V a.c.	3	3
	100NHG00B	00	100	500 V a.c.	3	3
1318030	125NHG00B	00	125	500 V a.c.	3	3
1318033	160NHG00B	00	160	500 V a.c.	3	3
1318526, 1318533, 1318547 and 1318548	50NHG1B	1	50	500 V a.c.	3	3
	63NHG1B	1	63	500 V a.c.	3	3
	80NHG1B	1	80	500 V a.c.	3	3
	100NHG1B	1	100	500 V a.c.	3	3
	125NHG1B	1	125	500 V a.c.	3	3
	160NHG1B	1	160	500 V a.c.	3	3
	200NHG1B	1	200	500 V a.c.	3	3
	224NHG1B	1	224	500 V a.c.	3	3
1318526, 1318533 and 1318548	250NHG1B	1	250	500 V a.c.	3	3
	315NHG1B	1	315	440 V a.c.	3	3
1318533	355NHG1B	1	355	440 V a.c.	3	3
1318526, 1318533 and 1318548	250NHG2B	2	250	500 V a.c.	3	3
1318533 and 1318548	300NHG2B	2	300	500 V a.c.	3	3
	315NHG2B	2	315	500 V a.c.	3	3
1318533	355NHG2B	2	355	500 V a.c.	3	3
	400NHG2B	2	400	500 V a.c.	3	3
1318542 and 1318543 and 1318549	315NHG3B	3	315	500 V a.c.	3	3
	355NHG3B	3	355	500 V a.c.	3	3
	400NHG3B	3	400	500 V a.c.	3	3
	425NHG3B	3	425	500 V a.c.	3	3
1318542, 1318543	450NHG3B	3	450	500 V a.c.	3	3
	500NHG3B	3	500	500 V a.c.	3	3
	630NHG3B	3	630	500 V a.c.	3	3
1318543	800NHG3B	3	800	440 V a.c.	3	3

Data sheet 10164

Compatible Eaton's Bussmann series Fuse links

NH Fuse links suitable for QSA DIN switch-disconnector

500 V a.c. NH with insulated metal gripping lugs, 2 to 500 A, sizes 000 to 2, IEC 60269 and DIN 43620



QSA DIN	Compatible NH Fuse links					
Article number	Part number	Size	Rated current (Amps)	Rated voltage	Pack qty	MOQ
1318027, 1318030, 1318033, 1318201, 1318203, 1318205, 1318207 and 1318546	2NHG000BI	000	2	500 V a.c.	3	3
	4NHG000BI	000	4	500 V a.c.	3	3
	6NHG000BI	000	6	500 V a.c.	3	3
	10NHG000BI	000	10	500 V a.c.	3	3
	16NHG000BI	000	16	500 V a.c.	3	3
	20NHG000BI	000	20	500 V a.c.	3	3
	25NHG000BI	000	25	500 V a.c.	3	3
	32NHG000BI	000	32	500 V a.c.	3	3
	35NHG000BI	000	35	500 V a.c.	3	3
	40NHG000BI	000	40	500 V a.c.	3	3
1318027, 1318030, 1318033, 1318203, 1318207 and 1318546	50NHG000BI	000	50	500 V a.c.	3	3
	63NHG000BI	000	63	500 V a.c.	3	3
1318030, 1318033, 1318203, and 1318546	80NHG000BI	000	80	500 V a.c.	3	3
	100NHG000BI	000	100	500 V a.c.	3	3
1318030 and 1318033	125NHG00BI	00	125	500 V a.c.	3	3
1318033	160NHG00BI	00	160	500 V a.c.	3	3
1318526, 1318533, 1318547 and 1318548	50NHG1BI	1	50	500 V a.c.	3	3
	63NHG1BI	1	63	500 V a.c.	3	3
	80NHG1BI	1	80	500 V a.c.	3	3
	100NHG1BI	1	100	500 V a.c.	3	3
	125NHG1BI	1	125	500 V a.c.	3	3
	160NHG1BI	1	160	500 V a.c.	3	3
1318526, 1318533 and 1318548	200NHG1BI	1	200	500 V a.c.	3	3
	224NHG1BI	1	224	500 V a.c.	3	3
1318526, 1318533 and 1318548	250NHG1BI	1	250	500 V a.c.	3	3
	250NHG2BI	2	250	500 V a.c.	3	3
1318533 and 1318548	300NHG2BI	2	300	500 V a.c.	3	3
	315NHG2BI	2	315	500 V a.c.	3	3
1318533	355NHG2BI	2	355	500 V a.c.	3	3
	400NHG2BI	2	400	500 V a.c.	3	3

Fused switch-disconnectors, 40 A to 800 A, 690 V a.c.

QSA Fused switch-disconnector

Compatible Eaton's Bussmann series Fuse links

British Standard fuse links suitable for QSA BS switch-disconnector

BAO, 35 to 63 A, 500 V a.c. (gG and gM)



QSA BS Switch-Disconnectors Article number	Fuse links Part number	BS Ref	Rated current (Amps)	Rated voltage	Fixing centres	Pack qty	MOQ
1318011, 1320200, 1320202, 1320204 and 1320206	BAO35	A3	35	500 V a.c.	73.5 mm	10	10
	BAO40	A3	40	500 V a.c.	73.5 mm	10	10
1318011, 1320202 and 1320206	BAO50	A3	50	500 V a.c.	73.5 mm	10	10
	BAO63	A3	63	500 V a.c.	73.5 mm	10	10
	BAO63M80	A3	63M80	500 V a.c.	73.5 mm	10	10
	BAO63M100	A3	63M100	500 V a.c.	73.5 mm	10	10

[Data sheet 4112](#)

TIS, 35 to 63 A, 660-690 V a.c. and 460 V d.c. (gG and gM)



QSA BS Switch-Disconnectors Article number	Fuse links Part number	BS Ref	Rated current (Amps)	Rated voltage	Fixing centres	Pack qty	MOQ
1318011, 1320200, 1320202, 1320204 and 1320206	TIS35	A3	35	660-690 V a.c. / 460 V d.c.	73 mm	10	10
	TIS40	A3	40	660-690 V a.c. / 460 V d.c.	73 mm	10	10
1318011, 1320202 and 1320206	TIS50	A3	50	660-690 V a.c. / 460 V d.c.	73 mm	10	10
	TIS63	A3	63	660-690 V a.c. / 460 V d.c.	73 mm	10	10
	TIS63M80	A3	63M80	660-690 V a.c. / 460 V d.c.	73 mm	10	10
	TIS63M100	A3	63M100	660-690 V a.c. / 460 V d.c.	73 mm	10	10

[Data sheet 10020](#)

CEO, 32 to 100 A, 500 V a.c. (gG) and 415 V a.c.(gM)



QSA BS Switch-Disconnectors Article number	Fuse links Part number	BS Ref	Rated current (Amps)	Rated voltage	Fixing centres	Pack qty	MOQ
1318016	CEO32	A4	32	500 V a.c.	94 mm	10	10
	CEO40	A4	40	500 V a.c.	94 mm	10	10
	CEO50	A4	50	500 V a.c.	94 mm	10	10
	CEO63	A4	63	500 V a.c.	94 mm	10	10
	CEO80	A4	80	500 V a.c.	94 mm	10	10
	CEO100	A4	100	500 V a.c.	94 mm	10	10
	CEO100M125	A4	100M125	415 V a.c.	94 mm	10	10
	CEO100M160	A4	100M160	415 V a.c.	94 mm	10	10
	CEO100M200	A4	100M200	415 V a.c.	94 mm	10	10

[Data sheet 4115](#)

TCP, 32 to 100 A, 660-690 V a.c. and 350-460 V d.c. (gG); 660-690 V a.c. and 350 V d.c. (gM)



QSA BS Switch-Disconnectors Article number	Fuse links Part number	BS Ref	Rated current (Amps)	Rated voltage	Fixing centres	Pack qty	MOQ
1318020	TCP32	A4	32	660-690 V a.c. / 460 V d.c.	93.7 mm	10	10
	TCP40	A4	40	660-690 V a.c. / 460 V d.c.	93.7 mm	10	10
	TCP50	A4	50	660-690 V a.c. / 460 V d.c.	93.7 mm	10	10
	TCP63	A4	63	660-690 V a.c. / 460 V d.c.	93.7 mm	10	10
	TCP80	A4	80	660-690 V a.c. / 350 V d.c.	93.7 mm	10	10
	TCP100	A4	100	660-690 V a.c. / 350 V d.c.	93.7 mm	10	10
	TCP100M125	A4	100M125	660-690 V a.c. / 350 V d.c.	93.7 mm	10	10
	TCP100M160	A4	100M160	660-690 V a.c. / 350 V d.c.	93.7 mm	10	10
	TCP100M200	A4	100M200	660-690 V a.c. / 350 V d.c.	93.7 mm	10	10

[Data sheet 10020](#)

Compatible Eaton's Bussmann series Fuse links

British Standard fuse links suitable for QSA BS switch-disconnector

CD, 80 and 100 A, 500 V a.c. (gG) and 415 V a.c. (gM)



QSA BS Switch-Disconnectors Article number	Fuse links Part number	BS Ref	Rated current (Amps)	Rated voltage	Fixing centres	Pack qty	MOQ
1318020, 1318023, 1319065, 1319074, 1319095 and 1319103	CD80	B1	80	500 V a.c.	111 mm	10	10
	CD100	B1	100	500 V a.c.	111 mm	10	10
	CD100M125	B1	100M125	415 V a.c.	111 mm	10	10
	CD100M160	B1	100M160	415 V a.c.	111 mm	10	10
	CD100M200	B1	100M200	415 V a.c.	111 mm	10	10

[Data sheet 4116](#)

TC, 80 and 100 A, 660-690 V a.c. and 350 V d.c. (gG and gM)



QSA BS Switch-Disconnectors Article number	Fuse links Part number	BS Ref	Rated current (Amps)	Rated voltage	Fixing centres	Pack qty	MOQ
1318020, 1318023, 1319065, 1319074, 1319095 and 1319103	TC80	B1	80	660-690 V a.c. / 350 V d.c.	111 mm	10	10
	TC100	B1	100	660-690 V a.c. / 350 V d.c.	111 mm	10	10
	TC100M125	B1	100M125	660-690 V a.c. / 350 V d.c.	111 mm	10	10
	TC100M160	B1	100M160	660-690 V a.c. / 350 V d.c.	111 mm	10	10
	TC100M200	B1	100M200	660-690 V a.c. / 350 V d.c.	111 mm	10	10

[Data sheet 10078](#)

DD, 125 to 200 A, 415 V a.c. (gG and gM)



QSA BS Switch-Disconnectors Article number	Fuse links Part number	BS Ref	Rated current (Amps)	Rated voltage	Fixing centres	Pack qty	MOQ
1318020, 1318023, 1319065, 1319074, 1319095 and 1319103	DD125	B2	125	415 V a.c.	111 mm	5	5
	DD160	B2	160	415 V a.c.	111 mm	5	5
	DD200	B2	200	415 V a.c.	111 mm	5	5
	DD200M250	B2	200M250	415 V a.c.	111 mm	5	5
	DD200M315	B2	200M315	415 V a.c.	111 mm	5	5

[Data sheet 4118](#)

TF, 125 to 200 A, 660-690 V a.c. and 350 V d.c. (gG); 550-660-690 V a.c. and 460 V d.c. (gM)



QSA BS Switch-Disconnectors Article number	Fuse links Part number	BS Ref	Rated current (Amps)	Rated voltage	Fixing centres	Pack qty	MOQ
1318020, 1318023, 1319065, 1319074, 1319095 and 1319103	TF125	B2	125	660-690 V a.c., 350 V d.c.	111 mm	10	10
	TF160	B2	160	660-690 V a.c., 350 V d.c.	111 mm	10	10
	TF200	B2	200	660-690 V a.c., 350 V d.c.	111 mm	10	10
	TF200M250	B2	200M250	660-690 V a.c., 460 V d.c.	111 mm	10	10
	TF200M315	B2	200M315	550 V a.c.	111 mm	10	10

[Data sheet 10078](#)

ED, 250 to 400 A, 415 V a.c. (gG and gM)



QSA BS Switch-Disconnectors Article number	Fuse links Part number	BS Ref	Rated current (Amps)	Rated voltage	Fixing centres	Pack qty	MOQ
1319065, 1319074, 1319095 and 1319103	ED250	B3/B4	250	415 V a.c.	111 mm	1	1
	ED315	B3/B4	315	415 V a.c.	111 mm	1	1
	ED355	B3/B4	355	415 V a.c.	111 mm	1	1
	ED400	B3/B4	400	415 V a.c.	111 mm	1	1
	ED315M400	B3/B4	315M400	415 V a.c.	111 mm	1	1
	ED400M500	B3/B4	400M500	415 V a.c.	111 mm	1	1

[Data sheet 4119](#)

Fused switch-disconnectors, 40 A to 800 A, 690 V a.c.

QSA Fused switch-disconnector

Compatible Eaton's Bussmann series Fuse links

British Standard fuse links suitable for QSA BS switch-disconnector

TKF, 250 and 315 A, 660-690 V a.c. and 460 V d.c. (gG and gM)



QSA BS Switch-Disconnectors Article number	Fuse links Part number	BS Ref	Rated current (Amps)	Rated voltage	Fixing centres	Pack qty	MOQ
1319065, 1319074, 1319095 and 1319103	TKF250	B3	250	660-690 V a.c. / 460 V d.c.	111 mm	5	5
	TKF315	B3	315	660-690 V a.c. / 460 V d.c.	111 mm	5	5
	TKF315M355	B3	315M355	660-690 V a.c. / 460 V d.c.	111 mm	5	5

[Data sheet 10078](#)

TMF, 355 and 400 A, 660-690 V a.c. and 460 V d.c. (gG and gM)



QSA BS Switch-Disconnectors Article number	Fuse links Part number	BS Ref	Rated current (Amps)	Rated voltage	Fixing centres	Pack qty	MOQ
1319065, 1319074, 1319095 and 1319103	TMF355	B4	355	660-690 V a.c. / 460 V d.c.	111 mm	1	1
	TMF400	B4	400	660-690 V a.c. / 460 V d.c.	111 mm	1	1
	TMF400M450	B4	400M450	660-690 V a.c. / 460 V d.c.	111 mm	1	1

[Data sheet 10078](#)

EF, 355 and 400 A, 415 V a.c. (gG) and 550 V a.c. (gM)



QSA BS Switch-Disconnectors Article number	Fuse links Part number	BS Ref	Rated current (Amps)	Rated voltage	Fixing centres	Pack qty	MOQ
1318537, 1318544 and 1319175	EF355	C1	355	415 V a.c.	184 mm	1	1
	EF400	C1	400	415 V a.c.	184 mm	1	1
	EF400M500	C1	400M500	550 V a.c.	184 mm	1	1

[Data sheet 4120](#)

FF, 450 to 630 A, 690 V a.c. and 400 V d.c. (gG)



QSA BS Switch-Disconnectors Article number	Fuse links Part number	Rated current (Amps)	Rated voltage	Fixing centres	Pack qty	MOQ
1318537, 1318544 and 1319175	FF450	450	690 V a.c./400V d.c.	185 mm	1	1
	FF500	500	690 V a.c./400V d.c.	185 mm	1	1
	FF560	560	690 V a.c./400V d.c.	185 mm	1	1
	FF630	630	690 V a.c./400V d.c.	185 mm	1	1

[Data sheet 4102](#)

TTM, 450 to 630 A, 660-690 V a.c. and 450 V d.c. (gG and gM)

QSA BS Switch-Disconnectors Article number	Fuse links Part number	Rated current (Amps)	Rated voltage	Fixing centres	Pack qty	MOQ
1318537, 1318544 and 1319175	TTM450	450	660-690 V a.c. / 450 V d.c.	133 mm	1	1
	TTM500	500	660-690 V a.c. / 450 V d.c.	133 mm	1	1
	TTM560	560	660-690 V a.c. / 450 V d.c.	133 mm	1	1
	TTM630	630	660-690 V a.c. / 450 V d.c.	133 mm	1	1
	TTM630M670	630M670	660-690 V a.c. / 450 V d.c.	133 mm	1	1

[Data sheet 10078](#)

GF, 710 and 800 A, 550 V a.c. and 250 V d.c. (gG)

QSA BS Switch-Disconnectors Article number	Fuse links Part number	BS Ref	Rated current (Amps)	Rated voltage	Fixing centres	Pack qty	MOQ
1318537, 1318544 and 1319175	GF710	C3	710	550 V a.c./ 250V d.c.	185 mm	1	1
	GF800	C3	800	550 V a.c./ 250V d.c.	185 mm	1	1

[Data sheet 4103](#)

All-around service for your machine control systems

Powering Business: For Eaton, this promise means more than just providing reliable products and technologies. It means using our support expertise and services to provide you with an engineering solution that is perfectly tailored to your own specific needs. Or, put more simply, turnkey solutions designed to drive your success.

Engineering for your machine control systems

From the initial idea to bringing your application to life – Eaton will accompany you through every step involved in developing your machine, providing unparalleled support all throughout. The Lean Solution expert's knowhow, combined with the innovation of Eaton products, ensures that you will be able to take advantage of our engineering edge to establish a solid competitive advantage on the market.

Eaton will not only help you select products, but will also provide advice concerning your machine's electrical and hydraulic design and be there for you every step of the way while you implement your applications and programs and commission your system. By combining these services with Eaton components, you can rest assured knowing that your needs will be fully met.

Enabling businesses to successfully export their products to North America

Our long business partnership with SAE Schaltanlagenbau Erfurt, which has the required certifications for building control panels for export to North America, enables us to provide our customers with solutions that are ideal for use in that region. In addition to our products and to the production of control panels built in accordance with UL 508A and NFPA 79, Eaton's and SAE's range of services includes workshops designed to provide the special knowhow required to successfully export electrical equipment to North America.



Fused switch-disconnector 25 A, 35 A and 50 A, 400 V a.c.

Pasco Fused switch-disconnector, 25 A, 35 A and 50 A, 400 V a.c.



Description

The Pasco fused switch-disconnector provide the ultimate safety in electrical protection for equipment and personnel. The 'D' Type low voltage fuse links fitted in the Pasco unit protect the equipment against overcurrents and the switch enables safe disconnection.

Standards/Approvals

- IEC 60947-3
- KEMA-KEUR

Technical data

- Voltage: 400 V ac.
- Current: 25 A, 35 A and 50 A
- 1-pole, 2-pole, 3-poles

Recommended fuse links

Eaton's Bussmann series D Type fuse links

Features

- Enclosure made of non-tracking synthetic material
- Suitable for horizontal DIN-Rail mounting
- Fuse-base contact is not live once the 'D' Type fuse link has been removed
- Semi-independent manual operating mechanism
- Terminals protected against accidental touch
- Fuse rating guide plate included
- Blown fuse LED indicator light
- Utilisation category: AC-21 A and AC-22 B

Fused switch-disconnector 25 A, 35 A and 50 A, 400 V a.c.

Pasco Fused switch-disconnector and Paco fuse holder

Pasco and Paco range overview

	Voltage (V a.c.)	25 A	35 A	50 A
Pasco fused switch-disconnector	230/400	✓	✓	✓
Paco fuse holder	230	✓		✓

Pasco fused switch-disconnector - Type LPC - 25 A , 35 A and 50 A, 230 and 400 V a.c.



1713612

1713616



1713618

Current (A)	Voltage (V a.c.)	Number of poles	Width (mm)	Part number	Article number	Pack qty	Compatible Eaton's Bussmann series D Type fuse links
25	230	1P + Neutral	36	LPC25-16AFUSE	1713610	1	16A fuse already included with unit
25	230	1P + Neutral	36	LPC25	1713612	1	DII fuse links
50	230	1P + Neutral	36	LPC50	1713613	1	DIII fuse links
25	230	2P + 2 Neutral	72	LPC25/2	1713616	1	DII fuse links
25	400	3P + Neutral	108	LPC25/3	1713617	1	DII fuse links
35	400	3P + Neutral	108	LPC35/3	1713618	1	DIII fuse links

Paco fuse holder - Type PHM - 25 A and 50 A, 230 V a.c.



1713614

Current (A)	Voltage (V a.c.)	Number of poles	Width (mm)	Part number	Article number	Pack qty	Compatible Eaton's Bussmann series D Type fuse links
25	230	1P	36	PHM25-16AFUSE	1713611	1	16A fuse already included with unit
25	230	1P	36	PHM25	1713614	1	DII fuse links
50	230	1P	36	PHM50	1713615	1	DIII fuse links

See compatible Eaton's Bussmann series 'D' Type fuse links

Accessories

Fuse rating guide plate



1713622

Current (A)	Fuse link size	Colour	Part number	Article number	Pack qty
6	0	Green	LPC6-ADAPTER	1713622	10
10	0	Red	LPC10-ADAPTER	1713623	10
16	1	Grey	LPC16-ADAPTER	1713624	10
20	1	Blue	LPC20-ADAPTER	1713625	10
25	1	Yellow	LPC25-ADAPTER	1713626	10
35	1	Black	LPC35-ADAPTER	1713627	10
50	2	White	LPC50-ADAPTER	1713628	10

Tool for inserting fuse rating guide plate



1713629

Part number	Article number	Pack qty
LPC-ADAPTERKEY	1713629	1

Fused switch-disconnector 25 A, 35 A and 50 A, 400 V a.c.

Pasco Fused switch-disconnector and Paco fuse holder

Accessories

Dummy fuse insert for maintenance work



Part number	Article number	Pack qty
LPC-PHM-DUMMY	1713607	1

1713607

Compatible Eaton's Bussmann series Fuse links


'D' Type low voltage fuse links suitable for Pasco fused switch-disconnector





Pasco/Paco	Compatible 'D' Type Fuse links					
Article number	Part number	Size	Type	Current (Amps)	Voltage (V a.c.)	Pack qty
Pasco LPC25 : 1713612, 1713616 and 1713617	6D27	DII	Time-delay	6	500	25
	10D27	DII	Time-delay	10	500	25
	16D27	DII	Time-delay	16	500	25
	20D27	DII	Time-delay	20	500	25
	25D27	DII	Time-delay	25	500	25
	6D27Q	DII	Fast acting	6	500	25
	10D27Q	DII	Fast acting	10	500	25
	16D27Q	DII	Fast acting	16	500	25
	20D27Q	DII	Fast acting	20	500	25
	25D27Q	DII	Fast acting	25	500	25
	6D27R	DII	Ultra rapid	6	500	25
	10D27R	DII	Ultra rapid	10	500	25
	16D27R	DII	Ultra rapid	16	500	25
	20D27R	DII	Ultra rapid	20	500	25
	25D27R	DII	Ultra rapid	25	500	25
Pasco LPC35 1713618	35D33	DIII	Time-delay	35	500	25
	35D33Q	DIII	Fast acting	35	500	25
	35D33R	DIII	Ultra rapid	35	500	25
	35D33	DIII	Time-delay	35	500	25
	40D33	DIII	Time-delay	40	500	25
Pasco LPC50 1713613	50D33	DIII	Time-delay	50	500	25
	35D33Q	DIII	Fast acting	35	500	25
	40D33Q	DIII	Fast acting	40	500	25
	50D33Q	DIII	Fast acting	50	500	25
	35D33R	DIII	Ultra rapid	35	500	25
Paco PHM50: 1713615	40D33R	DIII	Ultra rapid	40	500	25
	50D33R	DIII	Ultra rapid	50	500	25

[Data sheet 4124](#)

Outline drawings



Pasco, Type LPC - mm

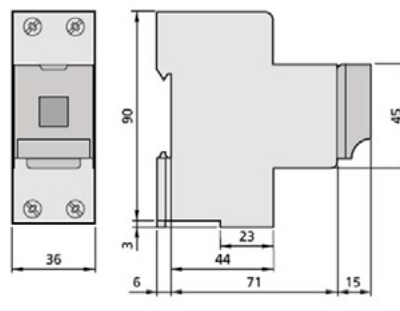

Paco, Type HPM - mm

Fused switch-disconnector 25 A, 35 A and 50 A, 400 V a.c.


Pasco Fused switch-disconnector and Paco fuse holder

Technical data

		Pasco LPC25	Pasco LPC35/50	Paco PHM25	Paco PHM50
Conventional free air thermal current	I_{th}	25 A	50 A 1P+N, 35 A 3P+N	25 A	50 A
Conventional enclosed thermal current	I_{the} 35°C	25 A	50 A 1P+N, 35 A 3P+N	25 A	50 A
Rated uninterrupted current	I_u	25 A	50 A 1P+N, 35 A 3P+N	25 A	50 A
Rated operational voltage	U_e	230 V LPC25 230 V LPC25/2 400 V LPC25/3	230 V LPC50 400 V LPC35/3	230 V	230 V
Rated insulation voltage	U_i	400 V	400 V	230 V	230 V
Rated impulse withstand voltage	U_{imp}	6 kV	6 kV	6 kV	6 kV
Rated frequency		50 / 60 Hz	50 / 60 Hz	50 / 60 Hz	50 / 60 Hz
Storage temperature		-25...+80°C	-25...+80°C	-25...+80°C	-25...+80°C
Max altitude (without derating)		2000 m	2000 m	2000 m	2000 m
Rated operational current					
AC-21A					
At $U_e = 230$ V AC-21A	I_e	25 A	50 A LPC50 35 A LPC35/3	-	-
AC-22A					
At $U_e = 230$ V AC-22A	I_e	25 A LPC25, LPC25/2	50 A LPC50	-	-
At $U_e = 400$ V AC-22A	I_e	50 A LPC25/3	35 A LPC35/3	-	-
AC-21B					
At $U_e = 230$ V AC-21B	I_e	-	-	25 A	50 A
AC-22B					
At $U_e = 400$ V AC-22B	I_e	-	35 A 3P+N	-	-
Rated conditional short-circuit current	I_p	50 kA	35 kA	50 kA	35 kA
Cut-off current	max.	4.8 kA	6.7 kA	4.8 kA	6.7 kA
Joule integral	max.	4 kA ² s	15 kA ² s	4 kA ² s	15 kA ² s
Fuse-link max	I_n	25 A	50 A LPC50 35 A LPC35/3	25 A	50 A
Fuse link Type		DII	DIII	DII	DIII
Power dissipation per pole at I_{th}		1.7 W	2.4 W (35 A), 3.1 W (50 A)	0.5 W	1.9 W
Maximum fuse watts loss		3 W	5 W (1P+N), 4.1 W (3P+N)	3 W	5 W
Durability - maximum cycles (on + off)		10.000	10.000	2.000	2.000
Protection class		IP20	IP20	IP20	IP20
Terminal capacities					
Cross section 1 cable					
Solid		1.5 - 6 mm ²	1.5 - 6 mm ²	1.5 - 6 mm ²	1.5 - 6 mm ²
Flexible		1.5 - 16 mm ²	1.5 - 16 mm ²	1.5 - 16 mm ²	1.5 - 16 mm ²
Cross section 2 cables					
Solid		1.5 - 4 mm ²	1.5 - 4 mm ²	1.5 - 4 mm ²	1.5 - 4 mm ²
Flexible		1.5 - 4 mm ²	1.5 - 4 mm ²	1.5 - 4 mm ²	1.5 - 4 mm ²
Tightening torque		2 Nm	2 Nm	2 Nm	2 Nm
Pollution degree		II/2	II/2	II/2	II/2
Standards		EN-IEC 60947-3			
Approvals		CE, KEMA-KEUR			

Switch-disconnectors for DC applications, 125 A to 1250 A, 800/1000 V d.c.

DDC Dumeco, 125 A to 1250 A, 800/1000 V d.c.

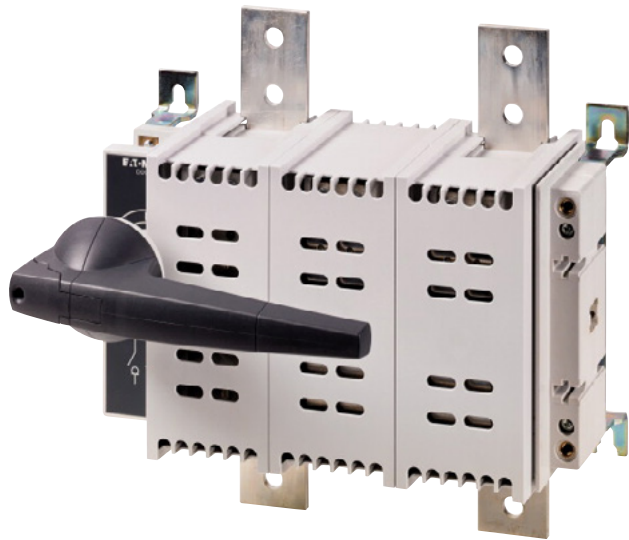

Description

The Dumeco DDC switch-disconnectors are specifically designed for applications such as residential, light commercial sites and DC battery storage.

Standards/Approvals

- IEC 60947-3
- CE
- RoHS
- CCC

Technical data

- Voltage frame size 2
 - 125 A to 200 A: 800 V.d.c
 - 250 A to 630 A: 1000 V.d.c
- Voltage frame size 3: 1000 V d.c.
- Current: 125 A to 1250 A

Features

- Operator independent switch
- Specially designed self-cleaning roller contacts
- Bi-directional pole connection gives installation flexibility (non polarised)
- Suitable for rear/base plate mounting
- Operational shaft lengths up to 600 mm
- Protection degree up to IP65
- Door interlocking in OFF position by using D-Type handles
- Padlockable handles in OFF position, defeatable in ON position

DDC Dumeco, 125 A to 1250 A, 800/ 1000 V d.c.

DDC range overview

	125 A	160 A	200 A	250 A	400 A	630 A	800 A	1000 A	1250 A
Switch-disconnectors with pre-mounted grey handle	✓	✓	✓	✓	✓	✓	✓	✓	✓
Switch-disconnectors without shaft and handle	✓	✓	✓	✓	✓	✓	✓	✓	✓
Switch-disconnectors with 300 mm shaft and grey handle	✓	✓	✓	✓	✓	✓	✓	✓	✓

DDC with pre-mounted grey handle



Current rating	Voltage rating	Number of poles	Frame size	Part number	Article number	Pack qty
125 A	800 V d.c.	2P	1	DDC-125/2	6098930	1
160 A	800 V d.c.	2P	1	DDC-160/2	6098933	1
200 A	800 V d.c.	2P	1	DDC-200/2	6098936	1
250 A	1000 V d.c.	2P	2	DDC-250/2	6098940	1
400 A	1000 V d.c.	2P	2	DDC-400/2	6098943	1
630 A	1000 V d.c.	2P	2	DDC-630/2	6098946	1
800 A	1000 V d.c.	2P	3	DDC-800/2	6098950	1
1000 A	1000 V d.c.	2P	3	DDC-1000/2	6098953	1
1250 A	1000 V d.c.	2P	3	DDC-1250/2	6098956	1

DDC without shaft and handle



Current rating	Voltage rating	Number of poles	Frame size	Part number	Article number	Pack qty
125 A	800 V d.c.	2P	1	DDC-125/2-SK	6098931	1
160 A	800 V d.c.	2P	1	DDC-160/2-SK	6098934	1
200 A	800 V d.c.	2P	1	DDC-200/2-SK	6098937	1
250 A	1000 V d.c.	2P	2	DDC-250/2-SK	6098941	1
400 A	1000 V d.c.	2P	2	DDC-400/2-SK	6098944	1
630 A	1000 V d.c.	2P	2	DDC-630/2-SK	6098947	1
800 A	1000 V d.c.	2P	3	DDC-800/2-SK	6098951	1
1000 A	1000 V d.c.	2P	3	DDC-1000/2-SK	6098954	1
1250 A	1000 V d.c.	2P	3	DDC-1250/2-SK	6098957	1

DDC with 300 mm shaft and D/P padlockable grey handle with interlock function



6098958

Current rating	Voltage rating	Number of poles	Frame size	Part number	Article number	Pack qty
125 A	800 V d.c.	2P	1	DDC-125/2/M4/P-G	6098932	1
160 A	800 V d.c.	2P	1	DDC-160/2/M4/P-G	6098935	1
200 A	800 V d.c.	2P	1	DDC-200/2/M4/P-G	6098938	1
250 A	1000 V d.c.	2P	2	DDC-250/2/M4/P-G	6098942	1
400 A	1000 V d.c.	2P	2	DDC-400/2/M4/P-G	6098945	1
630 A	1000 V d.c.	2P	2	DDC-630/2/M4/P-G	6098948	1
800 A	1000 V d.c.	2P	3	DDC-800/2/M4/P-G	6098952	1
1000 A	1000 V d.c.	2P	3	DDC-1000/2/M4/P-G	6098955	1
1250 A	1000 V d.c.	2P	3	DDC-1250/2/M4/P-G	6098958	1

Switch-disconnectors for DC applications, 125 A to 1250 A, 800/1000 V d.c.

DDC Dumeco

Handles and shafts

Handles mounting types overview

DDC Type	Frame size	K Type handles	A Type handles		D/P Type handles		D/C Type handles	
			Grey	Red	Grey	Red/ Yellow	Grey	Red/ Yellow
DDC without pre-mounted grey handle DDC-2/SK	2	K3	✓	✓	✓	✓	✓	✓
	3	K4	✓	✓	✓	✓	✓	✓

- A Type:** Handle mounted directly on switch
- D/P Type:** Handle padlockable for mounting on hinged door, with interlock function
- D/C Type:** Handle with cylinder lock for mounting on hinged door, supplied with two keys, with interlock function

A Type handles

Mounted directly on switch suitable for Dumeco DDC-2/SK Type



K3 A handle
1818202

K4 A handle
1818010

Shafts

DDC	Frame size	A Type handles		Metal shafts		Pack qty	
		Handle colours		Length of shafts			
		Grey	Red				
				Shaft mm□	300 mm	600 mm	
DDC-250/2	2	K3AG 1818202	K3AR 1818111	10 x 10	4K10300MMK3 1319319	4K10600MMK3 1319322	1
DDC-400/2	2						
DDC-630/2	2						
DDC-800/2	3	K4AG 1818203	K4AR 1818010	12 x 12	4K12300MMK4 1319326	4K12600MMK4 1319329	1
DDC-1000/2	3						
DDC-1250/2	3						

Handles and shafts

D/P Type handles

Padlockable for mounting on hinged door, with interlock function, suitable for Dumeco DDC-2/SK Type



K3 D/P handle
1818069



K4 D/P handle
1818051



Shafts

DDC	Frame size	D/P Type handles		Metal shafts		Pack qty	
		Handle colours		Shaft mm□	Length of shafts		
		Grey	Red/ Yellow		300 mm		600 mm
DDC-250/2	2	K3DG/P 1818069	K3DR/P 1818096	10 x 10	4K10300MMK3 1319319	4K10600MMK3 1319322	1
DDC-400/2	2						
DDC-630/2	2						
DDC-800/2	3	K4DG/P 1818052	K4DR/P 1818051	12 x 12	4K12300MMK4 1319326	4K12600MMK4 1319329	1
DDC-1000/2	3						
DDC-1250/2	3						

D/C Type handles

With cylinder lock for mounting on hinged door supplied with two keys, with interlock function, suitable for Dumeco DDC-2/SK Type



K3 D/C handle
1818097



K4 D/C handle
1818055



Shafts

		D/C Type handles		Metal shafts			
DDC	Frame size	Handle colours		Shaft mm□	Lengths of shafts		Pack qty
		Grey	Red/ Yellow		300 mm	600 mm	
DDC-250/2	2	K3DG/C 1818070	K3DR/C 1818097	10 x 10	4K10300MMK3 1319319	4K10600MMK3 1319322	1
DDC-400/2	2						
DDC-630/2	2						
DDC-800/2	3	K4DG/C 1818055	K4DR/C 1818054	12 x 12	4K12300MMK4 1319326	4K12600MMK4 1319329	1
DDC-1000/2	3						
DDC-1250/2	3						

Switch-disconnectors for DC applications, 125 A to 1250 A, 800/1000 V d.c.

DDC Dumeco

Accessories

Coupling for extending shaft length for DDC 800 A, 1000 A and 1250 A, frame size 3



6098274

DDC Type	Part number	Article number	Pack qty
Frame size 3	SC4K12/14	6098274	1

Conversion kits for locking the D Type handles in both On and Off position



1818105

DDC Type	Frame size	Part number	Article number	Pack qty
DDC-250	2	ADAPTORPADLOCK-K3	1818105	1
DDC-400	2			1
DDC-630	2			1
DDC-800	3	ADAPTORPADLOCK-K4,K5,K61	1818106	1
DDC-1000	3			1
DDC-1250	3			1

Multi locking device for accomodating up to 3 additional padlocks



1059849

DDC	Frame size	Shackle	Part number	Article number	Pack qty
DDC 250 to 630 A	2	9 mm	LOCKMULTIPLIER-K1-6	1059849	1
DDC 800 to 1250 A	3	9 mm			1

Connection kit



1314915

DDC	Frame size	Bolt size	Part number	Article number	Pack qty
DDC 250 to 630 A	2	M10 x 20 mm	KITM10X20	1314915	1
		M10 x 30 mm	KITM10X30	1314648	1
DDC 800 to 1250 A	3	M12 x 35 mm	KITM12X35	1314857	1

Terminal covers



1319413

DDC	Frame size	Bolt size	Part number	Article number	Pack qty
DDC 250 to 630 A	2	M10	QSACOVER1PM10	1319413	1
DDC 800 to 1250 A	3	M12	QSACOVER1PM12	1319415	1

Auxiliary contact set



6028293

DDC	Frame size	Mounting	Part number	Article number	Pack qty
DDC 250 to 630 A	2	2 Auxiliary contacts per switch	AUX1NO+1NC+BOX012	6028293	1
DDC 800 to 1250 A	3	1 Auxiliary contact per switch	AUX1NO+1NC+BOX3	6101137	1

Technical data

DDC 250 A to 1250 A, frame size 1 and 2

			Frame size 1			Frame size 2		
			DDC 125	DDC 160	DDC 200	DDC 250	DDC 400	DDC 630
Conventional free air thermal current	I_{th}		125 A	160 A	200 A	250 A	400 A	630 A
Conventional enclosed thermal current	I_{the}	35°C	125 A	160 A	200 A	250 A	400 A	630 A
		50°C	125 A	160 A	200 A	250 A	400 A	560 A
		65°C	125 A	160 A	200 A	250 A	380 A	480 A
Rated uninterrupted current	I_u		125 A	160 A	200 A	250 A	400 A	630 A
Rated operational voltage	U_e		800 V	800 V	800 V	1000	1000	1000
Rated insulation voltage	U_i		1200 V	1200 V	1200 V	1200 V	1200 V	1200 V
Rated impulse withstand voltage	U_{imp}		8 kV	8 kV	8 kV	12 kV	12 kV	12 kV
Storage temperature			-40°C +80°C	-40°C +80°C	-40°C +80°C	-40°C +80°C	-40°C +80°C	-40°C +80°C
Max altitude (without derating)			≤ 2000 m	≤ 2000 m	≤ 2000 m	≤ 2000 m	≤ 2000 m	≤ 2000 m
Rated operational current								
DC-21B								
At $U_e = 480$ V DC-21B	I_e		125 A	160 A	200 A	250 A	400 A	630 A
At $U_e = 600$ V DC-21B	I_e		125 A	160 A	200 A	250 A	400 A	630 A
At $U_e = 800$ V DC-21B	I_e		125 A	160 A	200 A	250 A	400 A	630 A
At $U_e = 1000$ V DC-21B	I_e		-	-	-	250 A	400 A	630 A
Rated short-time withstand current	I_{cw}		4 kAs	4 kAs	4 kAs	15 kAs	15 kAs	15 kAs
Rated short-circuit making capacity	I_{cm}		6 kA	6 kA	6 kA	25 kA	25 kA	25 kA
Power dissipation per pole	P		8 W	12 W	21 W	15 W	39 W	97 W
Durability - maximum cycles (on+off)			10000	10000	10000	10000	10000	10000
Pollution degree			III/3	III/3	III/3	III/3	III/3	III/3
Protection class			IP20	IP20	IP20	IP20	IP20	IP20
Terminal capacities								
Terminal bolt size			M8	M8	M8	M10	M10	M10
Cross section								
Stranded			120 mm ²	120 mm ²	120 mm ²	240 mm ²	240 mm ²	185 mm ² x 2
Busbars			1 x 30 x 3 2 x 20 x 3	1 x 30 x 3 2 x 20 x 3	1 x 30 x 3 2 x 20 x 3	1 x 25 x 6	2 x 25 x 6	2 x 40 x 5
Terminal tightening torque			14 Nm	14 Nm	14 Nm	20 Nm	20 Nm	20 Nm
Standards			IEC 60947-3			IEC 60947-3		
Certification			CE, RoHS, CCC			CE, RoHS, CCC		

Switch-disconnectors for DC applications, 125 A to 1250 A, 800/1000 V d.c.

DDC Dumeco


Technical data

DDC 250 A to 1250 A, frame size 3


		Frame size 3		
		DDC 800	DDC 1000	DDC 1250
Conventional free air thermal current	I_{th}	800 A	1000 A	1250 A
Conventional enclosed thermal current	I_{the} 35°C	800 A	1000 A	1250 A
	50°C	800 A	1000 A	1250 A
	65°C	700 A	900 A	1000 A
Rated uninterrupted current	I_u	800 A	1000 A	1250 A
Rated operational voltage	U_e	1000	1000	1000
Rated insulation voltage	U_i	1200 V	1200 V	1200 V
Rated impulse withstand voltage	U_{imp}	12 kV	12 kV	12 kV
Storage temperature		-40°C +80°C	-40°C +80°C	-40°C +80°C
Max altitude (without derating)		≤ 2000 m	≤ 2000 m	≤ 2000 m
Rated operational current				
DC-21B				
At $U_e = 480$ V DC-21B	I_e	800 A	1000 A	1250 A
At $U_e = 600$ V DC-21B	I_e	800 A	1000 A	1250 A
At $U_e = 800$ V DC-21B	I_e	800 A	1000 A	1250 A
At $U_e = 1000$ V DC-21B	I_e	800 A	1000 A	1250 A
Rated short-time withstand current	I_{cw}	25 kAs	25 kAs	25 kAs
Rated short-circuit making capacity	I_{cm}	54.5 kA	54.5 kA	54.5 kA
Power dissipation per pole	P	34 W	53 W	83 W
Durability - maximum cycles (on+off)		5000	5000	5000
Pollution degree		III/3	III/3	III/3
Protection class		IP20	IP20	IP20
Terminal capacities				
Terminal bolt size		M12	2 x M12	2 x M12
Cross section				
Stranded		240 mm ² x 2	-	-
Busbars		2 x 50 x 5	2 x 60 x 5	2 x 80 x 5
Terminal tightening torque		28 Nm	28 Nm	28 Nm
Standards		IEC 60947-3		
Certification		CE, RoHS, CCC		

Outline drawings

DDC Frame size 1 - 125 A, 160 A and 200 A - mm

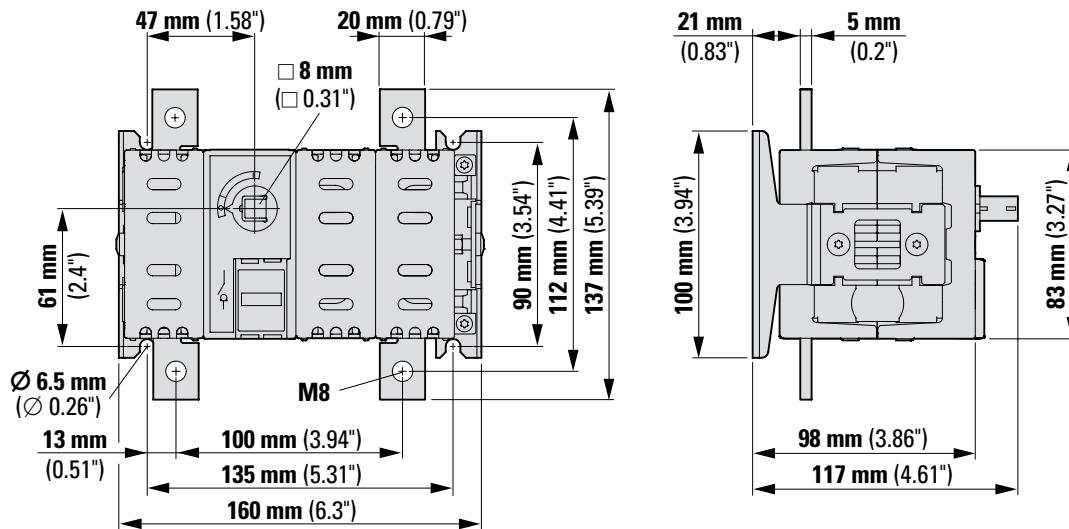

DDC Frame size 2 - 250 A, 400 A and 630 A - mm

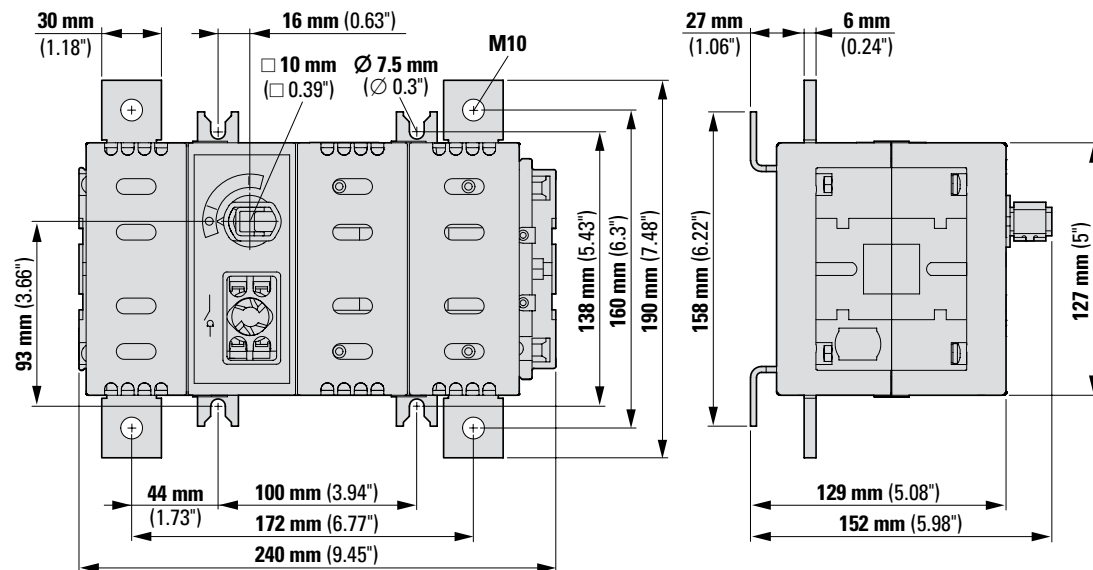


K Type handles dimensions

A Type handles


Handle mounted directly on switch (IP Protection IP65)

K1 'A' handle - mm

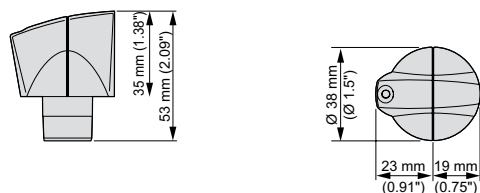


K1 A handle
1818001

K2S and K2 'A' handle - mm

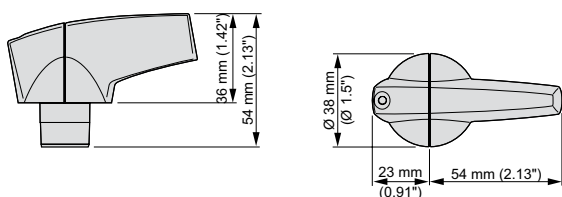


K2 A handle
1818004

K3 'A' handle - mm

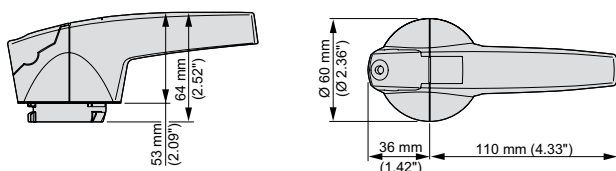


K3 A handle
1818202

K4 'A' handle - mm

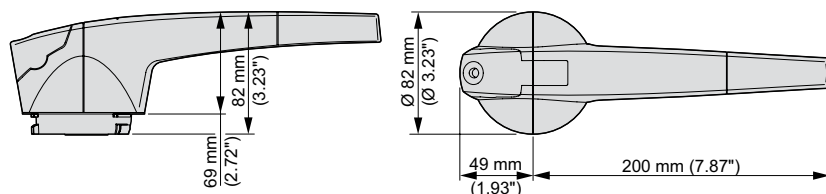


K4A handle
1818009

K5 'A' handle - mm

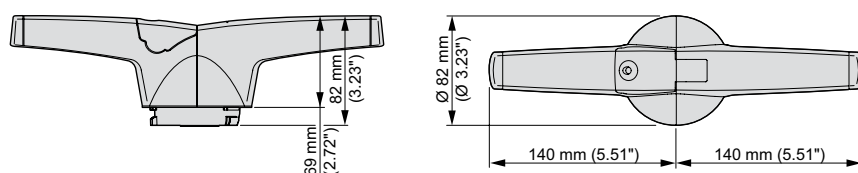

K5 A handle
1818012

K6 'A' handle

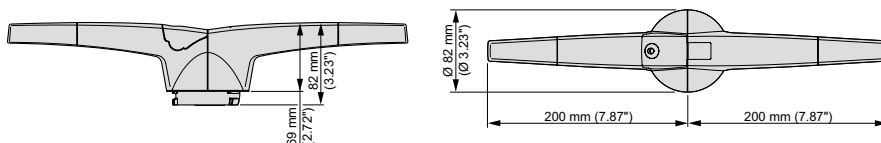


K6 A handle
1818013

K Type handles dimensions

C Type handles


Without interlock function, for example when mounted on the cover of Eaton's Halyester enclosure range (IP Protection IP56)

K1 'C' handle - mm

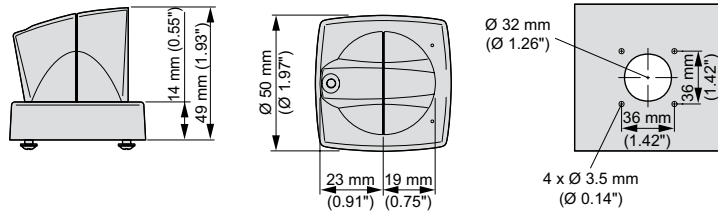



K1 C handle

K2S and K2 'C' handle - mm

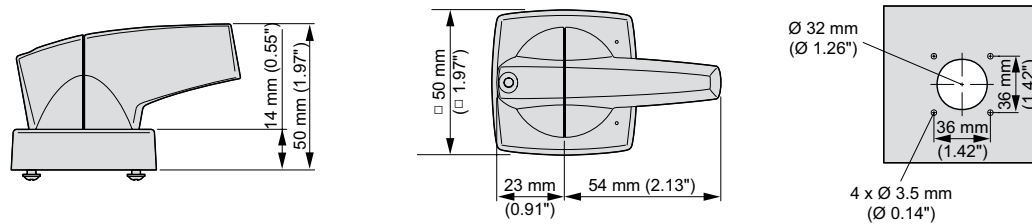


K2 handle
1818018

K3 'C' handle - mm

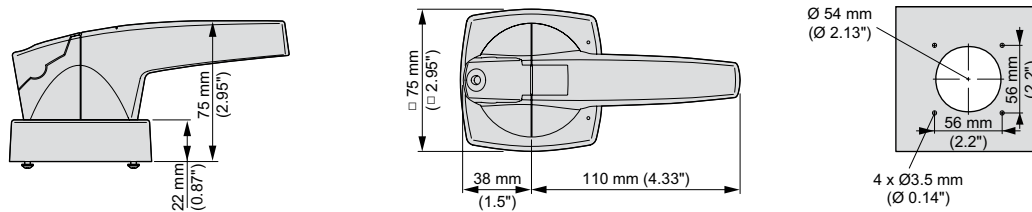


K3 C handle
1818068

K4 'C' handle - mm

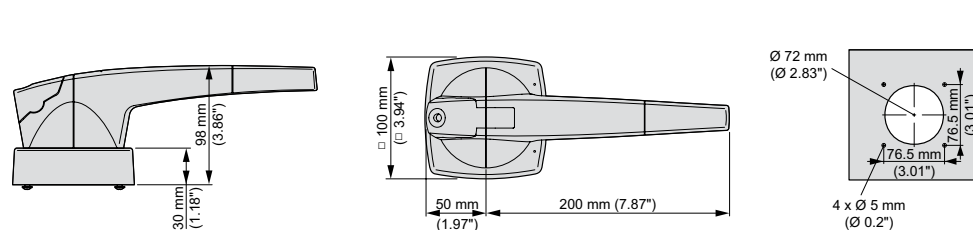


K4 C handle
1818024

K5 'C' handle - mm

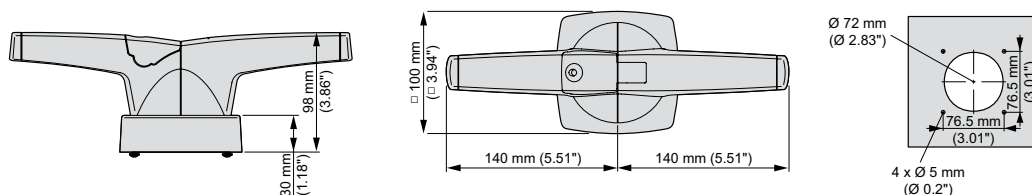

1818026

K6 'C' handle - mm

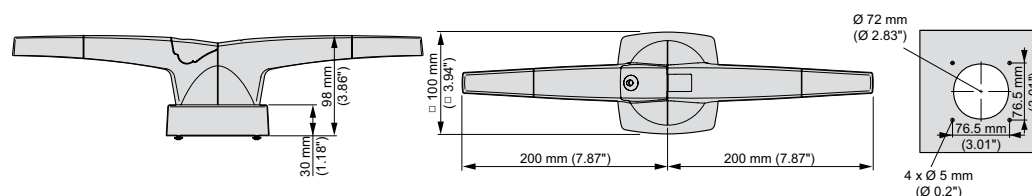


1818027

D/P handles


Handle padlockable for mounting on hinged door, with interlock function (IP Protection IP65)

K1 'D/P' handles - mm

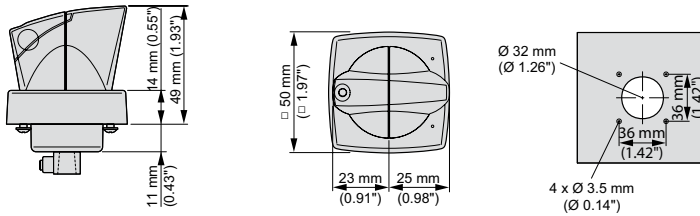


K1 D/P handle
1818029

K2S and K2 'D/P' handles - mm

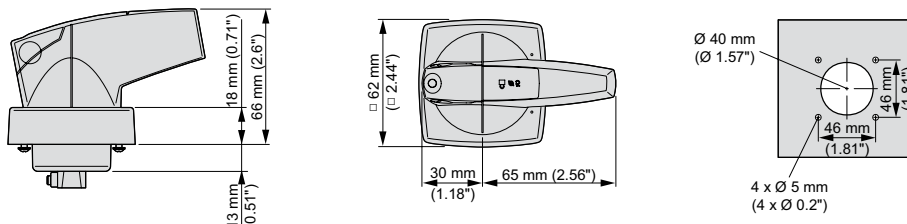


K2 D/P handle
1818033

K3 'D/P' handles - mm

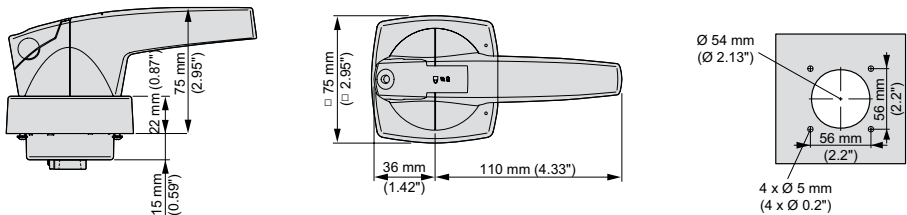


K3 D/P handle
1818069

K4 'D/P' handles - mm

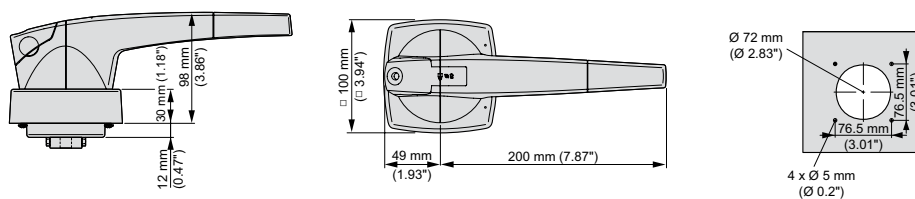


K4 D/P handle
1818113

K5 'D/P' handles - mm

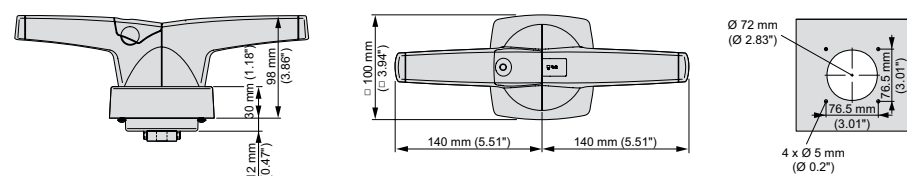

K5 D/P handle
1818057

K6 'D/P' handles - mm

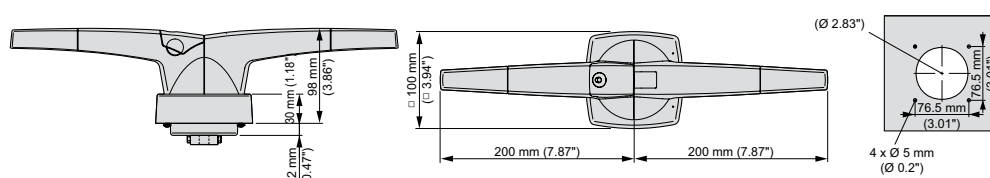


K6 D/P handle
1818064

K Type handles dimensions

D/C Type handles


Handle with cylinder lock for mounting on hinged door, supplied with two keys,with interlock function (IP Protection IP65)

K2S and K2 'D/C' handle - mm

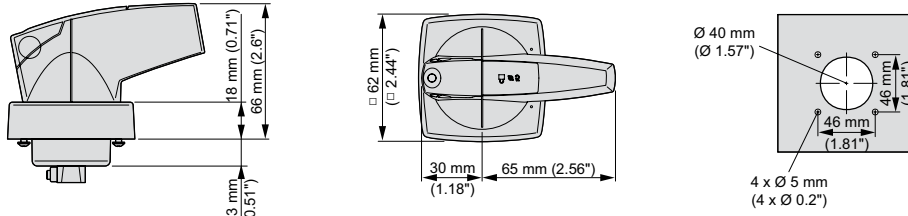


K2 D/C handle
1818038

K3 'D/C' handle - mm

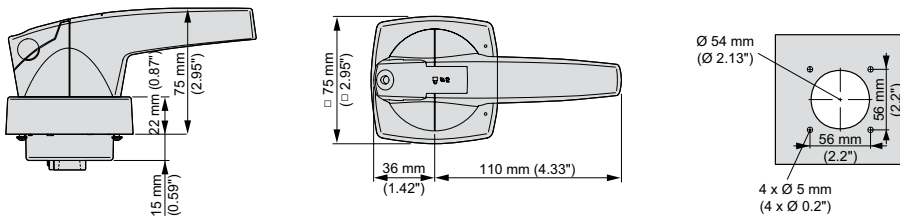


K3 D/C handle
1818097

K4 D/C' handles - mm

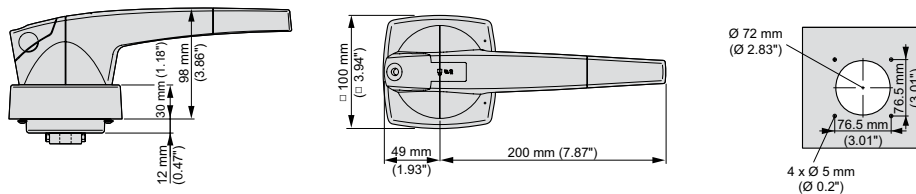


K4 D/C handle
1818055

K5 'D/C' handles - mm

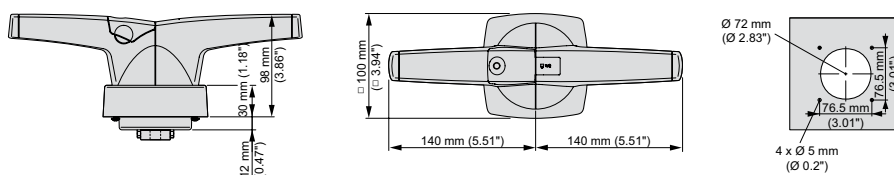

K5 D/C handle
1818060

K6 'D/C' handles - mm

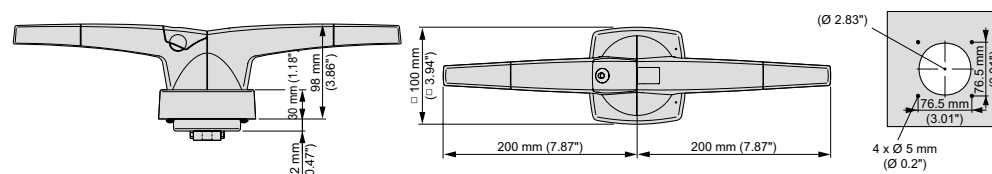

K6 D/C handle
1818067



The power of space

Next generation 30 A and 60 A
Compact Circuit Protector for use with
Class CF CUBEFuse™ requires up to 58%
less space

EATON

Powering Business Worldwide

CCP2 Compact circuit protector Class CF disconnect switches 30 A and 60 A

CCP2 class CF 30 A and 60 A, up to 600 V a.c./125 V d.c.



Description

The revolutionary, next generation Bussmann™ series Compact Circuit Protector (CCP2) is a fused UL® 98 branch circuit disconnect switch utilizing the UL Class CF time-delay or fast-acting CUBEFuse™. With 2/3 the footprint of a traditional fusible solution, these switches provide a high 200 kA SCCR to help improve panel and assembly SCCR.

Standards/Approvals

- IEC60947-3 AC-22A
- UL 98 Listed, Guide WHTY, File E302370
- cULus to Canadian Standard 2.2 No. 4-04, Guide WHTYZ, File 302370
- RoHS compliant
- CE

Technical data

- Voltage:
 - 347 V a.c. (1-pole switches)
 - 600 V ac. (2 and 3-pole switches)
 - 125 V d.c. (1- and 2-pole switches)
- Current: 30 A and 60 A
- SCCR:
 - 200 kA RMS Sym
 - 100 kA DC
- 1-pole, 2-pole and 3-pole

Features

- Uses UL Class CF time-delay or fast-acting CUBEFuse with Class J electrical performance
- Extremely compact design at 25.4 mm (1 inch) wide per pole
- Amp rating rejecting disconnects will not accept a CUBEFuse amp rating greater than switch
- Visible contact separation
- Full voltage rated at 347 V a.c. (1-pole switches) and 600 V a.c. (2 and 3-pole switches)

CCP2 class CF range overview

	30 A	60 A
Switch only	✓	✓
Right front rotary, clockwise operated switch	✓	✓
Left front rotary, clockwise operated switch	✓	✓
Right side rotary, clockwise operated switch	✓	✓
Left side rotary, counterclockwise operated switch	✓	✓

CCP2 class CF switch only



CCP2 switch

Article number	Current rating	Number of poles	Voltage rating	Max Hp rating (V a.c.)				Pack qty
				120	240	480	600	
CCP2-1-30CF	30 A	1P	347 V a.c./125 V d.c.	1.5	-	-	-	12
CCP2-2-30CF	30 A	2P	600 V a.c./125 V d.c.	-	3	-	-	6
CCP2-3-30CF	30 A	3P	600 V a.c.	-	5	15	10	4
CCP2-1-60CF	60 A	1P	347 V a.c./125 V d.c.*	3	-	-	-	12
CCP2-2-60CF	60 A	2P	600 V a.c./125 V d.c.*	-	7.5	-	-	6
CCP2-3-60CF	60 A	3P	600 V a.c.	-	7.5	20	10	4

CCP2 class CF right front rotary, clockwise operated switch



CCP2 right front rotary switch

Article number	Current rating	Number of poles	Voltage rating	Max Hp rating (V a.c.)				Pack qty
				120	240	480	600	
CCP2R-2-30CF	30 A	2P	600 V a.c./125 V d.c.	-	3	-	-	1
CCP2R-3-30CF	30 A	3P	600 V a.c.	-	5	15	10	1
CCP2R-2-60CF	60 A	2P	600 V a.c./125 V d.c.*	-	7.5	-	-	1
CCP2R-3-60CF	60 A	3P	600 V a.c.	-	7.5	20	10	1

CCP2 class CF left front rotary, clockwise operated switch



CCP2 left front rotary switch

Article number	Current rating	Number of poles	Voltage rating	Max Hp rating (V a.c.)				Pack qty
				120	240	480	600	
CCP2RL-2-30CF	30 A	2P	600 V a.c./125 V d.c.	-	3	-	-	1
CCP2RL-3-30CF	30 A	3P	600 V a.c.	-	5	15	10	1
CCP2RL-2-60CF	60 A	2P	600 V a.c./125 V d.c.*	-	7.5	-	-	1
CCP2RL-3-60CF	60 A	3P	600 V a.c.	-	7.5	20	10	1

* 125 V d.c. for installed amp ratings up to 40 A, 24 V d.c. for installed fuse amp ratings from 45 to 60 A

[See data sheet TD134003EN](#)

CCP2 Compact circuit protector Class CF disconnect switches 30 A and 60 A

CCP2 class CF

CCP2 Class CF 30 A and 60 A, 600 V a.c./125 V d.c.

CCP2 class CF right side rotary, clockwise operated switch



CCP2 right side rotary switch

Article number	Current rating	Number of poles	Voltage rating	Max Hp rating (V a.c.)				Pack qty
				120	240	480	600	
CCP2S-2-30CF	30 A	2P	600 V a.c./125 V d.c.	-	3	-	-	1
CCP2S-3-30CF	30 A	3P	600 V a.c.	-	5	15	10	1
CCP2S-2-60CF	60 A	2P	600 V a.c./125 V d.c.*	-	7.5	-	-	1
CCP2S-3-60CF	60 A	3P	600 V a.c.	-	7.5	20	10	1

CCP2 class CF left side rotary, counterclockwise operated switch



CCP2 left side rotary switch

Article number	Current rating	Number of poles	Voltage rating	Max Hp rating (V a.c.)				Pack qty
				120	240	480	600	
CCP2SL-2-30CF	30 A	2P	600 V a.c./125 V d.c.	-	3	-	-	1
CCP2SL-3-30CF	30 A	3P	600 V a.c.	-	5	15	10	1
CCP2SL-2-60CF	60 A	2P	600 V a.c./125 V d.c.*	-	7.5	-	-	1
CCP2SL-3-60CF	60 A	3P	600 V a.c.	-	7.5	20	10	1

* 125 V d.c. for installed amp ratings up to 40 A, 24 V d.c. for installed fuse amp ratings from 45 to 60 A

Handles and shafts for CCP2 class CF (Handles and shaft are to be ordered separately)

Handles mounting types overview

CCP2	Shaft square mm	Selector handles clockwise		Selector handles counterclockwise		Pistol handles clockwise		Pistol handles counterclockwise	
		Black/ Grey	Red/ Yellow	Black/ Grey	Red/ Yellow	Black/ Grey	Red/ Yellow	Black/ Grey	Red/ Yellow
CCP2R-(pole)-30CF	8 x 8	✓	✓			✓	✓		
CCP2R-(pole)-60CF	8 x 8	✓	✓			✓	✓		
CCP2R-(pole)-100CF	8 x 8	✓	✓			✓	✓		
CCP2RL-(pole)-30CF	8 x 8	✓	✓			✓	✓		
CCP2RL-(pole)-60CF	8 x 8	✓	✓			✓	✓		
CCP2RL-(pole)-100CF	8 x 8	✓	✓			✓	✓		
CCP2S-(pole)-30CF	8 x 8	✓	✓			✓	✓		
CCP2S-(pole)-60CF	8 x 8	✓	✓			✓	✓		
CCP2S-(pole)-100CF	8 x 8	✓	✓			✓	✓		
CCP2SL-(pole)-30CF	8 x 8			✓	✓			✓	✓
CCP2SL-(pole)-60CF	8 x 8			✓	✓			✓	✓
CCP2SL-(pole)-100CF	8 x 8			✓	✓			✓	✓

See data sheet TD134003EN

Handles and shafts

Selector and pistol clockwise handles



Selector handle
CCP2-H4X-B1



Selector handle
CCP2-H4X-R1



Pistol handle
CCP2-H4X-B2



Pistol handle
CCP2-H4X-R2



Shafts
CCP-SH1

CCP2 class CF		Description	Selector handles		Pistol handles		Metal shafts			Pack qty
			Handle colours		Handle colours		Shaft mm□	Shaft length		
			Black/Grey	Red/ Yellow	Black/Grey	Red/ Yellow		290 mm	490 mm	
CCP2R-(pole)-30CF		Right front rotary switch clockwise handle								
CCP2R-(pole)-60CF			CCP2-H4X-B1	CCP2-H4X-R1	CCP2-H4X-B2	CCP2-H4X-R2	8 x 8	CCP2-SH1-290	CCP2-SH1-490	1
CCP2R-(pole)-100CF										
CCP2RL-(pole)-30CF		Left front rotary switch clockwise handle								
CCP2RL-(pole)-60CF			CCP2-H4X-B1	CCP2-H4X-R1	CCP2-H4X-B2	CCP2-H4X-R2	8 x 8	CCP2-SH1-290	CCP2-SH1-490	1
CCP2RL-(pole)-100CF										
CCP2S-(pole)-30CF		Right side rotary switch, clockwise handle								
CCP2S-(pole)-60CF			CCP2-H4X-B1	CCP2-H4X-R1	CCP2-H4X-B2	CCP2-H4X-R2	8 x 8	CCP2-SH1-290	CCP2-SH1-490	1
CCP2S-(pole)-100CF										

Selector and pistol counterclockwise handles



Selector handle
CCP2-H4X-B1L



Selector handle
CCP2-H4X-R1L



Pistol handle
CCP2-H4X-B2L



Pistol handle
CCP2-H4X-R2L



Shafts
CCP-SH1

CCP2 Class CF	Description	Selector handles		Pistol handles		Metal shafts			Pack qty
		Handle colours		Handle colours		Shaft mm□	Shaft length		
		Black/Grey	Red/ Yellow	Black/Grey	Red/ Yellow		290 mm	490 mm	
CCP2SL-(pole)-30CF	Left side rotary switch, counterclockwise handle								
CCP2SL-(pole)-60CF		CCP2-H4X-B1L	CCP2-H4X-R1L	CCP2-H4X-B2L	CCP2-H4X-R2L	8 x 8	CCP2-SH1-290	CCP2-SH1-490	1
CCP2SL-(pole)-100CF									

CCP2 Compact circuit protector Class CF disconnect switches 30 A and 60 A

CCP2 class CF

Accessories

Multi-wire lug kits



CCP2-MW1-3

Article number	Description	Suitable for CCP2	Pack qty
CCP2-MW1-3	3-port multi-wire, 75°C Cu.Al, 6-14 includes terminal shield	30 A and 60 A	3

Terminal shrouds



CCP2-TS1-3

Article number	Suitable for CCP2	Pack qty
CCP2-TS1-3	30 A and 60 A	3

Auxiliary contacts



CCP2-AUX

Article number	Description	Suitable for CCP2	CCP Type	Pack qty
CCP2-AUX	NO + NC, 5A /240 V a.c., mounts on right side	CCP2-(poles)-30CF	Switch only	3
		CCP2-(poles)-60CF		
	NO + NC, 5A /240 V a.c.	CCP2RL-(poles)-30CF	Left front rotary	3
		CCP2RL-(poles)-60CF		
	NO + NC, 5A /240 V a.c., mounts on right side	CCP2SL-(poles)-30CF	Left side rotary	3
		CCP2SL-(poles)-60CF		

[See data sheet TD134003EN](#)

Technical data for CCP2 Class CF

CCP2 Class CF 30 A and 60 A	
Rated voltage	347 V a.c. (1-pole switches) 600 V a.c. (2 and 3-pole switches) 125 V d.c.*
SCCR	200 kA AC and 100 kA DC
Poles	1-pole, 2-pole and 3-pole
Conductors/terminals	75°C Cu, see conductor tables for size, type and torque information Box lug, single/dual indicator Fork terminal suitable for line, load or accessory connection, max. 30 A suitable for use with - 10-24 screw for 30 A and 60 A switches - 1/4-28 screw for 100 A switches
Local open fuse indication minimum voltage (Open fuse indication requires an open fuse to be in the CCP2 and the switch in the ON position)	90 V a.c. for AC switches 12 V d.c. for DC switches
Storage and operating temperature	-20°C to 75°C For fuse performance under or above 25°C, consult fuse performance derating charts in the Bussmann division publication no 3002, titled Selecting Protection Devices (SPD)
Lockout/tag provisions	1/4" lock, direct use on switches without rotary mechanisms requires a lock with a straight shank of sufficient length to engage all poles
Minimum enclosure size	254 x 203 x 152 mm for 30 and 60 A switch 356 x 305 x 152 mm for 100 switch
Mounting	35 mm DIN-Rail
Data sheet	10801
Agency information	UL 98 Listed, Guide WHTY, File E302370 cULus to Canadian Standard 2.2 NO 4-04, Guide WHTY7 File 302370 RoHS compliant CE

* Switch amp rating and installed fuse amp rating dependent

Box lug terminal conductor data

Wire type	AWG range	Class	Quantity	Torque N•m (lb-in)	Wire type	AWG range	Class	Quantity	Torque N•m (lb-in)
30 and 60 A switches					100 A switches				
75°C Cu	4-6	Stranded, Class B to K	Single	3.95 (35)	75°C Cu	12-18	Stranded, Class B/C	Single	2.26 (20)
	8-18			2.26 (20)		10			2.82 (25)
	6-8	Stranded, Class B/C	Dual	3.39 (30)		8			4.52 (40)
		Stranded, Class K		2.26 (20)		4-6			5.08 (45)
	10-18	Stranded, Class B to K		6.21 (55)		1-3			
	10-18	Solid	Single/dual	2.26 (20)		4-12		Dual	5.08 (45)
	4-18	Stranded, UL ferrule, Class B/C	Single	3.39 (30)		12-18	Stranded, UL ferrule, Class B/C	Single	2.26 (20)
	6-18		Twin†			10			3.95 (35)
	4-18	Stranded, UL ferrule, Class K	Single	2.82 (25)		1-8		4.52 (40)	
	6-18		Twin†			10-18		Twin†	2.26 (20)
					6-9			2.82 (25)	
					10-18	Solid		Single/Dual	2.26 (20)
					8-18	Class K		Single	2.26 (20)
					1-7		3.39 (30)		
					3-10			Dual	5.08 (45)
					8-18	Class K, UL ferrule	Single	2.26 (20)	
					1-7			3.39 (30)	
					6-18			Twin	2.26 (20)

† Two stranded conductors placed in one UL Listed twin ferrule.

† Two stranded conductors placed in one UL Listed twin ferrule.

† Two stranded conductors placed in one UL Listed twin ferrule.


See data sheet TD134003EN

CCP2 Compact circuit protector Class CF disconnect switches 30 A and 60 A


CCP2 class CF

Outline drawings

30 A and 60 A Switch only (shown with optional terminal shrouds) - mm (in)

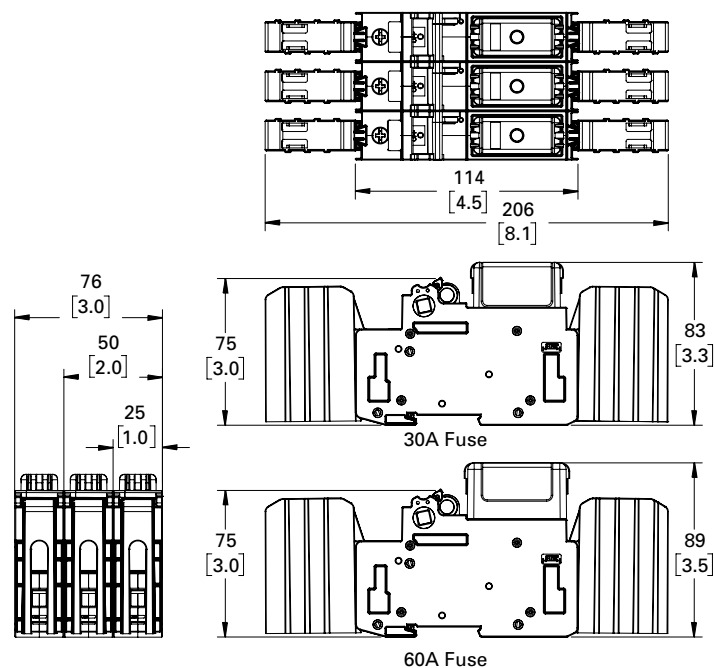


30 A and 60 A Right front rotary switches (shown with optional terminal shrouds) - mm (in)

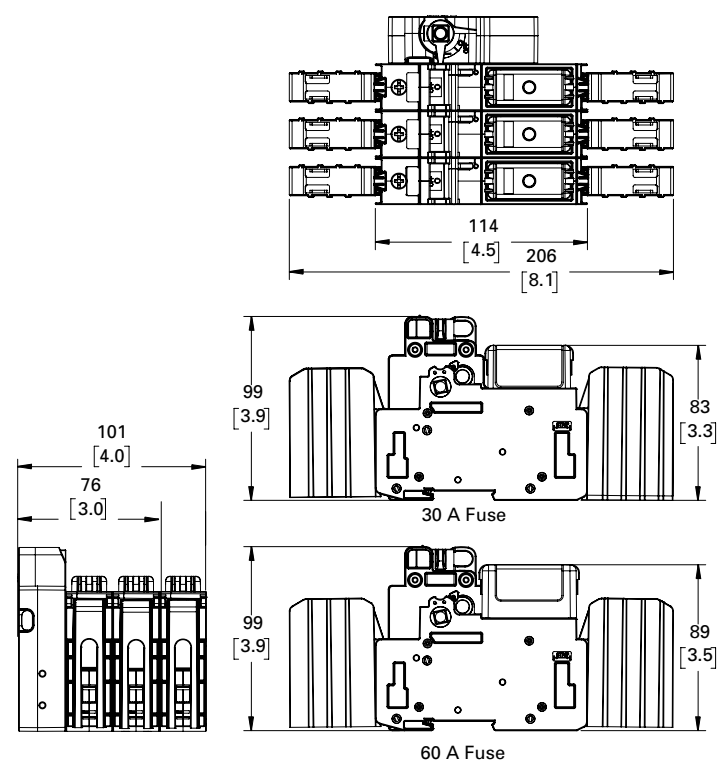


[See data sheet TD134003EN](#)

Outline drawings

30 A and 60 A Left front rotary switches (shown with optional terminal shrouds) - mm (in)

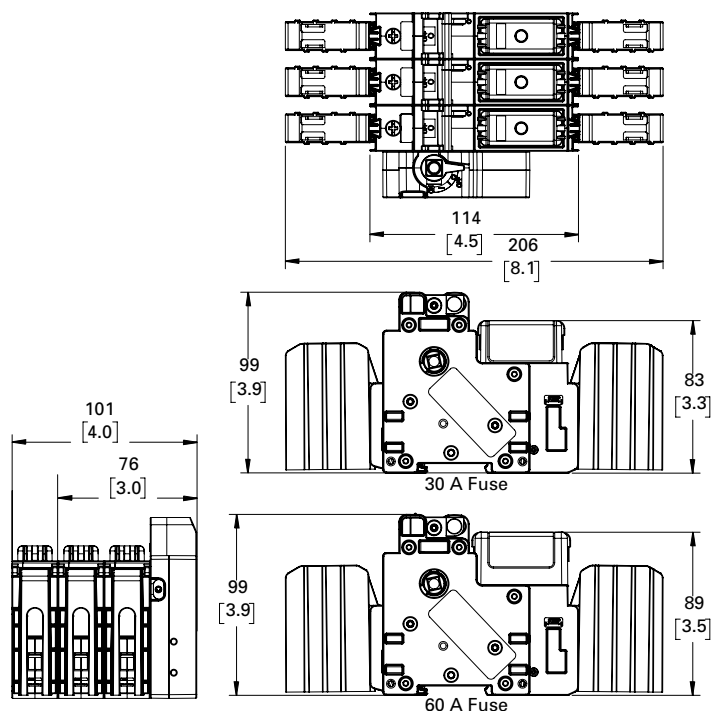

30 A and 60 A Right side rotary switches (shown with optional terminal shrouds) - mm (in)

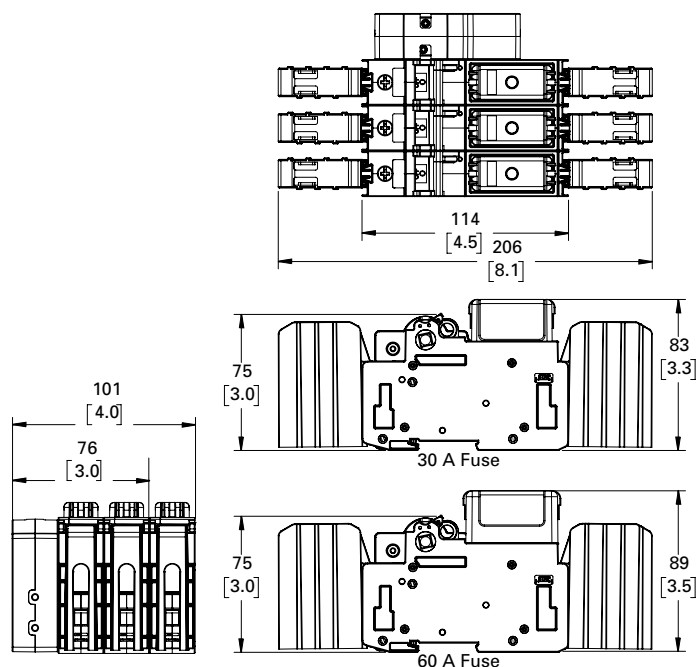


CCP2 Compact circuit protector Class CF disconnect switches 30 A and 60 A

CCP2 class CF

Outline drawings for CCP2 class CF (Dimensions are in mm (in))


30 A and 60 A Left side rotary switches (shown with optional terminal shrouds) - mm (in)

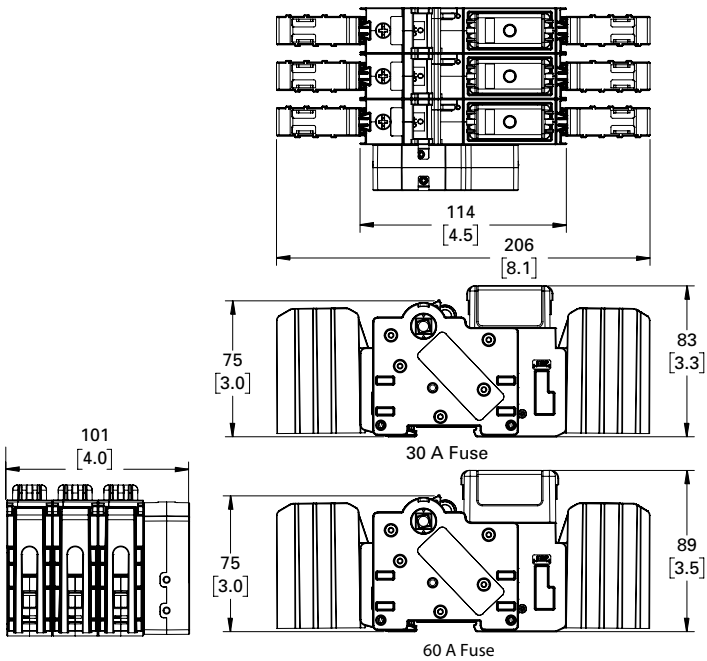

[See data sheet TD134003EN](#)

CCP2 class CF Compatible Eaton's Bussmann series fuse links

TCF UL Class CF branch circuit time-delay CUBEFuse



CCP Class CF	Compatible CUBEFuse			
Article number	Article number	Current (Amps)	Voltage	Pack qty
Indicating CUBEFuse				
CCP 30 A , CCP 60 A and CCP 100 A	TCF6	6	600 V a.c./ 100 V d.c.	12
	TCF10	10		12
	TCF15	15		12
	TCF17-1/2	17.5		12
	TCF20	20		12
	TCF25	25		12
	TCF30	30		12
CCP 60 A and CCP 100 A	TCF35	35	600 V a.c./ 100 V d.c.	12
	TCF40	40		12
	TCF45	45		12
	TCF50	50		12
	TCF60	60		12
	TCF70	70		6
	TCF80	80		6
CCP 100 A	TCF90	90	600 V a.c./ 100 V d.c.	6
	TCF100	100		6
	Non-indicating CUBEFuse			
CCP 30 A , CCP 60 A and CCP 100 A	TCF1RN	1	600 V a.c./ 100 V d.c.	12
	TCF3RN	3		12
	TCF6RN	6		12
	TCF10RN	10		12
	TCF15RN	15		12
	TCF17-1/2RN	17.5		12
	TCF20RN	20		12
	TCF25RN	25		12
CCP 60 A and CCP 100 A	TCF30RN	30	600 V a.c./ 100 V d.c.	12
	TCF35RN	35		12
	TCF40RN	40		12
	TCF45RN	45		12
	TCF50RN	50		12
	TCF60RN	60		12
CCP 100 A	TCF70RN	70	600 V a.c./ 100 V d.c.	6
	TCF80RN	80		6
	TCF90RN	90		6
	TCF100RN	100		6

See data sheet [9000](#)

Index

4K10	11, 38, 39, 46, 47
4K10/4K	65
4K10K	9, 10, 11
4K14	11, 38, 39, 46, 47
4K14K	9, 10, 11
4K6116	9, 10, 11, 24, 25, 32
4K6132	9, 10, 11, 24, 25, 32
4K6148	9, 10, 11, 24, 25, 32
4K6172	9, 10, 11, 24, 25, 32
4K6180	59, 60
4K6180MM	52
4K6270	9, 10, 11, 24, 25, 32
4K6300	59, 60
4K6300MM	52
4K6400	9, 10, 11, 24, 25, 32
4K6600	59, 60
4K6600MM	52
4K8115	59, 60, 61
4K8140	59, 60, 61
4K8180	59, 60, 61
4K8300	59, 60, 61
4K8600	59, 60, 61
4K10135	59, 60, 61
4K10180	59, 60, 61
4K10300	59, 60, 61, 88, 89
4K10600	59, 60, 61, 88, 89
4K12300	59, 60, 61, 88, 89
4K12600	59, 60, 61, 88, 89
5A	46
098931	87
131932	60
171362	83
172789	22
172790	22
172791	22
172792	22
172793	22
172794	22
172795	22
172796	22
172797	22
172798	23
172799	23
172800	23
172801	23
172802	23
172803	23
172804	23
172805	23
172806	23
172846	22
172847	22
172848	22
172849	22
172850	22
172851	22
172852	22
172853	22
172854	22
172855	23
172856	23
172857	23
172858	23
172859	23
172860	23
172861	23
172862	23
172863	23
181444	8
181807	11
199531	21
199532	21
199533	21
199534	21
199969	21
199970	21
319432	63
319832	59
319853	53
1050240	9, 10, 11, 46, 47
1050242	9, 10, 11, 46, 47
1050243	9, 10, 11, 46, 47
1050244	9, 10, 11, 46, 47
1050247	9, 10, 11, 46, 47
1050248	9, 10, 11, 38, 39
1050250	9, 10, 11, 38, 39
1050251	38, 39
1050252	38, 39
1050253	38, 39
1050254	38, 39
1050256	12
1050257	12
1059849	90
1314002	31
1314004	31
1314005	31
1314006	31
1314007	31
1314009	31
1314015	31
1314016	31
1314031	12
1314052	21
1314053	21
1314054	22
1314055	22
1314056	21
1314057	21
1314104	31
1314105	31
1314106	31
1314107	31
1314108	31
1314109	31
1314110	31
1314111	31
1314112	31
1314113	31
1314157	21
1314158	21
1314159	22
1314160	22
1314161	21
1314162	21
1314203	21
1314204	21
1314206	22
1314207	22
1314210	21
1314211	21
1314230	12
1314232	26
1314300	26, 33
1314301	26, 33
1314314	37
1314320	37
1314330	26
1314331	26, 33
1314334	24, 25, 32
1314335	24, 25, 32
1314336	37
1314341	24, 25, 32
1314342	24, 25, 32
1314344	33
1314369	26, 33
1314370	24, 25, 32
1314374	24, 25, 32
1314398	12
1314648	12, 90
1314682	37
1314691	9, 10, 11
1314692	9, 10, 11
1314693	9, 10, 11
1314736	12
1314751	9, 10, 11
1314752	9, 10, 11
1314830	12
1314857	12, 90
1314878	37
1314879	37
1314881	37
1314883	37
1314884	37
1314915	12, 90
1314927	12
1314996	9, 10, 11
1318011	58
1318016	58
1318020	58
1318023	58
1318027	57
1318030	57
1318033	57
1318476	64
1318526	57
1318533	57
1318537	58
1318542	57
1318543	57
1318544	58
1318546	57
1318547	57
1318548	57
1318549	57
1318550	57
1318551	57
1318552	57
1318553	57
1318554	57
1318555	57
1318612	57
1318614	57
1318685	65
1318694	57
1318699	57
1319065	58
1319074	58
1319095	58
1319103	58
1319175	58
1319301	59, 60, 61
1319303	59, 60, 61
1319306	59, 60, 61
1319307	59, 60, 61
1319311	59, 60, 61
1319314	59, 60, 61
1319315	59, 60, 61
1319319	59, 60, 61, 88, 89
1319322	59, 60, 61, 88, 89
1319326	59, 60, 61, 88, 89
1319329	59, 60, 61, 88, 89
1319332	65
1319334	65
1319336	65
1319398	65
1319409	63
1319411	63
1319413	63, 90
1319415	63, 90
1319417	64
1319418	63
1319423	64
1319426	64
1319429	64
1319435	64
1319438	64
1319439	64
1319441	64
1319460	62
1319462	62
1319466	62
1319467	62
1319472	62
1319473	62
1319474	62
1319476	62
1319480	62
1319482	62
1319486	62
1319662	62
1319830	52, 59, 60
1319831	52, 59, 60
1319832	52, 60
1319833	33, 52, 65
1319851	53
1319855	52
1319856	52
1319857	52
1319858	52
1319859	52
1319868	53
1319869	53
1319870	53
1319871	53
1319872	53
1319873	53
1319967	52
1319969	52
1320200	58
1320201	57
1320202	58
1320203	57
1320204	58
1320205	57
1320206	58
1320207*	57
1320237	64
1320239	63
1320297	57
1320298	57
1713607	84
1713610	83
1713611	83
1713612	83
1713613	83
1713614	83
1713615	83
1713616	83
1713617	83
1713618	83
1713622	83
1713623	83
1713625	83
1713626	83
1713627	83
1713628	83
1713629	83
1814065	7
1814174	7
1814175	7
1814176	7
1814177	7
1814178	7
1814179	7
1814186	7
1814187	7
1814188	7
1814408	7
1814409	7
1814410	7
1814411	7
1814412	7
1814413	7
1814420	8
1814421	8
1814422	8
1814423	8
1814424	8
1814425	8
1814442	7
1814443	7
1814444	7
1814445	7
1814446	7
1814447	7
1814448	8
1814449	8
1814450	8
1814451	8
1814452	8
1814453	8
1814590	7
1814591	7
1814592	7
1814595	7
1814596	7
1814597	7
1818001	24, 32, 59
1818002	24, 32, 59
1818003	9, 24, 38
1818004	9, 24, 38
1818005	59
1818006	59
1818009	59
1818010	59, 88
1818011	9, 38, 46
1818012	9, 38, 46
1818013	9, 38
1818014	9, 38
1818015	24, 32, 60
1818016	24, 32, 60
1818017	10, 24
1818018	10, 24
1818019	60
1818020	60
1818023	60
1818024	60
1818025	10
1818026	10
1818027	10
1818028	10
1818029	25, 32, 60
1818030	25, 32, 60
1818031	25, 32, 60
1818032	10, 25
1818033	10, 25
1818034	10, 25
1818035	60
1818036	60
1818037	60
1818038	11, 25
1818039	11, 25
1818040	11, 25
1818041	61
1818042	61
1818043	61

1818050 60
 1818051 60, 88
 1818052 60, 88
 1818053 61
 1818054 61, 89
 1818055 61, 89
 1818056 11, 46
 1818057 11, 46
 1818058 11, 46
 1818059 11, 47
 1818060 11, 47
 1818061 11, 47
 1818062 11
 1818063 11
 1818064 11
 1818065 11
 1818066 11
 1818067 11
 1818068 10, 60
 1818069 11, 46, 60, 88
 1818070 11, 47, 61, 89
 1818072 39
 1818076 39
 1818078 39
 1818096 11, 46, 60, 88
 1818097 11, 47, 61, 89
 1818103 33, 61
 1818104 61
 1818105 61, 90
 1818106 61, 90
 1818110 9, 38, 46, 59
 1818111 9, 38, 46, 59, 88
 1818112 10, 60
 1818113 11, 46, 60
 1818114 11, 47, 61
 1818116 39
 1818200 24, 32, 59
 1818201 59
 1818202 9, 38, 46, 59, 88
 1818203 59, 88
 6028293 63, 90
 6083336 21
 6084846 8
 6084847 8
 6084848 8
 6085416 21
 6085417 21
 6085418 21
 6090659 9, 10, 11
 6093242 8
 6093243 8
 6093244 8
 6093344 21
 6093345 21
 6093346 21
 6093347 21
 6094964 22
 6094965 22
 6094966 8
 6094967 8
 6094968 22
 6094969 22
 6094970 8
 6094971 8
 6096804 22
 6096805 22
 6096806 22
 6096807 22
 6098274 90
 6098930 87
 6098932 87
 6098933 87
 6098934 87
 6098935 87
 6098936 87
 6098937 87
 6098938 87
 6098940 87
 6098941 87
 6098942 87
 6098943 87
 6098944 87
 6098945 87
 6098946 87
 6098947 87
 6098948 87
 6098950 87
 6098951 87
 6098952 87
 6098953 87
 6098954 87
 6098955 87

6098956 87
 6098957 87
 6098958 87
 6099271 8
 6099272 8
 6099273 8
 6099274 8
 6101137 63, 90
 ADAPTORPADLOCK 61, 90
 ADAPTORPADLOCK-K1 33
 AUX1NO+1NC 63
 AUX1NO+1NC+BOX 90
 AUX1NO+1NCDCM/DMM 26, 33
 AUX1NO+1NCDMV160N 12
 AUX1NO+1NCDMVS160-2000 12
 AUX2NO+2NCDCM/DMM 26, 33
 BAO 78
 CCP2 100
 CCP2-AUX 104
 CCP2-H4X 103
 CCP2-MW1-3 104
 CCP2-TS1-3 104
 CD 79
 CEO 78
 CODM 37
 COUP 65
 COUP6X6MM 33, 52
 COVERDCM/DMM 26
 COVERDCM/DMM40/63 33
 COVERDMV160 12
 COVERDMV630N/1000N 12
 D27 84
 D33 84
 DCM 30
 DCM-40 31
 DCM-63 31
 DD 79
 DDC 86, 87
 DMM 20
 DMM-12 21
 DMM-40 21, 22
 DMM-63 21, 22
 DMM-80 21
 DMM-100 21
 DMM-125 22, 23
 DMM-160 21, 22, 23
 DMV 6
 DMV-160N 7
 DMV-250 8
 DMV-250N 7, 8
 DMV-400 8
 DMV-400N 7, 8
 DMV-630N 7, 8
 DMV-1000N 7, 8
 DMV-1250N 7
 DMV-1600N 7
 DMV-2000N 7
 DMV-2500 8
 DMV-3150 8
 ED 79
 EF 80
 EP-400894 12
 EXTENDED-COVERDMVS160N/400N 12
 FF 80
 FRONTKITDCM/DMM 33
 GF 80
 K1A 24, 32, 59
 K1C 24, 32, 60
 K1D 25, 32, 60
 K2A 59
 K2C 60
 K2D 60, 61
 K2S 10, 24
 K2SA 9, 24, 38
 K2SD 10, 11, 25
 K3A 9, 38, 46, 59, 88
 K3C 10, 60
 K3D 11, 46, 60, 61, 88, 89
 K3DB 11, 47
 K3DG 11
 K4A 59, 88
 K4C 60
 K4D 60, 61, 88, 89
 K5A 9, 38
 K5C 10
 K5D 11, 46
 K5DB 11, 47
 K5DG 11
 K5DR 11
 K6A 9, 38
 K6C 10
 K6D 11

K6DB 11
 K6DG 11
 K6DR 11
 K6100VERL 12
 K6200VERL 12
 KITM 12, 90
 KO2SDB 39
 KO3DB 39
 KO5DB 39
 KO6DB/P 39
 LOCKMULTIPLIER-K1-6 90
 LPC 83
 MPDMV 45
 NH 76
 Paco 83
 Pasco 83
 PHM 83
 QM 51
 QM63 51
 QM100 51
 QMAUX1NO 53
 QMCOSET 52
 QMCOVER 53
 QMDOORCOUP 52
 QMEARTH 53
 QMHANDLE 52
 QMNEUTRAL 52
 QSA 56, 57, 58
 QSA16 58
 QSA63 57, 58
 QSA100 57, 58
 QSA125 57
 QSA160 57
 QSA200 57, 58
 QSA250 57, 58
 QSA315 57, 58
 QSA400 57, 58
 QSA630 57, 58
 QSA800 57, 58
 QSACOVER1PM 63, 90
 QSAFCOVER 64
 QSAN 62
 QSANS 62
 QSARCOVER1P 64
 QSARCOVER400-800 64
 QSATCOVERBOX 63
 SC4K12/14 90
 SETDMM125 26
 SETDMV160N 37
 SETDMVS160N/250N 37
 SHAFTSETDCM/DMM 26, 33
 TC 79
 TCF 109
 TCP 78
 TF 79
 TIS 78
 TKF 80
 TMF 80
 TTM 80

Notes

[illegible]

Eaton is an intelligent power management company dedicated to protecting the environment and improving the quality of life for people everywhere. We make products for the data center, utility, industrial, commercial, machine building, residential, aerospace and mobility markets. We are guided by our commitment to do business right, to operate sustainably and to help our customers manage power - today and well into the future. By capitalizing on the global growth trends of electrification and digitalization, we're helping to solve the world's most urgent power management challenges and building a more sustainable society for people today and generations to come.

Founded in 1911, Eaton has continuously evolved to meet the changing and expanding needs of our stakeholders. With revenues of nearly \$25 billion in 2024, the company serves customers in more than 160 countries.

For more information, visit [eaton.com](https://www.eaton.com). Follow us on [LinkedIn](#).



Eaton Electrical Products Limited
Unit 1, Hawker Business Park
Melton road
Burton-on-the-Wolds
LE12 5TH
United Kingdom

© 2018 Eaton
All Rights Reserved
Printed in the United Kingdom
Publication No. CA008011EN
October 2025

Changes to the products, to the information contained in this document, and to prices are reserved; so are errors and omissions. Only order confirmations and technical documentation by Eaton is binding. Photos and pictures also do not warrant a specific layout or functionality. Their use in whatever form is subject to prior approval by Eaton. The same applies to Trademarks (especially Eaton, Moeller, and Cutler-Hammer). The Terms and Conditions of Eaton apply, as referenced on Eaton Internet pages and Eaton order confirmations.

Eaton is a registered trademark.

All other trademarks are property of their respective owners.

Follow us on social media to get the latest product and support information.

