


Walraven Heavy Duty Clamp HD500 (1/2") (BUP1000)

(B1009)

for steel pipes

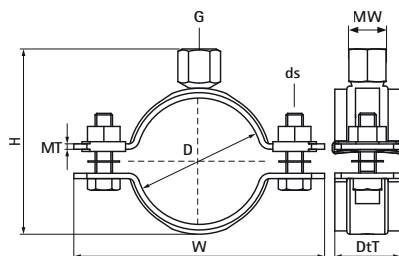

Features & benefits

- two-part clamp with two locking bolts
- heavy design
- bolts secured with anti-loss washer
- with CO₂ welded connection nut
- material: steel
- surface protection:
- product is part of the Walraven BIS UltraProtect® 1000 system
- suitable for in- and outdoor applications
- stands min. 1,000 hours salt spray test (max. 5% red rust) according to ISO 9227
- also available: noise insulating lining of silicone rubber (reddish brown), heat resistant up to +200 °C (A 35 15)
- tested for fire safety



EPD

Product Number	DN	Pipe Diameter Imperial	Connection Thread	Total Height	Total Width	Total Depth	Material Width	Material Thickness	Screw Size	Maximum Allowed Load Faz	Approvals
Reference letter	D	D	G	H	W	DtT	MW	MT	ds	Fa,z	
Unit description	"			mm	mm	mm	mm	mm		N	
33078019	DN 10	3/8	G1/2"	41	75	32	30	2.50	M8	2,100	ITB (KOT), CE, ETA, RAL-GZ 655/B, EPD
33078023	DN 15	1/2	G1/2"	45	79	32	30	2.50	M8	2,100	ITB (KOT), CE, ETA, RAL-GZ 655/B, EPD
33078030	DN 20	3/4	G1/2"	52	85	32	30	2.50	M8	2,100	ITB (KOT), CE, ETA, RAL-GZ 655/B, EPD
33078036	DN 25	1	G1/2"	58	91	32	30	2.50	M8	2,100	ITB (KOT), CE, ETA, RAL-GZ 655/B, EPD
33078042	-	-	G1/2"	65	98	32	30	2.50	M8	2,100	ITB (KOT), CE, ETA, RAL-GZ 655/B, EPD
33078045	DN 32	1 1/4	G1/2"	68	102	32	30	2.50	M8	2,100	ITB (KOT), CE, ETA, RAL-GZ 655/B, EPD
33078052	DN 40	1 1/2	G1/2"	75	109	32	30	2.50	M8	2,100	ITB (KOT), CE, ETA, RAL-GZ 655/B, EPD
33078058	-	-	G1/2"	81	114	32	30	2.50	M8	2,100	ITB (KOT), CE, ETA, RAL-GZ 655/B, EPD
33078065	DN 50	2	G1/2"	88	121	32	30	2.50	M8	2,100	ITB (KOT), CE, ETA, RAL-GZ 655/B, EPD
33078071	-	-	G1/2"	94	129	32	30	2.50	M8	2,100	ITB (KOT), CE, ETA, RAL-GZ 655/B, EPD
33078078	DN 65	2 1/2	G1/2"	102	137	32	30	3.00	M8	4,000	ITB (KOT), CE, ETA, RAL-GZ 655/B, EPD
33078085	-	-	G1/2"	109	144	32	30	3.00	M8	4,000	ITB (KOT), CE, ETA, RAL-GZ 655/B, EPD
33078092	DN 80	3	G1/2"	116	151	32	30	3.00	M8	4,000	ITB (KOT), CE, ETA, RAL-GZ 655/B, EPD
33078106	-	-	G1/2"	130	165	32	30	3.00	M8	4,000	ITB (KOT), CE, ETA, RAL-GZ 655/B, EPD
33078116	DN 100	4	G1/2"	140	175	32	30	3.00	M8	4,000	ITB (KOT), CE, ETA, RAL-GZ 655/B, EPD
33078133	-	-	G1/2"	157	192	32	30	3.00	M8	4,000	ITB (KOT), CE, ETA, RAL-GZ 655/B, EPD
33078140	DN 125	5	G1/2"	164	199	32	30	3.00	M8	4,000	ITB (KOT), CE, ETA, RAL-GZ 655/B, EPD
33078154	-	-	G1/2"	179	213	32	30	3.00	M8	4,000	ITB (KOT), CE, ETA, RAL-GZ 655/B, EPD
33078169	DN 150	6	G1/2"	195	240	38	38	4.00	M10	8,200	ITB (KOT), CE, ETA, RAL-GZ 655/B, EPD
33078183	-	-	G1/2"	209	254	38	38	4.00	M10	8,200	ITB (KOT), CE, ETA, RAL-GZ 655/B, EPD
33078202	-	-	G1/2"	228	274	38	38	4.00	M10	8,200	ITB (KOT), CE, ETA, RAL-GZ 655/B, EPD
33078219	-	-	G1/2"	245	291	38	38	4.00	M10	8,200	ITB (KOT), CE, ETA, RAL-GZ 655/B, EPD
33078227	DN 200	8	G1/2"	253	299	38	38	4.00	M10	8,200	ITB (KOT), CE, ETA, RAL-GZ 655/B, EPD
33078254	-	-	G1/2"	280	335	38	38	4.00	M12	8,200	ITB (KOT), CE, ETA, RAL-GZ 655/B, EPD
33078279	DN 250	10	G1/2"	305	360	38	38	4.00	M12	8,200	ITB (KOT), CE, ETA, RAL-GZ 655/B, EPD
33078289	-	-	G1/2"	314	368	48	48	5.00	M12	12,000	ITB (KOT), CE, ETA, RAL-GZ 655/B
33078325	DN 300	12	G1/2"	350	404	48	48	5.00	M12	12,000	ITB (KOT), CE, ETA, RAL-GZ 655/B
33078360	-	-	G1/2"	385	439	48	48	5.00	M12	12,000	ITB (KOT), CE, ETA, RAL-GZ 655/B, EPD
33078408	DN 400	16	G1/2"	433	487	48	48	5.00	M12	12,000	ITB (KOT), CE, ETA, RAL-GZ 655/B, EPD
33078436	-	-	G1/2"	461	515	48	48	5.00	M12	12,000	ITB (KOT), CE, ETA, RAL-GZ 655/B, EPD

Walraven Heavy Duty Clamp HD500 (1/2") (BUP1000)

(B1009)

for steel pipes

Product Number	DN	Pipe Diameter Imperial	Connection Thread	Total Height	Total Width	Total Depth	Material Width	Material Thickness	Screw Size	Maximum Allowed Load Faz	Approvals
Reference letter	D	D	G	H	W	DtT	MW	MT	ds	Faz	
Unit description		"		mm	mm	mm	mm	mm		N	
33078458	DN 450	18	G1/2"	483	538	48	48	5.00	M12	12,000	ITB (KOT), CE, ETA, RAL-GZ 655/B, EPD
33078509	DN 500	20	G1/2"	534	589	48	48	5.00	M12	12,000	ITB (KOT), CE, ETA, RAL-GZ 655/B, EPD
33078564	-	-	G1/2"	589	644	48	48	5.00	M12	12,000	ITB (KOT), CE, ETA, RAL-GZ 655/B, EPD