


## OPTIX SURFACE 1200x200 2 LINE 4000K ALU SSC 2023709

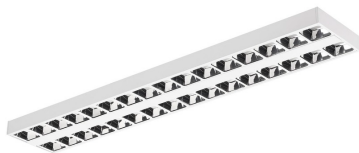

### Features

• OPTIX SURFACE 1200x200 2 LINE 4000K ALU SSC is a high efficacy low glare luminaire for office and education applications. Suitable for surface and suspended mounting. Size: 1129x200x45mm. Aluminised plastic extra low glare optics in 2 lines configuration. White RAL9016 fixture body. SylSmart Standalone capable. 4000K Neutral White LED, CRI>80, chromaticity tolerance of 3-step MacAdam ellipse. Luminous flux 3600lm. Power consumption 27W. Luminaire efficacy 133lm/W. Lifespan: 60,000 hours L90B10. UGR<16, Luminance at 65°<200 Cd/m2, IK07, IP20. Photobiological safety risk group 0. Electrical protection Class I. Glow wire test 850°C


### Product Overview

|                                 |                                             |
|---------------------------------|---------------------------------------------|
| Product name                    | OPTIX SURFACE 1200x200 2 LINE 4000K ALU SSC |
| Technology                      | LED (3 SDCM)                                |
| Cap/Base                        | N/A                                         |
| Housing                         | Steel                                       |
| Mount                           | Ceiling surface mounting                    |
| Fixture rating                  | Enclosed                                    |
| Fixture luminous flux (lm)      | 3600                                        |
| Luminaire efficacy (lm/W)       | 133                                         |
| Colour temperature (K)          | 4000                                        |
| Light colour                    | Neutral White                               |
| CRI (Ra)                        | 80                                          |
| Colour Variation Initial (SDCM) | 3                                           |
| Glare control                   | < 16                                        |
| Photobiological Risk Group      | RG0                                         |
| Total power consumption (W)     | 27                                          |
| Electrical protection           | Class I                                     |
| Control gear type               | LED driver constant current                 |
| LED Flickering Rate             | Ultra low (5% or less)                      |

## OPTIX SURFACE 1200x200 2 LINE 4000K ALU SSC 2023709

|                    |                                  |
|--------------------|----------------------------------|
| Housing colour     | RAL 9016 - Traffic white / Bezel |
| IP rating          | IP20                             |
| IK rating          | IK07                             |
| Product EAN number | 5025768237098                    |
| Warranty           | 5 years                          |

### Photometry

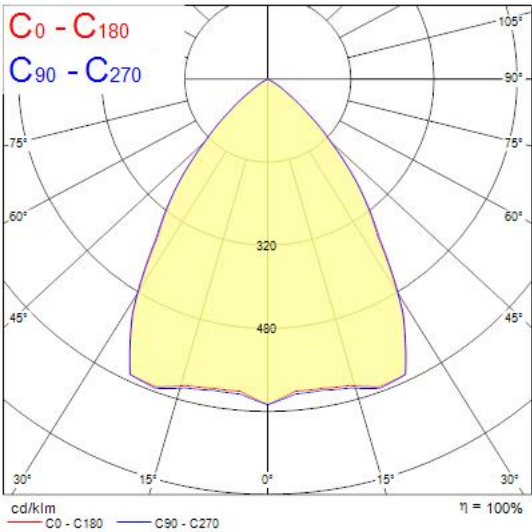

### Technical drawings

