

Features

• OPTIX SURFACE 1200x200 2 LINE 4000K C9 ALU DALI EM is a high efficacy low glare luminaire for office and education applications. Suitable for surface and suspended mounting. Size: 1129x200x45mm. Aluminised plastic extra low glare optics in 2 lines configuration. White RAL9016 fixture body. DALI dimmable. 3hr maintained emergency version. 4000K Neutral White LED, CRI>90, chromaticity tolerance of 3-step MacAdam ellipse. Luminous flux 3700lm. Power consumption 32W. Luminaire efficacy 116lm/W. Lifespan: 60,000 hours L90B10. UGR<16, Luminance at 65°<200 Cd/m2, IK07, IP20. Photobiological safety risk group 0. Electrical protection Class I. Glow wire test 850°C.


Product Overview

Product name	OPTIX SURFACE 1200x200 2 LINE 4000K C9 ALU DALI EM
Technology	LED (3 SDCM)
Cap/Base	N/A
Housing	Steel
Mount	Ceiling surface mounting
Fixture rating	Enclosed
Fixture luminous flux (lm)	3700
Luminaire efficacy (lm/W)	116
Colour temperature (K)	4000
Light colour	Neutral White
CRI (Ra)	90
Colour Variation Initial (SDCM)	3
Glare control	< 16
Photobiological Risk Group	RG0
Luminous flux (emergency) (lm)	85

OPTIX SURFACE 1200x200 2 LINE 4000K C9 ALU DALI EM
2023711

Total power consumption (W)	32
Electrical protection	Class I
Control gear type	LED driver constant current
LED Flickering Rate	Ultra low (5% or less)
Housing colour	RAL 9016 - Traffic white / Bezel
IP rating	IP20
IK rating	IK07
Product EAN number	5025768237111
Warranty	5 years

Photometry

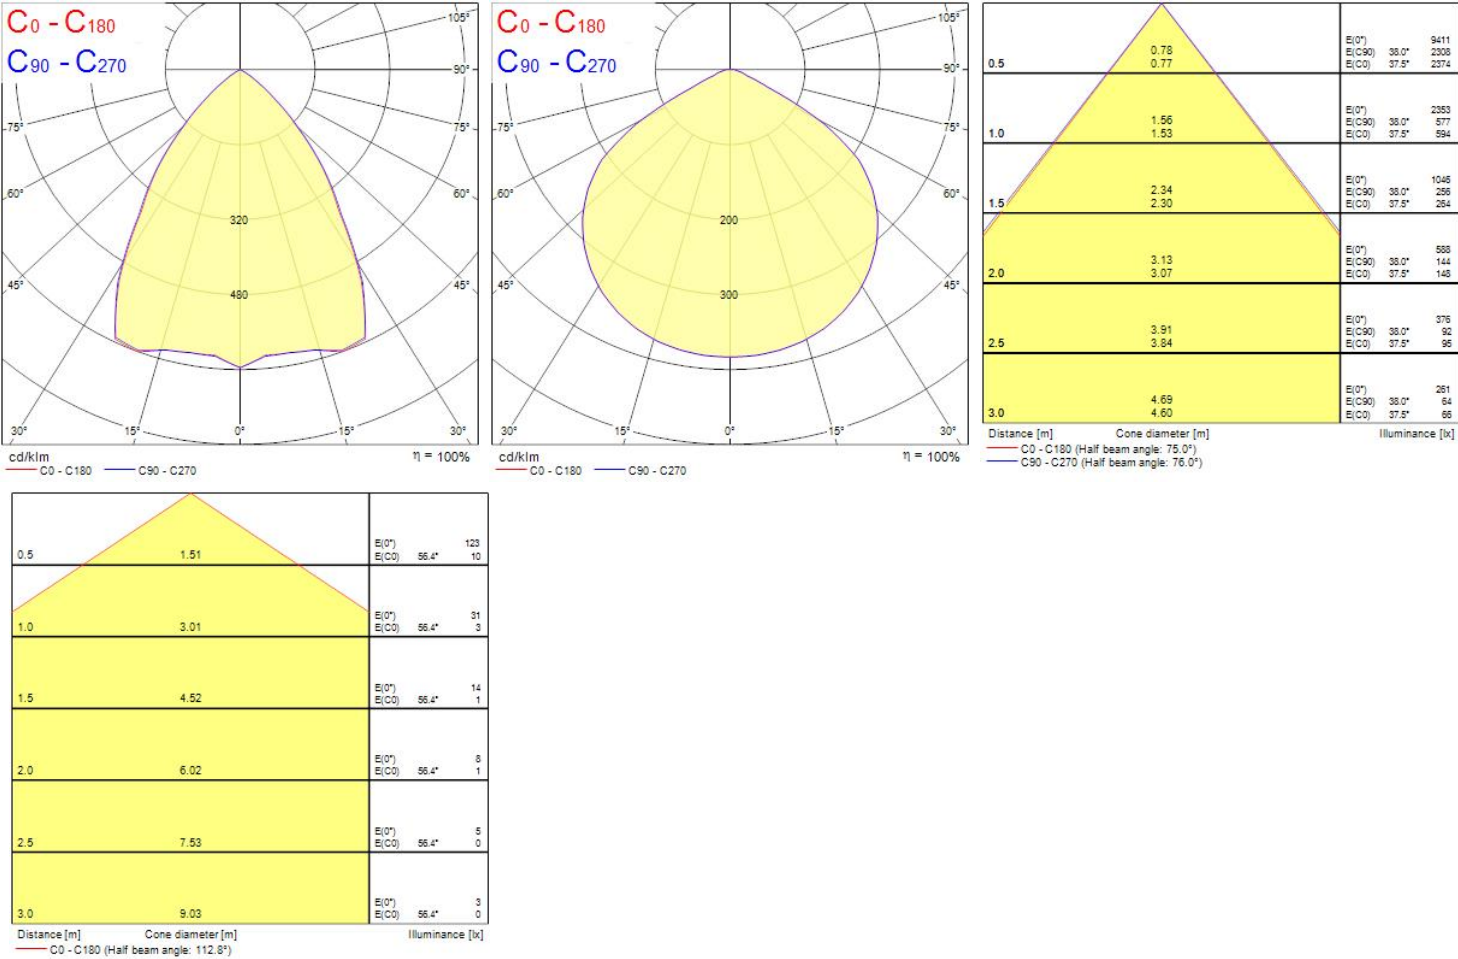

C0 - C180
C90 - C270

cd/klm
C0 - C180 C90 - C270

η = 100%

C0 - C180
C90 - C270

cd/klm
C0 - C180 C90 - C270

η = 100%

Distance [m]	Cone diameter [m]	E(0°) E(C90) E(C0)	Illuminance [lx]
0.5	1.51	56.4°	123 10
1.0	3.01	56.4°	31 3
1.5	4.52	56.4°	14 1
2.0	6.02	56.4°	8 1
2.5	7.53	56.4°	5 0
3.0	9.03	56.4°	3 0


Distance [m] Cone diameter [m] Illuminance [lx]
C0 - C180 (Half beam angle: 112.8°)

Concord

OPTIX SURFACE 1200x200 2 LINE 4000K C9 ALU DALI EM

2023711

Technical drawings

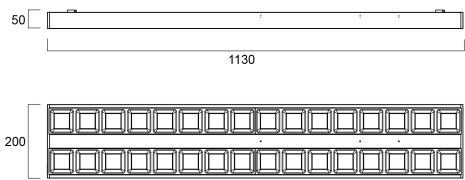

Data table

GENERAL DATA

Product name	OPTIX SURFACE 1200x200 2 LINE 4000K C9 ALU DALI EM
Technology	LED (3 SDCM)
Cap/Base	N/A
Housing	Steel
Mount	Ceiling surface mounting
Fixture rating	Enclosed
Performance ambient temperature Tq (°C)	25
Warranty	5 years

OPTICAL DATA

Fixture luminous flux (lm)	3700
Luminaire efficacy (lm/W)	116
Colour temperature (K)	4000
Light colour	Neutral White
CRI (Ra)	90
Colour Variation Initial (SDCM)	3
Glare control	< 16
Photobiological Risk Group	RG0
Luminous flux (emergency) (lm)	85

OPTIX SURFACE 1200x200 2 LINE 4000K C9 ALU DALI EM 2023711

Emergency duration (h)	3
------------------------	---

ELECTRICAL DATA

Total power consumption (W)	32
Primary Supply/Product voltage - min (V)	198.0
Lamp power factor	0.98
Electrical protection	Class I
Control gear required	No
Control gear type	LED driver constant current
Drive current (mA)	225
Inrush Current (A)	29
Inrush Duration (µs)	180
Glow Wire Test (°C)	850
Energy Efficiency Class (A->G) of contained light source	D
Nominal Frequency (Hz)	50/60Hz
LED Flickering Rate	Ultra low (5% or less)
Max. products per 10A C Breaker	21
Max. products per 20A B Breaker	27
Connectable conductor cross section - Min (mm²)	2.5
Connectable conductor cross section - Max (mm²)	2.5

LIFETIME DATA

Lifespan L70 B50	120000
Lifespan L80 B20	120000
Lifespan L90 B10	60000

PHYSICAL DATA

Housing colour	RAL 9016 - Traffic white / Bezel
IP rating	IP20
IK rating	IK07
Diffuser finish	Matt/satinized

OPTIX SURFACE 1200x200 2 LINE 4000K C9 ALU DALI EM 2023711

Diffuser material	PC Polycarbonate
Nominal Product Length (mm)	1129
Nominal Product Width (mm)	200
Weight (kg)	5.0

PACKAGING

Single packaging type	Carton
Product EAN number	5025768237111
Packaging single width (cm)	22.5
Packaging single depth (cm)	6.8
DUN14 (outer)	05025768237111
Packaging outer length / height (cm)	117.0

SAFETY DATA

Special purpose lamp	No
Dry applications use only	No
Suitable for household illumination	No