
Onefold faceplate, for double switch functions, Niko Rocker brass dark bronze patina

211-56102

4 year warranty

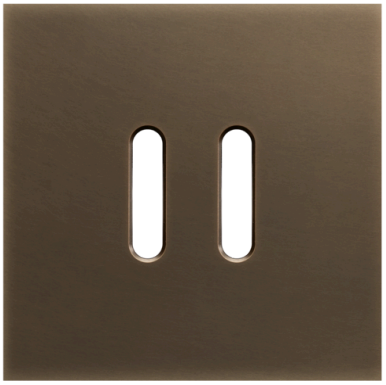

The Niko Rocker onefold faceplate for a double switch clicks onto a single installed double switch function. The faceplate combines with any available Niko Rocker for double switch functions.

It consists of an upper frame, light guide and lower frame that are mechanically interconnected.

The light guide is made of a translucid plastic and transports the light from the optional LED to the lever.

The upperframe is made of brass. The lower frame is made of anthracite polycarbonate (PC) + acrylic-styrene-acrylate (ASA). The lead concentration in the brass is higher than 0.1% (w/w). The upper frame is 6 mm thick and the lower frame 2 mm.

Niko recommends a design combination with the Niko Rocker in the following colour: brass dark bronze patina.

- Exclusive materials
- Authentic vintage design
- Belgian design & craftsmanship
- Design matches Niko Pure portfolio
- Proven Niko quality
- Unique illuminated switch design (by adding feedback LED)

Technical data

Onefold faceplate, for double switch functions, Niko Rocker brass dark bronze patina.

- Number of spaces for mechanisms: 1
- Colour faceplate: brass dark bronze patina
- Colour RAL (approximately): 060 40 10
- Colour NCS (approximately): NCS S 7005-Y50R
- Recommended colour central plate: brass dark bronze patina
- Frame composition: It consists of an upper frame, light guide and lower frame that are mechanically interconnected.
- Material finishing: The upperframe is made of brass. The lower frame is made of anthracite polycarbonate (PC) + acrylic-styrene-acrylate (ASA).

The lead concentration in the brass is higher than 0.1% (w/w).

- Surface treatment: patina and protective varnish
- Surface finishing: matt
- Coating upper frame: the upperframe is enamelled bronze
- Coating lower frame: enamelled dark brown
- Frame thickness: The upper frame is 6 mm thick and the lower frame 2 mm.
- Recess for indication led:
  - the faceplate is fitted with a light guide
  - the light guide is made of a translucid plastic
  - the light guide transports the light from the optional LED to the lever
  - please note that the faceplate should not be mounted upside down to ensure that the optional LED fits nicely with the light guide
- Surface-mounting height: max. 8.5 mm
- Fire safety:
  - self-extinguishing: complies with a filament test of 650°C
- Halogen-free: yes
- Protection degree: the combination of a mechanism, a central plate and a faceplate has a protection degree of IP20D
- Impact resistance: the combination of a mechanism, a central plate and a faceplate has an impact-resistance of IK06
- Dimensions (HxWxD): 83 mm x 83 mm x 13 mm
- Dimensions visible (HxWxD): 83 mm x 83 mm