





De netspanningskasten voor de bouwplaats type 68 QP ACS en 68 CDK ACSK: direct stroomafwaarts van de energiemeter geïnstalleerd, om de lijn te beschermen van de leveringskast tot de netspanningsverdeelkast. Ze zijn verkrijgbaar in versies met een vermogen van 17 kW (32 A) tot 130 kW (250 A), allemaal voorzien van een nooddrukkноп.

Type	CDK ACS	type bord	Bedraad
Kleur	Grijs RAL 7035	Buitenste afm. LxHxD (mm)	298 x 260 x 140
Gewicht (kg)	4	In overeenstemming met normen	EN 61439-4 (ACS)
Kenmerken	UV-bestendigheid (EN 62208)	IP waarde	IP65
Mechanische weerstand	IK09	Gloeidraadtest	650 °C
Thermodruk met kogel	70 °C	Isolatie klasse	II
Aant. polen	4	Leverbaar vermogen (kW)	33
Hoofd schakelaar	MCB 63 A 4P 6k A	Installatieautomaten MT hoofd aardlekschakelaar	RCBO 63 A
Nooddrukkноп	Ja		

BEHAVIOUR WITH CHEMICAL AND ATMOSPHERIC AGENTS

Saline solution	Acids		Bases		Solvents				Mineral oil	UV rays
	Concentrated	Diluted	Concentrated	Diluted	Hexane	Benzol	Acetone	Alcohol		
Resistant	Not resistant	Limited resistance	Not resistant	Limited resistance	Limited resistance	Not resistant	Not resistant	Limited resistance	Limited resistance	Limited resistance

DIMENSIONAL

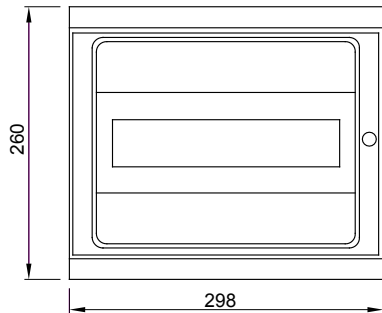

TECHNICAL SYMBOLOGY



EN 61439-4 (ACS)



UV-bestendigheid (EN 62208)

IP

IP65

IK

IK09

GWT

650 °C



70 °C



II

STANDARDS/APPROVALS

