

Concord

COLOSSAL 600mm 940 OPAL DIR WHITE SSC 2071190



Features

• 600mm diameter circular architectural luminaire, can be surface mounted or suspended. Powder coated aluminium housing (RAL9016) with polycarbonate opal diffuser. Direct light distribution, 4535lm luminuous flux, 40.1W system power, 113lm/W luminaire efficacy. Sylsmart Standalone enabled. Colour rendering index Ra >90, 4000K Neutral White LED, chromaticity tolerance of 3-step MacAdam ellipse. IP40, IK03. 450mA drive current. Electrical protection Class1, 220-240V. Reported lifetime 66k hours L90B10.

Product Overview

Product name	COLOSSAL 600mm 940 OPAL DIR WHITE SSC
Technology	LED (3 SDCM)
Cap/Base	N/A
Housing	Aluminium
Mount	Ceiling surface mounting, Suspended
Fixture luminous flux (lm)	4535
Luminaire efficacy (lm/W)	113
Colour temperature (K)	4000
Light colour	Neutral White
CRI (Ra)	90
Colour Variation Initial (SDCM)	3
Glare control	< 22
Photobiological Risk Group	RG0
Total power consumption (W)	40.1
Electrical protection	Class I
Control gear type	LED driver constant current
LED Flickering Rate	Ultra low (5% or less)
Housing colour	RAL 9016 - Traffic white / Bezel
IP rating	IP40/20
IK rating	IK07
Product EAN number	5025768711901


Concord

COLOSSAL 600mm 940 OPAL DIR WHITE SSC


2071190

Warranty	5 years
Colour Code	940

Photometry

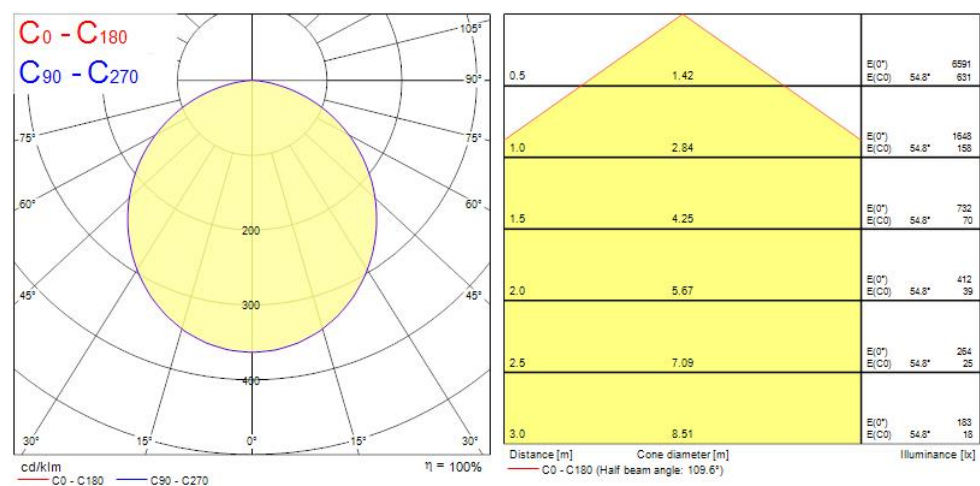

Technical drawings

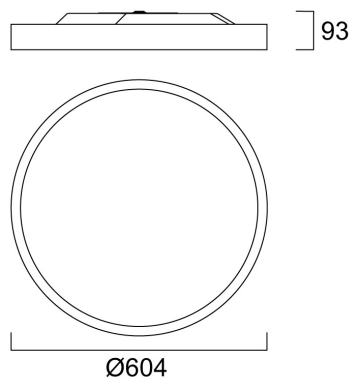

Data table

COLOSSAL 600mm 940 OPAL DIR WHITE SSC 2071190

GENERAL DATA

Product name	COLOSSAL 600mm 940 OPAL DIR WHITE SSC
Technology	LED (3 SDCM)
Cap/Base	N/A
Housing	Aluminium
Mount	Ceiling surface mounting, Suspended
Operating temperature range (°C)	10°C...+25°C
Warranty	5 years

OPTICAL DATA

Fixture luminous flux (lm)	4535
Luminaire efficacy (lm/W)	113
Colour temperature (K)	4000
Colour Code	940
Light colour	Neutral White
CRI (Ra)	90
Colour Variation Initial (SDCM)	3
Glare control	< 22
Photobiological Risk Group	RG0

ELECTRICAL DATA

Total power consumption (W)	40.1
Primary Supply/Product voltage - min (V)	198.0
Lamp power factor	0.99
Electrical protection	Class I
Control gear required	No
Control gear type	LED driver constant current
Drive current (mA)	450
Inrush Current (A)	23
Inrush Duration (µs)	174
Glow Wire Test (°C)	650
Energy Efficiency Class (A->G) of contained light source	C

COLOSSAL 600mm 940 OPAL DIR WHITE SSC 2071190

Nominal Frequency (Hz)	50/60Hz
LED Flickering Rate	Ultra low (5% or less)
Max. products per 10A C Breaker	21
Max. products per 20A B Breaker	27
Connectable conductor cross section - Max (mm ²)	2.5

LIFETIME DATA

Lifespan L70 B50	170000
Lifespan L80 B20	145000
Lifespan L90 B10	66000

PHYSICAL DATA

Housing colour	RAL 9016 - Traffic white / Bezel
IP rating	IP40/20
IK rating	IK07
Diffuser finish	Opal
Diffuser material	PC Polycarbonate
Nominal Product Diameter (mm)	604
Weight (kg)	9.4

PACKAGING

Single packaging type	Carton
Product EAN number	5025768711901
Packaging single width (cm)	68.0
Packaging single depth (cm)	68.0
DUN14 (outer)	05025768711901
Packaging outer length / height (cm)	14.0

SAFETY DATA

Optimal operating condition (°C)	10-25
Special purpose lamp	No
Dry applications use only	No

Concord

COLOSSAL 600mm 940 OPAL DIR WHITE SSC
2071190

Suitable for household illumination	No
-------------------------------------	----