


Concord

BEACON XL 85CRI 4K WIDE BEAM L3 WHITE 2059723

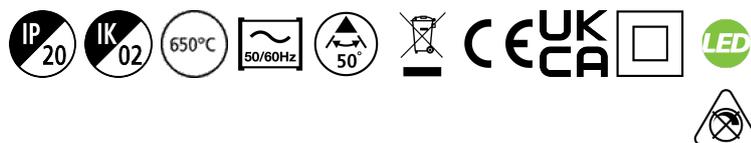

Features

- Integrated LED spotlight, white RAL 9016, compact and minimalist design, ideal for retail and display applications, die-cast aluminium body, passive cooling heatsink, beam angle: 50° wide beam, optics: Polycarbonate lens, colour temperature: 4000K neutral white, total system power: 33W, total fixture output: 3550lm, luminaire efficacy: 108lm/W, LOR: 100%, colour rendering: Ra 85 typical, LED Chromacity: 3 step MacAdam ellipse, IR/UV free light source without heat radiation, operating voltage: 220-240V / 50-60Hz, drive current: 800mA, electronic driver, non-dimmable, power factor: 0.9 electrical protection: CLASS II, 3-circuit track adaptor, suitable for Concord Lytespan 3 track, ingress protection rating: IP20, suitable for internal environment only, horizontal rotation: 355°, vertical tilt: 90°, dimensions: Ø113x165x205mm, weight: 1.66kg.

Product Overview


Product name	BEACON XL 85CRI 4K WIDE BEAM L3 WHITE
Technology	LED
Cap/Base	N/A
Housing	Aluminium
Mount	Track mounting
Environment	Internal
General application	Museums & Galleries, Retail
ETIM Class	EC001744
E-number FI	4280883
E-number SE	7401264
Fixture luminous flux (lm)	3550
Luminaire efficacy (lm/W)	108
LOR (%)	100

Concord

BEACON XL 85CRI 4K WIDE BEAM L3 WHITE 2059723

Correlated colour temperature (k)	4000
Light colour	Neutral White
CRI (Ra)	85
Colour Consistency (SDCM)	3
Beam Angle (°)	50
Photobiological Risk Group	RG1
Total power consumption (W)	33
Electrical protection	Class II
Control gear type	Electronic ballast
Housing colour	White
IP rating	IP20
IK rating	IK02
Product EAN number	5025768597239
Warranty	5 years
Dimming method	N/A
Useful luminous flux (#use)	3550

Photometry

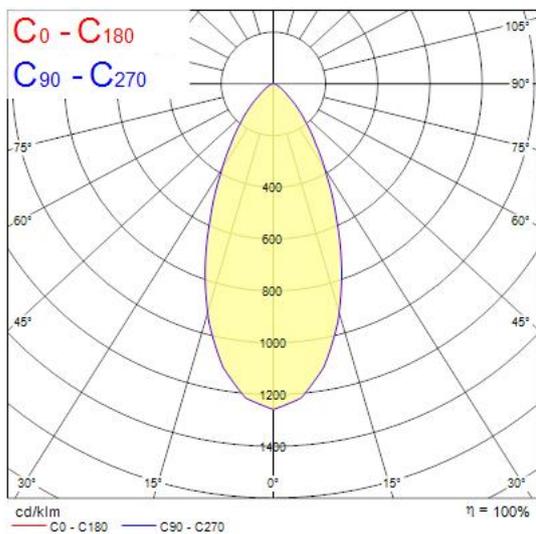

Technical drawings

