

Signalling Hooter HGW 11

**Loud all-purpose signalling device
for indoor and outdoor use
as well as on ships**

- ▶ Corrosion-resistant and very sturdy
- ▶ Aluminium housing
- ▶ Approval "German Lloyd"
- ▶ Protection degree IP 56
- ▶ Volume: approx. 108 dB(A) at 1 m



Application

The HGW signalling hooter is a signalling device for warning and calling which, thanks to its sturdy housing, can be used indoor in both dry and damp rooms as well as outside.

The seawater-proof aluminium housing makes the device also suitable for use on ships as well.

Design

The driver system consists of a strong, non-polarised electromagnet. The housing is made of seawater-proof aluminium.

The signalling hooter is available for all usual supply voltages.

The version HGWR 11 for 230 VAC is equipped with an additional telephone call relay. Cable entry is effected via an M 20 gland. The hooter with call relay has two cable glands.

Break announcement in a factory area



Thanks to the seawater-proof aluminium housing the signalling hooter is also suitable for use on ships as well.



Technical specifications

| | |
|----------------------|--|
| Housing | Aluminium, weather-proof coated |
| Protection degree | IP 56 (IEC 60529) |
| Protection class | I |
| Cable gland | Screw gland M 20 |
| Connection terminals | Cross section: 1,5 mm ² |
| Operating conditions | Indoor and outdoor |
| Operating position | Horn downwards |
| Operating mode | Continuous |
| Volume | Approx. 108 dB(A), 1m (Regarding volume specifications, please see the chapter "Technical Informations".) |
| Temperature range | |
| Operation | -20 °C bis +60 °C |
| Storage | -30 °C bis +80 °C |
| Approval | (GL) German Lloyd Certificate 57099-91HH 9 |
| Weight | Approx. 2.7 kg |

Wiring diagram

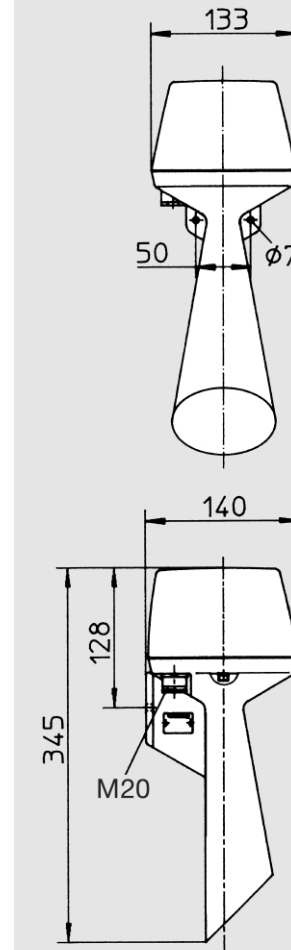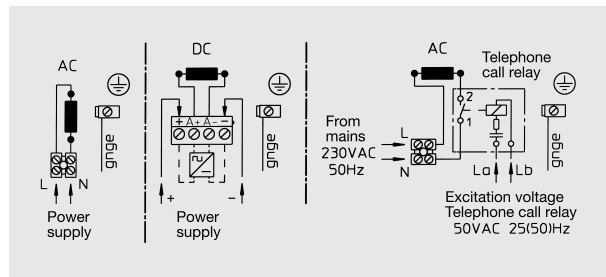

Order information

| Type | Name | Rated voltage U _e | Operating voltage range U _e | Current consumption | Article no. |
|---------|--------------------|------------------------------|--|---------------------|-------------|
| HGW 11 | Signalling Hooter | 6 VAC 50 Hz | +10/-15 % | 3.4 A | 212 665 01 |
| HGW 11 | Signalling Hooter | 12 VAC 50 Hz | +10/-15 % | 1.2 A | 212 665 02 |
| HGW 11 | Signalling Hooter | 24 VAC 50 Hz | +10/-15 % | 0.65 A | 212 665 03 |
| HGW 11 | Signalling Hooter | 42 VAC 50 Hz | +10/-15 % | 0.3 A | 212 665 04 |
| HGW 11 | Signalling Hooter | 60 VAC 50 Hz | +10/-15 % | 0.25 A | 212 665 05 |
| HGW 11 | Signalling Hooter | 110 VAC 50 Hz | +10/-15 % | 0.15 A | 212 665 06 |
| HGW 11 | Signalling Hooter | 230 VAC 50 Hz | +6/-10 % | 0.07 A | 212 665 07 |
| HGW 11 | Signalling Hooter | 120 VAC 60 Hz | +10/-15 % | 0.15 A | 212 666 06 |
| HGW 11 | Signalling Hooter | 240 VAC 60 Hz | +10/-15 % | 0.07 A | 212 666 07 |
| HGW 11 | Signalling Hooter | 6 VDC | +10/-15 % | 1.0 A | 212 665 11 |
| HGW 11 | Signalling Hooter | 12 VDC | +10/-15 % | 0.6 A | 212 665 12 |
| HGW 11 | Signalling Hooter | 24 VDC | +10/-15 % | 0.3 A | 212 665 13 |
| HGW 11 | Signalling Hooter | 48 VDC | +10/-15 % | 0.24 A | 224 665 14 |
| HGW 11 | Signalling Hooter | 60 VDC | +10/-15 % | 0.15 A | 212 665 15 |
| HGW 11 | Signalling Hooter | 110 VDC | +10/-15 % | 0.08 A | 212 665 16 |
| HGW 11 | Signalling Hooter | 220 VDC | +10/-15 % | 0.05 A | 212 665 17 |
| HGWR 11 | Signalling Hooter* | 230 VAC 50 Hz | +6/-10 % | 0.07 A | 212 667 07 |

* with call relay

Subject to change without notice · Printout 03/08