

### Features

- START Downlight Eco is an integrated LED recessed downlight with built-in non dimmable driver; Loop in loop out connector allows for quick installation; 24W; 2400Lm; 100Lm/W; 4000K.


### Product Overview

Product name	START Downlight Eco 195 2400lm 840
Technology	LED
Cap/Base	N/A
Housing	PC Polycarbonate
Mount	Ceiling recessed mounting
General application	Hospitality, Retail
ETIM Class	EC001744
Fixture luminous flux (lm)	2400
Luminaire efficacy (lm/W)	100
Colour temperature (K)	4000
Light colour	Neutral White
CRI (Ra)	80
Colour Variation Initial (SDCM)	6
Beam Angle (°)	110
Glare control	< 28
Photobiological Risk Group	RG0
Total power consumption (W)	24
Electrical protection	Class II
Control gear type	LED driver constant current
Dimmable	No

## START Downlight Eco 195 2400lm 840 0055190

LED Flickering Rate	Medium (21% - 40%)
Housing colour	RAL 9003 - Signal white
IP rating	IP20
IK rating	IK02
Product EAN number	5410288551906
Warranty	3 years
Useful luminous flux (#use)	2400
Dimming method	N/A

### Photometry

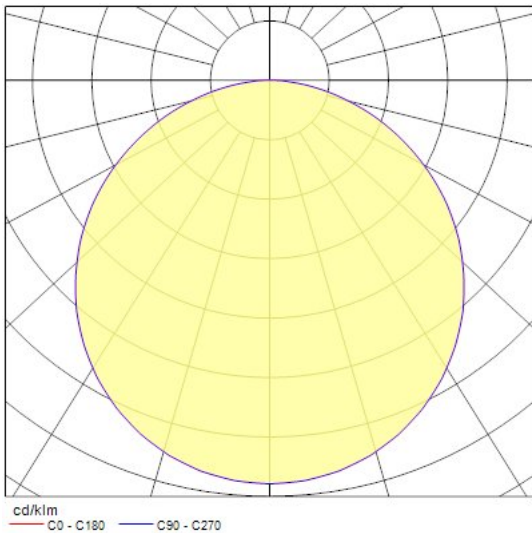

### Technical drawings

