

Features

- START Downlight Eco is an integrated LED recessed downlight with built-in non dimmable driver; Loop in loop out connector allows for quick installation; 15W; 1650Lm; 110Lm/W; 4000K.


Product Overview

Product name	START Downlight Eco 195 Square 1650lm 840
Technology	LED
Cap/Base	N/A
Housing	PC Polycarbonate
Mount	Ceiling recessed mounting
General application	Hospitality, Retail
ETIM Class	EC001744
Fixture luminous flux (lm)	1650
Luminaire efficacy (lm/W)	110
Colour temperature (K)	4000
Light colour	Neutral White
CRI (Ra)	80
Colour Variation Initial (SDCM)	6
Beam Angle (°)	110
Glare control	< 28
Photobiological Risk Group	RG0
Total power consumption (W)	15
Electrical protection	Class II
Control gear type	LED driver constant current
Dimmable	No

START Downlight Eco 195 Square 1650lm 840 0055192

LED Flickering Rate	Medium (21% - 40%)
Housing colour	RAL 9003 - Signal white
IP rating	IP20
IK rating	IK02
Product EAN number	5410288551920
Warranty	3 years
Useful luminous flux (#use)	1650
Dimming method	N/A

Photometry

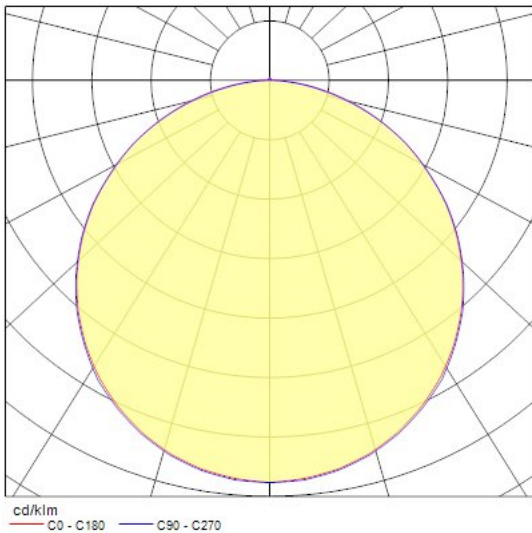

Technical drawings

