


## START Downlight eco 215 Square 1650lm 830 Surface 0055199

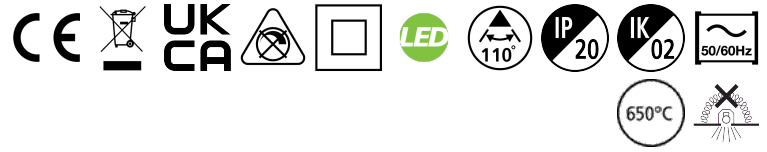

### Features

- START Downlight eco is an integrated LED surface mounted downlight with built-in non dimmable driver; 15W; 1650Lm; 110Lm/W; 3000K.


### Product Overview

Product name	START Downlight eco 215 Square 1650lm 830 Surface
Technology	LED
Cap/Base	N/A
Housing	PC Polycarbonate
Mount	Ceiling surface mounting
General application	Hospitality, Retail
ETIM Class	EC001744
Fixture luminous flux (lm)	1650
Luminaire efficacy (lm/W)	110
Colour temperature (K)	3000
Light colour	Warm White
CRI (Ra)	80
Colour Variation Initial (SDCM)	6
Beam Angle (°)	110
Glare control	< 28
Photobiological Risk Group	RG0
Total power consumption (W)	15
Electrical protection	Class II
Control gear type	LED driver constant current

## START Downlight eco 215 Square 1650lm 830 Surface 0055199

Dimmable	No
LED Flickering Rate	Medium (21% - 40%)
Housing colour	RAL 9003 - Signal white
IP rating	IP20
IK rating	IK02
Product EAN number	5410288551999
Warranty	3 years
Useful luminous flux (#use)	1650
Dimming method	N/A

### Photometry

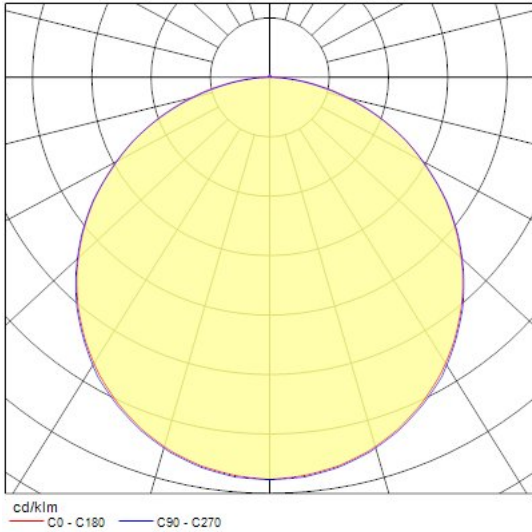

### Technical drawings

