


Data Sheet | Item Number: 857-170

Basic relay; Nominal input voltage: 5 VDC; 1 changeover contact; Limiting continuous current: 6 A; Module width: 5 mm

<https://www.wago.com/857-170>

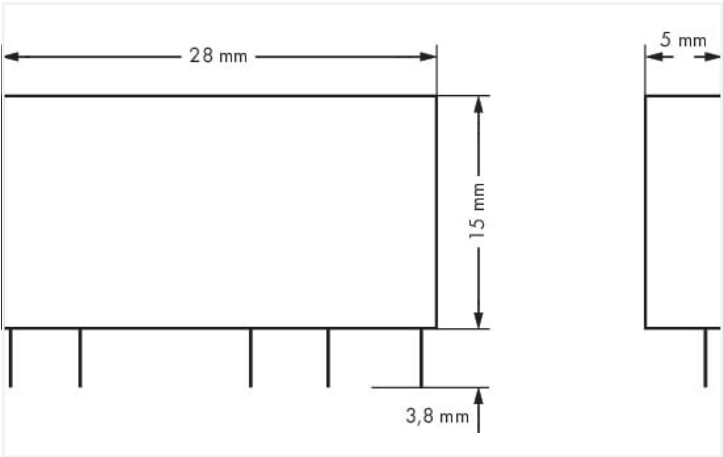

Dimensions in mm

Notes	
Note	To protect the relay coils and contacts, inductive loads must be dampened with an effective protection circuit.

Technical data	
Load circuit	
Number of changeover/switchover contacts	1

Physical data	
Width	5 mm / 0.197 inches
Height from the surface	15 mm / 0.591 inches
Depth	28 mm / 1.09 inches

Mechanical data	
Mounting type	Pluggable module

Material data	
Fire load	0 MJ
Weight	5 g



Environmental requirements	
Ambient temperature (storage)	-40 ... +85 °C
Relative humidity	5 ... 85 % (no condensation permissible)
Operating altitude (max.)	2000 m

Commercial data	
ETIM 8.0	EC001437
ETIM 7.0	EC001437
PU (SPU)	20 pcs
Packaging type	Box
Country of origin	DE
GTIN	4055143693226
Customs tariff number	85364900990

Environmental Product Compliance	
RoHS Compliance Status	Compliant, No Exemption

Approvals / Certificates

General approvals



Approval	Standard	Certificate Name
UL Underwriters Laboratories Inc.	UL 508	E340707

Downloads

CAD/CAE-Data

CAE data

EPLAN Data Portal
857-170

Download icon

Installation Notes

Installation



Removing a relay via ejector.

Subject to changes. Please also observe the further product documentation!