

Product data sheet

Item No. 91.030.5953.0

Intermediate coupling GST15I3Z 1P1 WS



Item No.	91.030.5953.0
EAN	4049088044083
Order Unit	100 Piece(s)

Certificates / Approvals



Technical data

General

Rated current	16 A
Rated voltage	250 V
Rated impulse voltage	4 kV
Pollution degree	2
Mechanical coding	Code 1
Interlockable	Yes
Color of coding/ contact carrier	White
Marking of poles	

Model

Number of poles	3
Number of inputs	1
Number of outputs	1
Type of fastening	No
Degree of protection (IP)	IP40


Material

Housing material	Polyamide
Halogen free	Yes
Contact material	CuZn
Insulation components continuous temperature	100 °C
Surface finish	Silver-plated


Dimensions

Length	32.4 mm
Width	21.4 mm
Height	12.5 mm

Technical drawing

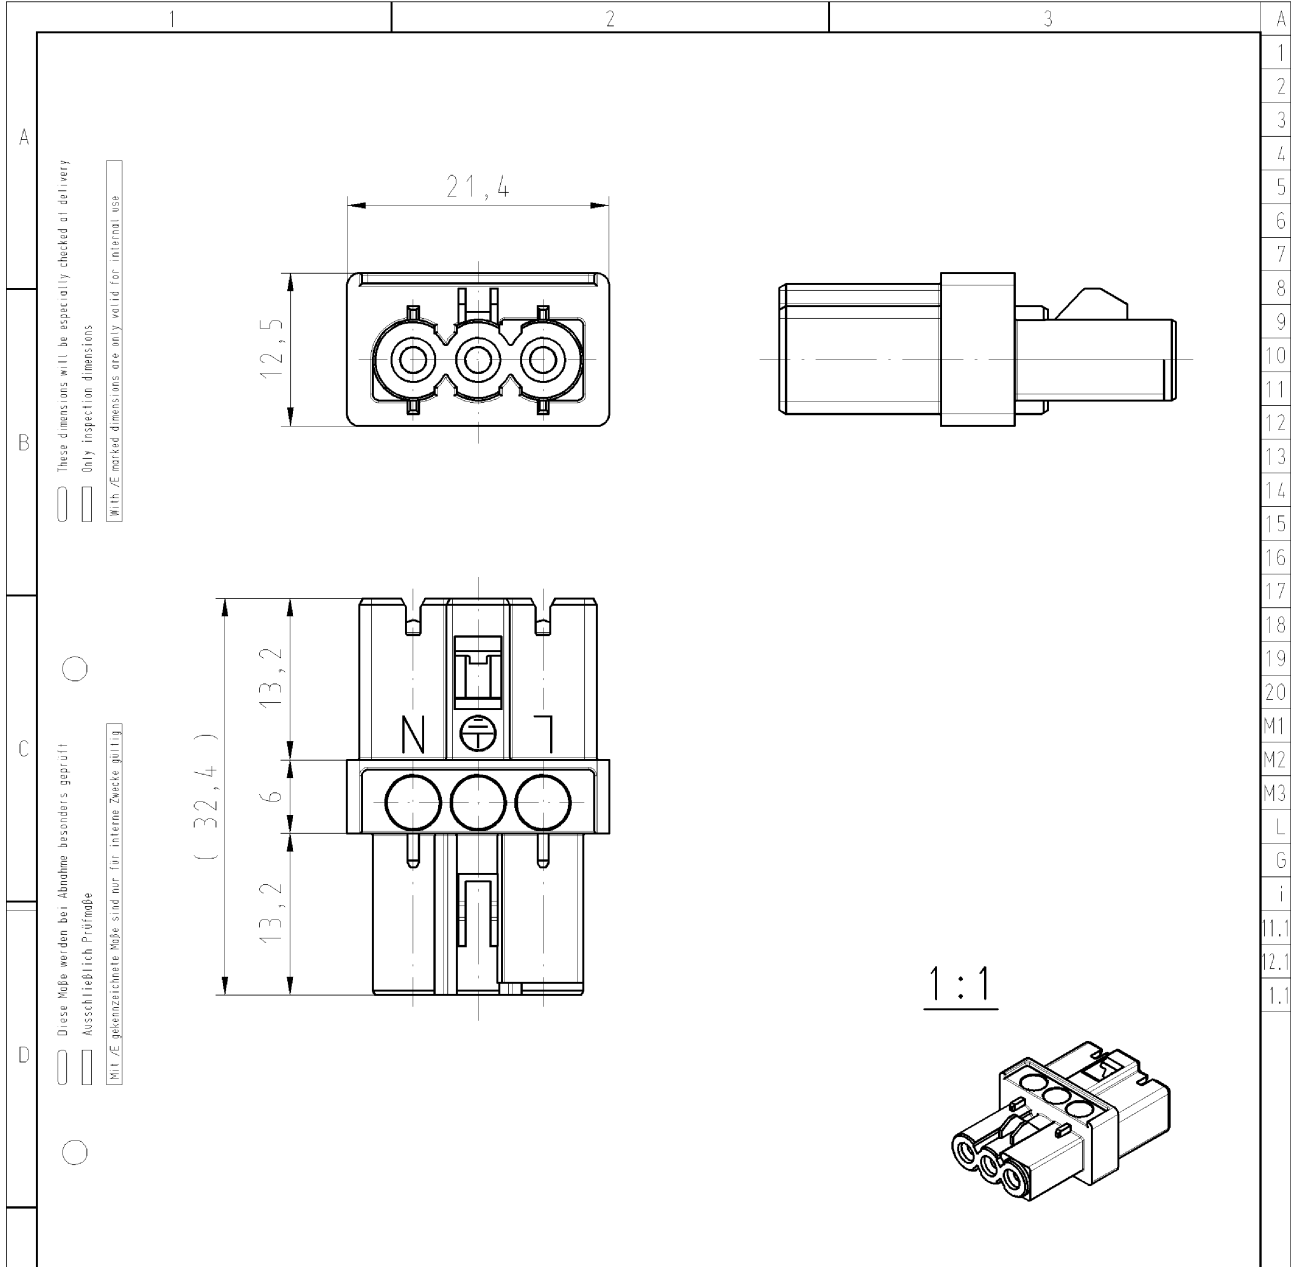

1:1



Teile-Nr./part no.	Farbe/colour
91.030.5953.0	weiß/white, RAL 9003
91.030.5953.1	schwarz/black, RAL 9005

Tolerierung nach DIN 7167/Tolerance system acc. to DIN 7167.
 (This DIN-standard describes the envelope principle. According to the envelope principle the deviations of form and parallelism are limited by the size tolerances).

ja/yes Stoffverbots- und Deklarationsliste nach UU-TOM-05/03 ist einzuhalten.
 Conformity with Wieland document UU-TOM-05/03 (list of prohibited / declarable hazardous substances) to be declared!

Freitoleranz nach General tolerance		CAD - Zeichnung, keine manuellen Änderungen CAD - drawing, no manual modifications allowed		1. Verwendung: - First Use:		Blatt: 1 von 1 Sheet: 1 of 1	
		Werkstoff/Material Farbe/colour: siehe Tabelle/see table		2008 gezeichnet drawn	Tag/Date 09.10. Pfalt	Name Pfalt	
		Maßstab/Scale 2:1		geprüft checked	-	Zeichnung Nr./Drawing No. 91.030.5953.0 01K	
		Vol. mm³ Ofl./Surf. mm²		Ersatz für/Replacement for: -		Maße in mm/Dimensions are in mm	
		wieland		Type		Benennung/Title ZWISCHENKUPPLUNG plug adapter für/for GST15i3 - Netzanschluss/main connection	
Index		Datum / Blatt Date / Sheet		Änderung/Revision			

910305953001K_4 CADW1038 Pfalt 2008-12-10 10:08:32:39 1:000

