



Features

- Pixo Line is a linear track system, adds flexibility to any space due the variety of product options Offers an easy installation with two separate modules Push-in/push-out mechanism with GR6d-15 connector Compatible with Zhaga Book 14 Aluminium body, plastic end caps,aluminised plastic low glare optics in a single line configuration, light beam angle:70° Textured white finishing colour. Light color temperature: 3000K, warm white, max. system power: 50W Max. fixture lumen output: 7300lm, efficacy: 146lm/W, Ra80 typical, LED chromacity: 3 step MacAdam ellipse (SDCM3), IR/UV free light source without heat radiation Multipower driver module with 8 power settings meet all installation needs with one single product (selection between 17W, 19W, 24W, 29W, 34W, 38W, 43W, 50W)Suitable for 3-circuit tracks, Electrical protection: Class III. Degree of protection: IP20, suitable for indoor environment only Light modules should be combined with suitable in-track drivers Nominal product dimensions: L.1464mmx37.4mmx37mm


Product Overview

Product name	PIXO LINE 1500 UGR19 830 WHITE
Technology	LED
Cap/Base	N/A
General application	Retail, Hospitality, Museums & Galleries, Office
ETIM Class	EC000996
E-number FI	4279409
Fixture luminous flux (lm)	7300
Luminaire efficacy (lm/W)	146
Colour temperature (K)	3000
Light colour	Warm White
CRI (Ra)	80
Colour Variation Initial (SDCM)	3






PIXO LINE 1500 UGR19 830 WHITE 0007825

Beam Angle (°)	70
Glare control	< 19
Photobiological Risk Group	Not applicable
Total power consumption (W)	50
Electrical protection	Class III
Dimmable	No
Housing colour	White
IP rating	IP20
IK rating	IK03
Product EAN number	5410288078250
Warranty	5 years
Dimming method	N/A

Photometry

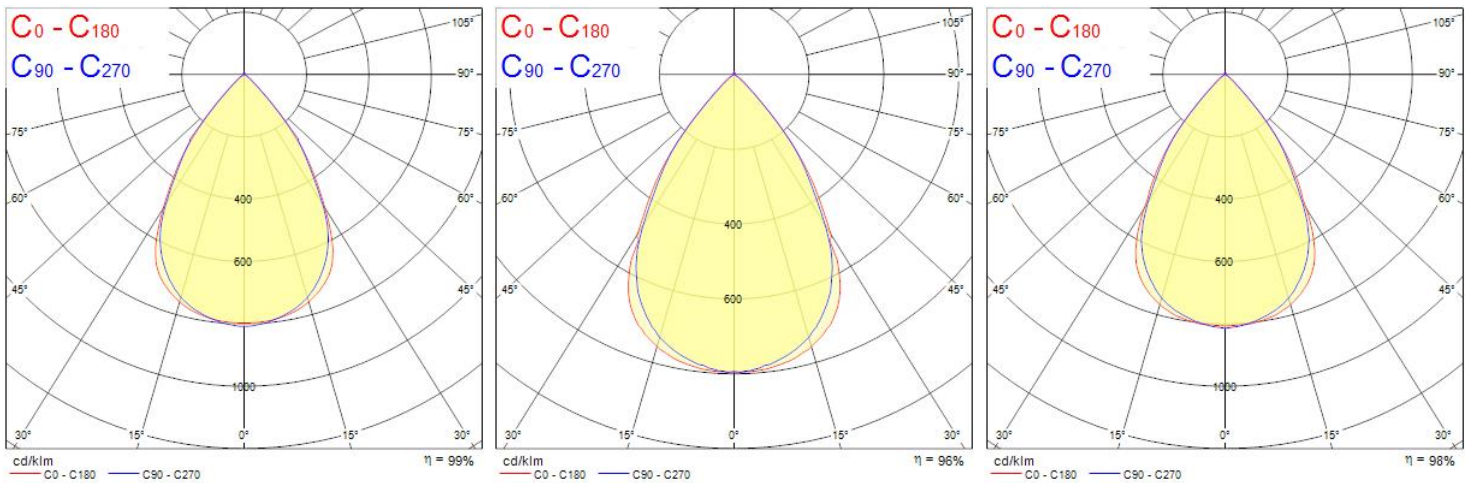

PIXO LINE 1500 UGR19 830 WHITE 0007825

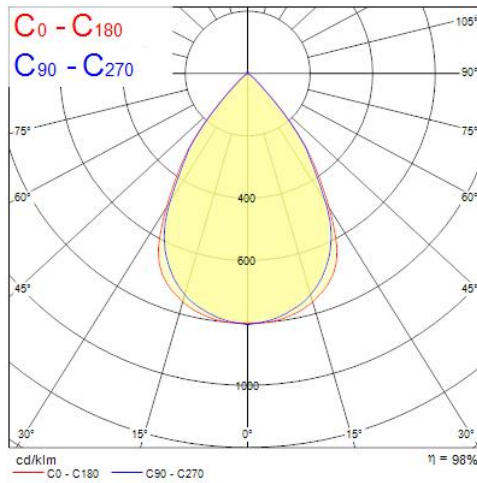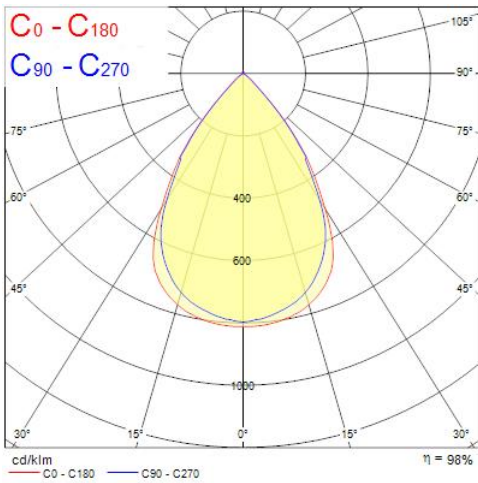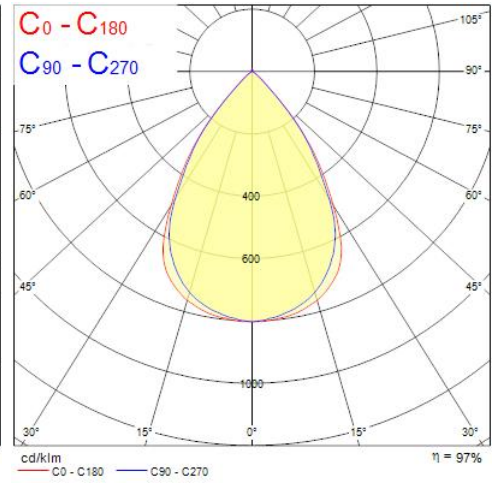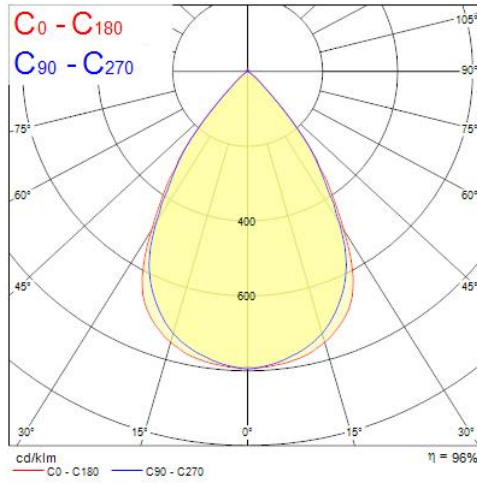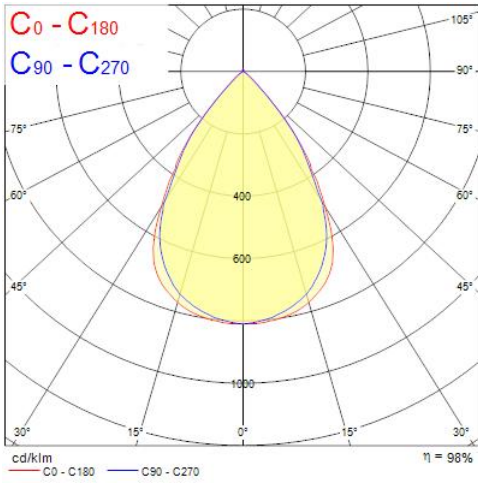

Distance [m]	Cone diameter [m]	E(0°)	E(C90)	E(CO)	illuminance [lx]
0.5	0.67 0.69	23417	33.7°	34.6°	6882
1.0	1.33 1.38	5854	33.7°	34.6°	1720
1.5	2.00 2.07	2622	33.7°	34.6°	765
2.0	2.67 2.76	1454	33.7°	34.6°	430
2.5	3.33 3.45	937	33.7°	34.6°	275
3.0	4.00 4.14	650	33.7°	34.6°	191

Distance [m] Cone diameter [m] Illuminance [lx]
 — C0 - C180 (Half beam angle: 69.2°)
 — C90 - C270 (Half beam angle: 67.4°)

Distance [m]	Cone diameter [m]	E(0°)	E(C90)	E(CO)	illuminance [lx]
0.5	0.66 0.69	8445	33.4°	34.5°	2482
1.0	1.32 1.37	2111	33.4°	34.5°	621
1.5	1.98 2.06	938	33.4°	34.5°	276
2.0	2.64 2.75	528	33.4°	34.5°	155
2.5	3.30 3.44	338	33.4°	34.5°	99
3.0	3.96 4.12	235	33.4°	34.5°	69

Distance [m] Cone diameter [m] Illuminance [lx]
 — C0 - C180 (Half beam angle: 69.0°)
 — C90 - C270 (Half beam angle: 66.8°)





Distance [m]	Cone diameter [m]	E(0°)	E(C90)	E(CO)	illuminance [lx]
0.5	0.66 0.69	9949	33.4°	34.5°	2931
1.0	1.32 1.37	2487	33.4°	34.5°	733
1.5	1.98 2.06	1105	33.4°	34.5°	326
2.0	2.64 2.75	622	33.4°	34.5°	183
2.5	3.30 3.44	396	33.4°	34.5°	117
3.0	3.96 4.12	276	33.4°	34.5°	81

Distance [m] Cone diameter [m] Illuminance [lx]
 — C0 - C180 (Half beam angle: 69.0°)
 — C90 - C270 (Half beam angle: 66.8°)


Distance [m]	Cone diameter [m]	E(0°)	E(C90)	E(CO)	illuminance [lx]
0.5	0.66 0.68	11997	33.5°	34.4°	3393
1.0	1.32 1.37	2924	33.5°	34.4°	845
1.5	1.99 2.05	1300	33.5°	34.4°	377
2.0	2.65 2.74	751	33.5°	34.4°	212
2.5	3.31 3.42	458	33.5°	34.4°	136
3.0	3.97 4.11	325	33.5°	34.4°	94

Distance [m] Cone diameter [m] Illuminance [lx]
 — C0 - C180 (Half beam angle: 68.8°)
 — C90 - C270 (Half beam angle: 67.0°)

PIXO LINE 1500 UGR19 830 WHITE 0007825

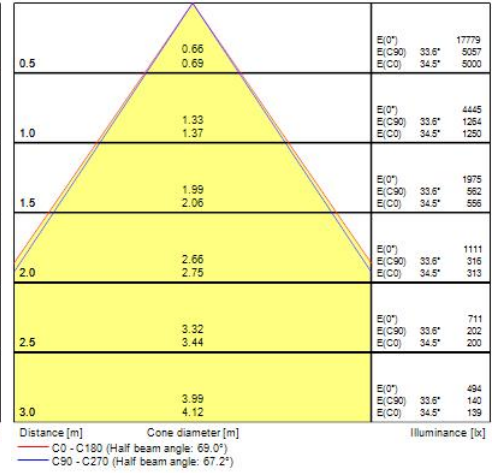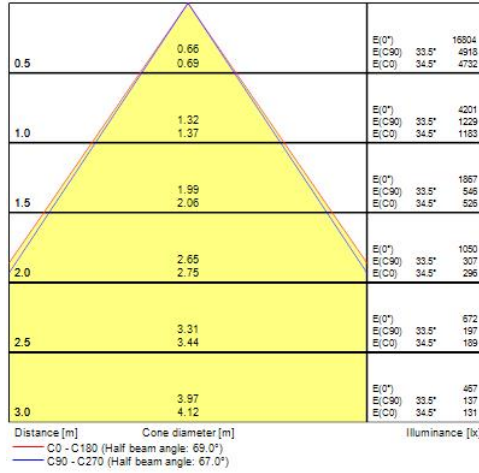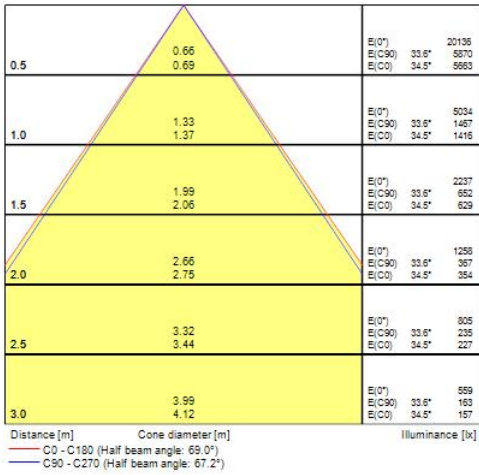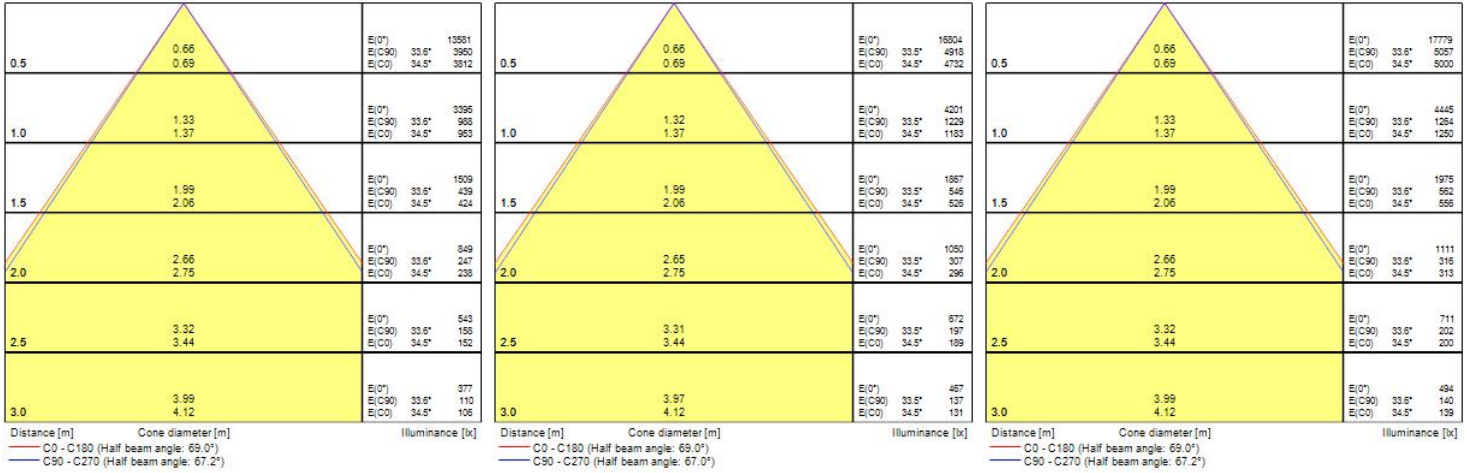

Technical drawings

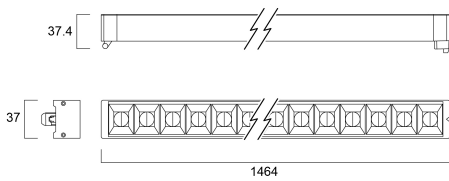

Data table

PIXO LINE 1500 UGR19 830 WHITE 0007825

GENERAL DATA

Product name	PIXO LINE 1500 UGR19 830 WHITE
Technology	LED
Cap/Base	N/A
General application	Retail, Hospitality, Museums & Galleries, Office
Operating temperature range (°C)	-20°C...+40°C
ETIM Class	EC000996
E-number FI	4279409
Warranty	5 years

OPTICAL DATA

Fixture luminous flux (lm)	7300
Luminaire efficacy (lm/W)	146
Colour temperature (K)	3000
Light colour	Warm White
CRI (Ra)	80
Colour Variation Initial (SDCM)	3
Beam Angle (°)	70
Glare control	< 19
Photobiological Risk Group	Not applicable

ELECTRICAL DATA

Total power consumption (W)	50
Electrical protection	Class III
Control gear required	No
Dimmable	No
Dimming method	N/A
Glow Wire Test (°C)	650
Energy Efficiency Class (A->G) of contained light source	C
Nominal Frequency (Hz)	N/A

LIFETIME DATA

PIXO LINE 1500 UGR19 830 WHITE 0007825

Lifespan L70 B50	90000
Lifespan L70 B20	90000
Lifespan L70 B10	90000
Lifespan L80 B50	90000
Lifespan L80 B20	79000
Lifespan L80 B10	76000
Lifespan L90 B50	43000
Lifespan L90 B20	37000
Lifespan L90 B10	36000

PHYSICAL DATA

Housing colour	White
IP rating	IP20
IK rating	IK03
Nominal Product Length (mm)	1464
Nominal Product Width (mm)	37
Nominal Product Height (mm)	37.4
Weight (kg)	0.9

PACKAGING

Product EAN number	5410288078250
Packaging single length / height (cm)	147.0
Packaging single width (cm)	4.3
Packaging single depth (cm)	4.3
DUN14 (outer)	15410288078257
Units per outer package	20
Packaging outer length / height (cm)	149.0
Packaging outer width (cm)	24.0
Packaging outer depth (cm)	19.0

SAFETY DATA

Optimal operating condition (°C)	-20-40
Special purpose lamp	No
Dry applications use only	No

SYLVANIA

PIXO LINE 1500 UGR19 830 WHITE

0007825

Suitable for household illumination

No

Light your world