

## Features

- Sensor Dim LED exterior surface mounted luminaire, 350mm diameter, 1500lm as max. lumen output, can be adjusted down to 1450lm by internal switch, 14W max. power consumption, 107lm/W efficacy, 4000K color temperature, CRI80, IP66, IK10, 50,000 hours (L70), whitehousing, vandal resistant. Integrated Microwave occupancy sensor with daylight harvest, dimming and corridor function. Integrated emergency, 3 hours, supplied with anti-theft screws


## Product Overview

<b>Product name</b>	START SURFACE IP66 1500LM 840 MW SENS EM3 IK10 WHT
<b>Technology</b>	LED
<b>Cap/Base</b>	N/A
<b>Housing</b>	PC Polycarbonate
<b>Mount</b>	Ceiling surface mounting
<b>Environment</b>	Indoor, Outdoor
<b>General application</b>	Hospitality
<b>ETIM Class</b>	EC002892
<b>Fixture luminous flux (lm)</b>	1500
<b>Luminaire efficacy (lm/W)</b>	84
<b>LOR (%)</b>	100
<b>Colour temperature (K)</b>	4000
<b>Light colour</b>	Neutral White
<b>CRI (Ra)</b>	80
<b>Colour Variation Initial (SDCM)</b>	6
<b>Beam Angle (°)</b>	120
<b>Glare control</b>	< 25
<b>Photobiological Risk Group</b>	RG0
<b>Luminous flux (emergency) (lm)</b>	124

## START SURFACE IP66 1500LM 840 MW SENS EM3 IK10 WHT 0098603

Total power consumption (W)	18
Electrical protection	Class II
Control gear type	LED driver constant current
Control gear mounting	Integrated
Dimmable	Yes
LED Flickering Rate	Ultra low (5% or less)
Housing colour	RAL9003
IP rating	IP66
IK rating	IK10
Product EAN number	5410288986036
Warranty	5 years
Useful luminous flux (#use)	1500
Colour Code	840
Dimming method	Other

### Photometry

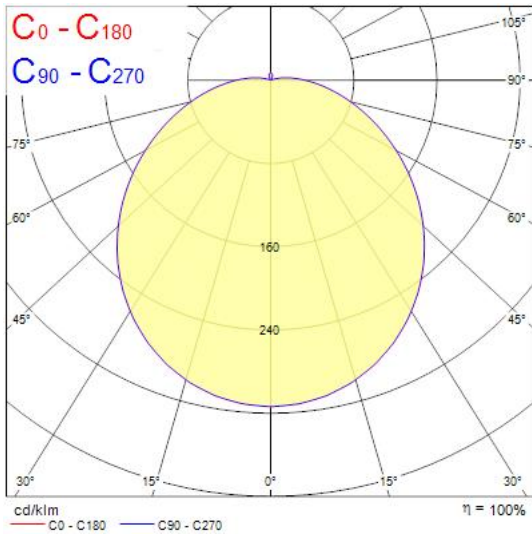

### Technical drawings

