

SPIROTECH TECHNISCHES DATENBLATT

Produkt:

elko-flex  
U25-6

Type:

EVU25-6

Datum:


14.02.2024

Kunde:


Projekt:

Referenz:

Zeichnung

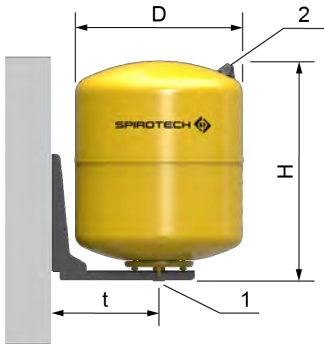

EVU6-18 .. EVU6-50

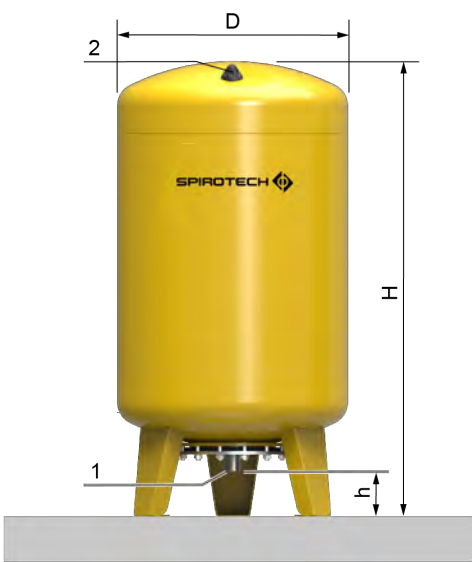

EVU6-90 .. EVU6-300

Auslegekriterien

|                                                                    |                     |
|--------------------------------------------------------------------|---------------------|
| Tested in accordance with:                                         | PED 2014/68/EU      |
| Max. safety temperature of the system without/with cooling vessel: | 90/110 °C           |
| Min. Temperatur:                                                   | 0 °C                |
| Max. Temperatur:                                                   | 70 °C               |
| Max. Betriebsdruck:                                                | 6 bar-g             |
| Permissible medium:                                                | Water, Water/Glycol |
| Farbe:                                                             | RAL 1003            |

Abmessungen

|                      |                    |
|----------------------|--------------------|
| D:                   | 360 mm             |
| H:                   | 400 mm             |
| h:                   | 230 mm             |
| t:                   | 230 mm             |
| Connection           | R3/4               |
| 1                    | Expansion pipe     |
| 2                    | Gas pressure valve |
| Volumen:             | 25 ltr             |
| Leergewicht (circa): | 9,8 kg             |

Änderungen vorbehalten