



### Features

- Resisto, integrated LED weatherproof luminaire, with UV stabilized flat diffuser designed to achieve uniform lit appearance, optimise light output and to reduce glare. 301 stainless steel diffuser clips and fixing brackets for surface mounting. Polycarbonate housing and diffuser - no yellow discolouration over time. 4200lm; 30W; 140lm/W; 4000K; SDCM<5; CRI80; IP65; IK08 (sensor IK03); Class I; 69,000hrs (L80B20) lifespan; 1588mm x 89mm x 88mm; D-mark. SylSmart® Connected integration delivers enhanced functionality, enabling comprehensive lighting control and monitoring via an integrated High Bay Sensor and Bluetooth® NLC


### Product Overview

<b>Product name</b>	RESISTO 1500 IP65 4200LM 840 SSA03H
<b>Technology</b>	LED
<b>Cap/Base</b>	N/A
<b>Housing</b>	PC Polycarbonate
<b>Mount</b>	Ceiling surface mounting
<b>General application</b>	Logistics & Industry
<b>ETIM Class</b>	EC002892
<b>Fixture luminous flux (lm)</b>	4200
<b>Luminaire efficacy (lm/W)</b>	140
<b>Correlated colour temperature (k)</b>	4000
<b>Light colour</b>	Neutral White
<b>CRI (Ra)</b>	80
<b>Colour Consistency (SDCM)</b>	5
<b>Colour Variation Initial (SDCM)</b>	5
<b>Beam Angle (°)</b>	110
<b>Glare control</b>	< 23

Light your world

Photobiological Risk Group	RG1
Total power consumption (W)	30
Electrical protection	Class I
Control gear type	LED driver constant current
Dimmable	Yes
Housing colour	Grey
IP rating	IP65
IK rating	IK08
Product EAN number	5410288104331
Warranty	5 years
Dimming method	SylSmart SSA

#### Photometry

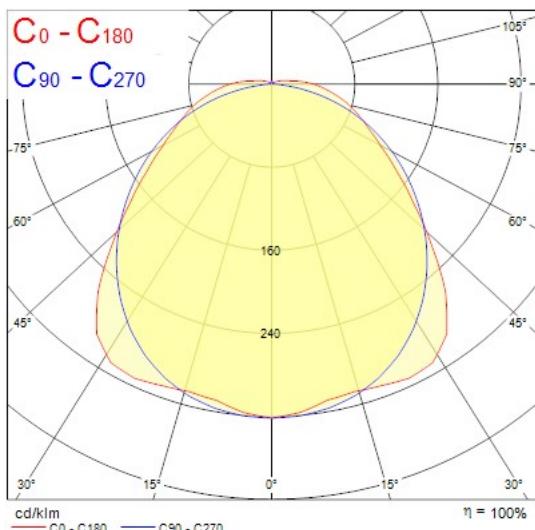

#### Technical drawings

