

10424500	DATA SHEET	
Valid from: 19.08.2026	EPIC® H-A 3 MAGSV	

Description

- Innovative metal housing
- For safe connections in the smallest possible space

General characteristics

Series	H-A 3
Version	Surface-mount base angled
Locking mechanism	Single lever
Cable entry	Lateral
Cable gland	See table
Clamping range	See table
Protection rating (DIN EN 60529)	IP 66 (latched) IP 68 – 1 meter / 10 hours (latched)
Temperature range	-40 °C to +125 °C



Materials and surfaces

Housing, base material	Zinc die-casting
Housing, surface	Powder-coating, grey
Pressure screw	Brass, nickel-plated
Pressure washer	Steel, zinc-plated
Gland body	Brass, nickel-plated
Incised sealing ring	CR (M20)
Lever	PA
Flat gasket	NBR (must be ordered separately. Art. No.: 10607100)

Standards

Safety Standard	IEC 61984
-----------------	-----------


Versions

Article number	Article description	Thread	Cable gland	Clamping range	Dimension C
19512700	EPIC® H-A 3 MAGSV M20 ZW. SURFACE MOUNT BASE	M20	No	-	54,5
19512701	EPIC® H-A 3 MAGSV M20	M20	No	-	-
19424500	EPIC® H-A 3 MAGSV M20 KPL. SURFACE MOUNT BASE	M20	Yes	3 - 13,5 mm	61

Creator: THBO1/PDP Released: TODV1/PDP	Document: DB10424500EN Version: 04	Page 1 of 2
---	---------------------------------------	-------------

10424500	DATA SHEET	
Valid from: 19.08.2026	EPIC® H-A 3 MAGSV	

Technical Drawings

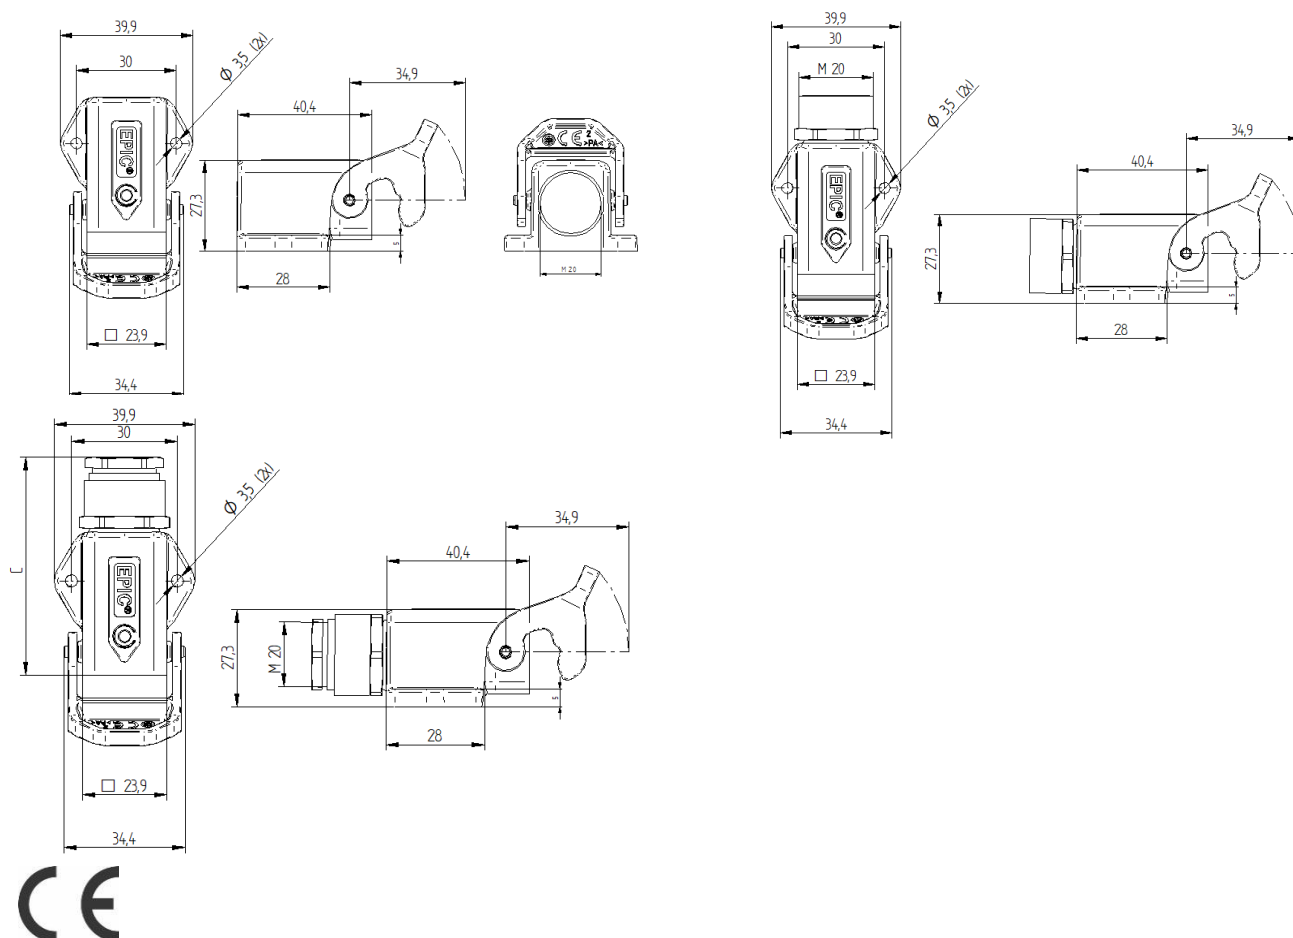

Industrial machinery and plant engineering



Mechanical resistance



Robust



Waterproof

Info

Compact, robust metal- and plastic housings size H-A 3

Application range

Machine and equipment manufacturing
Control engineering
Electronic laboratory

Remark

Photographs are not to scale and do not represent detailed images of the respective products.

Creator: THBO1/PDP Released: TODV1/PDP	Document: DB10424500EN Version: 04	Page 2 of 2
---	---------------------------------------	-------------