

Contact us

ABB Oy

Muottitie 2A 65320

Vaasa, Finland

abb.com/lowvoltage



© Copyright 2025 ABB. All rights reserved.
Specifications subject to change without notice.

34OT_AUXG rev. B/ 1SCC390188M0201 # 28.03.2025

OT Plus Auxiliary contacts AUXG_

AUXGB-11


OT16...63G1- BS
OT63...100G2- BS
OT30...160G3- BS

AUXGD-11


OT16...63G1- DS
OT63...100G2- DS
OT30...160G3- DS

AUXGM3-11


OT16...63G1- BS
OT63...100G2- BS
OT30...160G3- BS






Install




Remove

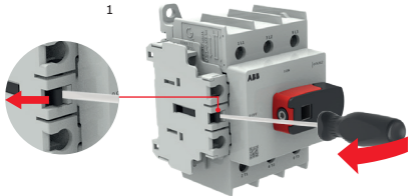


Install

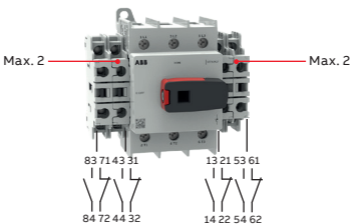

Clearances per UL60947-5-1



Stripping length & tightening torque

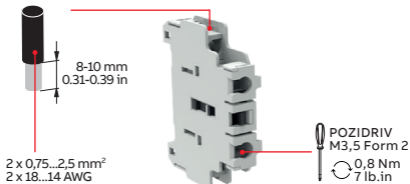

AUXG_

| Wire type | 1 Wire (mm ²) | 2 Wire (mm ²) | Stripping length | Tightening torque |
|------------------------------------|---------------------------|---------------------------|---------------------------------|---------------------------|
| Class 5-Flexible | 0.75-2.5 | 0.75-2.5 | <p>8-10 mm 0.31-0.39 in</p> | <p>0,8 Nm 7 lb.in</p> |
| Class 2-Stranded | 0.75-2.5 | 0.75-2.5 | | |
| Class 6-Very flexible with ferrule | 0.75-1.5 | 0.75-1 | | |
| Class 1-Solid | 0.75-2.5 | 0.75-2.5 | | |
| UL - CU wire size (AWG) | 18-14 | 18-14 | | |