

Concord

NILO 1200 DIR/INDIR 4K DALI BLACK 2050611



Features

- Nilo is a 360° curve-shaped luminaire with a striking, minimalistic design, perfect for retail, hospitality, and office environments. The product can be suspended at different heights to create appealing lighting effects. Stand-alone and self-contained lighting fixture. Aluminium body, opal diffuser, emits direct and indirect lighting. Textured black finishing colour. Light color temperature: 4000K, neutral white. System power: 85W. Fixture lumen output: 9570lm, efficacy: 113lm/W, Ra80 typical, LED chromaticity: 3 step MacAdam ellipse (SDCM3), IR/UV free light source without heat radiation. DALI dimmable, 220-240V / 50-60Hz. 75% direct, and 25% indirect lighting. Electrical protection: Class I. Degree of protection: IP20, suitable for indoor environment only. Nominal product dimensions: diameter 1140mmx65mm.

Product Overview


| | |
|---------------------------------|--|
| Product name | NILO 1200 DIR/INDIR 4K DALI BLACK |
| Technology | LED |
| Cap/Base | N/A |
| Housing | Aluminium |
| Mount | Suspended |
| General application | Hospitality, Retail, Museums & Galleries |
| ETIM Class | EC002892 |
| Fixture luminous flux (lm) | 9570 |
| Luminaire efficacy (lm/W) | 113 |
| Colour temperature (K) | 4000 |
| Light colour | Neutral White |
| CRI (Ra) | 80 |
| Colour Variation Initial (SDCM) | 3 |
| Glare control | < 23 |

Concord

NILO 1200 DIR/INDIR 4K DALI BLACK 2050611

| | |
|-----------------------------|-----------------------------|
| Photobiological Risk Group | RG0 |
| Total power consumption (W) | 85 |
| Electrical protection | Class I |
| Control gear type | LED driver constant current |
| Dimmable | Yes |
| Housing colour | Black |
| IP rating | IP20 |
| IK rating | IK03 |
| Product EAN number | 5025768506118 |
| Warranty | 5 years |
| Dimming method | DALI |

Photometry

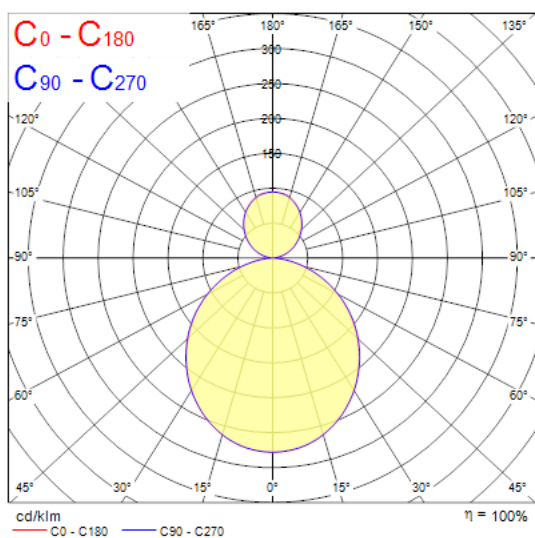

Technical drawings

